OREGON®

OregonProducts.com

2024

This catalogue is regularly updated
new sections will be added soon.

V.01.2024

EN/EUR

TRUSTED BY
SINCE
PROS
1947
LOGGERS + ARBORISTS
TM

OREGON®

SAW CHAINS AND GUIDE BARS

CB_1.2
EN/EUR

OREGON®
PowerCut™

OREGON
PowerCut

SHARPER BY NATURE

1947 ushered in a better way of woodcutting when logger Joseph Buford Cox realised how easily timber-beetle larvae can chew through timber, creating the first revolutionary Oregon saw chain that duplicated their alternating C-shaped jaws in steel. From the invention of modern saw chain to research innovations that reduce injury-causing kickback, Oregon has always been the industry leader. There's a reason we're the world's number-one in saw chain, guide bars, sprockets, forestry accessories, lawnmower blades and outdoor equipment parts.

Product Families

Oregon understands that the needs of woodcutters – professionals and novices – are as diverse as the terrains and environments in which they work.

We have organized our saw chains into product families with key characteristics that different users will value. These product families will help ensure that you choose the right chain based on your everyday needs — helping to make understanding the differences between our chains effortless.

To help easily identify our tiers of products, packaging is differentiated by color. Products within families meeting the needs of occasional users will be indicated by gray or white packaging. Product families targeted at demanding professional users will be indicated by black packaging.

OCCASIONAL USERS - Basic Products

IDENTIFIED BY WHITE PACKAGING

Standard replacement chain for homeowners using a chainsaw occasionally. User-friendly because of the low kickback design.

FREQUENT USERS - Chain with Reliable Performance

IDENTIFIED BY GRAY PACKAGING

AdvanceCut™

Perfect for homeowners cutting trees on their property and for tree-cutting professionals who only need to occasionally cut wood. User-friendly because of the low kickback design.

PROFESSIONAL USERS - Chain for High-Performance Saws

IDENTIFIED BY BLACK PACKAGING

SpeedCut™

Faster, cutting performance for wood-cutting professionals and experienced firewood cutters alike. Narrow kerf system requires less power to cut through high volumes of wood quickly and easily.

VersaCut™

Designed for tree-cutting professionals who require high performance from their saw chain. Uses cutters designed for maximum durability and versatility.

ControlCut™

Ideal for property owners & professionals looking for additional control, delivering a smooth cut every single time. Easy to maintain, with a forgiving sharpening profile.

PowerCut™

The ultimate saw chain for loggers and skilled forest workers. Full chisel cutters power through timber with speed, efficiency, and precision.

DuraCut™

Made for woodcutters working in abrasive and tough environments. Advanced plating process with extra layers of chrome. Cut up to three times longer than conventional saw chain.

RipCut™

Created specifically for chain-type sawmills. Produces smooth ripping cuts with supreme efficiency to make precise boards and planks.

Saw Chain Loop and Guide Bar packaging

Package Materials and Durability

You'll notice a real improvement in our packaging; we've used higher quality materials and superior construction for better durability.

Clear Communication and User-Friendly Layout

You can identify and choose the right product through the following:

1. **Product family**
2. **Part number**
3. **OEM chain saw fit up**
4. **Product information**
5. **Window for product visibility**
6. **Bar motor mount exposed for easy identification**
7. **Areas to write product information**

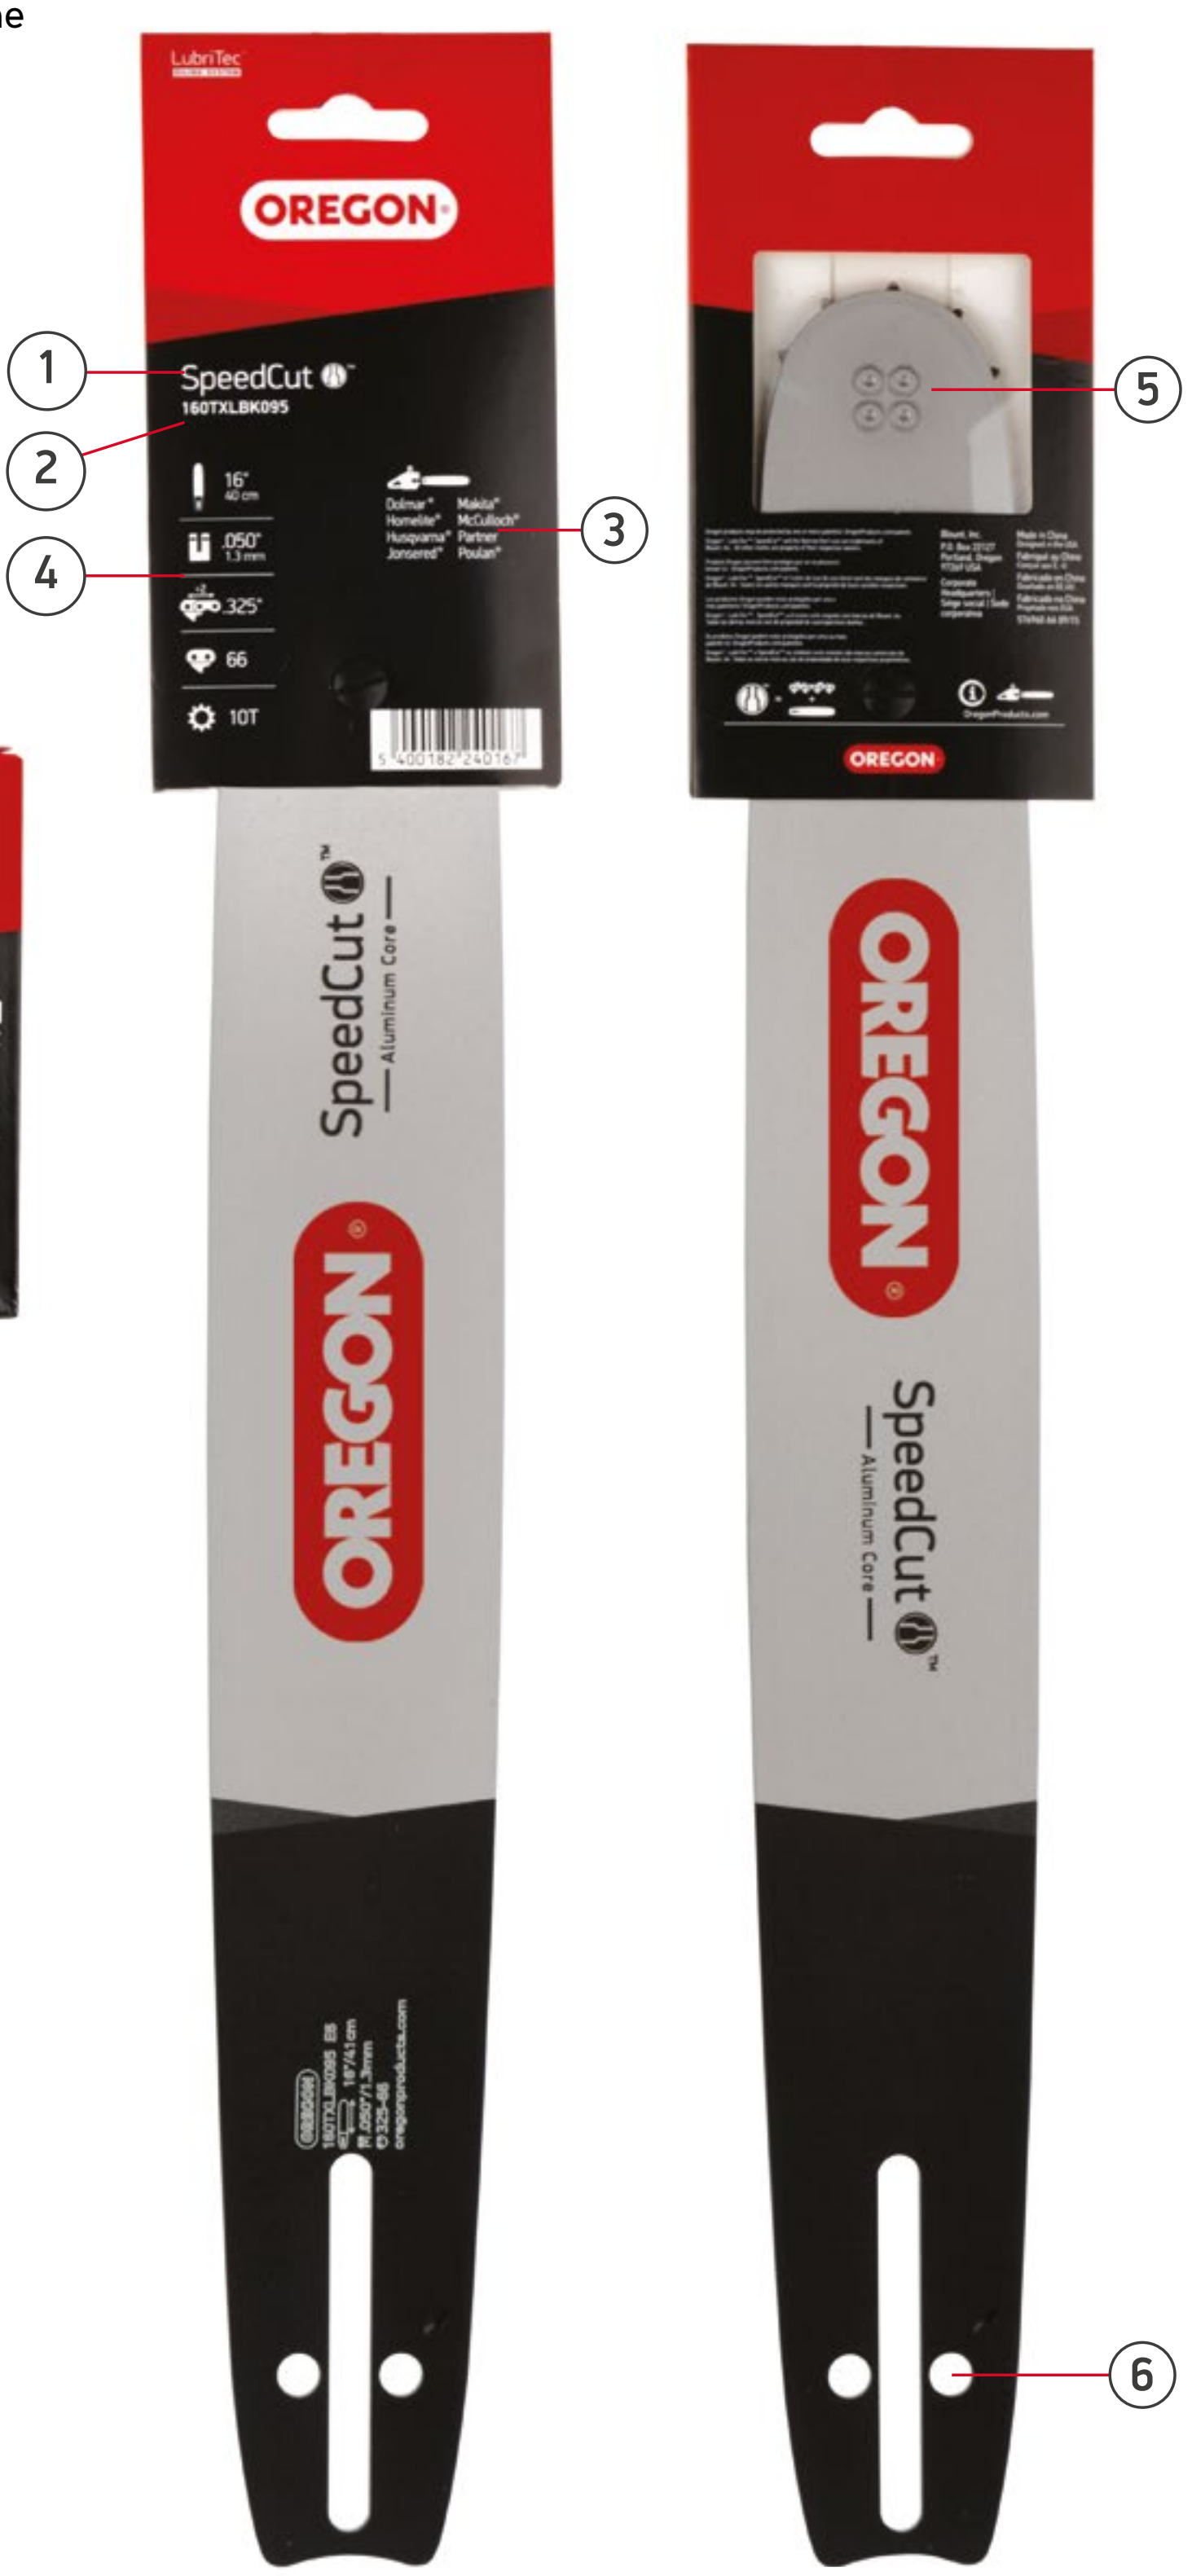
1
2
3
4
5
6
LubriTec
OREGON
SpeedCut
160TXLBK095
16" 40 cm
.050" 1.3 mm
.325"
66
10T
Dolmar* Homelite* Husqvarna* Jonsered*
Makita* McCulloch* Partner Poulan*
SpeedCut — Aluminum Core —

front

back

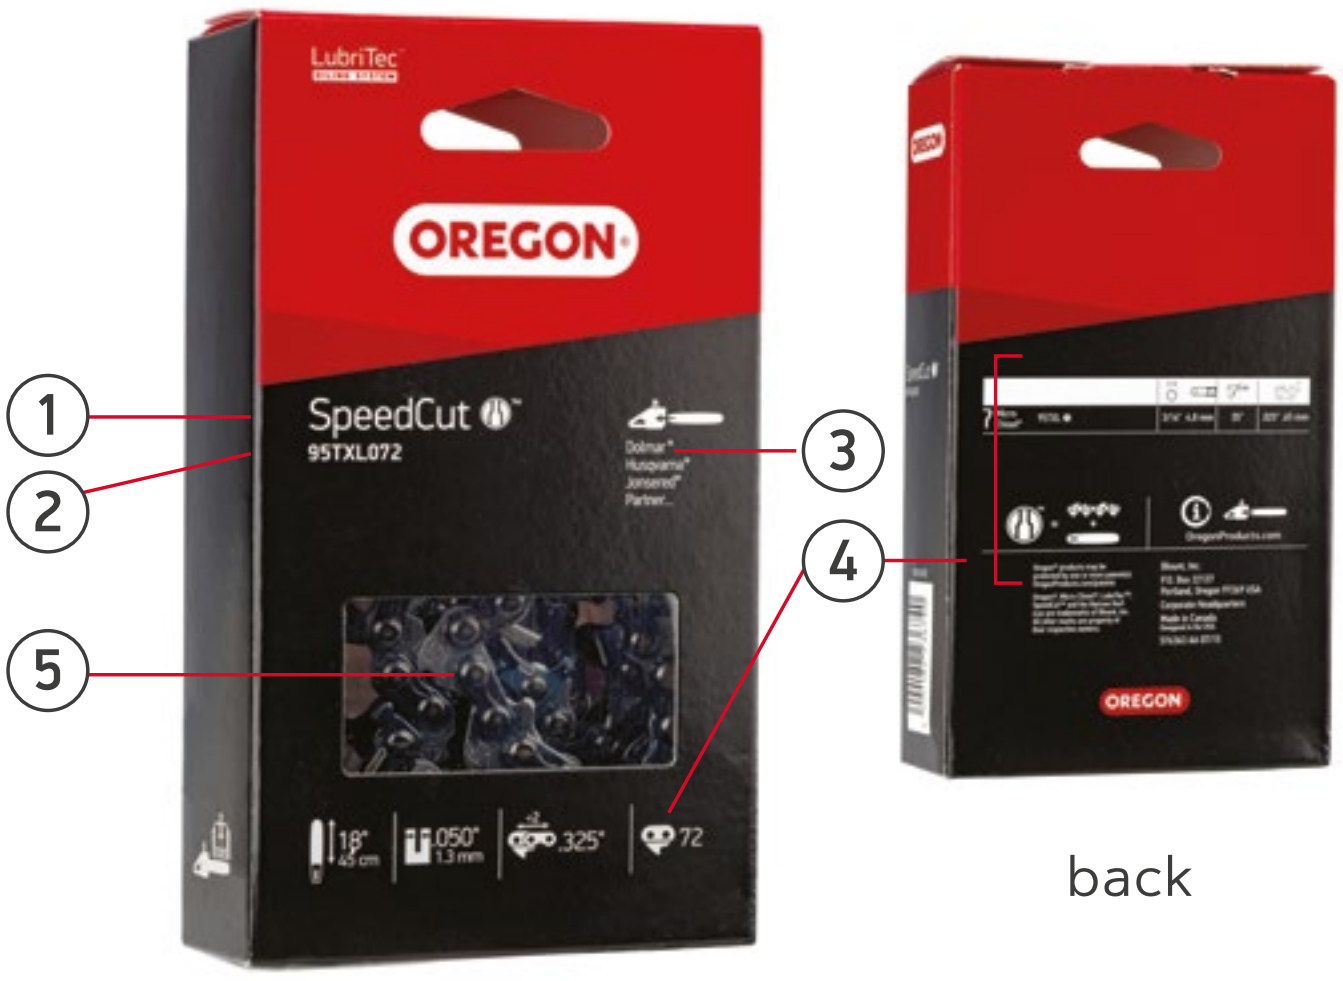
1
2
3
4
5
LubriTec
OREGON
SpeedCut
95TXL072
Dolmar* Husqvarna* Jonsered* Partner...
18" 45 cm
.050" 1.3 mm
.325"
72

back

front

7
5
7
LubriTec
OREGON

generic loop box front

NEW

SPEEDCUT ™ NANO

CUTTING SYSTEM

Designed for battery-powered and compact light-weight petrol chainsaws (20-38 cc).

80TXL Saw Chain

New patented-shape Micro-Chisel chain designed to maximize cutting speed and empowering compact saws : Faster speed, Smooth cut and unstoppable performance. Ideal for arborists and pruners.

- Longer Run Time
- Increased Speed
- Smooth Cuts
- Unstoppable Performance

BEST

.325″ LOW PROFILE | 7 Micro Chisel | 80 : 1,1 mm | 4,0 mm | LubriTec™ OILING SYSTEM

80TXL Guide Bar

Exclusive guide bar for New SpeedCut™ Nano cutting system (bar, chain, sprocket): increased speed, smoother cut, longer run time, unstoppable performance.

Engineered for professional arborist and top handle use.

Power through the day with a guide bar engineered specifically for 80TXL saw chain.

- High-strength body
- Performance-driven nose components

20-38cc

Inch	10″	12″	14″	16″
cm	25	30	35	40

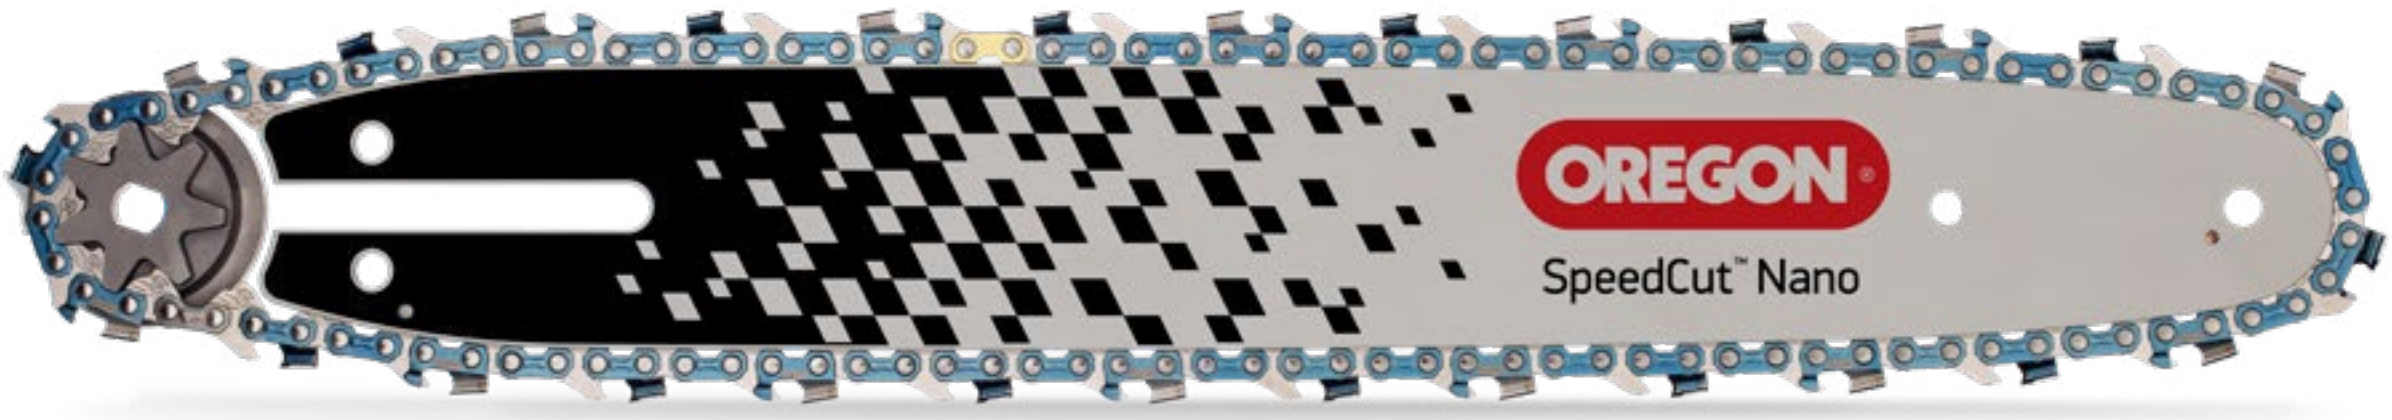

Oregon® is a registered trademark of Oregon Tool Inc.
All other marks are the property of their respective owners.

SHARPER BY NATURE™

CONVERSION KITS

80TXL must be used together with the corresponding guide bar and sprocket and is not compatible with other existing cutting systems. SpeedCut Nano conversion kits include a sprocket, a guide bar and a chain loop.

Stihl®	**10"** (25cm)	**12"** (30cm)	**14"** (35cm)	**16"** (40cm)
MS 150 MS 150T MS 151 MS 151T	635137	614383	614382	
MSA 161T	637260	637261	637262	637263
MS 170 MS 171 MS 180 MS 181		637259	614384	614385
MS 192 MS 192T MS 193 MS 193T MS 194 MS 194T MS 200 MS 200T MS 201 MS 201T	614379	614380	614377	614381
Husqvarna®				
T 435	614388	614391	614395	614398
T 525	637264	637265	637266	637267
T536Li XP 536Li XP	614389	614392	614396	614399
T540 XP T540 XP II	614387	614390	614393	614397
Echo®				
CCS-58V	637231	637232	637233	637234
CS-2511TES	637235	637236	637237	637238
CS-303T	637255	637256	637257	637258

24AP

NEW

Made for precision pruning when the quality and smoothness of the cut matter most, 24AP is a 1/4" pitch low-profile 1,1mm gauge chain designed for use with one-handed pruners, pole-saws and small petrol or battery powered chainsaws.

24AP saw chain is ideal for precise pruning of small diameter branches.

Low profile, ensuring low vibration and less kickback without compromising cutting performance

The 24AP chain is not for sale, resale, or use in the United States or Germany.

NEW 24AP 1/4″ LOW PROFILE

SMOOTH AND PRECISE

GET SMOOTHER AND CLEANER CUTS WITH THE NEW 24AP LOW-PROFILE, NARROW-KERF CHAIN.

MAXIMISE YOUR EFFICIENCY COMPARED TO STANDARD 1/4″ PITCH CHAINS.

+ EFFICIENT

The 24AP chain provides fast and efficient cutting of small diameter applications. it's low-profile, narrow kerf design extends run-time over standard profile 1/4″ pitch or 3/8 low-profile chains.

+ SMOOTH

24AP's semi-chisel cutters provide a smooth cut with minimal feed-load, with little effort, which reduces fatigue so that the user can do the work with ease.

+ PRECISE

The precision semi-chisel cutters of 24AP quickly engage in the cut and provide a clean and smooth cutting action, even with smaller diameter wood.

Semi-chisel cutter has a rounded cutting surface that allows chain to stay sharper, longer, without sacrificing speed

1/4″ LOW PROFILE	7	24 : 1,1mm	3,2mm	30°	55°	0,50mm

28	56	57	64	65	72
24AP028E	24AP056E	24AP057E	24AP064E	24AP065E	24AP072E

POWERCUT™ 70-SERIES EXL

The evolution of 3/8" professional chainsaw chain

The 70-series EXL chain provides superior cutting performance to increase work efficiency and minimise fatigue.

BEST

FASTER

Reshaped cutter optimised for maximum performance, right out of the box

LESS EFFORT

Increased self-feeding to reduce effort during the cut

POWERFUL

Efficient transfer of every horsepower into the cut, maximising the chainsaw's power

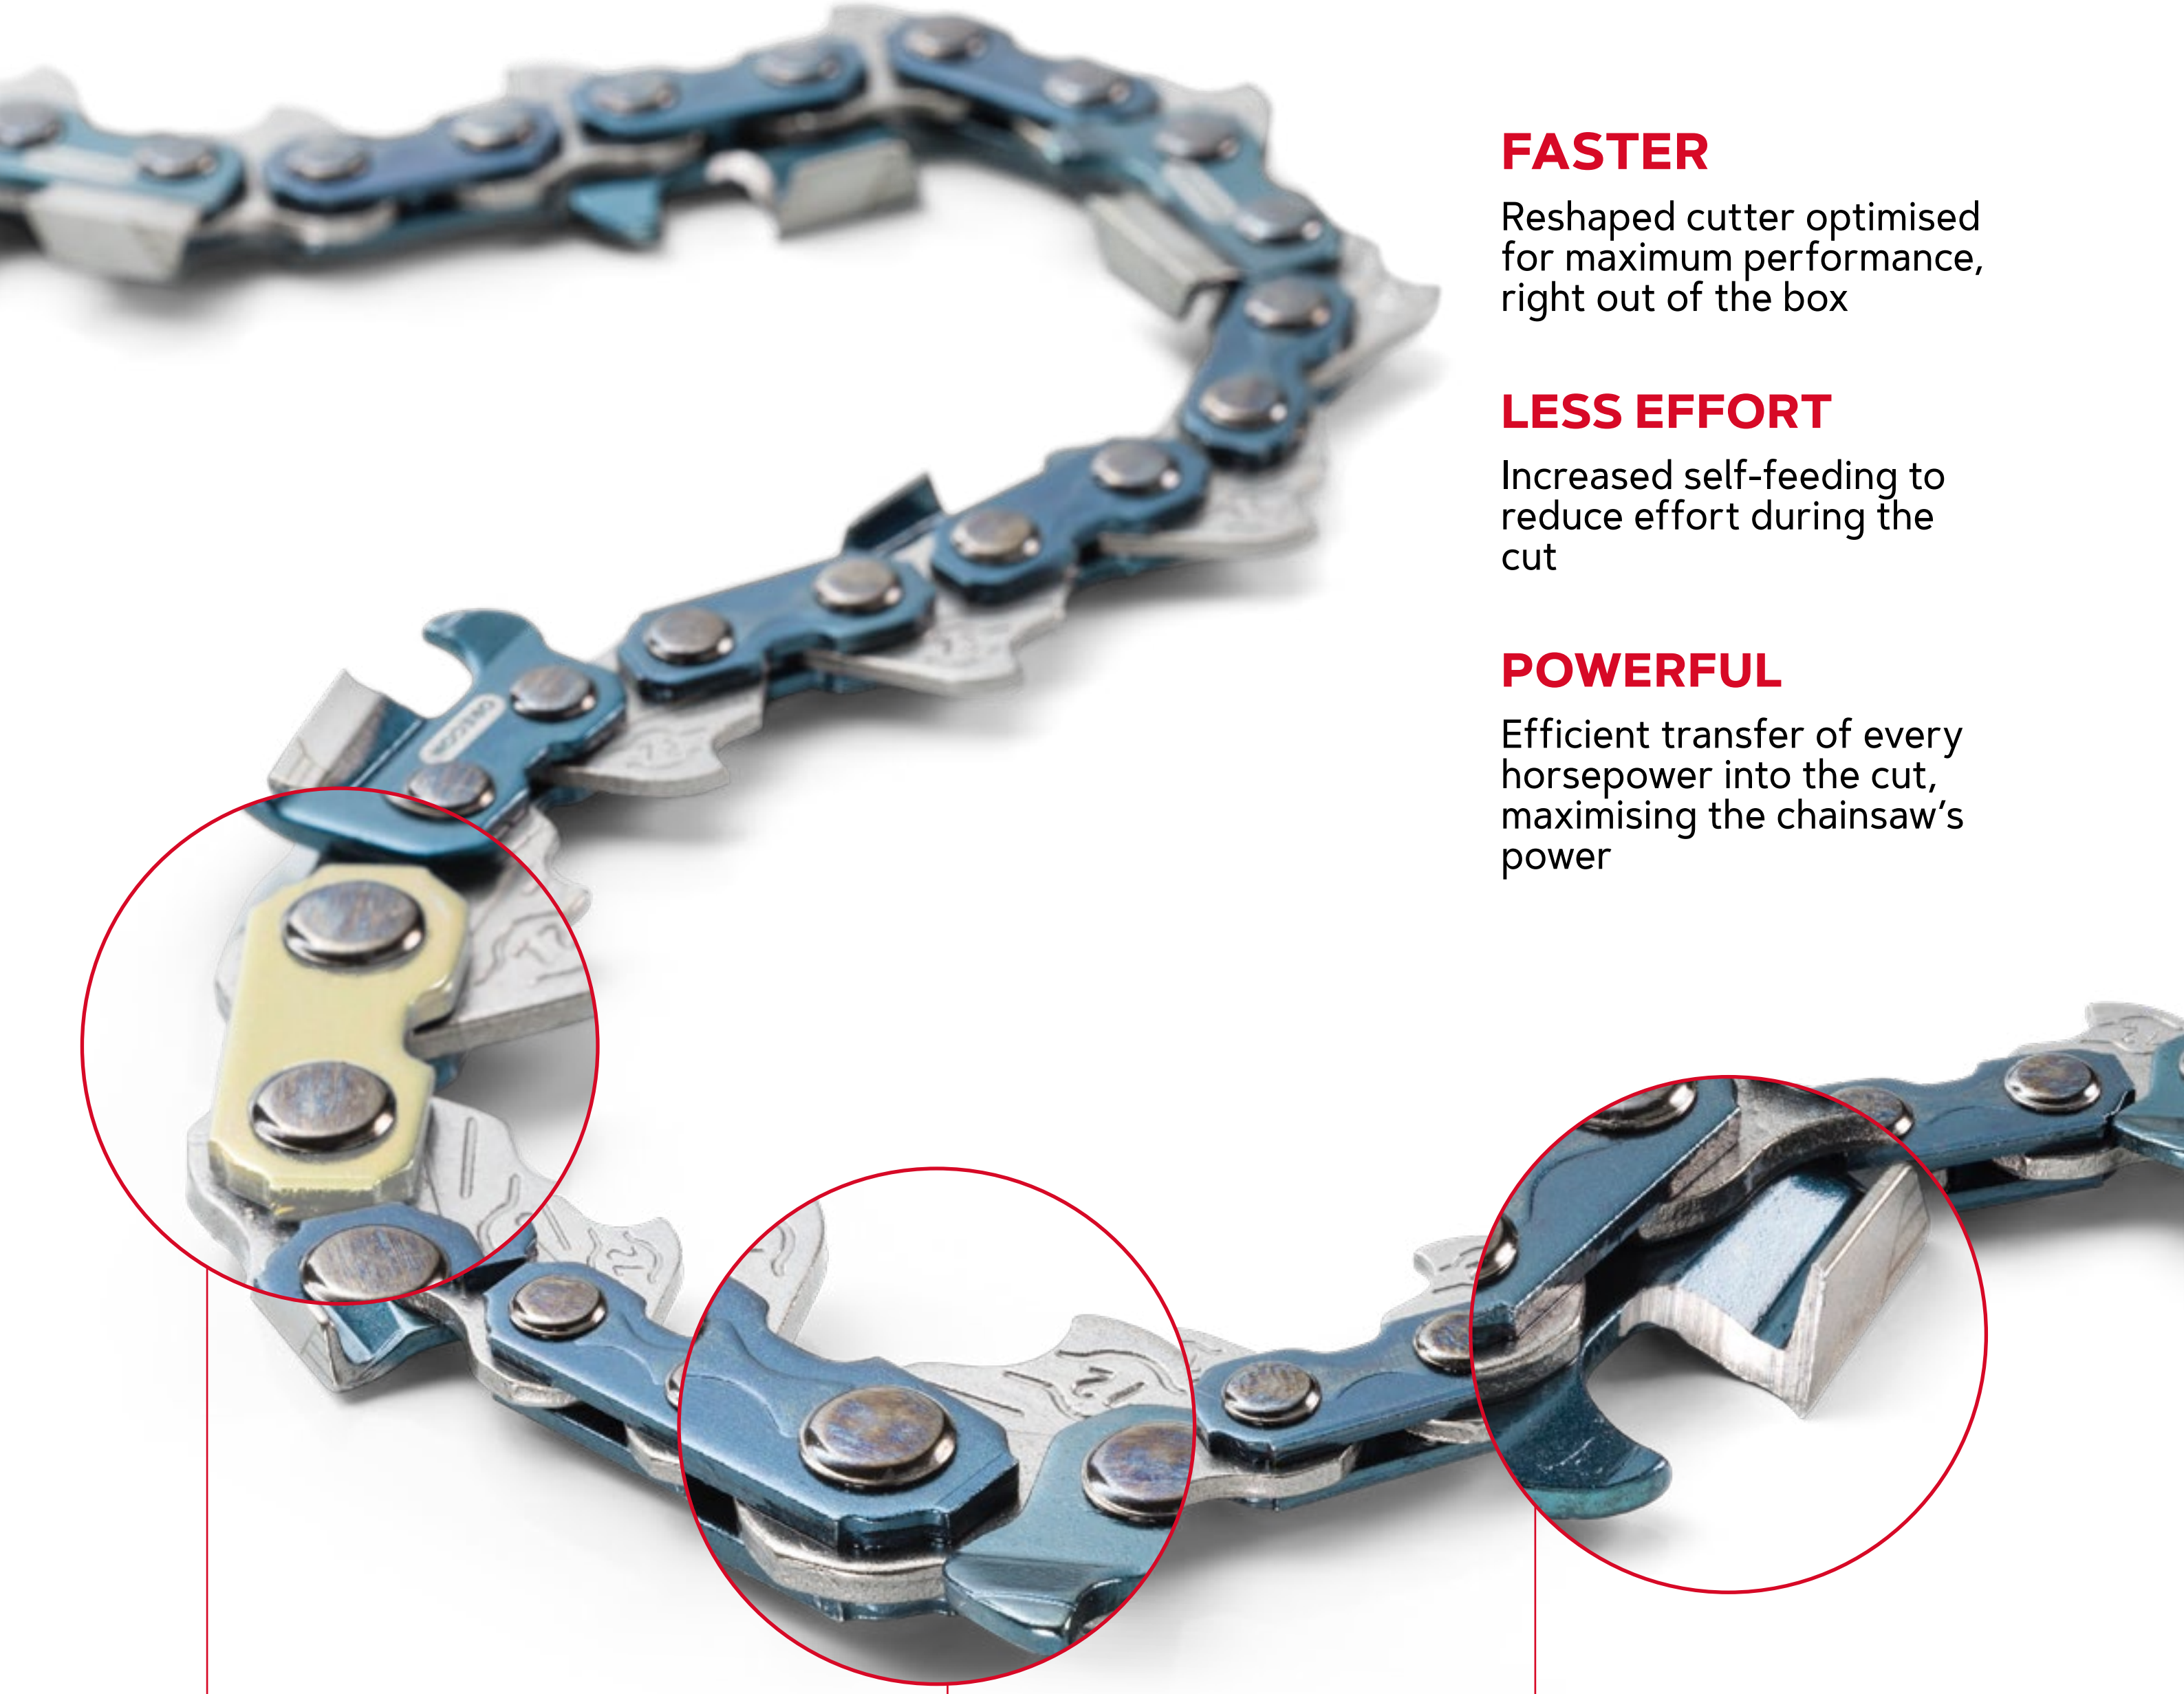

Gold Loop start/stop Indicator, enhanced filing indicators (side/top/end-of-life) and easier to file geometry.

LubriTec™ oiling sytem. Less friction, longer life.

Reshaped Full-Chisel cutters. Cleaner, Sharper, more durable cutting edge. Optimised ramped depth gauge design.

Bumperless, low kickback, low vibration.

OREGON
PowerCut™

THE WORLD'S SHARPEST, CLEANEST CUTTING EDGE FROM OREGON'S PROPRIETARY GRIND PROCESS

Multi-axis grind technology.
No need to file out-of-box.

Dry-touch oiled from factory. Less mess.

Reduces the force needed by the operator by up to 14%

Engineered to utilise the power of today's high output professional saw.

Skip sequence available on request

A sharper, reshaped cutter provides faster speed and requires less effort in the cut

Saw Size

50–100 cc

Bar Lengths

40–90 cm (16–36")

Full Chisel

7

LubriTec™
OILING SYSTEM

OREGON			Loop Sizes Available											
72EXL	.050"	1.3 mm												100ft
73EXL	.058"	1.5 mm	56	60	64		68	72		84	92			100ft
75EXL	.063"	1.6 mm	56	60		66		72	76	84		98	114	100ft

OREGON			Loop Sizes Available											
73EXJ	.058"	1.5 mm												100ft
75EXJ	.063"	1.6 mm												100ft

POWERSHARP®

PRECISION SAW CHAIN SHARPENING SYSTEM

Occasional saw chain users sometimes spend too much time using hand files to sharpen dull chain. Fumbling an inexact sharpening is a thing of the past with PowerSharp. PowerSharp chain goes from dull to sharp in as little as 3 or 4 seconds.

PowerSharp is also ideal for professional users who want greater productivity on the job. Professionals get precise and knife-sharp edges quickly and easily – every time.

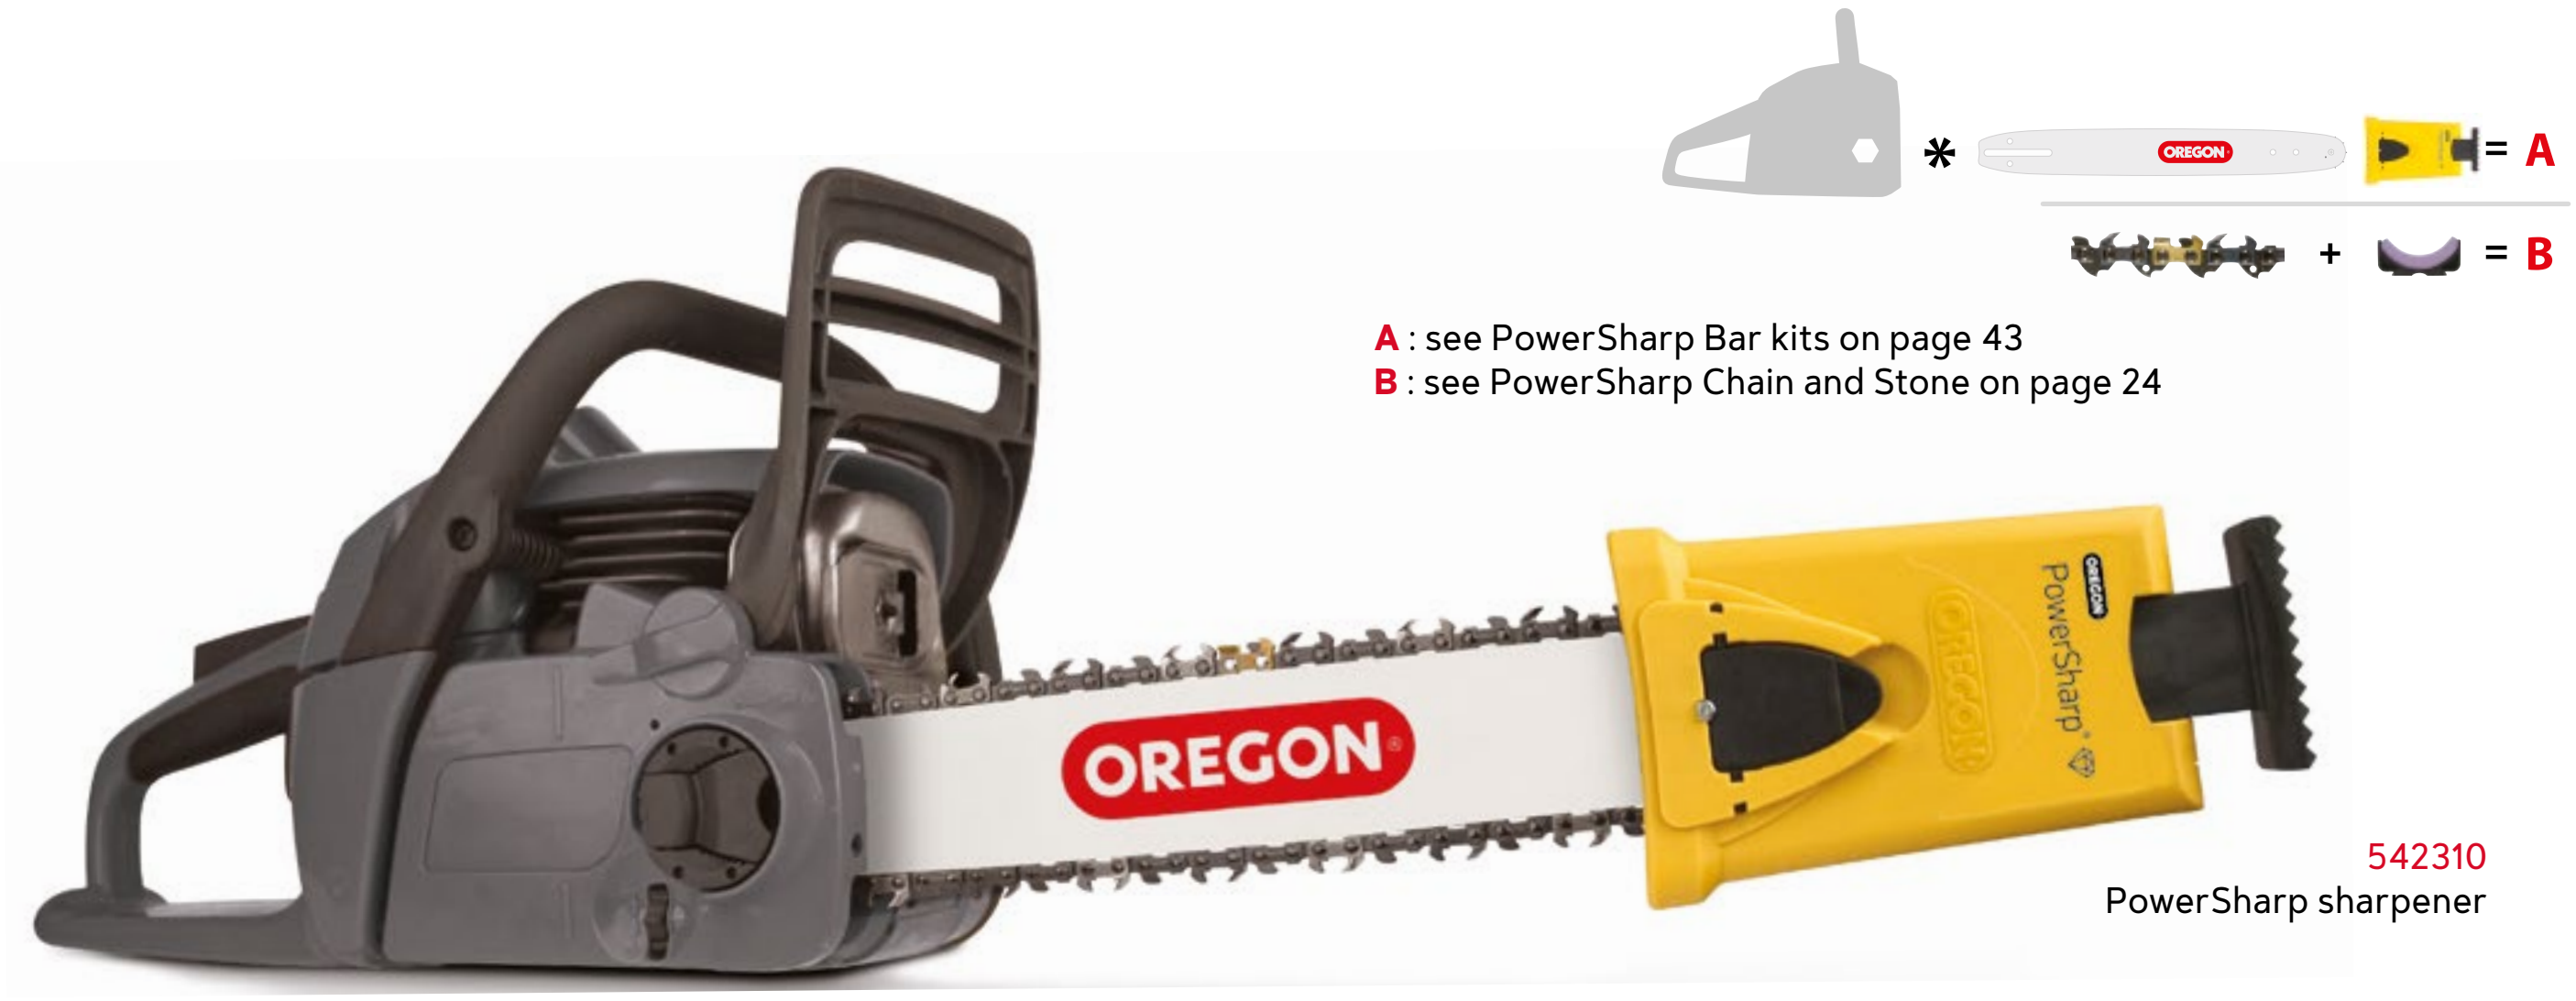

A : see PowerSharp Bar kits on page 43
B : see PowerSharp Chain and Stone on page 24

542310
PowerSharp sharpener

PowerSharp® is an easy-to-use, precision sharpening system that gives chain saw users the power to sharpen their chain in a matter of seconds with a simple-to-use attachment.

FAST	- Goes from dull to sharp in as little as 3 or 4 seconds (Up to 10 on electric models).
EASY	- Only three steps to faster, easier cutting.
PORTABLE	- Bar-mount sharpener is lightweight, durable, and highly visible.
PRECISE	- Exact alignment insures perfect cutter geometry.
TOUGH	- Durable and hardworking as other Oregon 3/8” pitch, low-profile chain.

SHARPER BY NATURE™

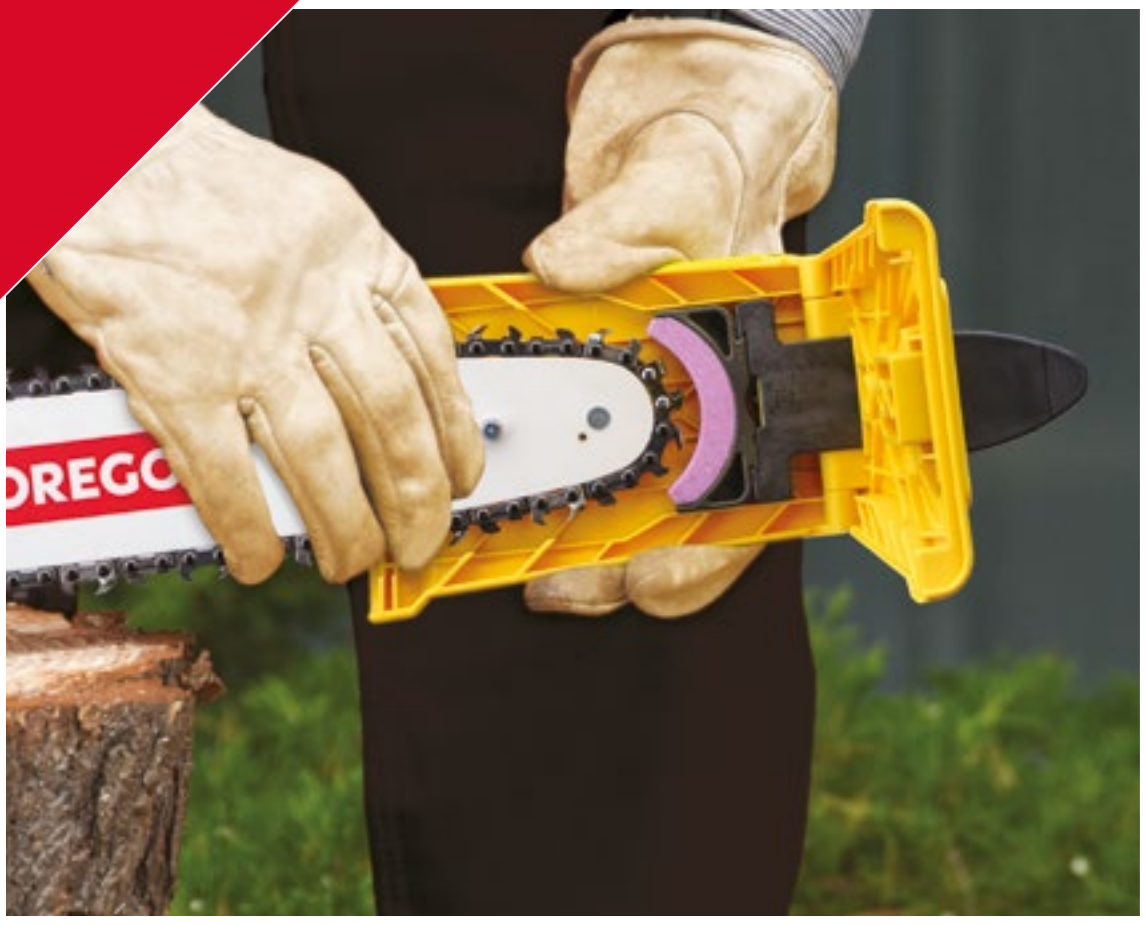

ATTACH

When the chain dulls from normal use simply attach the bar-mount sharpener to the PowerSharp® guide bar. Twin guide holes in the tip of the guide bar helps insure a perfect alignment every time the sharpener is used.

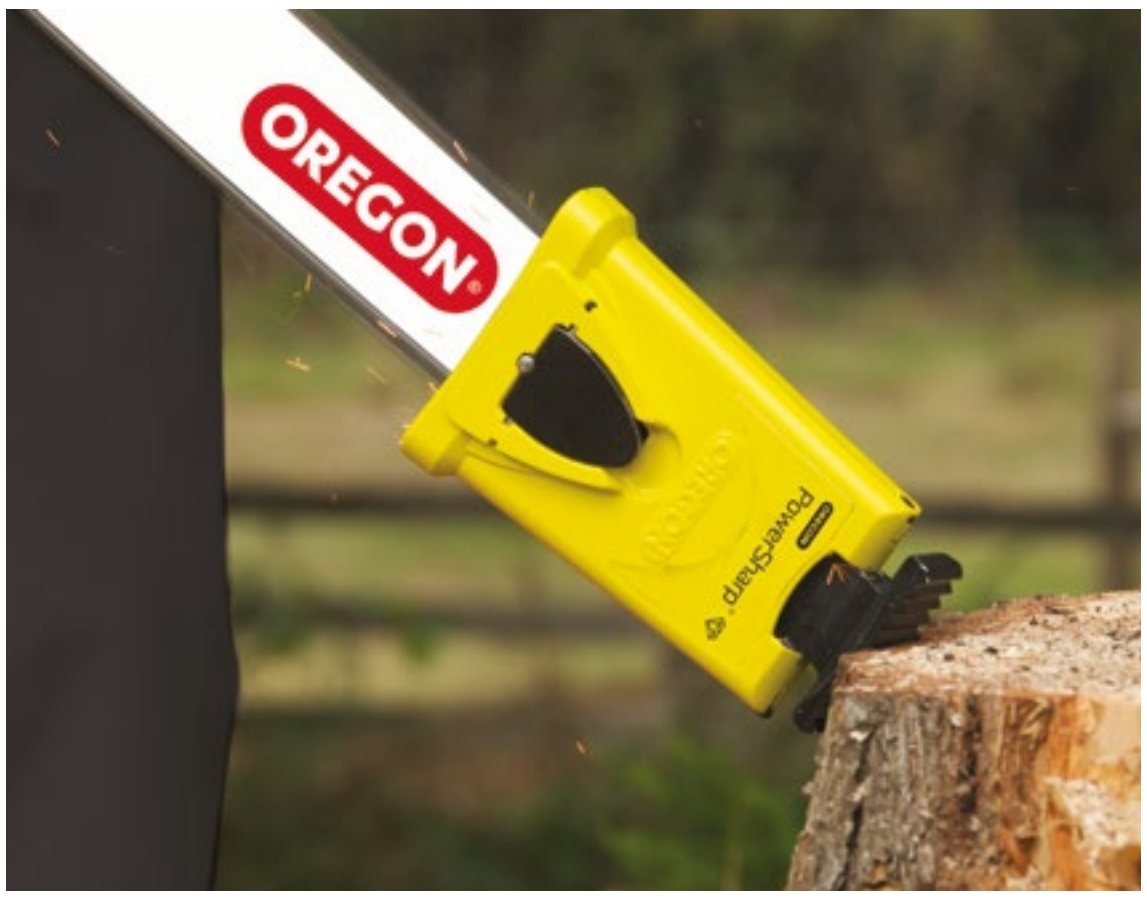

SHARPEN

Press the tip of the sharpener to a solid surface for 3 or 4 seconds at full throttle (Up to 10 seconds on Electric saws).

CUT

And it's back to the job,
working faster with less effort.

TRUSTED BY

SINCE

PROS™

1947

LOGGERS
+
ARBORISTS

DESIGNED &
ENGINEERED
IN THE USA

OREGON®

SAW CHAINS

Saw Chain Terminology

PARTS OF SAW CHAIN

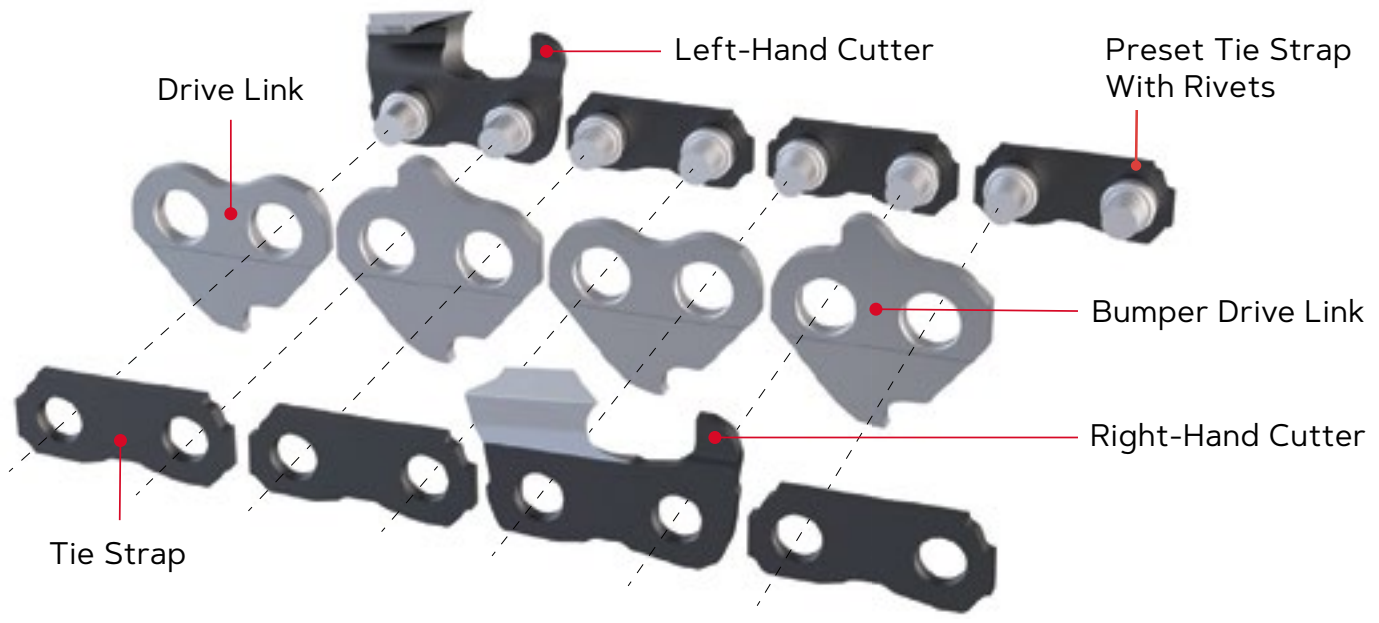
Drive Link
Left-Hand Cutter
Preset Tie Strap With Rivets
Bumper Drive Link
Right-Hand Cutter
Tie Strap

PARTS OF A CUTTER


Cutting Corner
Depth Gauge
Gullet
Toe
Top Plate
Side Plate
Rivet Hole
Heel

PARTS OF A RIVET



LOW VIBRATION

Less vibration equals more comfort. We wanted to lessen vibration-induced white finger (VWF), so we created a small space between the saw chain and the guide bar. A lot of the energy gets dissipated by the saw chain, acting as a shock absorber. It never reaches the guide bar, the saw — or most important — the operator.

Our low vibration design reduces vibrations by 25% or more.

Low vibration heel

FILING INDICATORS

Your sharpening made easier and more accurate. Special filing marks show the best top-plate angle. Lines make it easier for filing the correct top-plate angle and help maintain equal cutter lengths. Filing indicators show you when cutters have reached the end of their life. Cutters should not be sharpened beyond the line.


Filing indicators

BLUED COMPONENTS

Our Blued Components give you high-quality resistance to corrosion with the presence of protective oil. A precise and controlled tempering process results in a blue surface, designating our best-in-class saw chain.



CHROME-PLATED CUTTERS

Your chain stays sharper, longer. Oregon electroplates a layer of industrial hard chrome to all our saw chain cutters. Chrome delivers a harder surface and better wear resistance. So you spend more time cutting and less time filing or grinding the chain.


Chrome-plating

HARDENED RIVETS

For a longer working saw chain, Oregon induction hardens and quenches all saw chain rivets, delivering a high quality, load-bearing surface that resists wear and improves strength. Less wear and chain stretch means fewer chain tension adjustments.



Chain Cutter Sequence Terminology

STANDARD



SKIP SEQUENCE



Consumer users of chainsaws will probably never need to use a skip sequence chain. However, professional or commercial chainsaw operators who use their saws frequently and who use longer bars may prefer a skip chain for these reasons:

- Fewer cutters to sharpen makes sharpening faster
- Greater clearance for better chip flow – the larger the wood being cut and the longer the bar used, the more important good chip flow becomes

LubriTec™ OILING SYSTEM

You want tools to work smarter and last longer. We designed LubriTec to deliver the best possible lubrication for your saw chain. Keeping lubrication where it's needed most means a longer lasting saw chain and guide bar and less down time. Here's how it works:

LUBRITEC FOR THE CHAIN

- Lubricant is held inside LubriTec reservoirs.
- Oil flows freely into and around the saw chain parts and the guide bar. Oil is held in the high-friction zone where the saw chain and guide bar groove walls make contact.
- The presence of lubricant lowers friction during the start-up period before the saw's oiling system reaches its peak function.
- LubriTec strengthens the saw chain tie straps and reduces their tendency to flex during operation, making a more stable and durable saw chain.

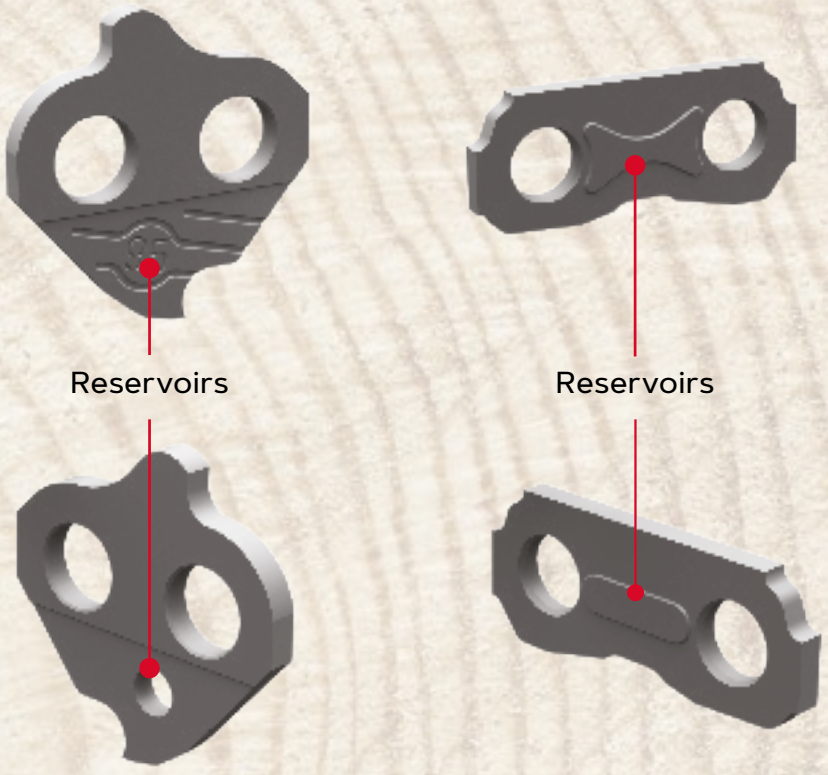

LUBRITEC FOR THE GUIDE BAR

- Our LubriTec guide bar dam is cleverly designed to keep lubricant where it's needed most. It looks like a small barrier and is found in the bottom of the guide bar's groove, just behind the oil hole. It both increases available oil and reduces oil hole plugging. Resulting in better overall lubrication.
- The LubriTec angled oil hole virtually eliminates guide bar oil hole plugging. The oil hole slopes up toward the top of the guide bar and forward toward the nose. It's approximately 40% smaller in diameter than a standard hole, increasing velocity as oil enters the guide bar. It also helps clear sawdust and debris away from the hole during operation.

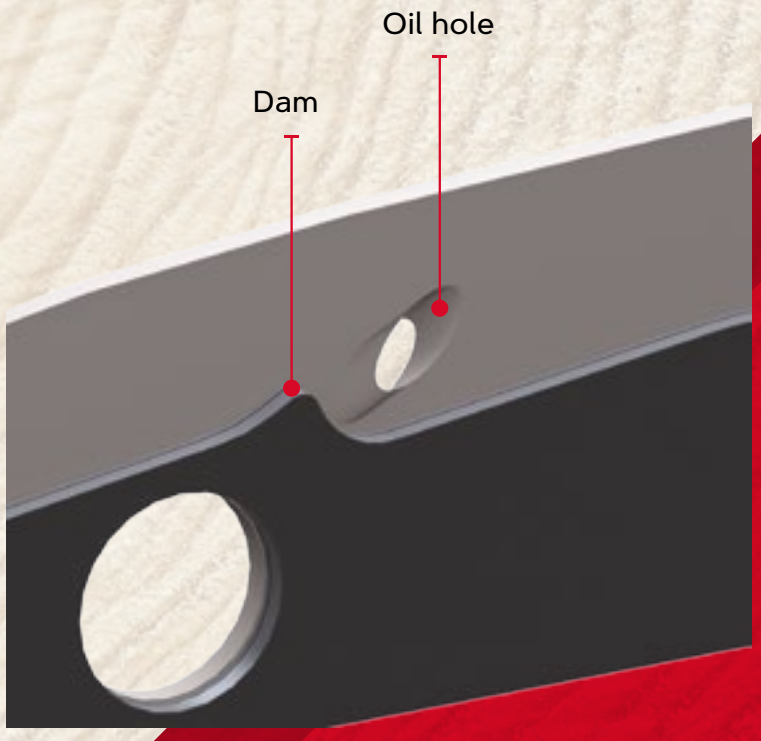

Chains part numbers and families overview

80 TXL 064 E

CHAIN PITCH AND GAUGE			
1/4" LOW PROFILE	24	.043"	1,1mm
1/4"	25	.050"	1,3mm
.325" LOW PROFILE	80	.043"	1,1mm
3/8" LOW PROFILE	90	.043"	1,1mm
	91	.050"	1,3mm
.325"	95	.050"	1,3mm
	20	.050"	1,3mm
	21	.058"	1,5mm
	22	.063"	1,6mm
3/8"	72	.050"	1,3mm
	73	.058"	1,5mm
	75	.063"	1,6mm
.404"	27	.063"	1,6mm
	59	.063"	1,6mm
	18	.080"	2,0mm
	19	.080"	2,0mm
3/4"	11	.122"	3,1mm

CHAIN FAMILY	
ACL	VersaCut™
AP	ControlCut™
BPX	ControlCut™
DPX/DX	VersaCut™
EXL	PowerCut™
EXJ	PowerCut™
H	Harvester
HX	Harvester
L	PowerCut™
LGX	PowerCut™
LPX	PowerCut™
P	Standard
PS	PowerSharp™
PX	AdvanceCut™
R	RipCut™
RD	RipCut™
RX	RipCut™
TXL	SpeedCut™ SpeedCut™ Nano
VXL	VersaCut™
X	VersaCut™

LENGTH number of drivelinks	
...	...
034	34
040	40
042	42
044	44
045	45
046	46
047	47
050	50
051	51
052	52
053	53
055	55
056	56
057	57
058	58
059	59
060	60
062	62
063	63
064	64
065	65
066	66
067	67
068	68
072	72
074	74
076	76
078	78
080	80
081	81
084	84
091	91
092	92
098	98
102	102
114	114
115	115
135	135
100	100 ft

PACKAGING TYPE

OREGON
SpeedCut

E	Loops
R	100 ft Reels

OREGON
100'/30.5 m

	÷2							narrow kerf		Page
BETTER	1/4" LOW PROFILE	NEW	AdvanceCut™	24AP	Semi-chisel	.043"	1,1mm		≤ 38 cc	20
BEST	1/4"		ControlCut™	25AP	Micro Chisel®	.050"	1,3mm		≤ 38 cc	20
	.325" LOW PROFILE		SpeedCut™ Nano	80TXL	Micro Chisel®	.043"	1,1mm		20 → 38 cc	20
BETTER	3/8" LOW PROFILE		AdvanceCut™	90PX	Chamfer Chisel™	.043"	1,1mm	●	≤ 42 cc	22
GOOD			Standard	91P	Chamfer Chisel™	.050"	1,3mm		≤ 42 cc	22
BETTER			AdvanceCut™	91PX	Chamfer Chisel™	.050"	1,3mm		≤ 42 cc	22
BEST			VersaCut™	91VXL	Semi-chisel	.050"	1,3mm		≤ 42 cc	22
			DuraCut™	M91VXL	Semi-chisel	.050"	1,3mm		≤ 42 cc	22
BETTER			PowerSharp™	91PS	Powersharp	.050"	1,3mm		≤ 42 cc	24
BEST			RipCut™	91R	Chamfer Chisel™	.050"	1,3mm		Ripping cuts only	24
	.325"		SpeedCut™	95TXL	Micro Chisel®	.050"	1,3mm	●	38 → 55 cc	25
			DuraCut™	M95VPX	Micro Chisel®	.050"	1,3mm	●	38 → 55 cc	25
			ControlCut™	20BPX	Micro Chisel®	.050"	1,3mm		38 → 62 cc	26
			ControlCut™	21BPX	Micro Chisel®	.058"	1,5mm		38 → 62 cc	26
			ControlCut™	22BPX	Micro Chisel®	.063"	1,6mm		38 → 62 cc	26
			PowerCut™	20LPX	Full chisel	.050"	1,3mm		38 → 62 cc	27
			PowerCut™	21LPX	Full chisel	.058"	1,5mm		38 → 62 cc	27
			PowerCut™	22LPX	Full chisel	.063"	1,6mm		38 → 62 cc	27
			DuraCut™	M21LPX	Full chisel	.058"	1,5mm		38 → 62 cc	27
			PowerCut™	20LGX	Full chisel	.050"	1,3mm		38 → 62 cc	28
			PowerCut™	21LGX	Full chisel	.058"	1,5mm		38 → 62 cc	28
			PowerCut™	22LGX	Full chisel	.063"	1,6mm		38 → 62 cc	28
	3/8"		VersaCut™	72DPX/DX	Semi-chisel	.050"	1,3mm		50 → 100 cc	29
			VersaCut™	73DPX/DX	Semi-chisel	.058"	1,5mm		50 → 100 cc	29
			VersaCut™	75DPX/DX	Semi-chisel	.063"	1,6mm		50 → 100 cc	29
			PowerCut™	72LPX	Full chisel	.050"	1,3mm		50 → 100 cc	30
			PowerCut™	73LPX	Full chisel	.058"	1,5mm		50 → 100 cc	30
			PowerCut™	75LPX	Full chisel	.063"	1,6mm		50 → 100 cc	30
			DuraCut™	M73LPX	Full chisel	.058"	1,5mm		50 → 100 cc	30
			DuraCut™	M75LPX	Full chisel	.063"	1,6mm		50 → 100 cc	30
			PowerCut™	72EXL	Full chisel	.050"	1,3mm		50 → 100 cc	31
			PowerCut™	73EXL	Full chisel	.058"	1,5mm		50 → 100 cc	31
			PowerCut™	75EXL	Full chisel	.063"	1,6mm		50 → 100 cc	31
		Skip	PowerCut™	73EXJ	Full chisel	.058"	1,5mm		50 → 100 cc	31
		Skip	PowerCut™	75EXJ	Full chisel	.063"	1,6mm		50 → 100 cc	31
			RipCut™	72RD	Semi-chisel	.050"	1,3mm		Ripping cuts only	32
			RipCut™	73RD	Semi-chisel	.058"	1,5mm		Ripping cuts only	32
			RipCut™	75RD	Semi-chisel	.063"	1,6mm		Ripping cuts only	32
	.404"		VersaCut™	27X	Micro Chisel®	.063"	1,6mm		≥ 65 cc	32
			VersaCut™	59ACL	Chipper	.063"	1,6mm		≥ 65 cc	33
			PowerCut™	59L	Full chisel	.063"	1,6mm		≥ 65 cc	33
			RipCut™	27R	Micro Chisel®	.063"	1,6mm		Ripping cuts only	33
		Skip	RipCut™	27RX	Micro Chisel®	.063"	1,6mm		Ripping cuts only	33
	.404"		Harvester	18HX	Micro Chisel®	.080"	2,0mm			Harvester catalogue
			Harvester	19HX	Chamfer Chisel™	.080"	2,0mm			
	3/4"		Harvester	11H	Semi-chisel	.122"	3,1mm			

NEW AdvanceCut™ 24AP

≤ 38 cc

Made for precision pruning when the quality and smoothness of the cut matter most, 24AP is a 1/4'' pitch low-profile 1,1mm gauge chain designed for use with one-handed pruners, pole-saws and small petrol or battery powered chainsaws.

24AP Semi Chisel saw chain is ideal for precise pruning of small diameter branches.

1/4″ LOW PROFILE		24 : 1,1mm	3,2mm	30°	55°	0,50mm

28	56	57	64	65	72
24AP028E	24AP056E	24AP057E	24AP064E	24AP065E	24AP072E

The 24AP chain is not for sale, resale, or use in the united states or Germany.

ControlCut™ 25AP

≤ 38 cc

Get your smallest jobs done just right. 25AP is light-weight, smooth chain, ideal for pruning — our Micro Chisel® cutters have small-radius working corners for excellent performance, and they are easy to maintain.
The 25AP is small and light-weight, making it easy to use and maneuver.

1/4″		25 : 1,3mm	4,0mm	30°	55°	0,64mm

42	58	60	2392
25AP042E	25AP058E	25AP060E	25AP100R

SpeedCut™ Nano 80TXL

20 → 38 cc

New patented-shape Micro Chisel® chain designed to maximize cutting speed and empowering compact saws: Faster speed, Smooth cut and unstoppable performance.
Ideal for arborists and pruners.

.325″ LOW PROFILE		80 : 1,1mm	LubriTec™ OILING SYSTEM	4,0mm	30°	70°	0,64mm

26	32	38	46	51	59	64	70
80TXL026E	80TXL032E	80TXL038E	80TXL046E	80TXL051E	80TXL059E	80TXL064E	80TXL070E

Stihl		10″ (25cm)			12″ (30cm)			14″ (35cm)			16″ (40cm)		
MS 150 / MS 150T MS 151 / MS 151T	610727N	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59			
MSA 161T	625333	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59	164TXLNA074	80TXL064E	64
MS 170 / MS 171, MS 180 / MS 181	610726N				124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59	164TXLNA074	80TXL064E	64
MS 192 / MS 192T, MS 193 / MS 193T, MS 194 / MS 194T, MS 200 / MS 200T, MS 201 / MS 201T	610725N	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59	164TXLNA074	80TXL064E	64

Husqvarna		**10″ (25cm)**			**12″ (30cm)**			**14″ (35cm)**			**16″ (40cm)**		
T435	610729N	104TXLNA095	80TXL046E	46	124TXLNA095	80TXL051E	51	144TXLNA095	80TXL059E	59	164TXLNA095	80TXL064E	64
T525	627943												
535i XP, T535i XP 536Li XP,T536Li XP, 540i XP, T540i XP	610730N												
T540 XP, T540 XP II	610728N												

Echo		**10″ (25cm)**			**12″ (30cm)**			**14″ (35cm)**			**16″ (40cm)**		
CCS-58V	629320	104TXLNA041	80TXL046E	46	124TXLNA041	80TXL051E	51	144TXLNA041	80TXL059E	59	164TXLNA041	80TXL064E	64
CS-2511TES	629318												
CS-303T	629322												

CONVERSION KITS

80TXL must be used together with the corresponding guide bar and sprocket and is not compatible with other existing cutting systems. SpeedCut Nano conversion kits include a sprocket, a guide bar and a chain loop.

Stihl®	**10″** (25cm)	**12″** (30cm)	**14″** (35cm)	**16″** (40cm)
MS 150 / MS 150T MS 151 / MS 151T	635137	614383	614382	
MSA 161T	637260	637261	637262	637263
MS 170, MS 171 MS 180, MS 181		637259	614384	614385
MS 192 / MS 192T MS 193 / MS 193T MS 194 / MS 194T MS 200 / MS 200T MS 201 / MS 201T	614379	614380	614377	614381

Husqvarna®	**10″** (25cm)	**12″** (30cm)	**14″** (35cm)	**16″** (40cm)
T 435	614388	614391	614395	614398
T 525	637264	637265	637266	637267
535i XP / T535i XP, 536Li XP / T536LiXP, 540i XP / T540i XP	614389	614392	614396	614399
540, T540 XP, T540 XP II	614387	614390	614393	614397

Echo	**10″** (25cm)	**12″** (30cm)	**14″** (35cm)	**16″** (40cm)
CCS-58V	637231	637232	637233	637234
CS-2511TES	637235	637236	637237	637238
CS-303T	637255	637256	637257	637258

OREGON
OREGON
SpeedCut Nano
SpeedCut NANO
OregonProducts.com
OREGON
SpeedCut Nano

Oregon® is a registered trademark of Oregon Tool Inc.
All other marks are the property of their respective owners.

AdvanceCut™ 90PX

OREGON
OREGON
OREGON
90
90
90

≤ 42 cc

Maintain your trees with ease. 90PX offers higher chain efficiency, ideal for small, low powered saws great for landscapers and homeowners. The narrow .043" gauge reduces the weight of the bar and chain by roughly 15%. Low-vibration, low kickback Chamfer Chisel™ cutters' twin cutting corners offer outstanding performance. They are durable, easy to maintain and forgiving, comparable to round-cornered chains. Bumper drive link paired with depth gauge design, offers reduced kickback with strong performance.

3/8" LOW PROFILE	7	90 : 1,1mm	Narrow Kerf	LubriTec™ OILING SYSTEM	4,5mm	30°	55°	0,64mm

33	34	40	44	45	46	50
90PX033E	90PX034E	90PX040E	90PX044E	90PX045E	90PX046E	90PX050E
52	56	57	1637			
90PX052E	90PX056E	90PX057E	90PX100R			

91P

OREGON
OREGO
91
91
91

≤ 42 cc

91P is for homeowners and occasional users who want a low kickback saw chain. The Chamfer Chisel cutters' twin cutting corners offer outstanding performance. Bumper drive link paired with depth gauge design, offers reduced kickback with strong performance.

3/8" LOW PROFILE	7	91 : 1,3mm	4,0mm	30°	55°	0,64mm

40	44	45	50	52	53	55
91P040E	91P044E	91P045E	91P050E	91P052E	91P053E	91P055E
56	57	62	1637			
91P056E	91P057E	91P062E	91P100R			

AdvanceCut™ 91PX

OREGON
OREGON
OREGON
91
91
91

≤ 42 cc

91PX is for homeowners and occasional users who want a low-vibration and low kickback saw chain. The Chamfer Chisel cutters' twin cutting corners offer outstanding performance. They are durable, easy to maintain and forgiving, comparable to round-cornered chains. Bumper drive link paired with depth gauge design, offers reduced kickback with strong performance. 91PX incorporates LubriTec oiling features for a longer lasting saw chain and less down time.

3/8" LOW PROFILE	91 : 1,3 mm	LubriTec™ OILING SYSTEM	4,0 mm	30°	55°	0,64 mm

33	40	44	45	47	50	52
91PX033E	91PX040E	91PX044E	91PX045E	91PX047E	91PX050E	91PX052E
53	55	56	57	62	1637	
91PX053E	91PX055E	91PX056E	91PX057E	91PX062E	91PX100R	

VersaCut™ 91VXL

OREGON
OREGON
OREGON
91
91
91
91
91

≤ 42 cc

91VXL is a high-performance, Low Profile chain. Ideal for professional arborists and orchardists who use light-weight chain saws. Low vibration, semi-chisel cutters provide an aggressive cutting edge with a forgiving sharpening profile and good stay-sharp. Cutter top-plates are 33% longer than standard 91 cutters.

3/8" LOW PROFILE	91 : 1,3 mm	LubriTec™ OILING SYSTEM	4,0 mm	30°	55°	0,64 mm

40	44	45	47	50	52	53
91VXL040E	91VXL044E	91VXL045E	91VXL047E	91VXL050E	91VXL052E	91VXL053E
55	56	57	62	1637		
91VXL055E	91VXL056E	91VXL057E	91VXL062E	91VXL100R		

DuraCut™ M91VXL

OREGON
OREGON
OREGON
91
91
91
91
91

≤ 42 cc

Work longer in dirty conditions with this more durable version of our aggressive 91VXL chain; keeps cutting up to 3 times longer vs standard 3/8" LP chains. Maintain with standard maintenance tools. (Formerly named MultiCut™)

3/8" LOW PROFILE	91 : 1,3 mm	LubriTec™ OILING SYSTEM	4,0 mm	30°	55°	0,64 mm

44	50	52	55	56	409
M91VXL044E	M91VXL050E	M91VXL052E	M91VXL055E	M91VXL056E	M91VXL025R

PowerSharp™ 91PS

≤ 42 cc

Sharpen the 91PS chain in a flash. Go from dull to sharp in just three seconds with this easy-to-use, precision sharpening system. A simple attachment lets you sharpen your chain in three easy steps. The portable bar-mount sharpener is light-weight and durable. Get precise sharpening through exact alignment between cutter and honing surface, for perfect angles and knife-sharp edges. Stays sharp three times longer than 91PX saw chain.

B	**3/8″** LOW PROFILE		91 : 1,3 mm	3 sec		**PowerSharp®**	**LubriTec™** OILING SYSTEM

50	52	55	56	62
PS50E	PS52E	PS55E	PS56E	PS62E

Note : Onboard PowerSharp replacement chains for CS1500 are in the Oregon Power Equipment section.

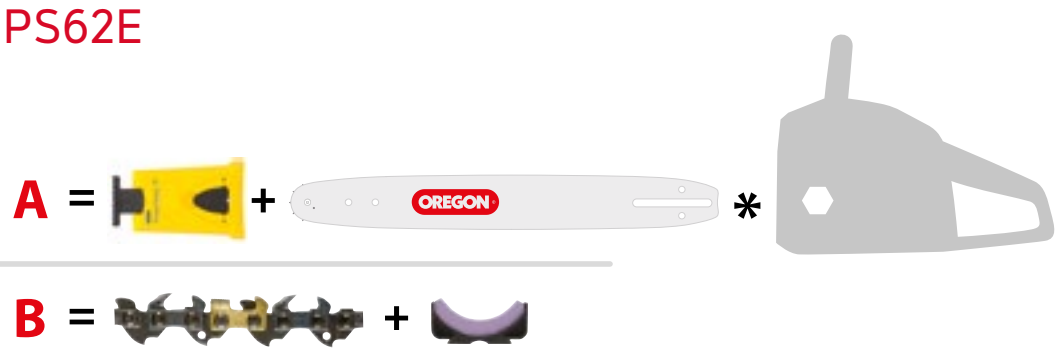

A : see PowerSharp Bar kits on page 43

RipCut™ 91R

91R is a chain intended for ripping in mobile sawmills. The cutting angle of the chain at 5° is adapted for sawing longitudinal fibers.

RipCut's precise ripping cuts give you a smooth surface every time you cut parallel to the wood grain. RipCut isn't recommended for hand-held use, but it suits experienced millwrights just fine.

3/8″ LOW PROFILE		91 : 1,3 mm	4,0 mm	5°	55°	0,64 mm

1637
91R100R

SpeedCut™ 95TXL

Narrow Kerf

38 → 55 cc

Work faster, sharper, easier, with a more efficient chain. Ideal for arborists and property owners who want top performance. 95TXL is for saws up to 55 cc. SpeedCut™ 95TXL narrow kerf cutting systems are more efficient, needing less power from the saw than standard cutting systems. Low-vibration, Micro Chisel cutters have small-radius working corners for excellent performance and easy maintenance. Get a faster, easier cut with a reshaped cutting surface. A sharper, more durable cutting edge from a new precision grind and optimized cutting angle. Always use SpeedCut narrow kerf chain in combination with Speedcut, AdvanceCut or AdvanceCut HD bars.

.325″		95 : 1,3 mm	Narrow Kerf	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm

56	60	62	64	66	67	72
95TXL056E	95TXL060E	95TXL062E	95TXL064E	95TXL066E	95TXL067E	95TXL072E
74	78	1848				
95TXL074E	95TXL078E	95TXL100R				

DuraCut™ M95VPX

Narrow Kerf

38 → 55 cc

Cut effectively in dirty and abrasive conditions with this more durable version of our high-performing .325" pitch "Narrow Kerf" 95VPX; keeps cutting up to 3 times longer vs standard .325" chains. (Formerly named MultiCut™) Maintenance with standard maintenance tools.

.325″		95 : 1,3 mm	Narrow Kerf	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm

56	64	72	462
M95VPX056E	M95VPX064E	M95VPX072E	M95VPX025R

ControlCut™ 20-Series BPX

38 → 62 cc

An ideal choice for occasional users like property owners and commercial cutters. The low-vibration, Micro Chisel cutters have small-radius working corners for excellent performance and easy maintenance. Low kickback design.

.325"		20 : 1,3 mm	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm

64	66	72	1848
20BPX064E	20BPX066E	20BPX072E	20BPX100R

.325"		21 : 1,5 mm	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm

56	64	66	68	72	76	78
21BPX056E	21BPX064E	21BPX066E	21BPX068E	21BPX072E	21BPX076E	21BPX078E
1848						
21BPX100R						

.325"		22 : 1,6 mm	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm

62	67	68	74	1848
22BPX062E	22BPX067E	22BPX068E	22BPX074E	22BPX100R

PowerCut™ 20-Series LPX

38 → 62 cc

An ideal chain for professional woodcutters who use .325″ pitch saws. Low-vibration, full chisel cutters offer top performance. Offset depth gauges prevent cutters from driving into the sidewall of the cut, offering a smoother cut.

.325″	7	20 : 1,3 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm

56	64	66	72	1848
20LPX056E	20LPX064E	20LPX066E	20LPX072E	20LPX100R

.325″	7	21 : 1,5 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm

56	64	66	72	76	78	1848
21LPX056E	21LPX064E	21LPX066E	21LPX072E	21LPX076E	21LPX078E	21LPX100R

.325″	7	22 : 1,6 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm

56	62	67	68	74	1848
22LPX056E	22LPX062E	22LPX067E	22LPX068E	22LPX074E	22LPX100R

DuraCut™ M21 LPX

38 → 62 cc

Cut effectively in dirty and abrasive conditions with this more durable version of our high-performing .325" pitch LPX chain; keeps cutting up times longer vs standard .325" chains. (Formerly named MultiCut™.) Maintain with standard maintenance tools.

.325″	7	21 : 1,5 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm

64	67	462
M21LPX064E	M21LPX072E	M21LPX025R

PowerCut™ 20-Series LGX

38 → 62 cc

The 20-Series LGX has been engineered to harness the power of today's high-performance saws. Blued, full-chisel cutters and advanced LubriTec™ oiling features mean this chain is ready to work as hard as you are.

.325"	7	20 : 1,3 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm

64	72	1848
20LGX064E	20LGX072E	20LGX100R

.325"	7	21 : 1,5 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm

64	66	68	80	1848
21LGX064E	21LGX066E	21LGX068E	21LGX080E	21LGX100R

.325"	7	22 : 1,6 mm	LubriTec™ OILING SYSTEM	4,8 mm	25°	55°	0,64 mm

62	67	68	74	1848
22LGX062E	22LGX067E	22LGX068E	22LGX074E	22LGX100R

VersaCut™ 70-Series DPX/DX

72
72
72
OREGON
OREGON
OREGON

50 → 100 cc

An ideal choice for occasional and commercial use. Easy to maintain. Low-vibration, semi-chisel cutter designs work fast. This design is typically more tolerant of sharpening errors than chisel cutters.

Kickback Reducing Features on DPX Chains.

DX version (non illustrated) does not include bumper drive links. All its drive links are standard bumperless.

3/8″		72 : 1,3 mm	LubriTec™ OILING SYSTEM	5,5 mm	30°	55°	0,64 mm

1637
72DPX100R

3/8″		73 : 1,5 mm	LubriTec™ OILING SYSTEM	5,5 mm	30°	55°	0,64 mm

56	64	68	72	84	1637
73DPX056E	73DPX064E	73DPX068E	73DPX072E	73DPX084E	73DPX100R

3/8″		75 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	30°	55°	0,64 mm

60	66	72	84	1637
75DPX060E	75DPX066E	75DPX072E	75DPX084E	75DPX100R

3/8″		72 : 1,3 mm	LubriTec™ OILING SYSTEM	5,5 mm	30°	55°	0,64 mm

1637
72DX100R

3/8″		73 : 1,5 mm	LubriTec™ OILING SYSTEM	5,5 mm	30°	55°	0,64 mm

68	72	1637
73DX068E	73DX072E	73DX100R

3/8″		75 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	30°	55°	0,64 mm

66	72	1637
75DX066E	75DX072E	75DX100R

PowerCut™ 70-Series LPX

50 → 100 cc

An ideal chain for professional woodcutters who use 3/8" pitch saws. Low-vibration, full chisel cutters offer top performance. Offset depth gauges prevent cutters from driving into the sidewall of the cut, offering a smoother cut.

3/8"		72 : 1,3 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

72	1637
72LPX072E	72LPX100R

3/8"		73 : 1,5 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

56	60	64	68	72	84	92
73LPX056E	73LPX060E	73LPX064E	73LPX068E	73LPX072E	73LPX084E	73LPX092E

1637
73LPX100R

3/8"		75 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

56	60	66	72	84	1637
75LPX056E	75LPX060E	75LPX066E	75LPX072E	75LPX084E	75LPX100R

DuraCut™ M70-Series LPX

50 → 100 cc

Cut more between sharpenings in the toughest, dirtiest, or most abrasive conditions with this more durable version of our high-performing 3/8" pitch LPX chain; cuts up to 3 times longer. (Formerly named MultiCut™). Maintain with standard maintenance tools.

3/8"		73 : 1,5 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

64	68	72	409
M73LPX064E	M73LPX068E	M73LPX072E	M73LPX025R

3/8"		75 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

409
M75LPX025R

PowerCut™ 70-Series EXL

50 → 100 cc

Designed to require less force from the operator to get through the cut quickly, Oregon PowerCut™ 70-Series makes the job feel like less work.

Increased cutting performance, less effort.

Skip sequence available on EXJ version.

EXL : STANDARD



EXJ : SKIP SEQUENCE



3/8″	7	72 : 1,3 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

1637
72EXL100R

3/8″	7	73 : 1,5 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

56	60	64	68	72	84	92	1637
73EXL056E	73EXL060E	73EXL064E	73EXL068E	73EXL072E	73EXL084E	73EXL092E	73EXL100R

3/8″	7	75 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

56	60	66	72	76	84	98	114
75EXL056E	75EXL060E	75EXL066E	75EXL072E	75EXL076E	75EXL084E	75EXL098E	75EXL114E

1637
75EXL100R

PowerCut™ 70-Series EXJ

3/8″	7	73 : 1,5 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

1637
73EXJ100R

3/8″	7	75 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

1637
75EXJ100R

RipCut™ 70-Series RD

OREGON
OREGON
OREGON
72
72
72
72
72

50 → 100 cc

Specially made for ripping — making cuts parallel to the wood grain. 72, 73, 75 RD has a special ripping application grind for making dimensional boards and planks from larger timbers. For use on chain-type sawmills. Not recommended for handheld use.

3/8″		72 : 1,3 mm	5,5 mm	10°	50°	0,64 mm

1637
72RD100R

3/8″		73 : 1,5 mm	5,5 mm	10°	50°	0,64 mm

1637
73RD100R

3/8″		75 : 1,6 mm	5,5 mm	10°	50°	0,64 mm

1637
75RD100R

VersaCut™ 27X

OREGON
OREGON
OREGON
27
27
27
27
27

≥ 65 cc

This is a heavy-duty, high-performance chain for professionals using large saws. Ideal for those who prefer the durability and easy maintenance of small-radius Micro Chisel cutters. Micro Chisel cutters have small-radius working corners for excellent performance and easy maintenance.

.404″		27 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	30°	55°	0,75 mm

1480
27X100R

VersaCut™ 59 ACL

≥ 65 cc

A big-timber, heavy-duty chain for professionals who use large saws especially in tropical hardwood areas. Rounded «Chipper» cutters have fully rounded working corner and side plate for excellent performance, easy sharpening and durability.

.404″		59 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	35°	55°	0,89 mm

1480
59ACL100R

PowerCut™ 59L

≥ 65 cc

A big-timber, heavy-duty chain for professionals who use large saws. Full chisel cutters offer top performance. Get less kickback without the added weight or bulk of other methods because of the depth gauge design.

.404″		59 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	25°	55°	0,64 mm

1480
59L100R

RipCut™ 27R

≥ 65 cc

Specially made for ripping — making cuts parallel to the wood grain. 27R - RX has a special ripping application grind for making dimensional boards and planks from larger timbers. Not recommended for handheld use.

Skip sequence available on RX version.

R : STANDARD



RX : SUPER SKIP SEQUENCE



.404″		27 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	10°	55°	0,75 mm

1480
27R100R

RipCut™ 27RX

.404″		27 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	10°	55°	0,75 mm

1480
27RX100R

Competitive chain Cross-Reference

÷2			STIHL®		HUSQVARNA®	DOLMAR / MAKITA	EFCO / OLEO MAC	CARLTON®	
			P/N	ALT P/N	P/N	P/N	P/N	P/N	ALT P/N
1/4″ LOW PROFILE	.043″	1,1mm	71PM3						
1/4″	.050″	1,3mm	13RM	13RMS	H00	466	E650MC-K	E1MC-BL	E1MC
.325″ LOW PROFILE	.043″	1,1mm			SP21G				
3/8″ LOW PROFILE	.043″	1,1mm	61PMN	61PMM3	H38	290 / 291		N4C-BL	N4C
	.050″	1,3mm	63PM1	63PM3	H37 / S93G	492		N1C-BL	
	.050″	1,3mm	63PM1	63PM3	H37 / S93G	492		N1C-BL	
	.050″	1,3mm	63PM		H35	480	N150C-N	N1C	
	.050″	1,3mm							
	.050″	1,3mm							
	.050″	1,3mm	63PMX						
.325″	.050″	1,3mm	23RM3 Pro		H30 / SP33G	484	K250NK-K	K1NK-BL	K1NK
	.050″	1,3mm							
	.050″	1,3mm	23RM3	23RM	H22	082	K250C-K	K1C-BL	K1C
	.058″	1,5mm	25RM3	25RM	H25	086	K258C-K	K2C-BL	K2C
	.063″	1,6mm	26RM3	26RM	H28			K3C-BL	K3C
	.050″	1,3mm	23RS3		H23			K1L-BL	
	.058″	1,5mm	25RS3		H21	686		K2L-BL	
	.063″	1,6mm	26RS3		H26			K3L-BL	
	.058″	1,5mm							
	.050″	1,3mm	23RS				K250L-N	K1LX	K1L
	.058″	1,5mm	25RS				K258L-N	K2LX	K2L
	.063″	1,6mm	26RS				K263L-N	K3LX	K3L
3/8″	.050″	1,3mm	33RM3		H51	101	A358EP-K	A1EP-BL	
	.058″	1,5mm	35RM3		H54	093		A2EP-BL	
	.063″	1,6mm	36RM3		H58	096		A3EP-BL	
	.050″	1,3mm	33RM				A350EP-N	A1EP	
	.058″	1,5mm	35RM		H49		A358EP-N	A2EP	
	.063″	1,6mm	36RM		H44		A363EP-N	A3EP	
	.050″	1,3mm	33RS3		H46	100		A1LM-BL	
	.058″	1,5mm	35RS3		H42	099		A2LM-BL	
	.063″	1,6mm	36RS3		H45	110		A3LM-BL	
	.058″	1,5mm							
	.063″	1,6mm							
	.050″	1,3mm	33RS		H47 / C83			A1LM	
	.058″	1,5mm	35RS		H48 / C85		A358LM-N	A2LM	
	.063″	1,6mm	36RS		H50		A363LM-N	A3LM	
	.058″	1,5mm							
	.063″	1,6mm							
	.050″	1,3mm						A1EP-RP	
	.058″	1,5mm			H52			A2EP-RP	
	.063″	1,6mm			H53			A3EP-RP	
.404″	.063″	1,6mm	46RM		H64	103		B3S	B3EP
	.063″	1,6mm			H66				
	.063″	1,6mm	46RS		H57		B463EP-N	B3LM	
	.063″	1,6mm			H65	108		B3H-RP	B3RM10
	.063″	1,6mm							

Oregon® is a registered trademark of Oregon Tool Inc. All other marks are the property of their respective owners.

	OREGON			narrow kerf	
NEW	VersaCut™	**24AP**	Semi-chisel		≤ 38 cc
	ControlCut™	**25AP**	Micro Chisel®		≤ 38 cc
NEW	SpeedCut™ Nano	**80TXL**	Micro Chisel®		20 → 38 cc
	AdvanceCut™	**90PX**	Chamfer Chisel™	●	≤ 42 cc
	Standard	**91P**	Chamfer Chisel™		≤ 42 cc
	AdvanceCut™	**91PX**	Chamfer Chisel™		≤ 42 cc
	VersaCut™	**91VXL**	Semi-chisel		≤ 42 cc
	DuraCut™	**M91VXL**	Semi-chisel		≤ 42 cc
	PowerSharp™	**91PS**	Powersharp		≤ 42 cc
	RipCut™	**91R**	Chamfer Chisel™		Ripping cuts only
	SpeedCut™	**95TXL**	Micro Chisel®	●	38 → 55 cc
	DuraCut™	**M95VPX**	Micro Chisel®	●	38 → 55 cc
	ControlCut™	**20BPX**	Micro Chisel®		38 → 62 cc
	ControlCut™	**21BPX**	Micro Chisel®		38 → 62 cc
	ControlCut™	**22BPX**	Micro Chisel®		38 → 62 cc
	PowerCut™	**20LPX**	Full chisel		38 → 62 cc
	PowerCut™	**21LPX**	Full chisel		38 → 62 cc
	PowerCut™	**22LPX**	Full chisel		38 → 62 cc
	DuraCut™	**M21LPX**	Full chisel		38 → 62 cc
	PowerCut™	**20LGX**	Full chisel		38 → 62 cc
	PowerCut™	**21LGX**	Full chisel		38 → 62 cc
	PowerCut™	**22LGX**	Full chisel		38 → 62 cc
	VersaCut™	**72DPX**	Semi-chisel		50 → 100 cc
	VersaCut™	**73DPX**	Semi-chisel		50 → 100 cc
	VersaCut™	**75DPX**	Semi-chisel		50 → 100 cc
	VersaCut™	**72DX**	Semi-chisel		50 → 100 cc
	VersaCut™	**73DX**	Semi-chisel		50 → 100 cc
	VersaCut™	**75DX**	Semi-chisel		50 → 100 cc
	PowerCut™	**72LPX**	Full chisel		50 → 100 cc
	PowerCut™	**73LPX**	Full chisel		50 → 100 cc
	PowerCut™	**75LPX**	Full chisel		50 → 100 cc
	DuraCut™	**M73LPX**	Full chisel		50 → 100 cc
	DuraCut™	**M75LPX**	Full chisel		50 → 100 cc
	PowerCut™	**72EXL**	Full chisel		50 → 100 cc
	PowerCut™	**73EXL**	Full chisel		50 → 100 cc
	PowerCut™	**75EXL**	Full chisel		50 → 100 cc
	PowerCut™	**73EXJ**	Full chisel		50 → 100 cc
	PowerCut™	**75EXJ**	Full chisel		50 → 100 cc
	RipCut™	**72RD**	Semi-chisel		Ripping cuts only
	RipCut™	**73RD**	Semi-chisel		Ripping cuts only
	RipCut™	**75RD**	Semi-chisel		Ripping cuts only
	VersaCut™	**27X**	Micro Chisel®		≥ 65 cc
	VersaCut™	**59ACL**	Chipper		≥ 65 cc
	PowerCut™	**59L**	Full chisel		≥ 65 cc
	RipCut™	**27R**	Micro Chisel®		Ripping cuts only
	RipCut™	**27RX**	Micro Chisel®		Ripping cuts only

This chart makes no comment whatsoever regarding the safety, or suitability for any particular purpose, of ANY saw chain not manufactured by Oregon Tool Inc. Read and follow all notes below to properly use this chart.

Notes:

This chart is intended for use by only those who wish to replace other brands of saw chain with a comparable Oregon chain.

Many saw chains are interchangeable in terms of their fit-up, but interchanging certain types of chains may be inappropriate for some users. Be certain that the chain chosen is appropriate for both the use, and for the user's level of experience.

This chart should not be used to replace Oregon saw chain with any other brand of chain. Doing so is a misuse of this chart and those who do so assume any and all risks associated with such misuse.

Most frequently requested chain spare parts*

			OREGON						
1/4"	.050"	1,3mm	**25AP**			P23850	P23956	P18960	
3/8" LOW PROFILE	.043"	1,1mm	**90PX**	P23850	P23956	P18960			
	.050"	1,3mm	**91P**						
	.050"	1,3mm	**91PX**			P24295	P25068		
	.050"	1,3mm	**91VXL**			P24295	P25068		
	.050"	1,3mm	**M91VXL**			P24295	P25068		
	.050"	1,3mm	**91PS**						
	.050"	1,3mm	**91R**			P24295	P25068		
.325"	.050"	1,3mm	**95TXL**	P575972		P571847	P576686	P576808	P571846
	.050"	1,3mm	**M95VPX**				P101125		
	.050"	1,3mm	**20BPX**	P22574	P22575	P23843	P31939	P31938	P34178
	.058"	1,5mm	**21BPX**	P22574	P22575	P23843	P31939	P34177	P34179
	.063"	1,6mm	**22BPX**	P22574	P22575	P23843	P34185	P35711	P37530
	.050"	1,3mm	**20LPX**		P35746	P23843	P31939	P31938	
	.058"	1,5mm	**21LPX**		P35746	P23843	P31939	P34177	P34178
	.063"	1,6mm	**22LPX**		P35746	P23843	P34185	P35711	P37530
	.058"	1,5mm	**M21LPX**			P23843	P31939	P34177	P34178
	.050"	1,3mm	**20LGX**	P616222	P616223	P23843	P31939	P31938	
	.058"	1,5mm	**21LGX**	P616222	P616223	P23843	P31939	P34177	
	.063"	1,6mm	**22LGX**	P616222	P616223	P23843	P34185	P35711	
3/8"	.050"	1,3mm	**72DPX/DX**	P67418	P67419	P23837	P23910		P20857
	.058"	1,5mm	**73DPX/DX**	P67418	P67419	P23837	P23910		P20856
	.063"	1,6mm	**75DPX/DX**	P67418	P67419	P23837	P23910		P20858
	.050"	1,3mm	**72LPX**	P101925	P101926	P23837	P23910		P20857
	.058"	1,5mm	**73LPX**	P101925	P101926	P23837	P23910		P20856
	.063"	1,6mm	**75LPX**	P101925	P101926	P23837	P23921		P20858
	.058"	1,5mm	**M73LPX**						
	.063"	1,6mm	**M75LPX**						
	.050"	1,3mm	**72EXL**	P582369	P582370	P581897	P596323	P582349	
	.058"	1,5mm	**73EXL**	P582369	P582370	P581897	P596323	P582353	
	.063"	1,6mm	**75EXL**	P582369	P582370	P581897	P596362	P582350	
	.058"	1,5mm	**73EXJ**						
	.063"	1,6mm	**75EXJ**						
	.050"	1,3mm	**72RD**	P38951	P38952	P23837	P23910		
	.058"	1,5mm	**73RD**	P38951	P38952	P23837	P23910		
	.063"	1,6mm	**75RD**	P38951	P38952	P23837	P23921		
.404"	.063"	1,6mm	**27X**	P18998	P18999	P23825	P23868		
	.063"	1,6mm	**59ACL**	P23835	P23836	P23825	P23868	P65513	
	.063"	1,6mm	**59L**	P108795	P108796	P23825	P23868	P65513	
	.063"	1,6mm	**27R**	P35145	P35146	P23825	P23868	P17464	
	.063"	1,6mm	**27RX**						
3/4"	.122"	3,1mm	**11H**	P107541	P107542	P24569	P24577	P107543	

*other specific spare parts are available on request

TRUSTED BY
SINCE
PROS
1947
LOGGERS
+
ARBORISTS
TM

DESIGNED &
ENGINEERED
IN THE USA

GUIDE BARS

OREGON
SpeedCut Nano

Guide bar part numbers and families overview

Oregon bar part numbers are printed on the bar package and etched on the bar body.

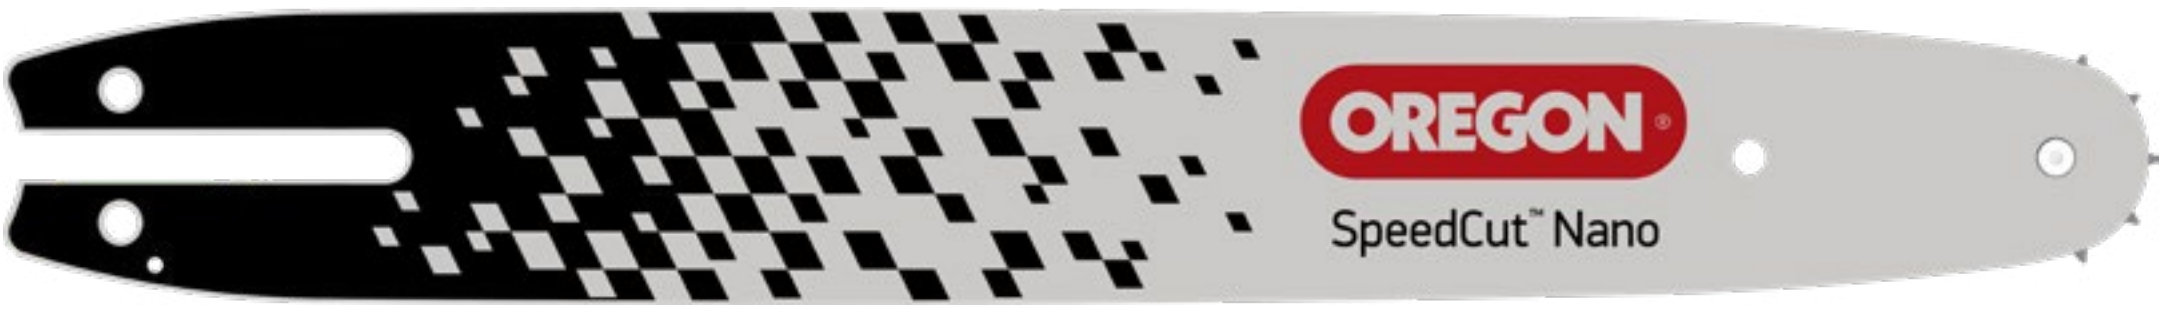

14 4 TXL N A074

Length inches (cm)		Gauge inches (cm)	Bar type	Sprocket nose codes			Bar Mount
					Pitch	Tooth	
08	20cm	4 .043" (1,1mm)	SD Single Rivet Sprocket-nose	A	1/4"	10	A041
10	25cm	0 .050" (1,3mm)	ML Single Rivet Narrow kerf / Sprocket-nose	B	.325"	10 or 12	A061
11	28cm	8 .058" (1,5mm)	SX AdvanceCut™ Sprocket-nose	D	3/8"	9 or 11	A064
12	30cm	3 .063" (1,6mm)	PX AdvanceCut™ Sprocket-nose	E	3/8"	7 or 9	A074
13	33cm		ML AdvanceCut™ Narrow kerf / Sprocket-nose	F	.404"	10	A089
14	35cm		SF AdvanceCut™ Sprocket-nose	G	.325"	12	A095
15	38cm		SP AdvanceCut™ HD Sprocket-nose	H	3/8"	11	A218
16	40cm		SL AdvanceCut™ HD Sprocket-nose	N Low Pro	.325"	7	A318
17	43cm		MP AdvanceCut™ HD Narrow kerf / Sprocket-nose	Solid nose code			B083
18	45cm		PXL ControlCut™ Sprocket-nose	M Medium radius 1.33" - 33.78 mm			D009
20	50cm		TXL SpeedCut™ SpeedCut™ Nano Narrow kerf / Sprocket nose	L Large radius 1.65" - 41.91mm			D024
21	53cm		VXL VersaCut™ sprocket nose				D025
22	55cm		RN PowerCut™ Replaceable sprocket-nose				D033
24	60cm		AT DuraCut™ Solid nose, laser welded tip with wear-resistant alloy				D176
25	63cm						E031
28	70cm						E099
30	75cm						K041
32	80cm						K153
33	83cm						K095
34	85cm						T041 Intenz®
36	90cm						
41	103cm						
42	105cm						

Comments:

- Chainsaws originally equipped with an Intenz® bar, and saws adapted to take an Intenz® bar, do not have a "bar adjustment pin" for tensioning the chain. Use ONLY an Intenz® bar when replacing the guide bar on these saws.
- PowerCut® solid body bars may be stamped with XXX, ZZZ or other letters as they can have different noses installed on the body, thereby changing the part number.
- Oregon Sculptor™ carving bar part numbers do not follow the Oregon bar part numbering system.
- In a few cases, where two bars would have the same length in their part numbers but different drive link counts, the letter Z will be used in the bar mount description to distinguish between them (K095 and Z095 for example).

GOOD

Ideal for Property Maintenance, Firewood, Home Owners

Single Rivet — Electric or gas ≤ 42cc

BETTER

Ideal for Landscape Maintenance, Property Management, Nursery, Farmers, Firewood, Construction/Demolition, Municipality, Fire Department

AdvanceCut™ — ≤ 57 cc

OREGON
AdvanceCut™

AdvanceCut™ ***HD*** — 38 → 65 cc

OREGON
AdvanceCut HD™

BEST

Ideal for Professional logger, Arborist, Tree Service Companies

NEW SpeedCut™ Nano — 20 → 38 cc


OREGON
SpeedCut™ Nano

ControlCut™ — 38 → 65 cc

OREGON
ControlCut™

SpeedCut™ — ≤ 55 cc

OREGON
SpeedCut™

VersaCut™ — 38 → 65 cc

OREGON
VersaCut™

PowerCut™ — ≥ 58 cc

OREGON
PowerCut™

DuraCut™ — ≥ 38 cc

OREGON
DuraCut™

		.043″ 1,1mm		.050″ 1,3mm					.058″ 1,5mm			.063″ 1,6mm			
		3/8″ LOW PROFILE	.325″ LOW PROFILE	1/4″	3/8″ LOW PROFILE	.325″		3/8″	.325″	3/8″	.404″	.325″	3/8″	.404″	
GOOD	Single Rivet	90 ●		25	91										
BETTER	AdvanceCut™				91	95 ●	20	72	21	73		22	75		
	AdvanceCut™ HD				91	95 ●	20	72	21	73		22	75		
BEST	NEW SpeedCut™ Nano		80												
	ControlCut™					95 ●	20	72	21	73		22	75		
	SpeedCut™					95 ●	20	72	21	73		22	75		
	VersaCut™					95 ●	20	72	21	73		22	75		
	PowerCut™						20	72	21	73	58	22	75	59	27
	DuraCut™						20	72		73	58		75	59	27

Guide bar nose types

Single Rivet

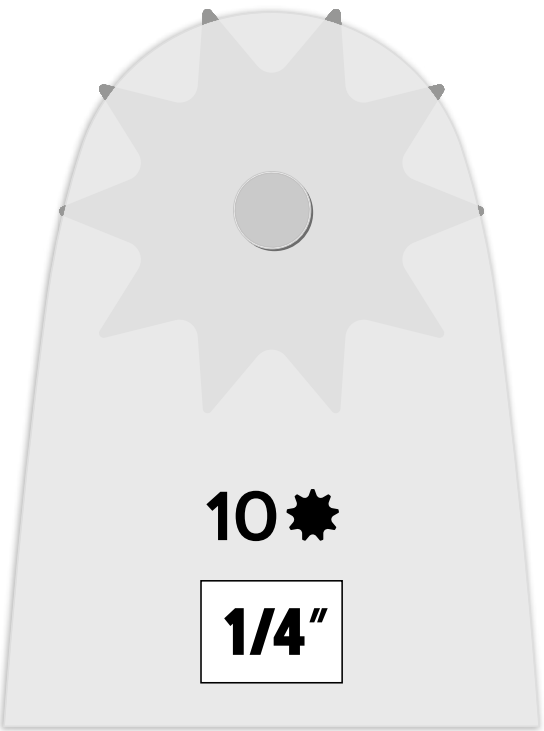

SDA

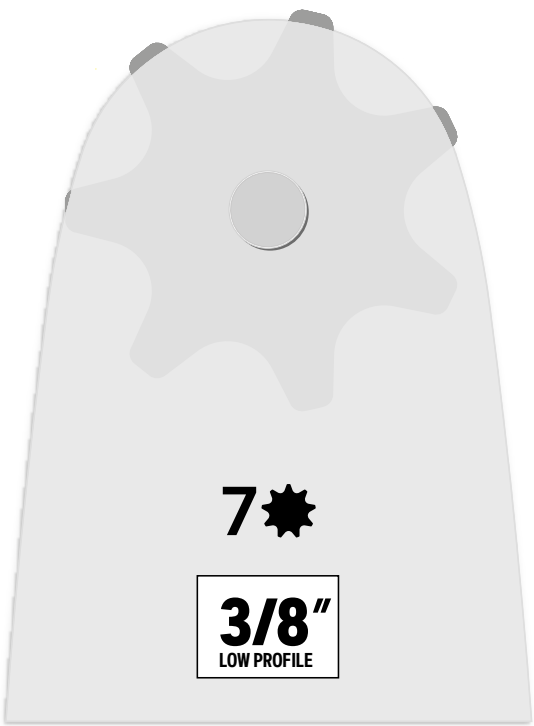
7✸
3/8″
LOW PROFILE

SDE • MLE

Sculptor®



DIME TIP (10mm)


1/4″
3/8″
LOW PROFILE

QUARTER TIP (12mm)

AdvanceCut™


9✸
3/8″
LOW PROFILE

SXE



PXB • MLB

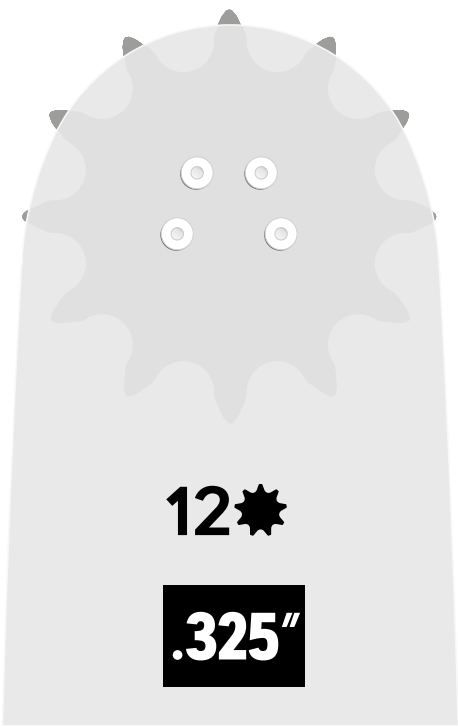

SFG

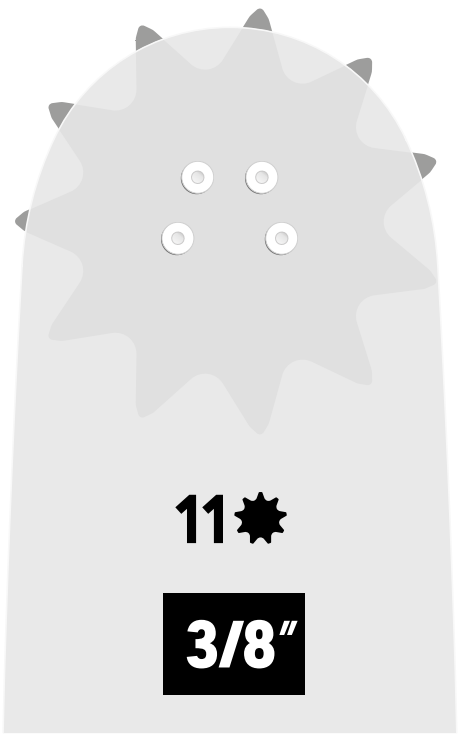

SFH

AdvanceCut™ HD ControlCut SpeedCut VersaCut


9✸
3/8″
LOW PROFILE

SPE



SLB • PXLB • MPB • TXLB

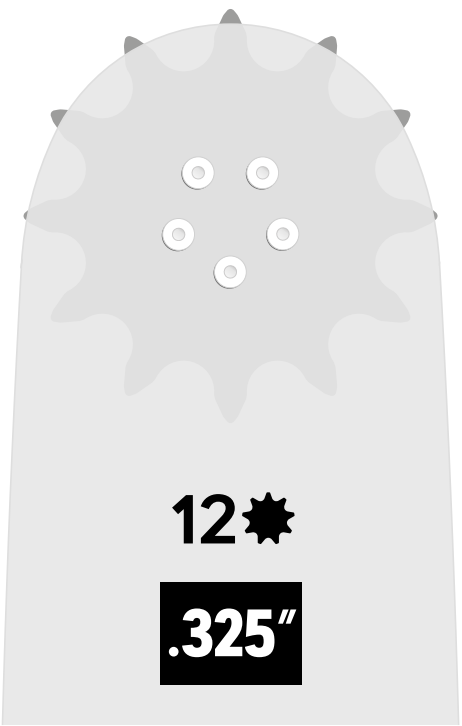

SLG • VXLG • MPG • TXLG

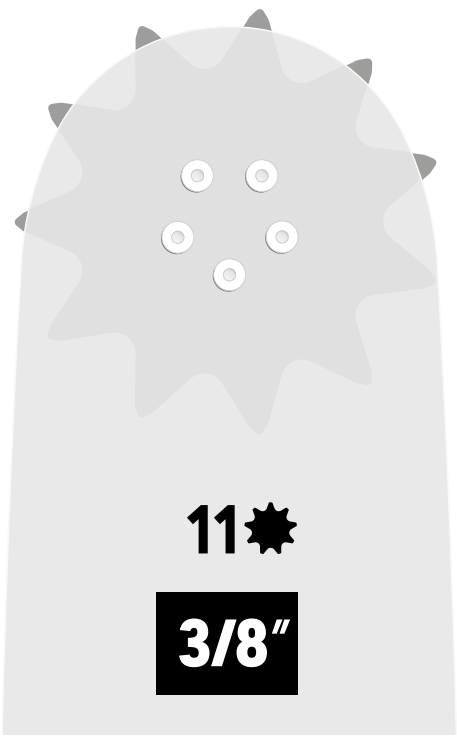

SLH • VXLH

PowerCut™

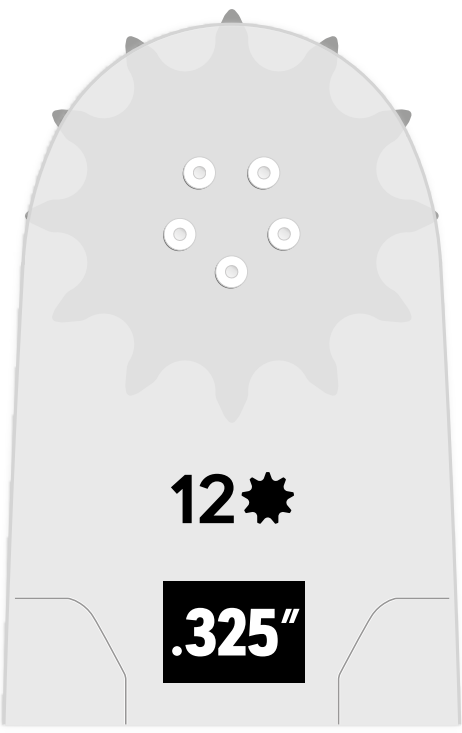

RNB

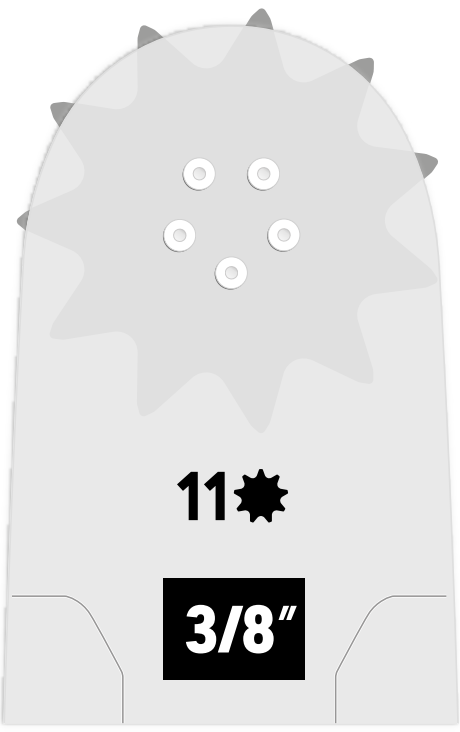

RND

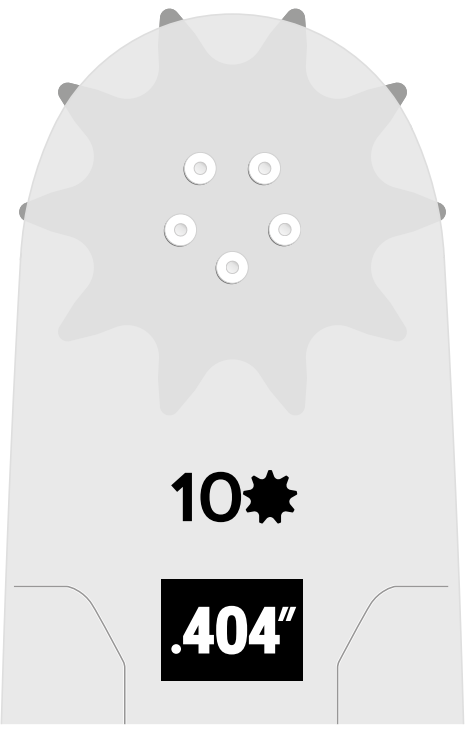

RNF

DuraCut™



ATM • ATL

Single Rivet

Electric or gas up to 42cc

For homeowners who only have an occasional need to use a chain saw. The single-rivet, smaller-radius noses helps reduce kickback.

PowerSharp® ready

1/4″ | 1,3mm | 10 tooth

10″ (25cm)	
100SDAA041	58
100SDAA318	58

3/8″ LOW PROFILE | 1,1mm | Narrow Kerf | 7 tooth

8″ (20cm)		10″ (25cm)		12″ (30cm)		14″ (35cm)		16″ (40cm)	
084MLEA041	34	104MLEA218	39	124MLEA041	45	144MLEA041	52	164MLEA041	56
		104MLEA318	39	124MLEA074	44	144MLEA074	50		
				124MLEA095	45	144MLEA095	52		

3/8″ LOW PROFILE | 1,3mm | 7 tooth

8″ (20cm)		10″ (25cm)		12″ (30cm)		14″ (35cm)		16″ (40cm)		18″ (45cm)	
080SDEA041	33	100SDEA041	40	120SDEA041	45	140SDEA041	52	160SDEA041	56	180SDEA041	62
		100SDEA218	39	120SDEA074	44	140SDEA074	50	160SDEA074	55	180SDEA095	60
				120SDEA095	45	140SDEA095	52	160SDEA095	56	180SDEA318	60
				120SDEA318	44	140SDEA318	49	160SDEA318	54		
						140SDET041	52	160SDEA129	56		
								160SDET041	56		

A | **3/8″ LOW PROFILE** | 1,3mm | 7 tooth | **PowerSharp®** +

14″ (35cm)		
542310	52	A041
542311	50	A074

16″ (40cm)		
542314	56	A041


A = + *

B = + : see PowerSharp chain and stone on page 24

Drive link count may vary depending on saw application and drive sprocket number of teeth.

AdvanceCut™

≤ 57 cc

Multi-rivet nose, lightweight, and maneuverable.
For experienced homeowners, as well as farmers and firewood cutters.

OREGON
AdvanceCut™

3/8″ LOW PROFILE | 1,3 mm | 9 tooth

10″ (25cm)	◆	12″ (30cm)	◆	14″ (35cm)	◆	16″ (40cm)	◆
100SXEA041	40	120SXEA041	45	140SXEA041	52	160SXEA041	56
		120SXEA074	44	140SXEA074	50	160SXEA074	55
		120SXEA095	45	140SXEA095	52	160SXEA095	56
						160SXEA318	56

.325″ | 1,3 mm | Narrow Kerf | 10 tooth

13″ (33cm)	◆	15″ (38cm)	◆	16″ (40cm)	◆	18″ (45cm)	◆
130MLBK041	56	150MLBK041	64	160MLBK041	66	180MLBK041	72
130MLBK095	56	150MLBK095	64	160MLBK095	66	180MLBK095	72

.325″ | 1,3 mm | 10 tooth

16″ (40cm)	◆	18″ (45cm)	◆	20″ (50cm)	◆
160PXBK095	66	180PXBK095	72	200PXBK095	78

.325″ | 1,5 mm | 10 tooth

13″ (33cm)	◆	15″ (38cm)	◆	16″ (40cm)	◆	18″ (45cm)	◆	20″ (50cm)	◆
138PXBK095	56	158PXBK095	64	168PXBK095	66	188PXBK095	72	208PXBK095	78
		158PXBK041	64	168PXBK041	66			208PXBZ095	76

.325″ | 1,5 mm | 12 tooth

18″ (45cm)	◆
188SFGK095	72

◆ Drive link count may vary depending on saw application and drive sprocket number of teeth.

.325″ 1,6 mm 10 tooth

16″ (40cm)		18″ (45cm)	
163PXBA074	62	183PXBA074	68

.325″ 1,6 mm 12 tooth

15″ (38cm)		16″ (40cm)		18″ (45cm)	
153SFGD025	62	163SFGD025	67	183SFGD025	74

3/8″ 1,5 mm 11 tooth

15″ (38cm)		16″ (40cm)		18″ (45cm)		20″ (50cm)		24″ (60cm)	
158SFHD009	56	168SFHD009	60	188SFHD009	68	208SFHD009	72	248SFHD009	84
				188SFHK095	68	208SFHD024	72		

3/8″ 1,6 mm 11 tooth

15″ (38cm)		16″ (40cm)		18″ (45cm)		20″ (50cm)		24″ (60cm)	
153SFHD025	56	163SFHD025	60	183SFHD025	66	203SFHD025	72	243SFHD025	84

AdvanceCut™ *HD*

38 → 65 cc

Heavy Duty laminated bars designed for higher power applications on small to medium-size chainsaws.
Ideal for professional and semi-professional users.

OREGON
AdvanceCut HD™

3/8″ LOW PROFILE | 1,3mm | 9 tooth

12″ (30cm)		14″ (35cm)		16″ (40cm)	
120SPEA074	44	140SPEA074	50	160SPEA041	56
				160SPEA074	55

.325″ | 1,3mm | Narrow Kerf | 10 tooth

15″ (38cm)		18″ (45cm)	
150MPBK095	64	180MPBK095	72

.325″ | 1,5mm | 10 tooth

13″ (33cm)		15″ (38cm)		16″ (40cm)	
138SLBK095	56	158SLBK095	64	168SLBK095	66

18″ (45cm)	
188SLBK095	72

.325″ | 1,5mm | 12 tooth

15″ (38cm)		18″ (45cm)	
158SLGK095	64	188SLGK095	72

.325″ | 1,6mm | 10 tooth

16″ (40cm)	
163SLBA074	62

3/8″ | 1,5mm | 11 tooth

15″ (38cm)		18″ (45cm)		20″ (50cm)	
158SLHD009	56	188SLHD009	68	208SLHD009	72
158SLHK095	56	188SLHK095	64		
158SLHK153	56				

3/8″ | 1,6mm | 11 tooth

16″ (40cm)		18″ (45cm)		20″ (50cm)	
163SLHD025	60	183SLHD025	66	203SLHD025	72

Drive link count may vary depending on saw application and drive sprocket number of teeth.

OREGON
OREGON
OREGON
OREGON
AdvanceCut HD

NEW SpeedCut™ Nano 80TXL .325″ LOW PROFILE



20 → 38 cc

SpeedCut™ Nano has been engineered from the ground up with maximum efficiency in mind. Built to optimize saw performance, SpeedCut Nano meets the demands of tree care professionals like no other system on the market.

SpeedCut Nano is the first ever .325″ Low Profile™ cutting system. By sizing the chain to better match the specific power range of battery-powered and compact light-weight gas-powered saws, we've maximized the chain's efficiency for improved performance.

Stihl	☼	10″ (25cm)	⛓	❤	12″ (30cm)	⛓	❤	14″ (35cm)	⛓	❤	16″ (40cm)	⛓	❤
MS 150, MS 150T MS 151, MS 151T	610727N	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59			
MSA 161T	625333	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59	164TXLNA074	80TXL064E	64
MS 170, MS 171 , MS 180, MS 181	610726N				124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59	164TXLNA074	80TXL064E	64
MS 192, MS 192T, MS 193, MS 193T, MS 194, MS 194T, MS 200, MS 200T, MS 201, MS 201T	610725N	104TXLNA074	80TXL046E	46	124TXLNA074	80TXL051E	51	144TXLNA074	80TXL059E	59	164TXLNA074	80TXL064E	64

Husqvarna	☼	10″ (25cm)	⛓	❤	12″ (30cm)	⛓	❤	14″ (35cm)	⛓	❤	16″ (40cm)	⛓	❤
T435	610729N	104TXLNA095	80TXL046E	46	124TXLNA095	80TXL051E	51	144TXLNA095	80TXL059E	59	164TXLNA095	80TXL064E	64
T525	627943												
535i XP, T535i XP 536Li XP,T536Li XP, 540i XP, T540i XP	610730N												
T540 XP, T540 XP II	610728N												

Echo	☼	10″ (25cm)	⛓	❤	12″ (30cm)	⛓	❤	14″ (35cm)	⛓	❤	16″ (40cm)	⛓	❤
CCS-58V	629320	104TXLNA041	80TXL046E	46	124TXLNA041	80TXL051E	51	144TXLNA041	80TXL059E	59	164TXLNA041	80TXL064E	64
CS-2511TES	629318												
CS-303T	629322												

❤ Drive link count may vary depending on saw application and drive sprocket number of teeth.

SpeedCut™ Nano CUTTING SYSTEM

CONVERSION KITS

80TXL must be used together with the corresponding guide bar and sprocket and is not compatible with other existing cutting systems. SpeedCut Nano conversion kits include a sprocket, a guide bar and a chain loop.

Stihl®	**10″** (25cm)	**12″** (30cm)	**14″** (35cm)	**16″** (40cm)
MS 150, MS 150T MS 151, MS 151T	635137	614383	614382	
MSA 161T	637260	637261	637262	637263
MS 170, MS 171 MS 180, MS 181		637259	614384	614385
MS 192, MS 192T MS 193, MS 193T MS 194, MS 194T MS 200, MS 200T MS 201, MS 201T	614379	614380	614377	614381

Husqvarna®	**10″** (25cm)	**12″** (30cm)	**14″** (35cm)	**16″** (40cm)
T 435	614388	614391	614395	614398
T 525	637264	637265	637266	637267
535i XP, T535i XP, 536Li XP, T536LiXP, 540i XP, T540i XP	614389	614392	614396	614399
540, T540 XP, T540 XP II	614387	614390	614393	614397

Echo	**10″** (25cm)	**12″** (30cm)	**14″** (35cm)	**16″** (40cm)
CCS-58V	637231	637232	637233	637234
CS-2511TES	637235	637236	637237	637238
CS-303T	637255	637256	637257	637258

OREGON
SpeedCut Nano

Oregon® is a registered trademark of Oregon Tool Inc.
All other marks are the property of their respective owners.

ControlCut™

38 → 65 cc

For users who require smooth and controlled cuts. Smaller radius nose reduces kickback. The lighter weight helps reduce operator fatigue.

OREGON
ControlCut™
Aluminium Core

.325″	1,5 mm	10 tooth

	13″ (33 cm)		15″ (38 cm)		16″ (40 cm)		18″ (45 cm)	
	138PXLBK095	56	158PXLBK041	64	168PXLBK095	67	188PXLBK095	72
			158PXLBK095	64				

.325″	1,6 mm	10 tooth

	16″ (40 cm)		18″ (45 cm)	
	163PXLBA074	62	183PXLBA074	68

SpeedCut™

38 → 55 cc

For professionals who cut high volumes of wood. Narrow kerf. Durable and efficient. The lighter weight helps reduce operator fatigue.

OREGON
SpeedCut™
Aluminium Core

.325″	1,3 mm	Narrow Kerf	10 tooth

	13″ (33 cm)		15″ (38 cm)		16″ (40 cm)		18″ (45 cm)		20″ (50 cm)	
	130TXLBK095	56	150TXLBK095	64	160TXLBK095	66	180TXLBK095	72	200TXLBK095	78
			150TXLGD025	64	160TXLGD025	66	180TXLGD025	72		
							180TXLBA074	72		

Drive link count may vary depending on saw application and drive sprocket number of teeth.

VersaCut™

OREGON
VersaCut™
Aluminum Core

38 → 65 cc

Ideal solution for arborists, orchardists, and other professionals who cuts with a variety of applications. Versatile and durable. The lighter weight helps reduce operator fatigue.

.325″ | 1,3 mm | 12 tooth

16″ (40 cm)		18″ (45 cm)	
160VXLGK095	66	180VXLGK041	72
		180VXLGK095	72

.325″ | 1,5 mm | 12 tooth

15″ (38 cm)		16″ (40 cm)		18″ (45 cm)		20″ (50 cm)	
158VXLGK041	64	168VXLGK041	66	188VXLGK041	72	208VXLGK095	80
158VXLGK095	64	168VXLGK095	66	188VXLGK095	72		

.325″ | 1,6 mm | 12 tooth

15″ (38 cm)		16″ (40 cm)		18″ (45 cm)		20″ (50 cm)	
153VXLGD025	62	163VXLGD025	67	183VXLGD025	74	203VXLGD025	81

3/8″ | 1,3 mm | 11 tooth

16″ (40 cm)		20″ (50 cm)		24″ (60 cm)	
160VXLHD025	56	200VXLHD009	60	240VXLHD009	84
		200VXLHD025	60	240VXLHD025	84

3/8″ | 1,5 mm | 11 tooth

15″ (38 cm)		16″ (40 cm)		17″ (43 cm)		18″ (45 cm)		20″ (50 cm)	
158VXLHD009	56	168VXLHD009	60	178VXLHD009	64	188VXLHD009	68	208VXLHD009	72
158VXLHK095	56	168VXLHK095	60			188VXLHK095	64	208VXLHK095	72
						188VXLHZ095	68		
						188VXLHK153	64		
						188VXLHD176	64		

3/8″ | 1,6 mm | 11 tooth

15″ (38 cm)		16″ (40 cm)		18″ (45 cm)		20″ (50 cm)	
153VXLHD025	56	163VXLHD025	60	183VXLHD025	66	203VXLHD025	72

PowerCut™

OREGON
PowerCut™

≥ 57 cc

For loggers and other tree-cutting professionals that need heavy-use guide bars. PowerCut's chrome-moly steel body is tough and powerful, enabling you to cut through timber precisely and efficiently.
The replaceable sprocket nose reduces the need for new guide bars, giving the PowerCut bar a longer life and greater durability.

.325″ 1,5 mm 12 tooth

	15″ (38 cm)	◆	16″ (40 cm)	◆	18″ (45 cm)	◆	20″ (50 cm)	◆
	158RNBK095	64	168RNBK095	66	188RNBK095	72	208RNBK095	78

.325″ 1,6 mm 12 tooth

	16″ (40 cm)	◆	18″ (45 cm)	◆
	163RNBD025	67	183RNBD025	74

3/8″ 1,3 mm 11 tooth

	20″ (50 cm)	◆	24″ (60 cm)	◆	28″ (70 cm)	◆
	200RNDD009	72	240RNDD025	84	280RNDK095	93
	200RNDD176	70	240RNDD176	81		

3/8″ 1,5 mm 11 tooth

	13″ (38 cm)	◆	15″ (38 cm)	◆	16″ (40 cm)	◆	17″ (43 cm)	◆	18″ (45 cm)	◆
	138RNDD009	52	158RNDD009	56	168RNDD009	60	178RNDD009	64	188RNDD009	68
					168RNDK095	60	178RNDB083	64	188RNDK095	68

	20″ (50 cm)	◆	22″ (55 cm)	◆	24″ (60 cm)	◆	26″ (65 cm)	◆	28″ (70 cm)	◆
	208RNDD009	72	228RNDD009	76	248RNDD009	84	268RNDD009	89	288RNDD009	92
	208RNDK095	72			248RNDK095	84				
	208RNDD024	72								
	208RNDD033	72								
	208RNDB083	72								
	(D176) 8873D	72								

	30″ (75 cm)	◆
	308RNDD009	102

◆ Drive link count may vary depending on saw application and drive sprocket number of teeth.

3/8″	1,6 mm	11 tooth

16″ (40 cm)		18″ (45 cm)		20″ (50 cm)		22″ (55 cm)		24″ (60 cm)	
163RNDD025	60	183RNDD025	68	203RNDD025	72	223RNDD025	77	243RNDD025	84
				203RNDD009	72				

28″ (70 cm)		30″ (75 cm)		32″ (80 cm)		36″ (90 cm)		42″ (105 cm)	
283RNDD025	91	303RNDD025	98	323RNDD025	105	363RNDD025	115	423RNDD025	135
						363RNDD009	115	423RNDD009	135

.404″	1,6 mm	10 tooth

24″ (60 cm)		36″ (105 cm)	
243RNFD009	76	363RNFD009	104

PowerCut™ Replacement Nose

Long nose takes most of the abuse and minimizes wear on the bar body of PowerCut (Power Match®) bars.
A single nose for 1,3 mm (.050″), 1,5 mm (.058″), and 1,6 mm (.063″) gauges.
Attachment rivet included.
(Nose radius 1.115″). Standard replacement sprocket nose (RSN) kits fit “RN” bars.

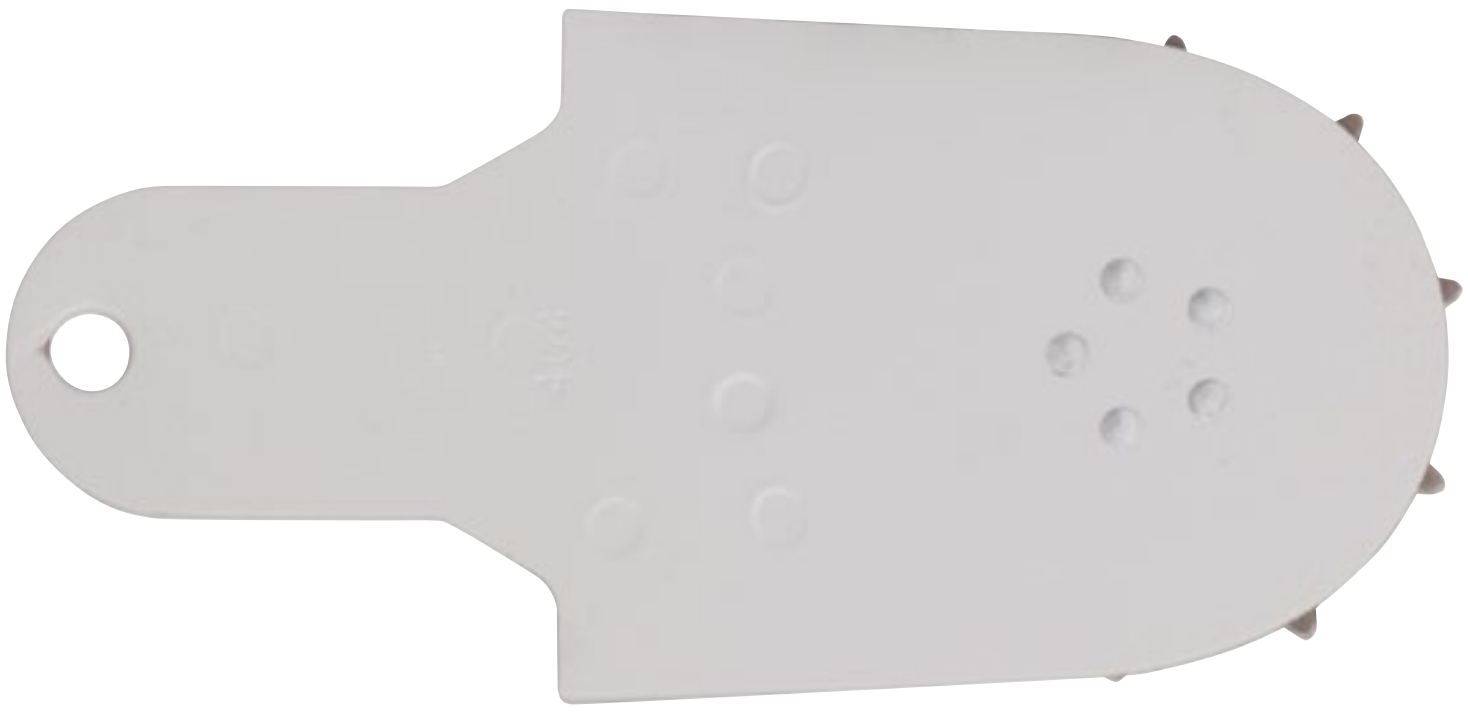

.325″	1,3 mm - 1,5 mm - 1,6 mm	12 tooth

34775	Standard Replacement Sprocket Nose Kit

3/8″	1,3 mm - 1,5 mm - 1,6 mm	11 tooth

30853	Standard Replacement Sprocket Nose Kit

.404″	1,3 mm - 1,5 mm - 1,6 mm	10 tooth

30855	Standard Replacement Sprocket Nose Kit

DuraCut™

OREGON
DuraCut™

≥ 38 cc

Created for all challenging and abrasive environments, including fire-damaged forests, deserts, or sandy environments, and areas where the wood is unstable and requires extra care. DuraCut has an ultra high-wear resistant stellite nose and chrome-moly steel body to give you a longer-lasting tool for the most punishing environments.

This list shows the most common applications, pitches and associated drive link counts for Duracut bars.

3/8″ 1,3 mm Medium nose

20″ (50cm)	
200ATMD009	72

3/8″ 1,5 mm Medium nose

16″ (40cm)		17″ (43cm)		18″ (45cm)		20″ (50cm)		24″ (60cm)		28″ (70cm)	
168ATMD009	60	178ATMD009	64	188ATMD009	68	208ATMD009	72	248ATMD009	84	288ATMD009	92
168ATMK095	60					208ATMK095	72				
						208ATMD024	72				

3/8″ 1,6 mm Medium nose

16″ (40 cm)		18″ (45 cm)		20″ (50 cm)		24″ (60 cm)	
163ATMD025	60	183ATMD025	68	203ATMD025	72	243ATMD025	84

.404″ 1,6 mm Medium nose

17″ (43 cm)		24″ (60 cm)		36″ (90 cm)	
173ATMD033	61	243ATMD009	76	363ATMD025	104

.404″ 1,6 mm Large nose

25″ (63 cm)		30″ (75 cm)		36″ (90 cm)		42″ (105 cm)	
253ATLE099	84	303ATLE099	92	363ATLD009	104	423ATLE086	124
				363ATLE099	104		

Drive link count may vary depending on saw application and drive sprocket number of teeth.

Sculptor™

OREGON
Sculptor™

Electric or gas 38 -> 65 cc

Sculptor™ Guide Bars are specially developed for chainsaw carving.

An essential tool for chainsaw artists seeking long-lasting performance and versatility.

- Manufactured with high-quality steel
- Precision gas-welded high cobalt/chrome alloy hard-facing material for better nose performance and life
- Clear-coated, brushed steel for distinctive and durable appearance and finish

1/4" 1,3 mm

Dime tip 10 mm

10" (25 cm)		
535044	60	A041 / A095

12" (30 cm)		
535045	68	A041 / A095

1/4" 1,3 mm

Quarter tip 12 mm

12" (30 cm)		
535047	68	A041 / A095
	68	A074

14" (35 cm)		
535048	76	A041 / A095
	75	A074

3/8" LOW PROFILE 1,3 mm

Quarter tip 12 mm

12" (30 cm)		
535047	47	A041 / A095
	47	A074

14" (35 cm)		
535048	52	A041 / A095
	51	A074

Drive link count may vary depending on saw application and drive sprocket number of teeth.

Most Popular guide bar motor mounts

A041 - K041 - T041

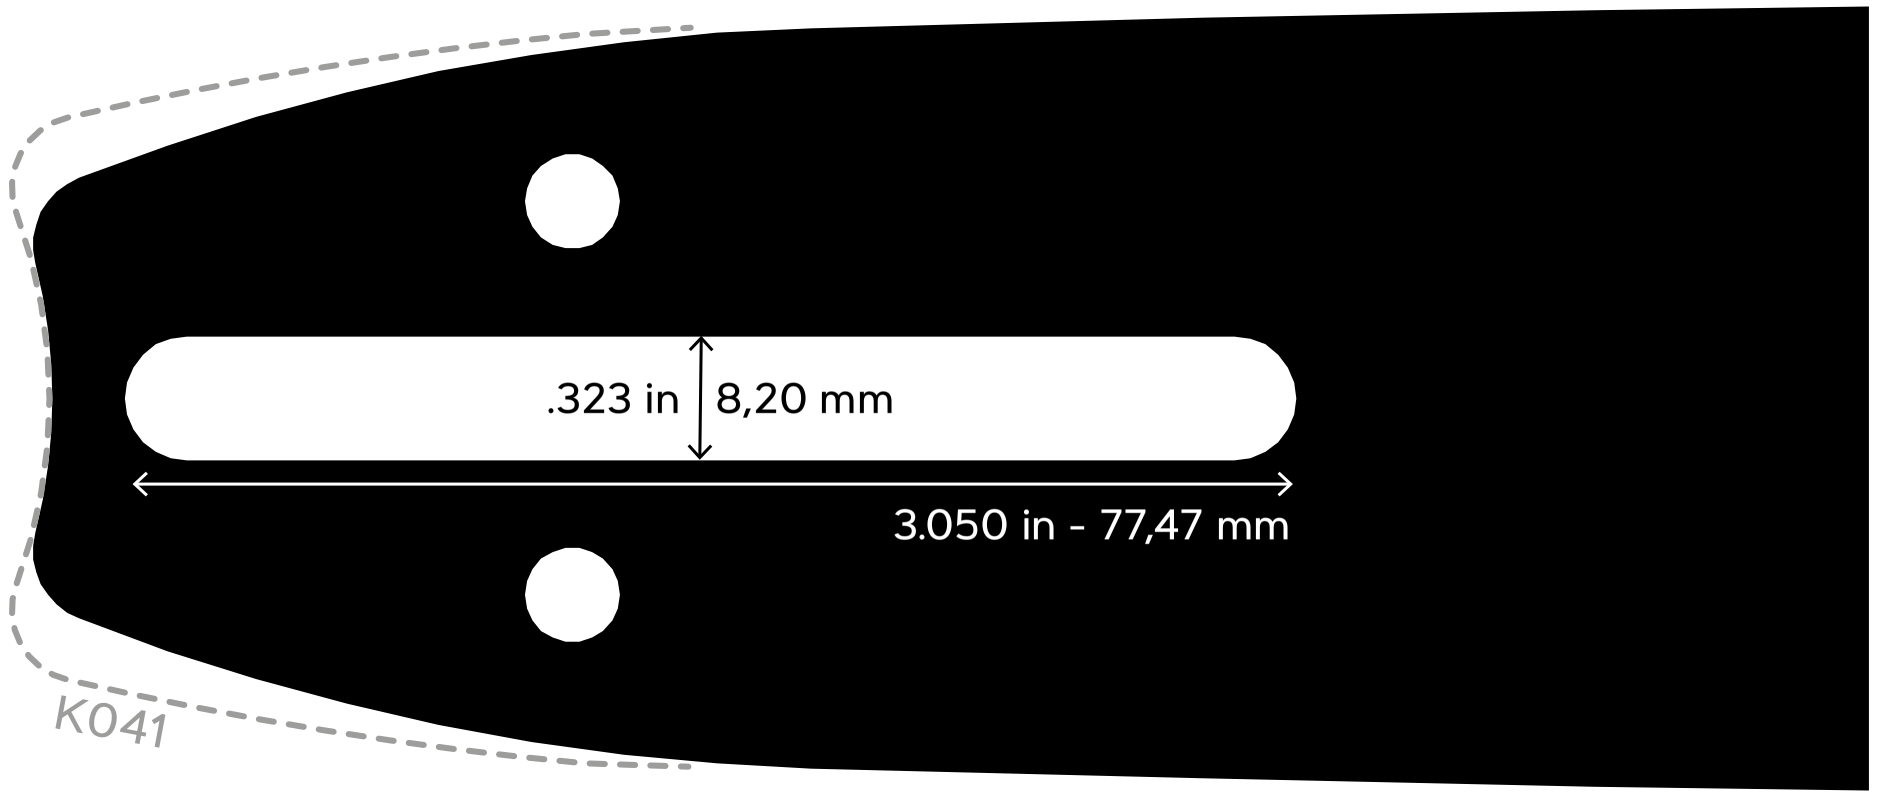
.323 in
8,20 mm
3.050 in - 77,47 mm
K041

OEM Applications: AEG, Active, AL-KO, Alpina, Black+Decker, Bosch, Castor, Cub Cadet®, Dolmar, Draper, Echo®, Efco®, Einhell®, Gardena, Greenworks, Grizzly, Hecht, Hitachi, Homelite®, Husqvarna®, Ikra, Iseki, Jonsered®, Makita®, McCulloch®, MTD, Oleo-Mac®, Partner, Poulan®/Poulan Pro®, Ryobi®, Shindaiwa, Skil®, Solo, Stiga, Tanaka®, Zenoah, and others

A074

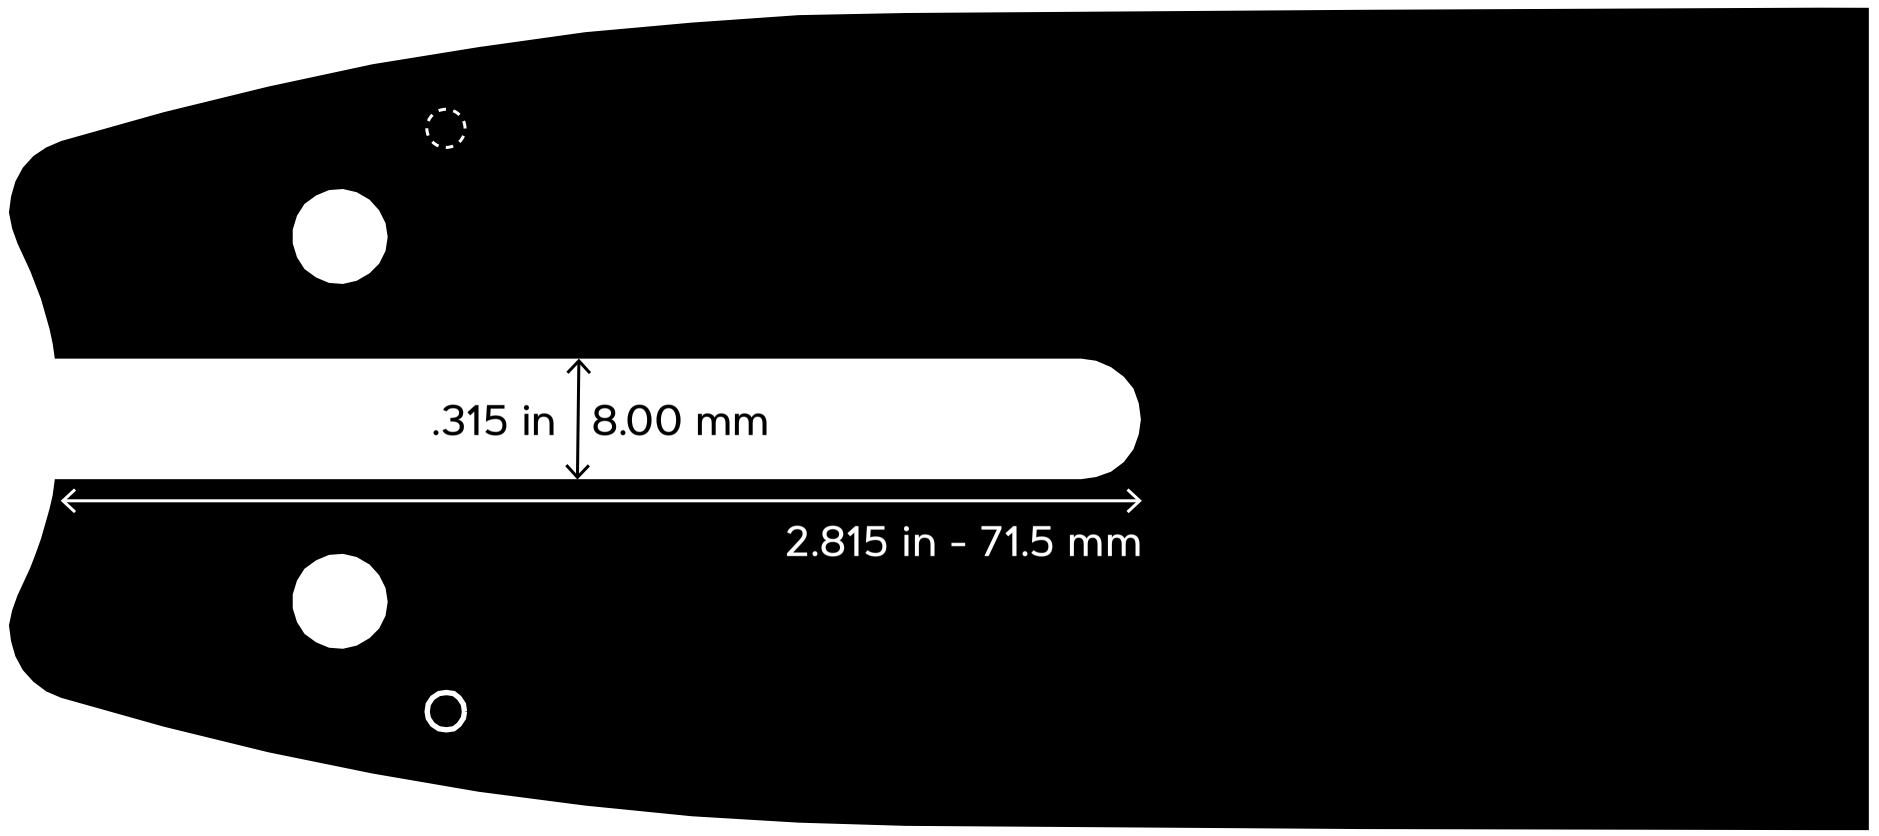
.315 in
8.00 mm
2.815 in - 71.5 mm

OEM Applications: Alpina, Castor, Metabo®, Oleo-Mac®, Stiga®, Stihl®

A095 - K095 - Z095*

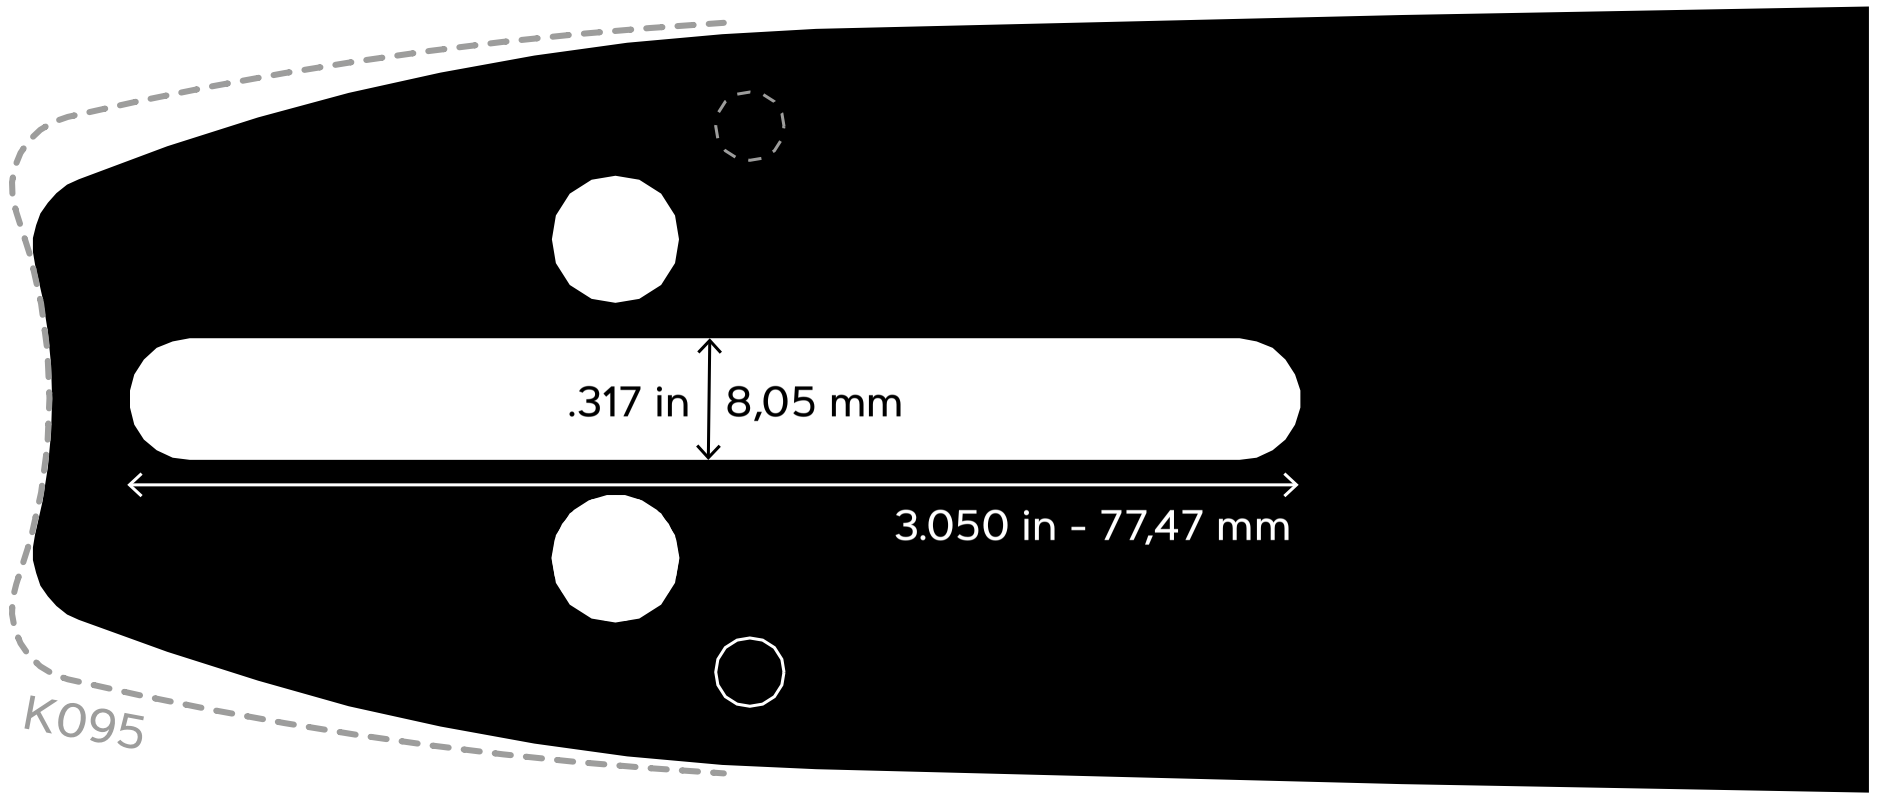
.317 in
8,05 mm
3.050 in - 77,47 mm
K095

***Note:**
In a few cases where two bars would have the same called length but different drive-link counts, the letter Z will be used in the motor-mount description to distinguish between them (K095 and Z095 for example).

OEM Applications: AL-KO, Alpina, Castor, Cub Cadet®, Dolmar, Efco®, Einhell®, Hecht, Homelite®, Husqvarna®, Jonsered®, Makita®, McCulloch®, Metabo®, Mitox, MTD, Oleo-Mac®, Partner, Pioneer, Poulan®/Poulan Pro®, Ryobi®, Shindaiwa, Solo®, Stiga®, Zenoah®, and others

A108

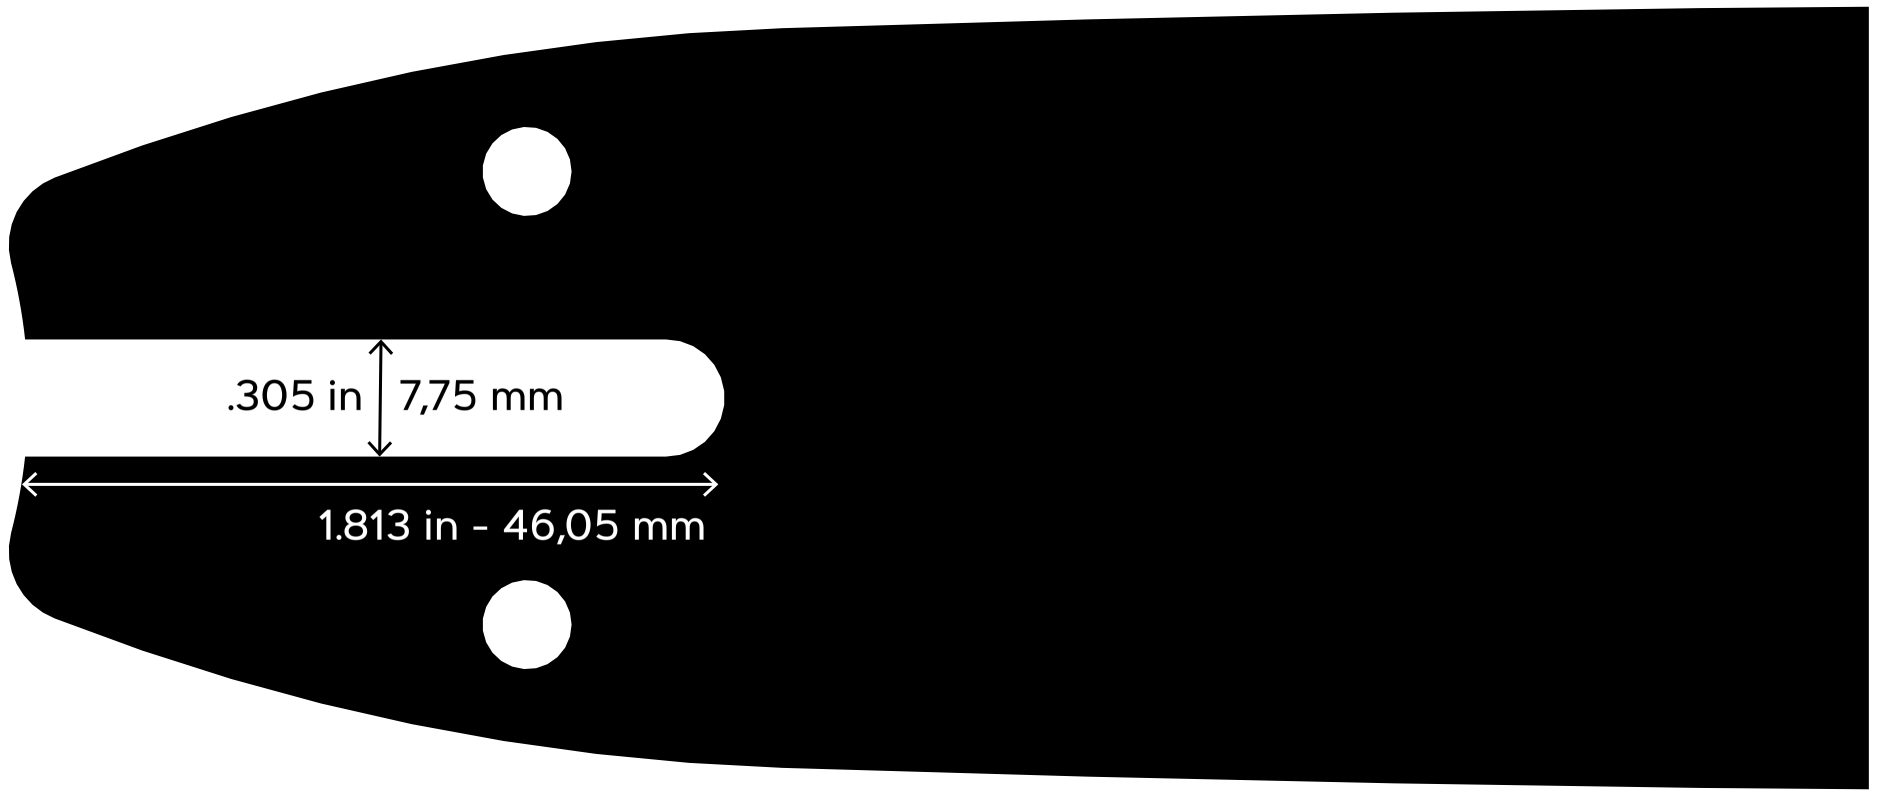
.305 in
7,75 mm
1.813 in - 46,05 mm

OEM Applications: Campagnola

Rotate 90° to match the 1:1 exact size (printed version)

A218

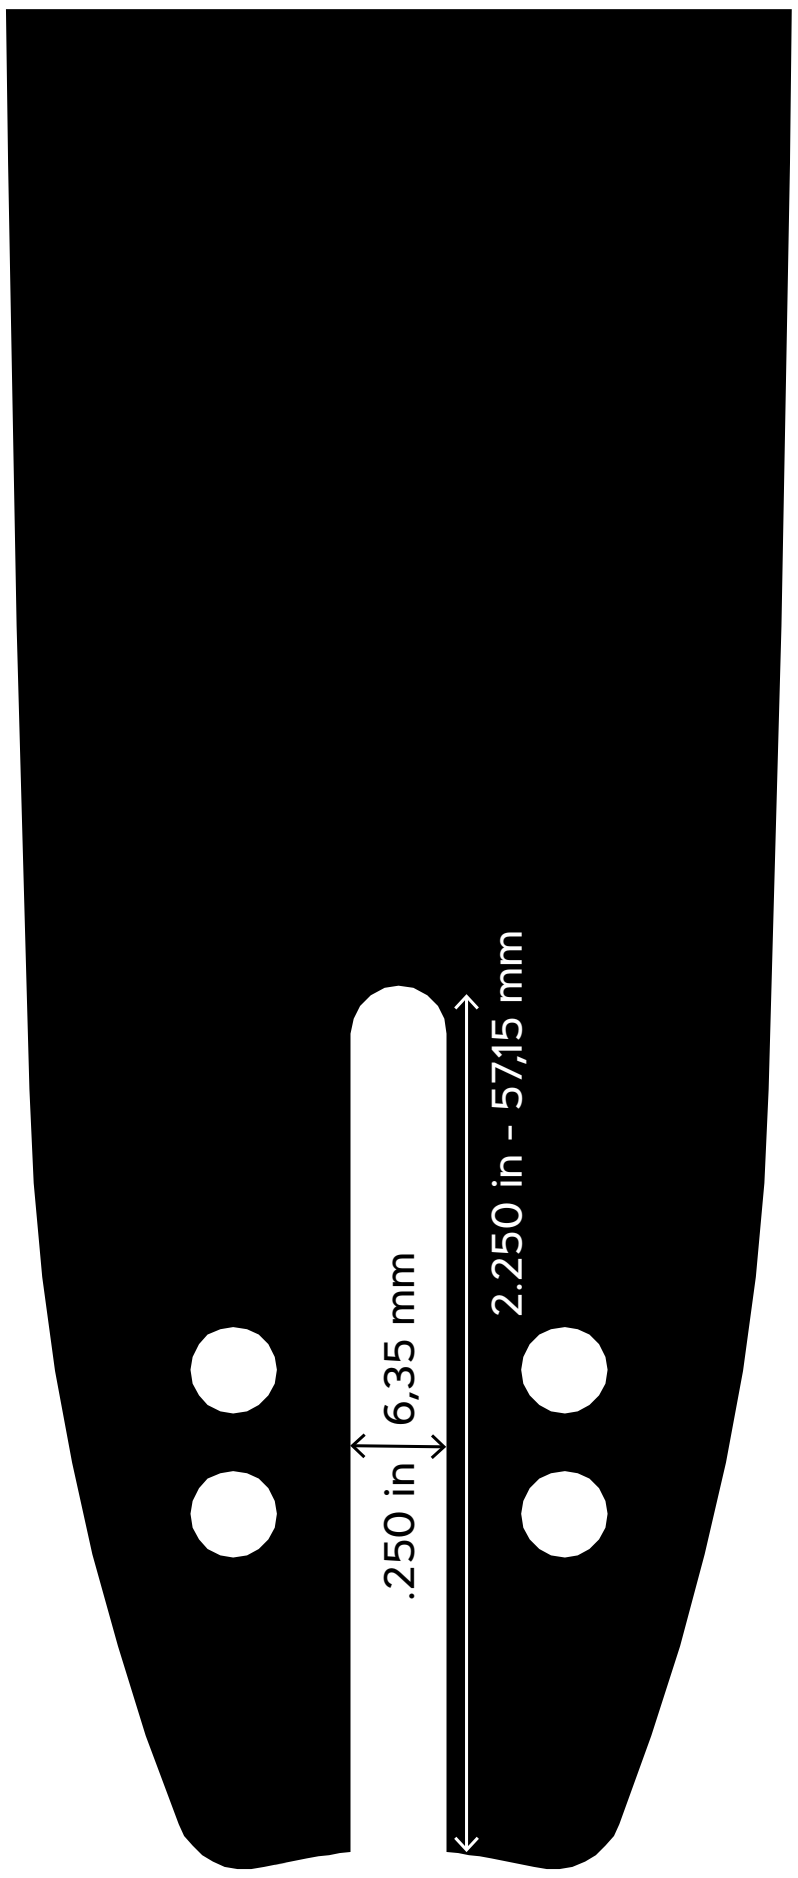
.250 in | 6,35 mm
2.250 in - 57,15 mm

OEM Applications: Active, AL-KO, Black+Decker®, Bosch, Dolmar, Makita®, McCulloch®, Power Pruner®/Echo® Power Pruner®, Polesaws, Ryobi®, Shindaiwa, Stiga®, and others

B083

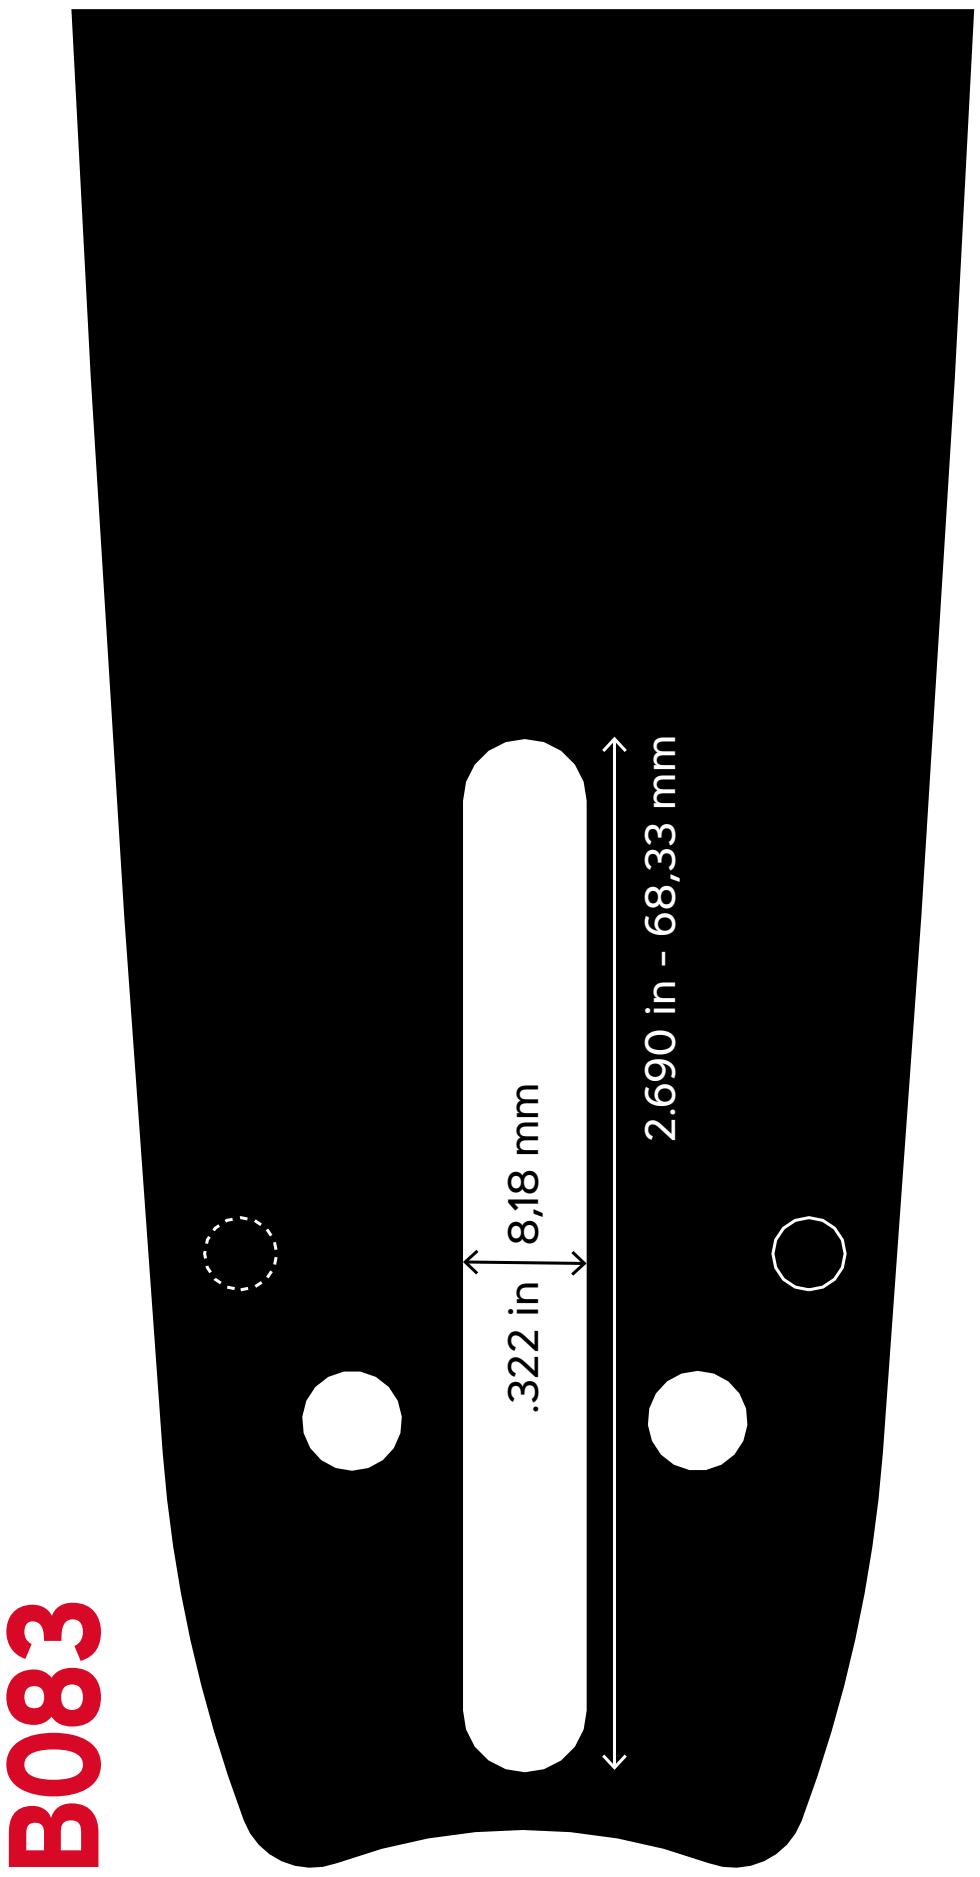
.322 in | 8,18 mm
2.690 in - 68,33 mm

OEM Applications: Dolmar, Makita®

A129

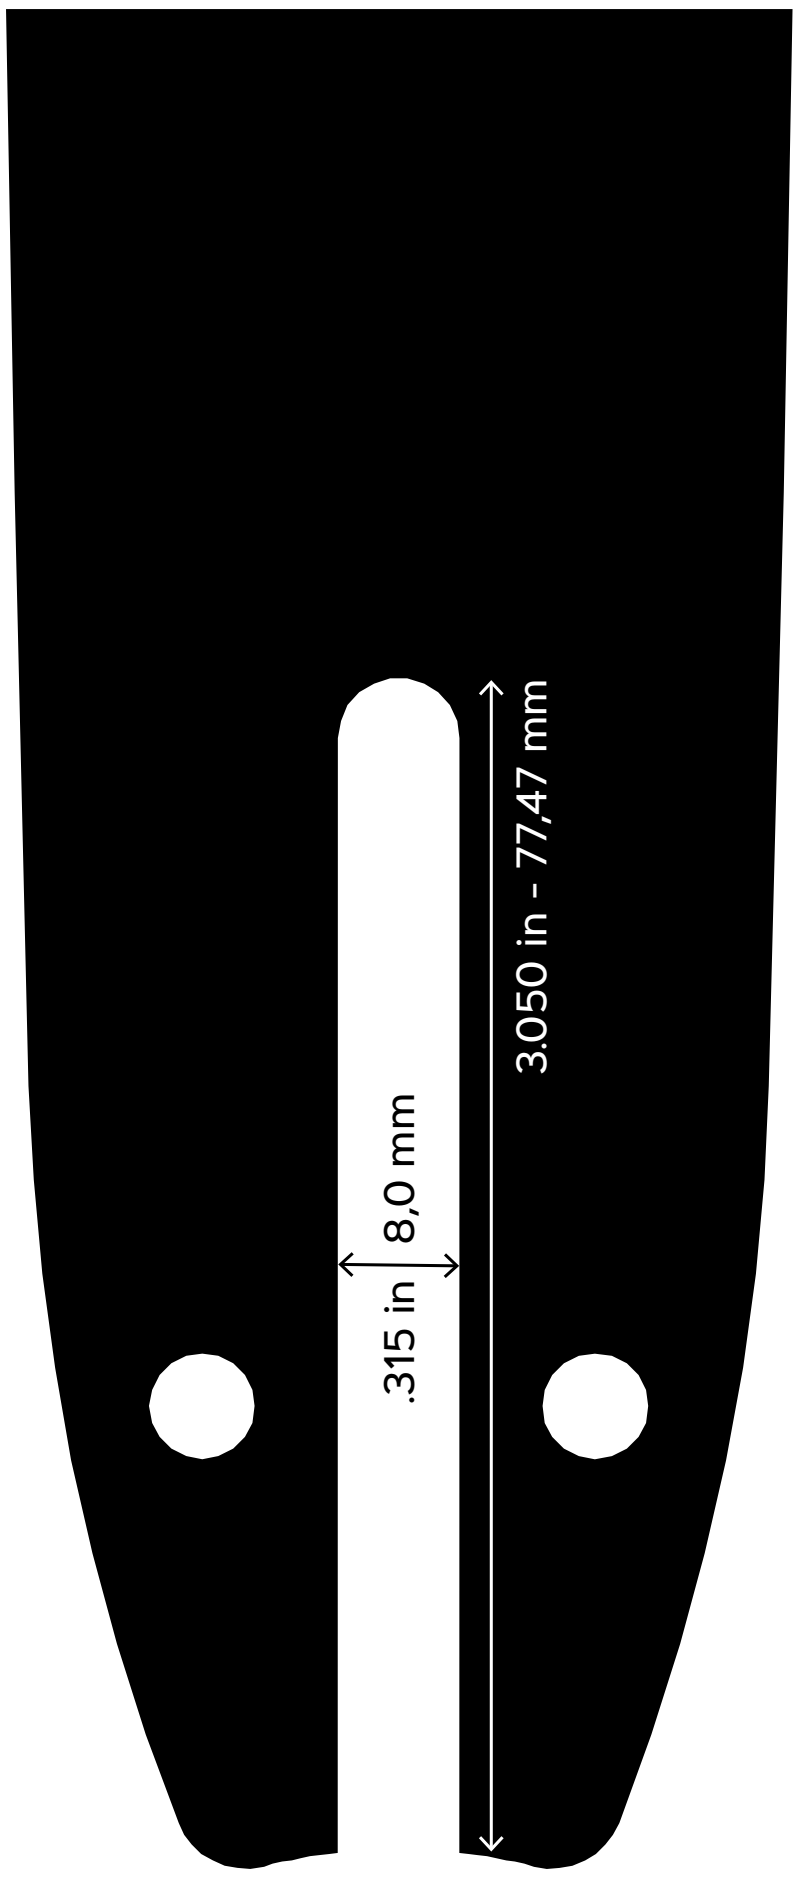
.315 in | 8,0 mm
3.050 in - 77,47 mm

OEM Applications: Efco®, Grizzly, Oleo-Mac®

A318

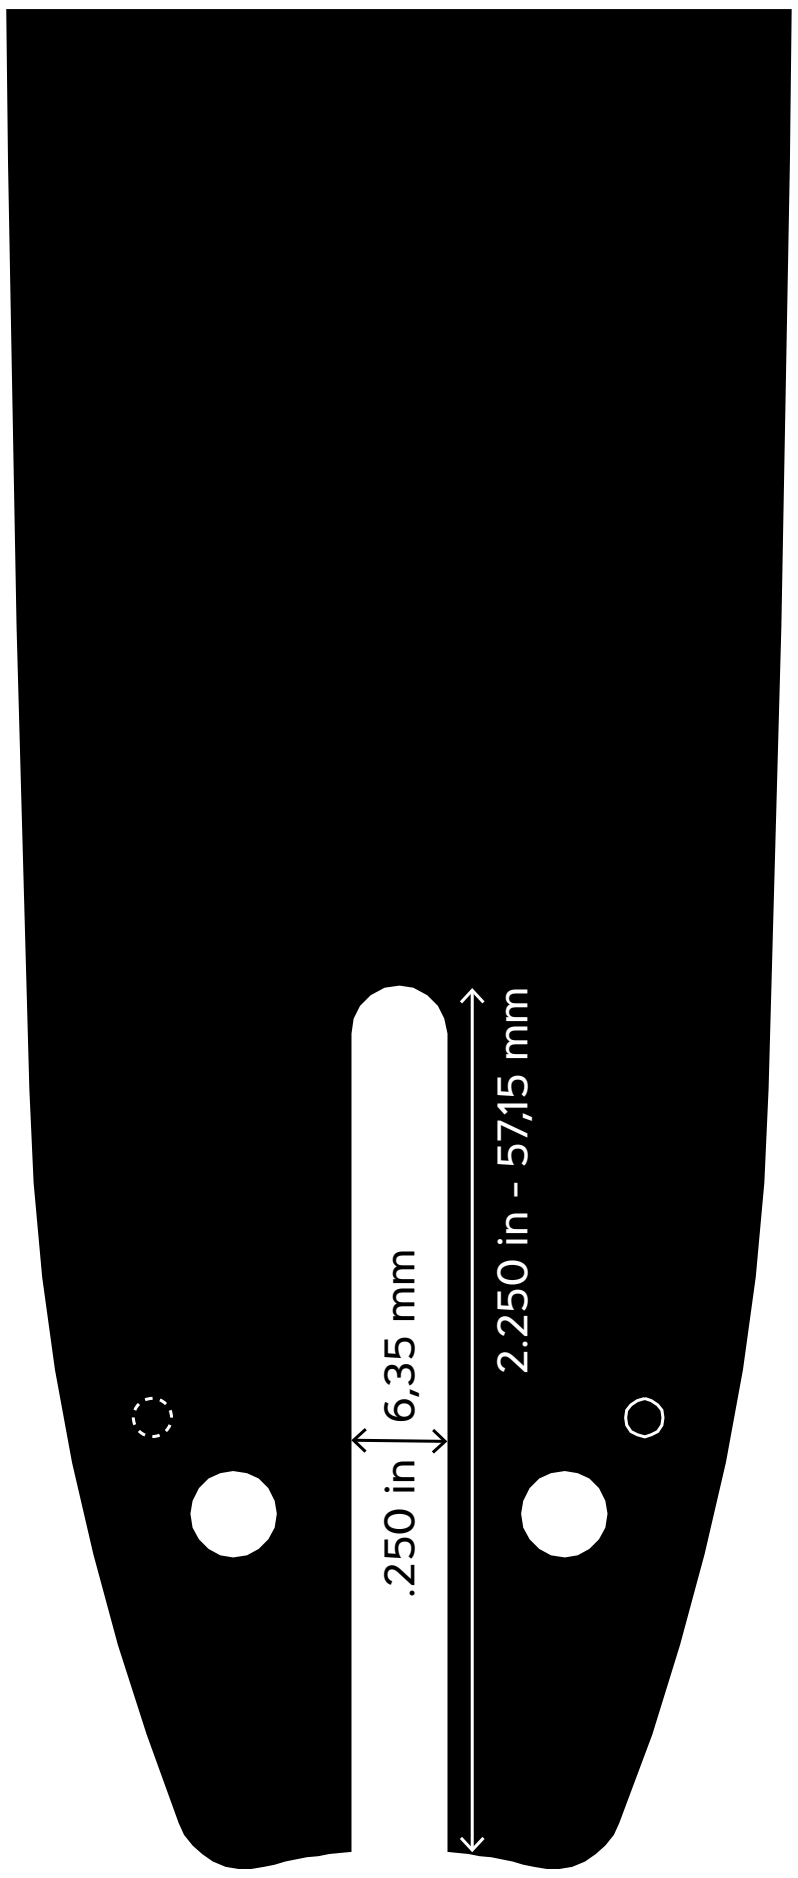
.250 in | 6,35 mm
2.250 in - 57,15 mm

OEM Applications: AL-KO, Black+Decker®, Dolmar, Echo®, Efco®, Einhell®, Grizzly, McCulloch®, Oleo-Mac®, Ryobi®, Shindaiwa, Stiga®, and others

K153

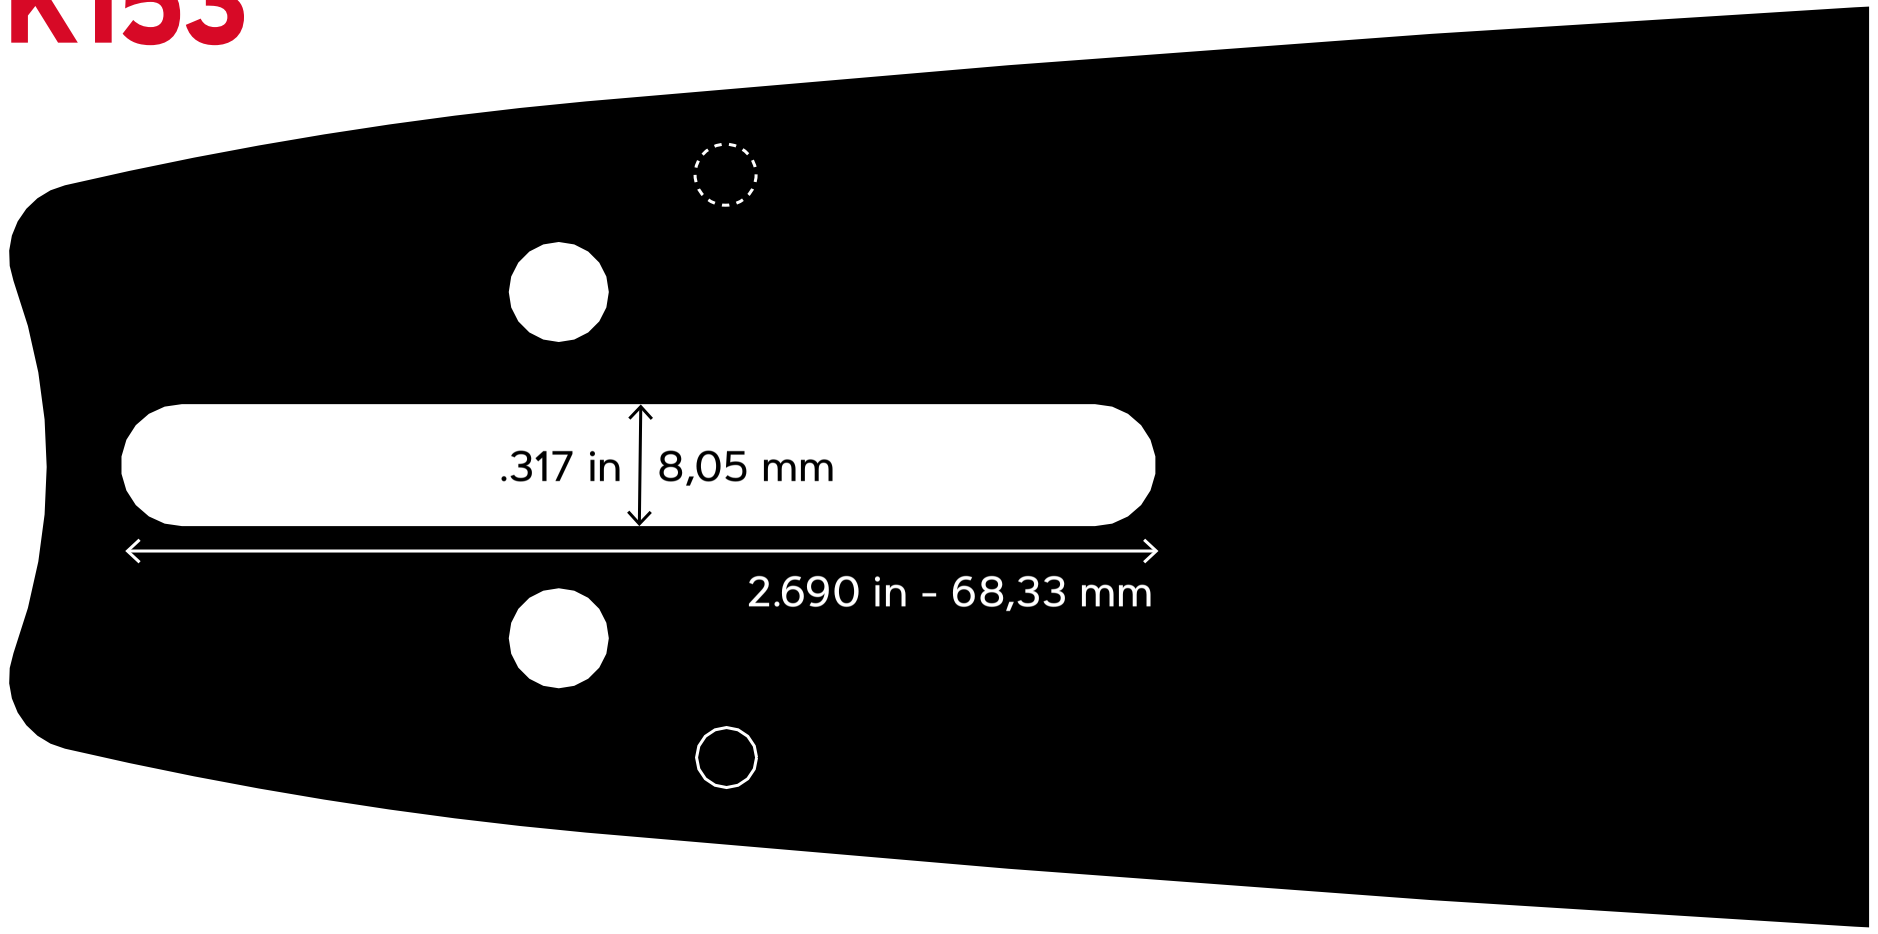

.317 in
8,05 mm
2.690 in - 68,33 mm

OEM Applications: Dolmar, Makita®

K216

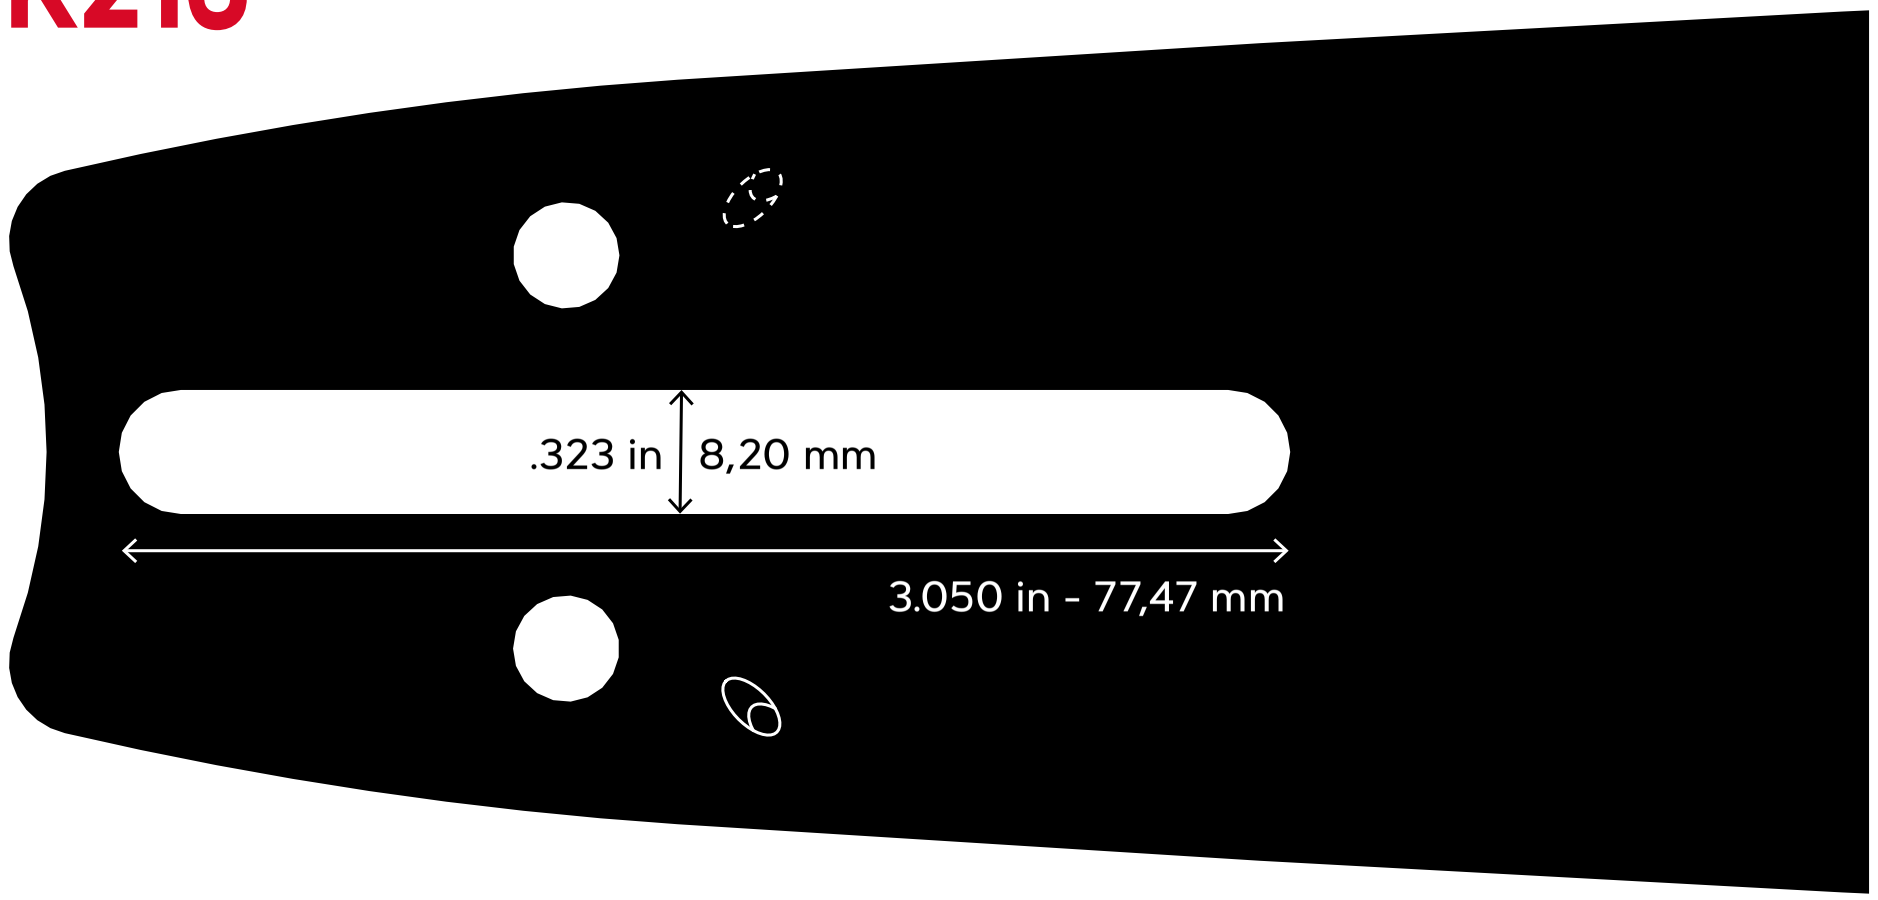

.323 in
8,20 mm
3.050 in - 77,47 mm

OEM Applications: Echo®, Shindaiwa

D009

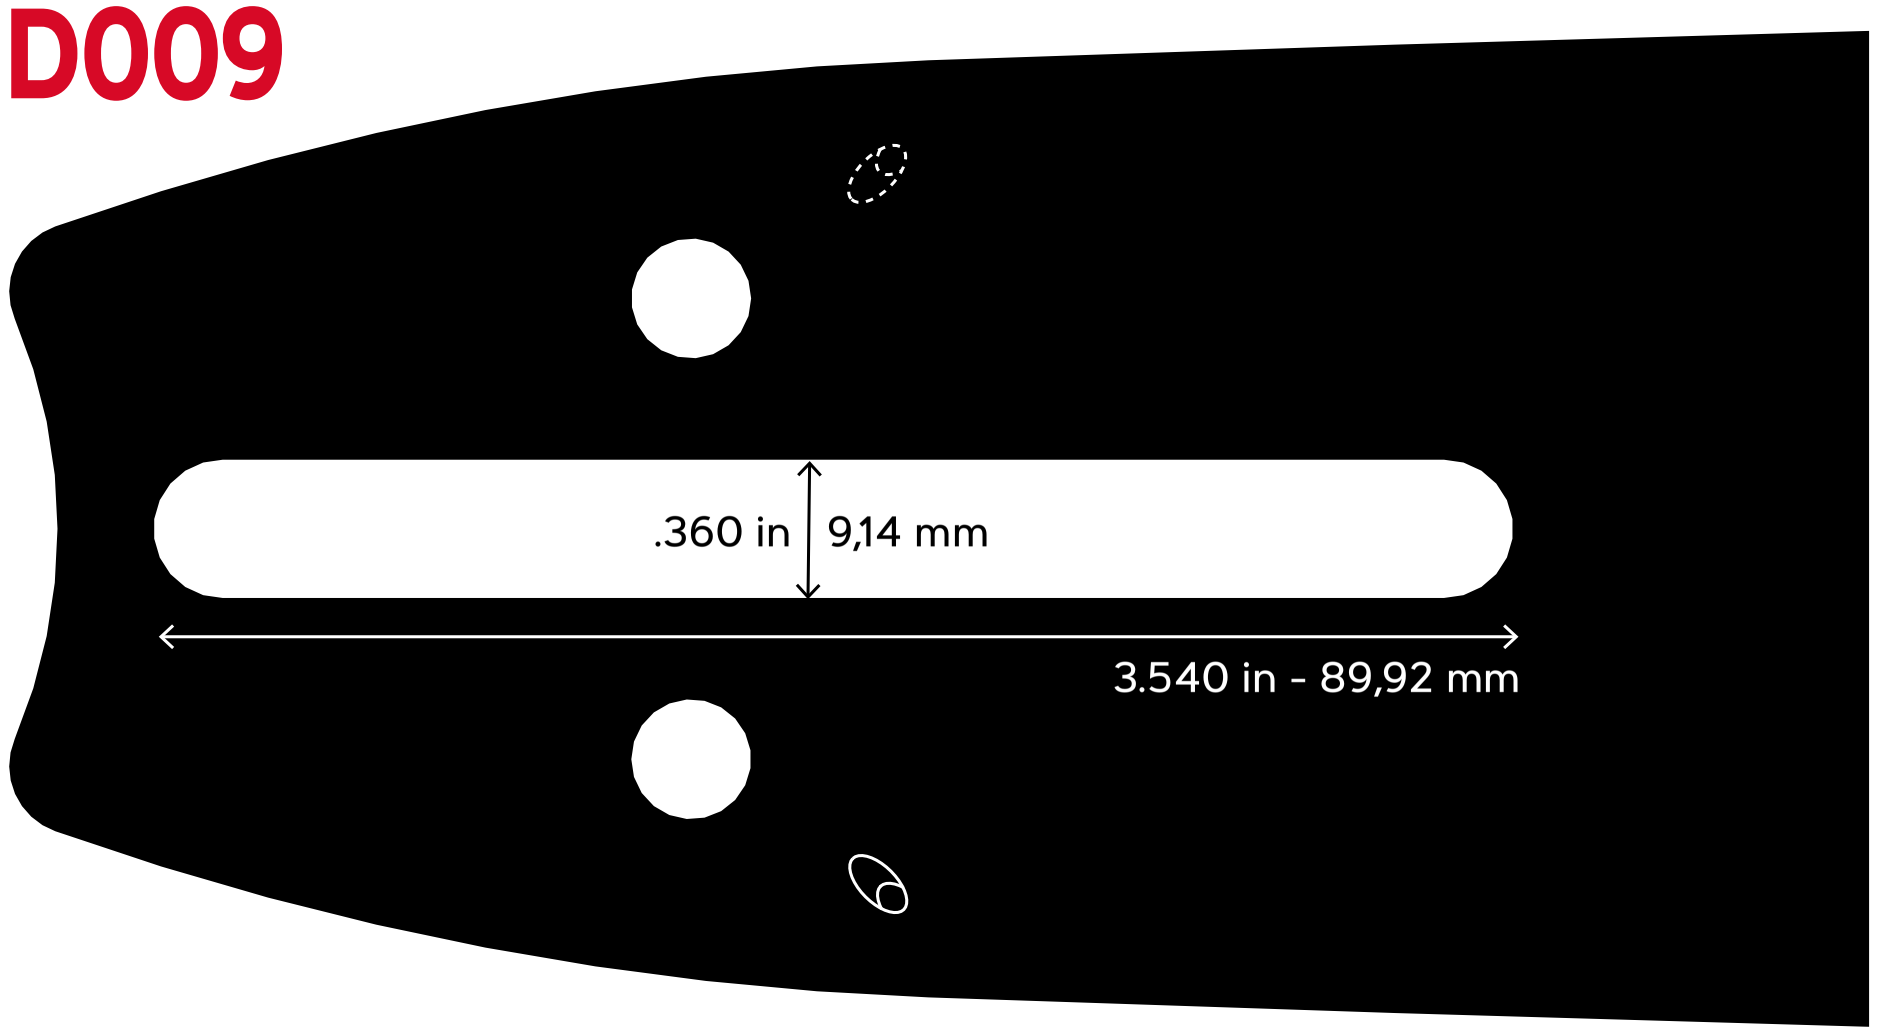

.360 in
9,14 mm
3.540 in - 89,92 mm

Note: VXL have oval holes and shorter slots

OEM Applications: Alpina, AL-KO, Dolmar, Efco®,Husqvarna®, Iseki , Jonsered®, Makita®, Oleo-Mac®, Partner, Shindaiwa, Solo®

D024

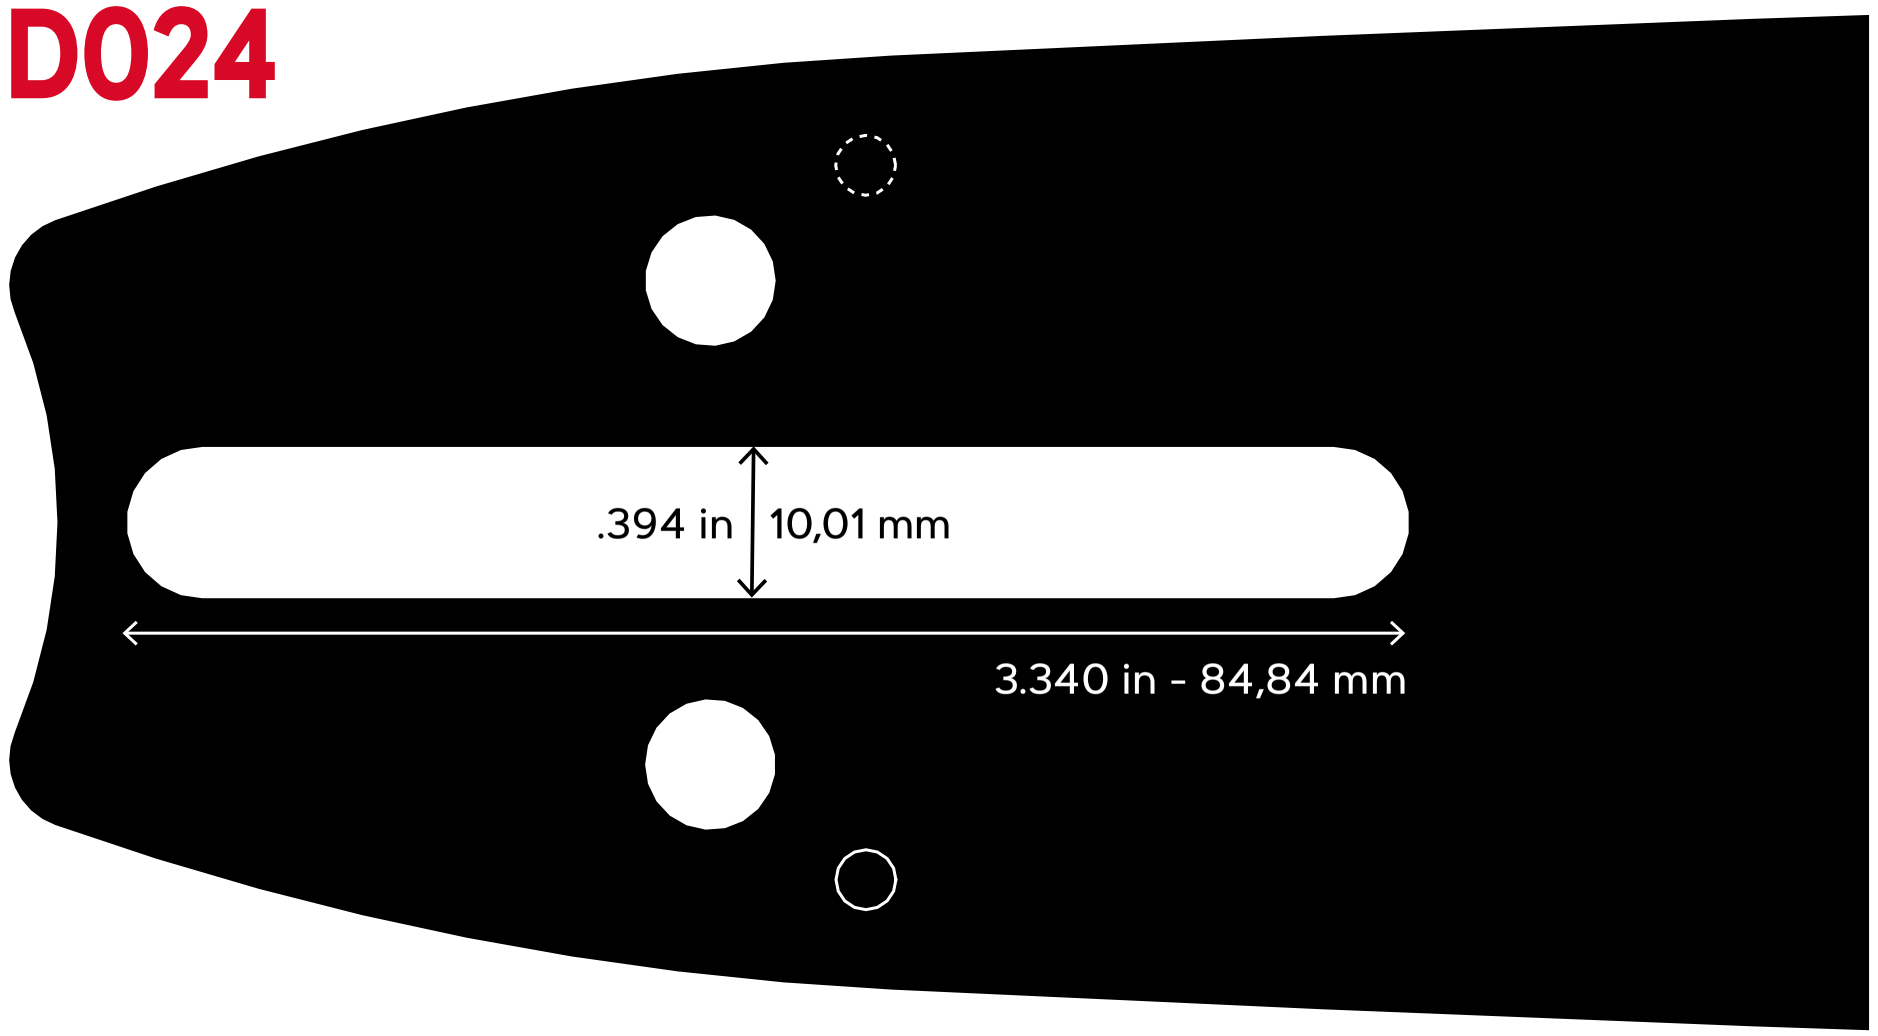

.394 in
10,01 mm
3.340 in - 84,84 mm

OEM Applications: Efco®, Ikra, Jonsered®, Oleo-Mac®, Partner

D025

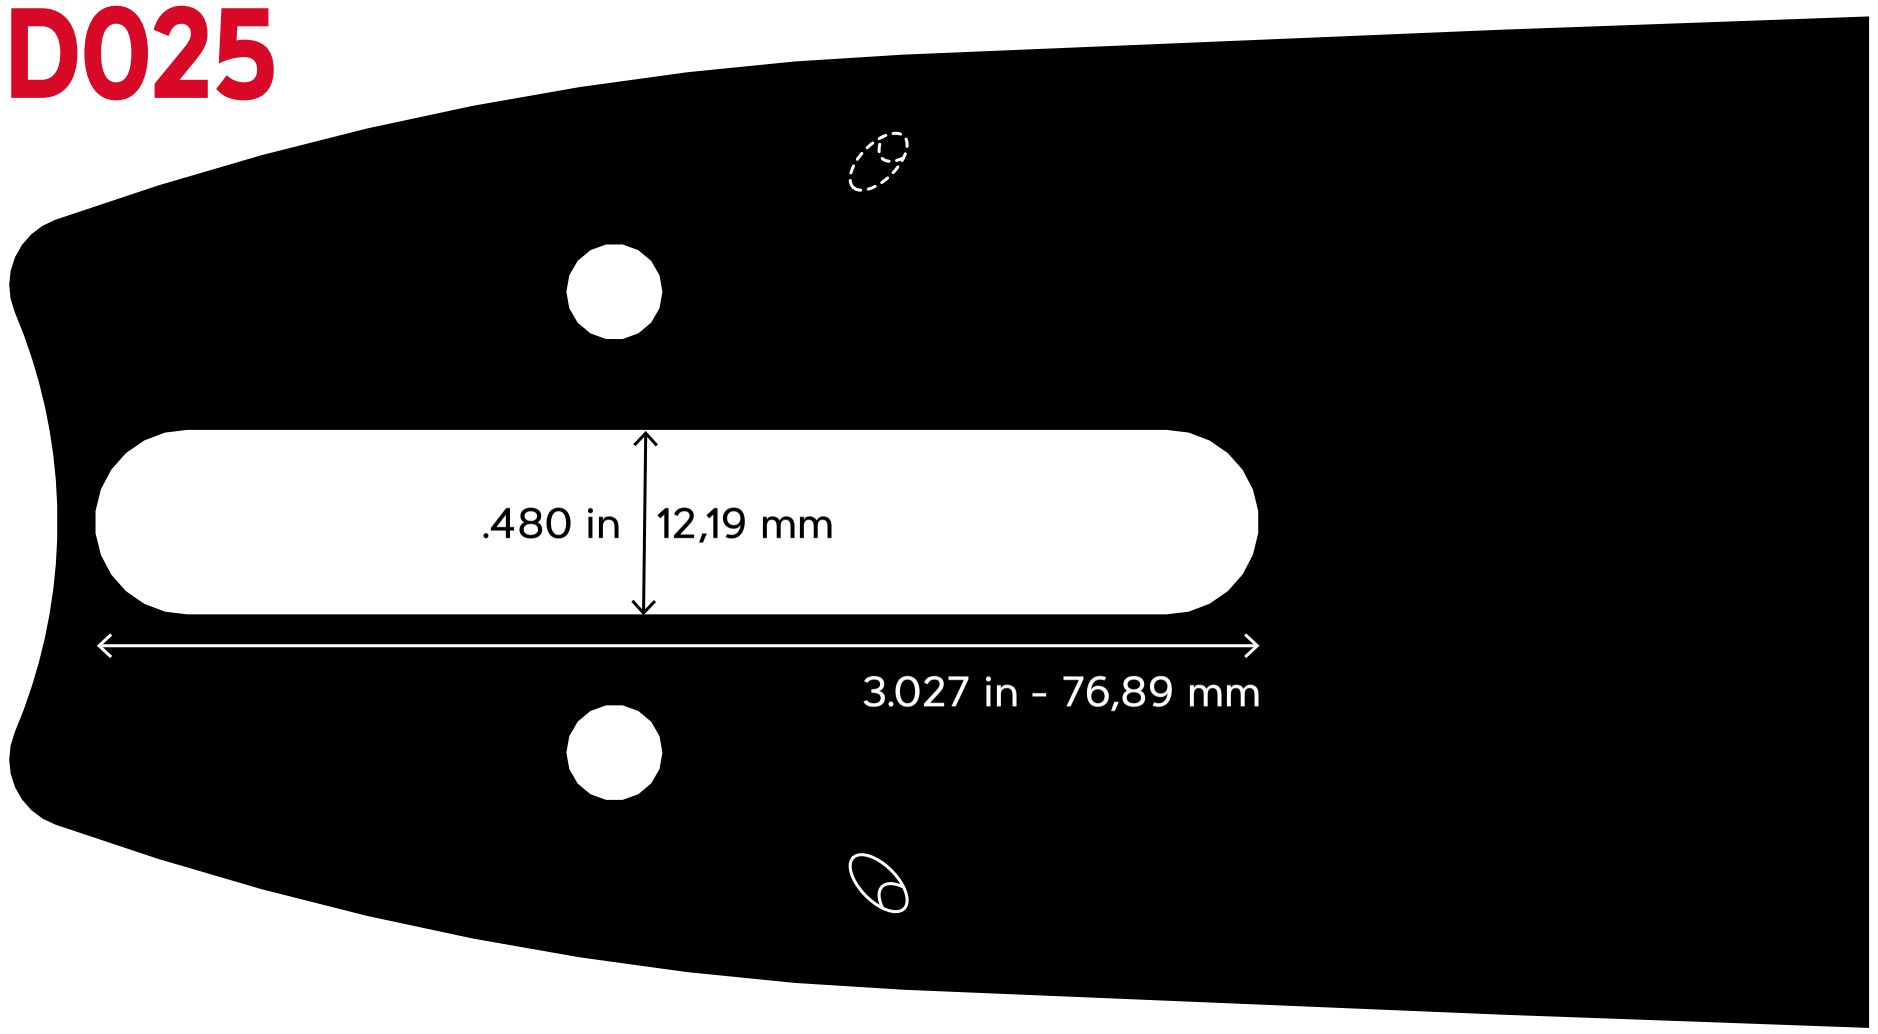
.480 in
12,19 mm
3.027 in - 76,89 mm

OEM Applications: AEG, Stihl®

D033

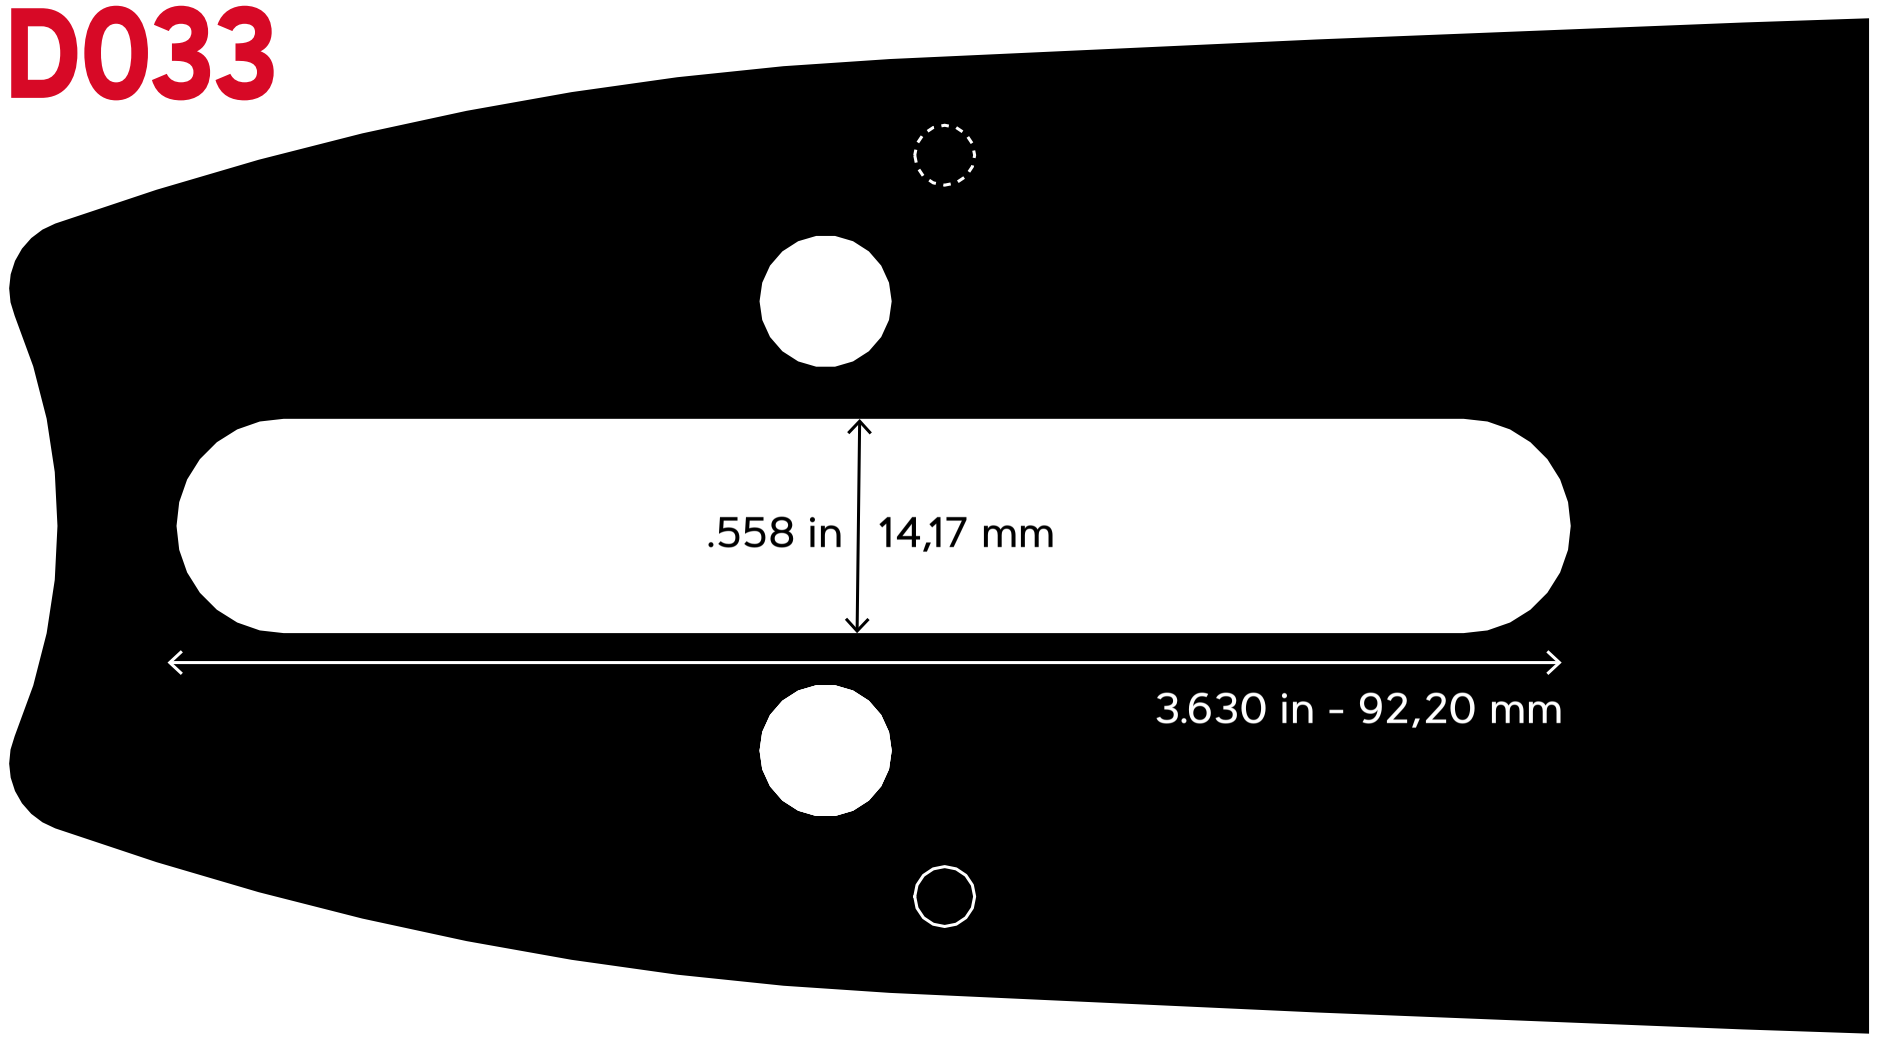
.558 in
14,17 mm
3.630 in - 92,20 mm

OEM Applications: Dolmar, Makita®, Poulan®

D176

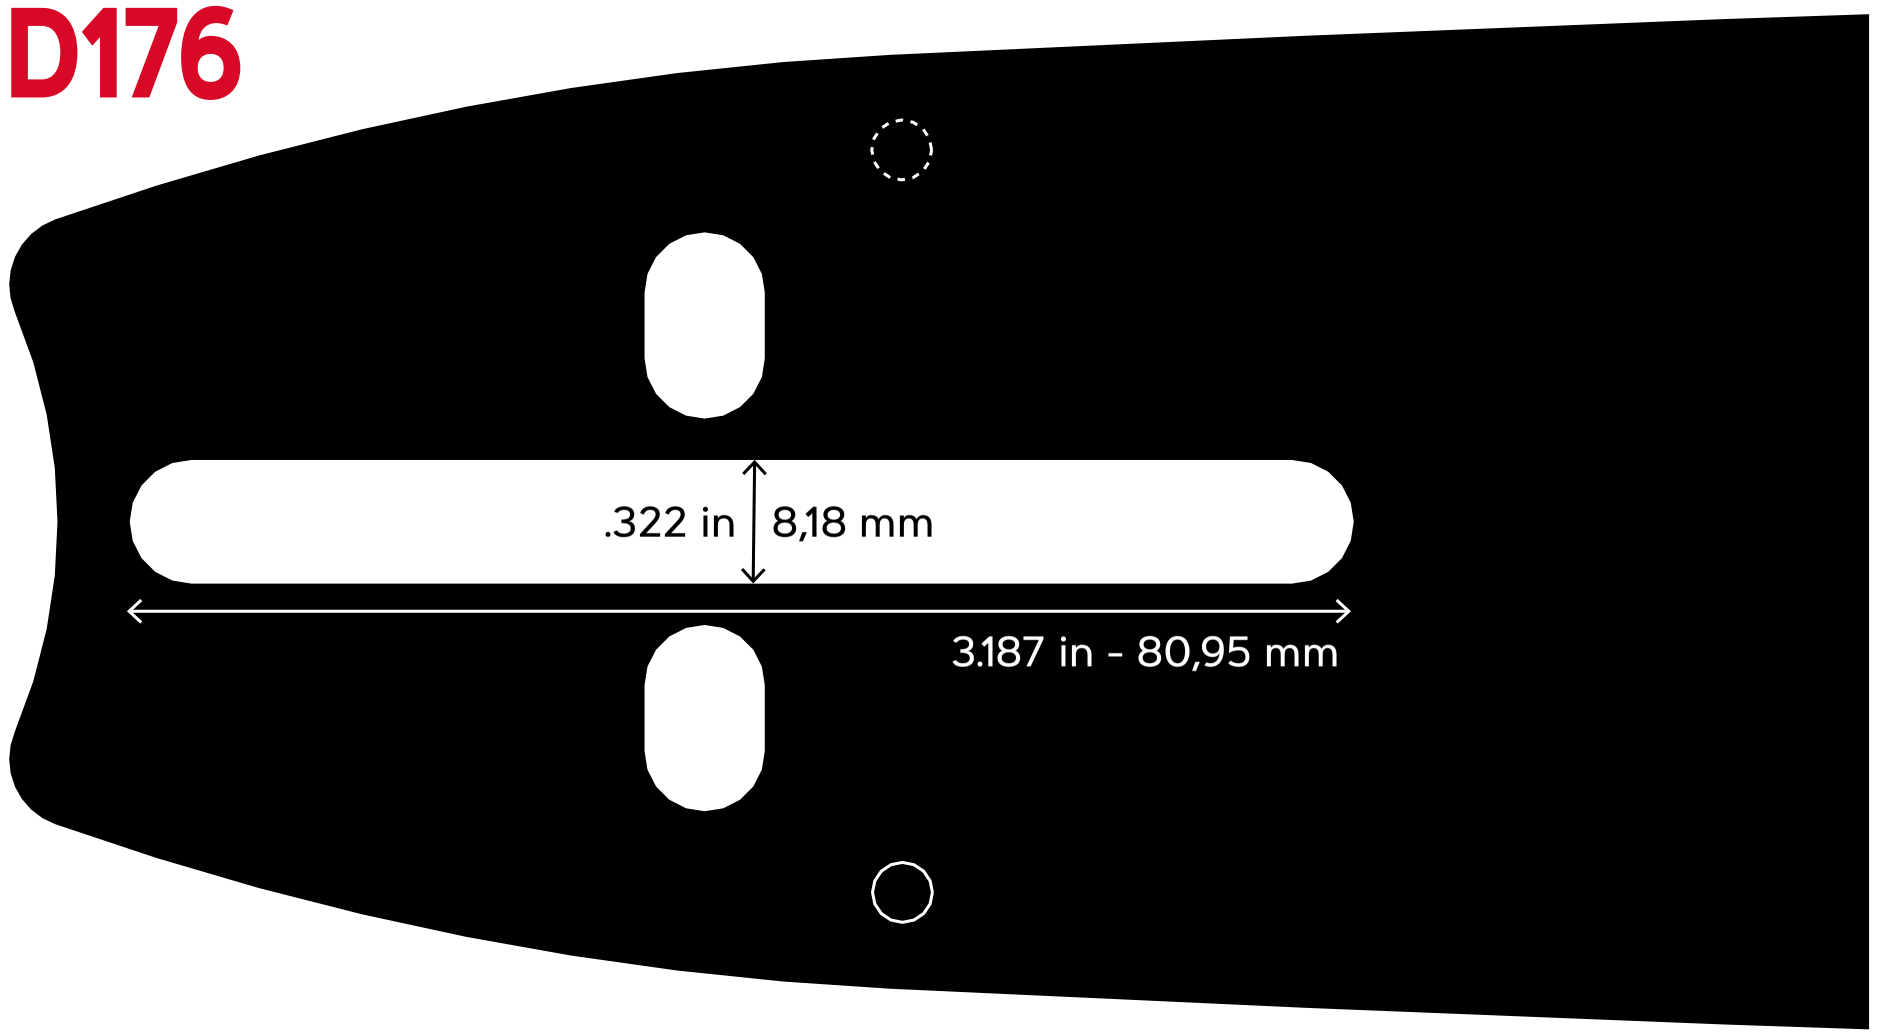
.322 in
8,18 mm
3.187 in - 80,95 mm

OEM Applications: AL-KO, Echo®, Poulan®/Poulan Pro®, Shindaiwa, Tanaka®, Zenoah®

E031

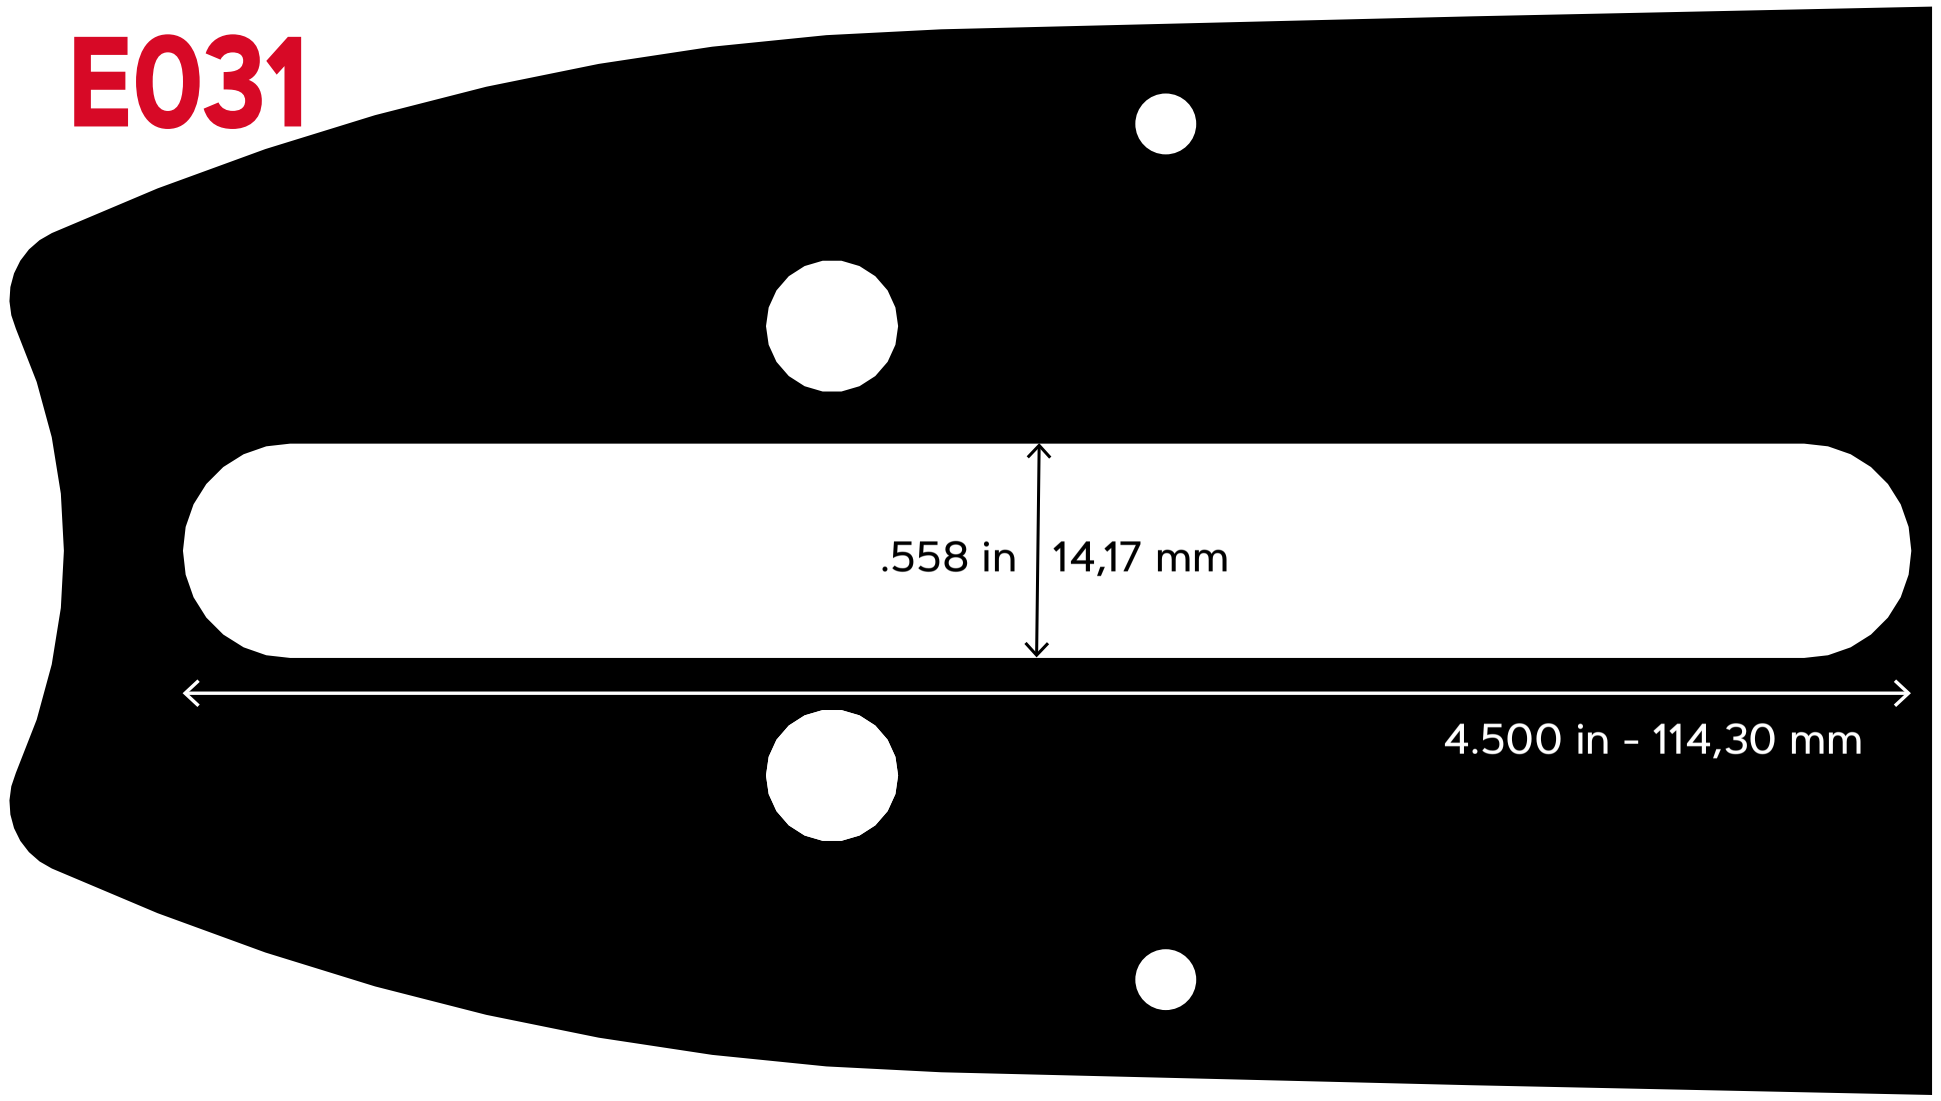
.558 in
14,17 mm
4.500 in - 114,30 mm

OEM Applications: Efco®, Hydrochief, Oleo-Mac®, Stihl®

Alternative packaging

COMBIPACK: 1 GUIDEBAR + 2 CHAINS

÷2				BAR PN	CHAIN PN		OREGON	OEM Application	
3/8" LOW PROFILE	1,3mm .50"	12"	A041	120SDEA041	91P045E	45	561605	Dolmar, Homelite®, Jonsered®, Makita®, Oleo-Mac®, Partner	4
			A074	120SDEA074	91P044E	44	567295	Stihl®	
		14"	A041	140SDEA041	91P052E	52	543437	Dolmar, Homelite®, Jonsered®, Makita®, Oleo-Mac®, Partner	
			A041	140SXEA041	91VXL052E	52	561601	Dolmar, Homelite®, Jonsered®, Makita®, Oleo-Mac®, Partner	
			A074	140SDEA074	91P050E	50	543482	Stihl®	
			A074	140SXEA074	91VXL050E	50	559166	Stihl®	
		16"	A041	160SXEA041	91VXL056E	56	561660	Dolmar, Homelite®, Jonsered®, Makita®, Oleo-Mac®, Partner	
			A041	160SDEA041	91P056E	56	543483	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
			A074	160SXEA074	91VXL055E	55	561603	Stihl®	
			A074	160SDEA074	91P055E	55	543484	Stihl®	
.325"	1,3mm .50"	13"	K095	130MLBK095	95TXL056E	56	581621	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
			K095	130TXLBK095	95TXL056E	56	578707	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
			D025	130TXLBD025	95TXL056E	56	578741	Stihl®	
		15"	K095	150MLBK095	95TXL064E	64	581620	HDolmar, Husqvarna®, Efco®, Makita®, Partner	
				150TXLBK095	95TXL064E	64	578708	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
		18"	K095	180MLBK095	95TXL072E	72	581619	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
			K095	180TXLBK095	95TXL072E	72	578739	Dolmar, Husqvarna®, Efco®, Makita®, Partner	
	1,5mm .58"	13"	K095	138PXBK095	21BPX056E	56	543479	Husqvarna, Jonsered, Dolmar, Partner, m.fl.	
			D025	138PXBD025	21BPX056E	56	543480	Stihl®	
		15"	K095	158PXBK095	21BPX064E	64	543486	Husqvarna, Jonsered, Dolmar, Partner	
		18"	K095	188SFGK095	21BPX072E	72	556429	Husqvarna, Jonsered, Dolmar, Partner	
	1,6mm .63"	15"	D025	153SFGD025	22BPX062E	62	556287	Stihl®	
		16"	A074	163PXBA074	22BPX062E	62	561604	Stihl®	
			D025	163SFGD025	22BPX067E	67	561608	Stihl®	
		18"	D025	183SFGD025	22BPX074E	74	561659	Stihl®	
3/8"	1,5mm .58"	15"	D009	158SFHD009	73DPX056E	56	556286	Dolmar, Efco®, Husqvarna®, Jonsered®, Partner, Solo®, Shindaiwa	
		18"		188SFHD009	73DPX068E	68	556288	Dolmar, Efco®, Husqvarna®, Jonsered®, Partner, Solo®, Shindaiwa	
		20"		208SFHD009	73DPX072E	72	556431	Dolmar, Efco®, Husqvarna®, Jonsered®, Partner, Solo®, Shindaiwa	
	1,6mm .63"	16"	D025	163SFHD025	75DPX060E	60	567293	Stihl®	
		18"		183SFHD025	75DPX066E	66	567292	Stihl®	
		20"		203SFHD025	75DPX072E	72	556430	Stihl®	

TWINPACK - 2 CHAINS

LubriTec
OREGON
SpeedCut
95TXL056
x2
13"
.050"
.325"
56

÷2					OREGON	OEM Application	
3/8" LOW PROFILE	1.1mm .43"	AdvanceCut™	90PX	50	564455	Stihl, Efco, Oleo-Mac	3
	1.3mm .50"	VersaCut™	91VXL	40	564268	Dolmar, Echo, Husqvarna, Makita,	
				45	564439	Dolmar, Echo, Husqvarna, Makita, Mc Culloch, Oleo-Mac, Partner	
				50	564440	Stihl	
				52	564441	Husqvarna, Jonsered,Partner	
				56	564443	Dolmar, Echo, Efco, Einhell, Husqvarna, Jonsered, Makita, Mc Culloch	
				57	564444	Bosch, Dolmar, Echo, Efco, Einhell, Makita, Oleo-Mac, Stiga	
.325"	1,3mm .50"	SpeedCut™	95TXL	56	576787	Husqvarna, Jonsered, Stihl, Dolmar, Partner	
				64	576788	Husqvarna, Jonsered, Dolmar, Partner	
	1,5mm .58"	PowerCut™	21LPX	64	564457	Husqvarna, Jonsered, Dolmar, Partner	

BLISTER PACKAGING

We offer a specially adapted range to facilitate self-service in store. This blister range contains the most common chains. All products are marked with a short code which is also stated in the associated application guide. All to make it as easy as possible for the consumer to find the right product for their chainsaw in the store.

LubriTec
OREGON
SpeedCut
D56
Dolmar
Husqvarna
Jonsered
Stihl
.050
1,3 mm
.325
56

Q90SG = 90PX

≤ 42 cc

3/8" LOW PROFILE	90 : 1,1mm	Narrow Kerf	LubriTec™ OILING SYSTEM	4,5mm	30°	55°	0,64mm

33	Q90SG033E	**A33**
40	Q90SG040E	**A40**
44	Q90SG044E	**A44**
45	Q90SG045E	**A45**
46	Q90SG046E	**A46**
50	Q90SG050E	**A50**
52	Q90SG052E	**A52**
56	Q90SG056E	**A56**
57	Q90SG057E	**A57**

Q91VG = 91PX

≤ 42 cc

3/8" LOW PROFILE	91 : 1,3mm	LubriTec™ OILING SYSTEM	4,0mm	30°	55°	0,64mm

33	Q91VG033E	**B33**
40	Q91VG040E	**B40**
44	Q91VG044E	**B44**
45	Q91VG045E	**B45**
46	Q91VG046E	**B46**
49	Q91VG049E	**B49**
50	Q91VG050E	**B50**
52	Q91VG052E	**B52**
53	Q91VG053E	**B53**
55	Q91VG055E	**B55**
56	Q91VG056E	**B56**
57	Q91VG057E	**B57**
61	Q91VG061E	**B61**
62	Q91VG062E	**B62**

Q95TXL = 95TXL

38 → 55 cc

.325"	95 : 1,3mm	Narrow Kerf	LubriTec™ OILING SYSTEM	4,8mm	30°	55°	0,64mm

56	Q95TXL056E	**D56**
64	Q95TXL064E	**D64**
66	Q95TXL066E	**D66**
72	Q95TXL072E	**D72**
78	Q95TXL078E	**D78**

Q20-21-22BP = 20-21-22 BPX

38 → 62 cc

OREGON
OREGON
OREGON
20
20
20

.325″	20 : 1,3 mm	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm

66	72
Q20BP066E **E66**	Q20BP072E **E72**

.325″	21 : 1,5 mm	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm

56	64	66	72	78
Q21BP056E **F56**	Q21BP064E **F64**	Q21BP066E **F66**	Q21BP072E **F72**	Q21BP078E **F78**

.325″	22 : 1,6 mm	LubriTec™ OILING SYSTEM	4,8 mm	30°	55°	0,64 mm

62	67	68	74
Q22BP062E **G62**	Q22BP067E **G67**	Q22BP068E **G68**	Q22BP074E **G74**

Q73-75DP = 73-75 DPX

38 → 62 cc

OREGON
OREGON
OREGON
73
73

3/8″	73 : 1,5 mm	LubriTec™ OILING SYSTEM	5,5 mm	30°	55°	0,64 mm

68	72
Q73DP068E **L68**	Q73DP072E **L72**

3/8″	75 : 1,6 mm	LubriTec™ OILING SYSTEM	5,5 mm	30°	55°	0,64 mm

60	66	72
Q75DP060E **M60**	Q75DP066E **M66**	Q75DP072E **M72**

TRUSTED BY

SINCE

PROS

1947

™

LOGGERS
+
ARBORISTS

DESIGNED &
ENGINEERED
IN THE USA

SPUR AND POWER MATE® RIM SPROCKETS

Choose the right Sprocket

	.043″ 1,1mm		.050″ 1,3mm					.058″ 1,5mm			.063″ 1,6mm			
	3/8″ LOW PROFILE	.325″ LOW PROFILE	1/4″	3/8″ LOW PROFILE	.325″		3/8″	.325″	3/8″	.404″	.325″	3/8″	.404″	
Spur Sprockets – Electric or gas	90			91	95	20	72	21	73	58	22	75	59	27
NEW SpeedCut™ Nano		80												
Power Mate® Rim Sprocket Systems – ≥ 38 cc					95	20	72	21	73	58	22	75	59	27

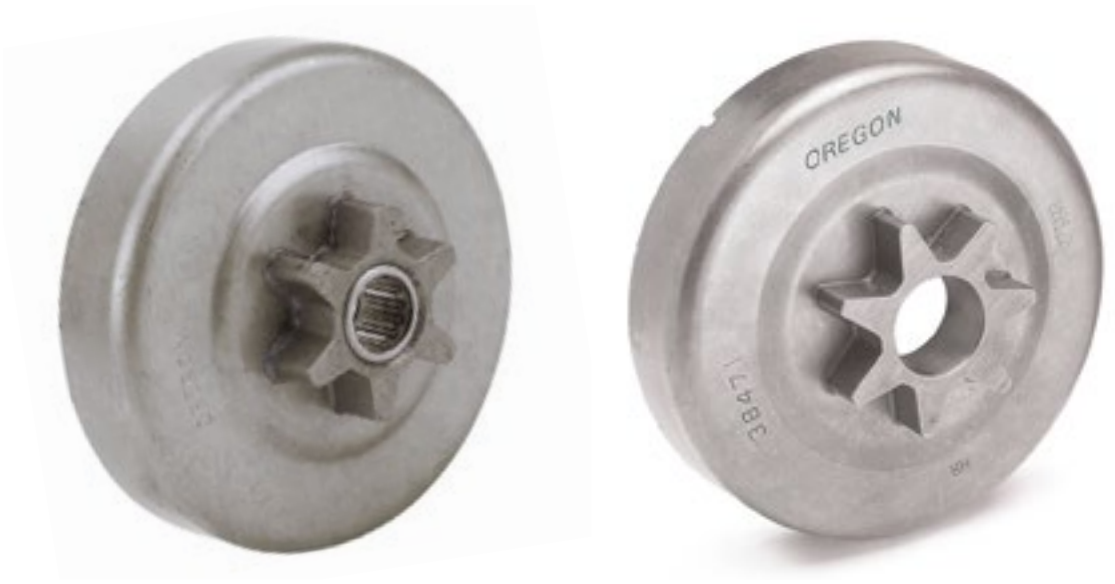

NEW

SpeedCut™ Nano

NEW

SpeedCut™ Nano sprocket

20 → 38 cc

.325″ LOW PROFILE

SpeedCut Nano sprockets, 80TXL saw chain and TXLN guide bars work together as a system to optimized performance on battery-powered and small gas chainsaws.

Economical with good wear resistance

A one-piece design that must be replaced as a complete unit

Replacement schedule: every two chain loops

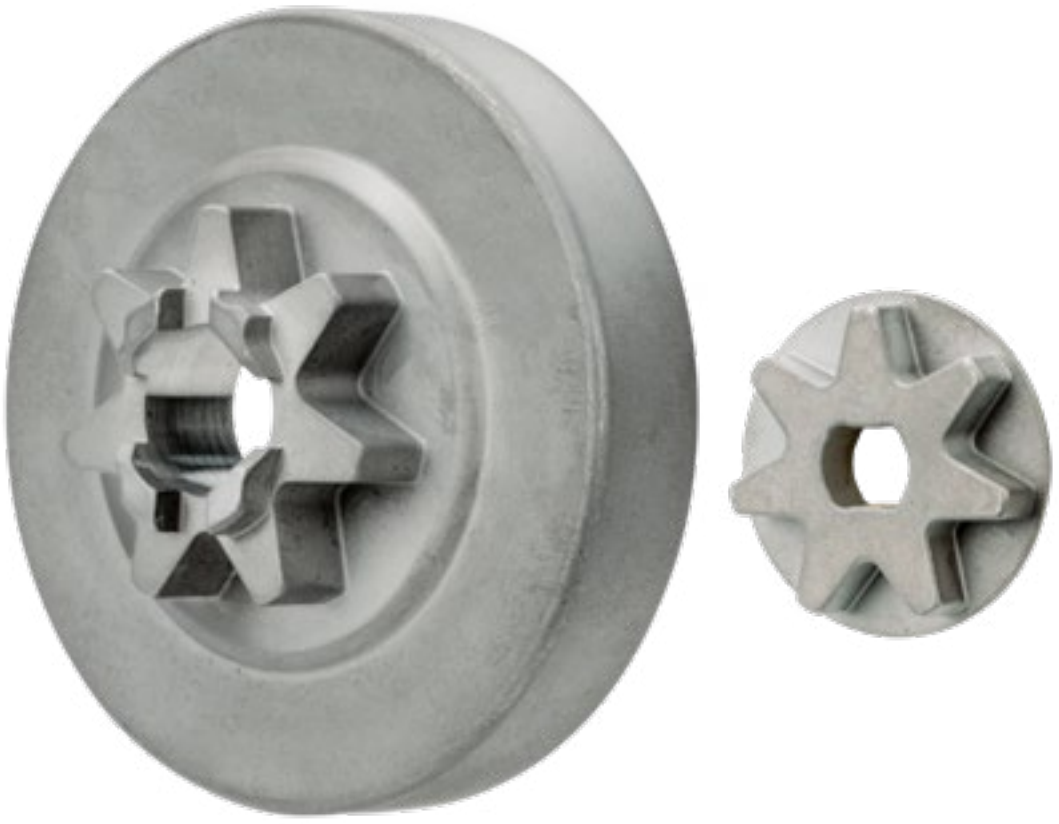

Stihl	7 Zähne
MS 150, MS 150 T MS 151, MS 151 T	610727N
MSA 161T	625333N
MS 170, MS 171 MS 180, MS 181	610726N
MS 192, MS 192 T MS 193, MS 193 T MS 194, MS 194 T MS 200, MS 200 T MS 201, MS 201 T	610725N

Husqvarna	7 Zähne
T435	610729N
T525	627943
535i XP, T535i XP, 536Li XP, T536Li XP 540i XP, T540i XP,	610730N
T540 XP, T540 XP II	610728N

Echo	7 Zähne
CCS-58V	629320
CS-2511TES	629318
CS-303T, CS-362WES, CS-362TES	629322

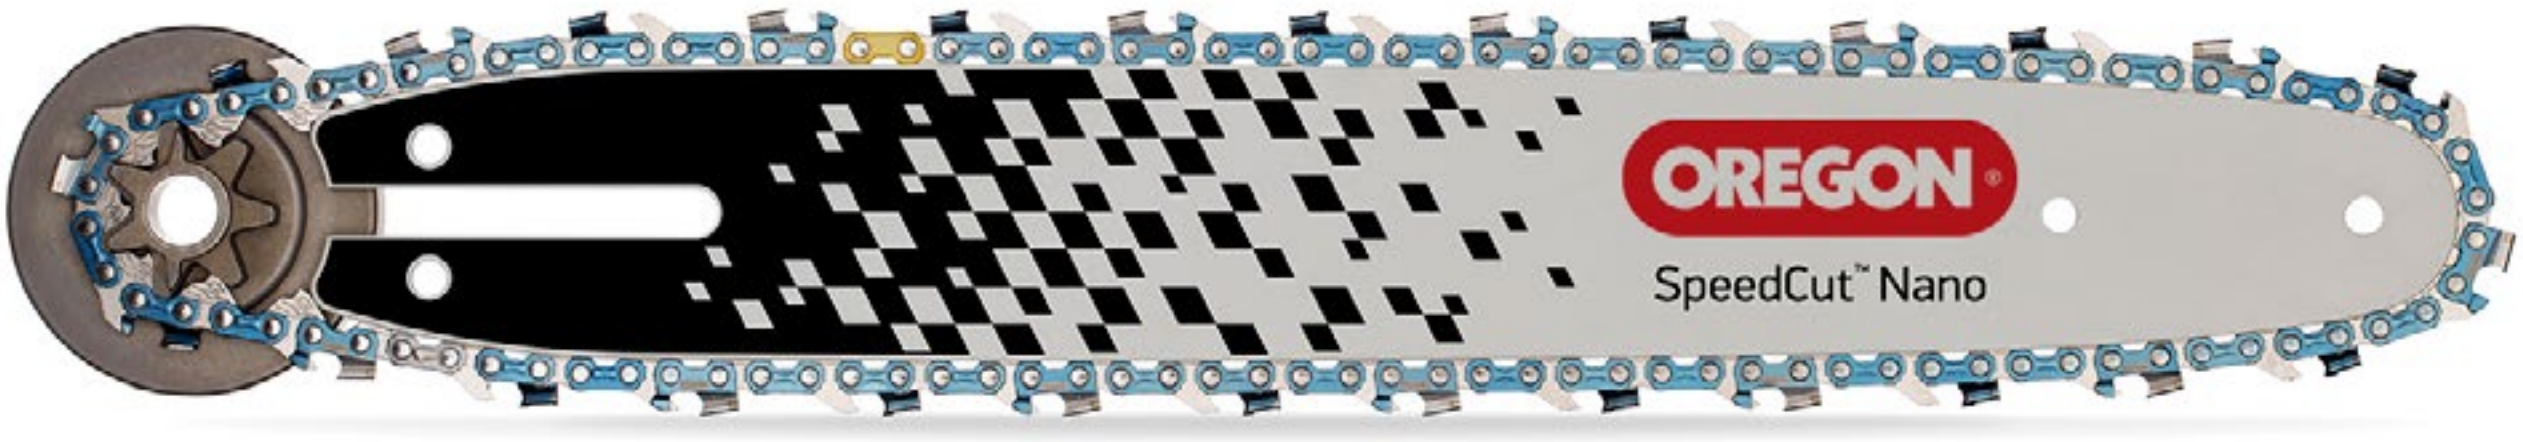

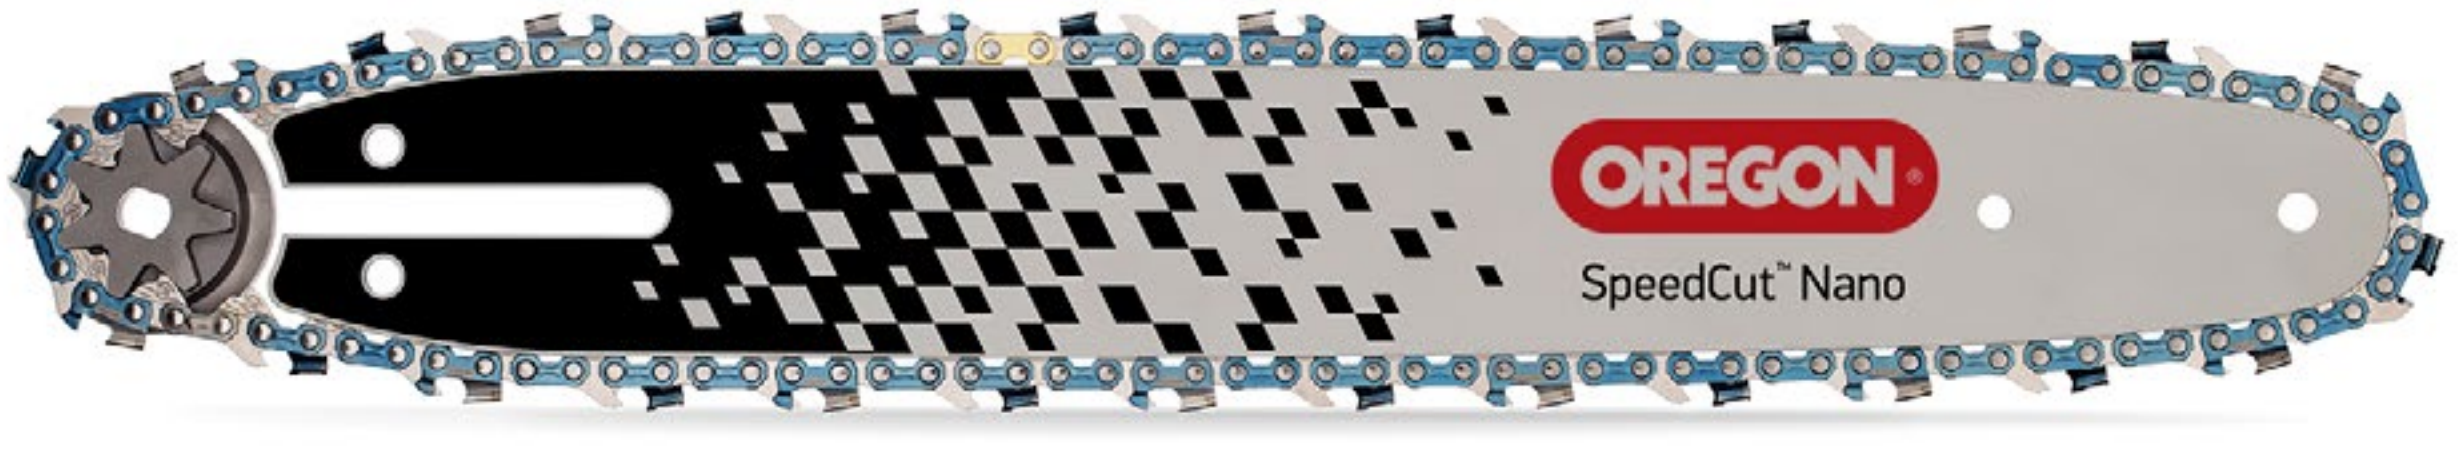

Spur® sprocket

Superior performance and value for users who prefer a spur sprocket.

- Rugged and dependable, with excellent wear resistance.
- A one-piece design that must be replaced as a complete unit
- Replacement schedule:
  Every two chain loops

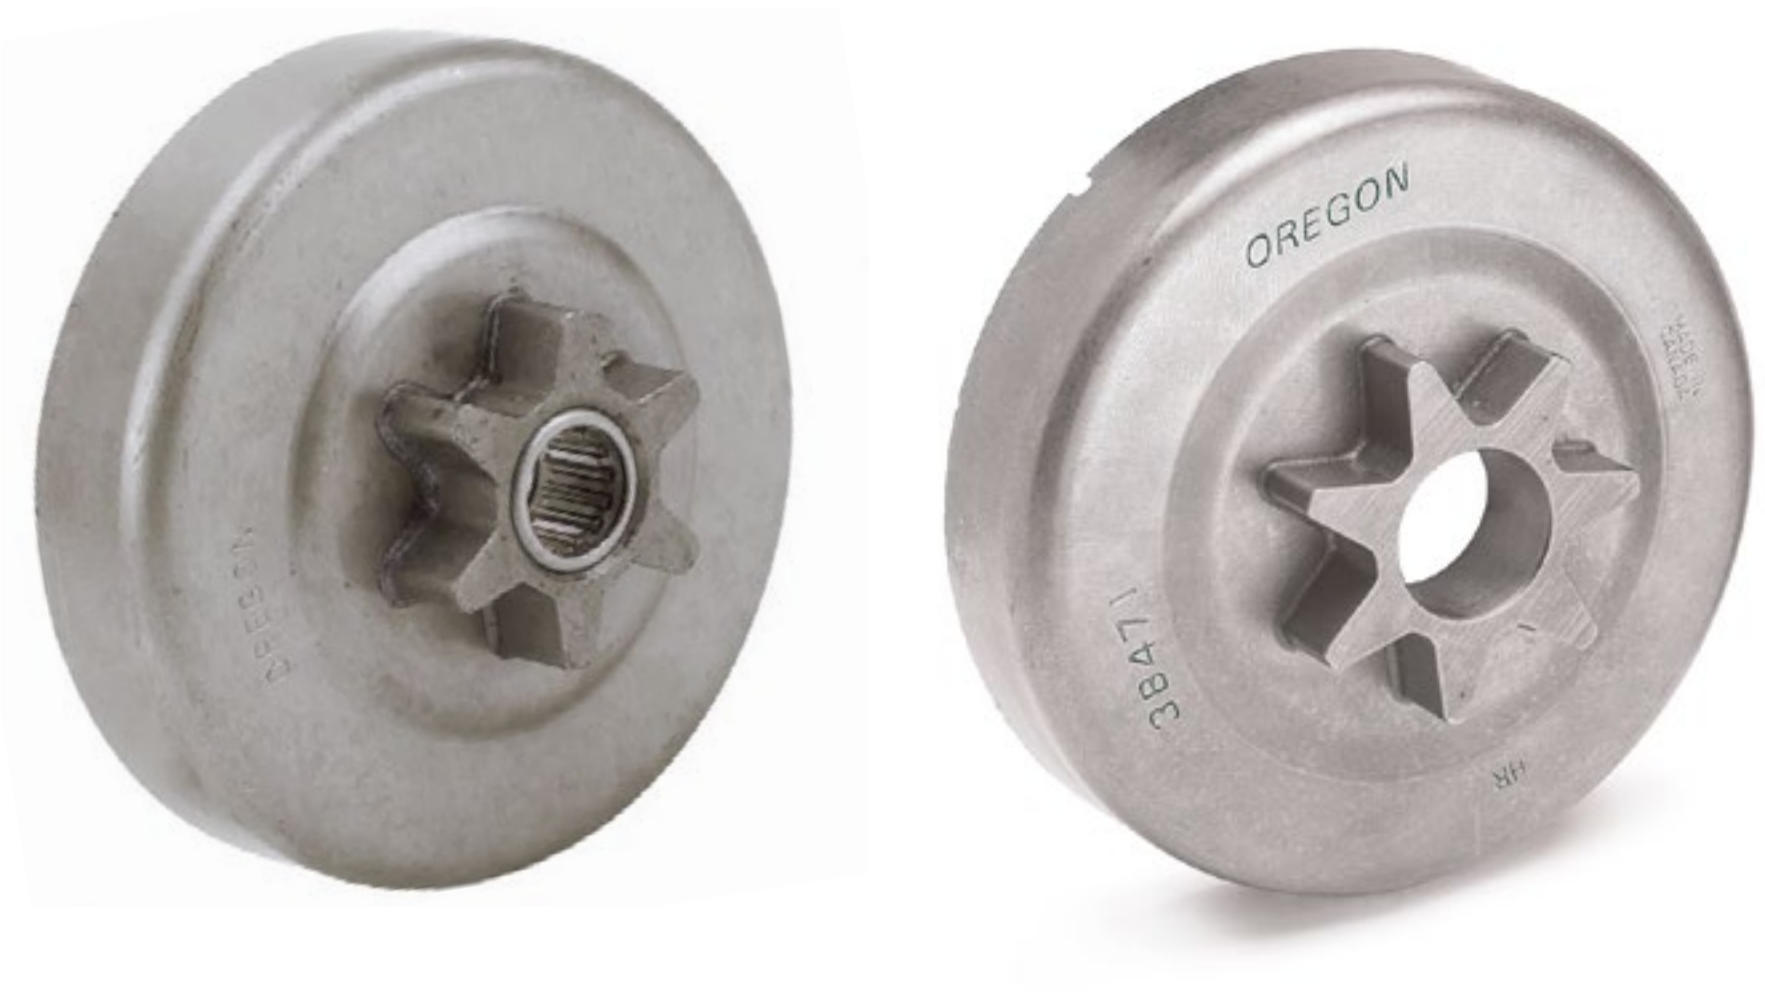

3/8″ LOW PROFILE	.325″	3/8″	.404″
Electric or gas ≤ 42 cc	≥ 38cc	≥ 38cc	≥ 38cc
6 Tooth	7 Tooth	7 Tooth	7 Tooth
			
100962X 106114	108308X	38145X	32669X

Attention Dealers

Some Oregon spur sprockets have bearings installed, but some do not. Part numbers ending with a number have bearings installed. Part numbers ending with the letter "X" do not. Bearings must be purchased separately for all part numbers that end with an X.

Power Mate® Rim Sprocket System

≥ 38 cc

This two-piece sprocket system is the ultimate way to drive the chain on most types of saws and can be used by all types of chainsaw users.

- The complete sprocket system includes a clutch drum with spline and a replaceable rim sprocket.
- The rim floats freely on the spline, maximizing chain-bar groove alignment for reduced wear and extended operational life.
- The rim is replaceable which extends the life of the entire system and reduces overall costs.
- The system provides smoother cutting and less chain jumping and wear.
- Power Mate splines have either small (SM7) or standard (SD7) diameter.

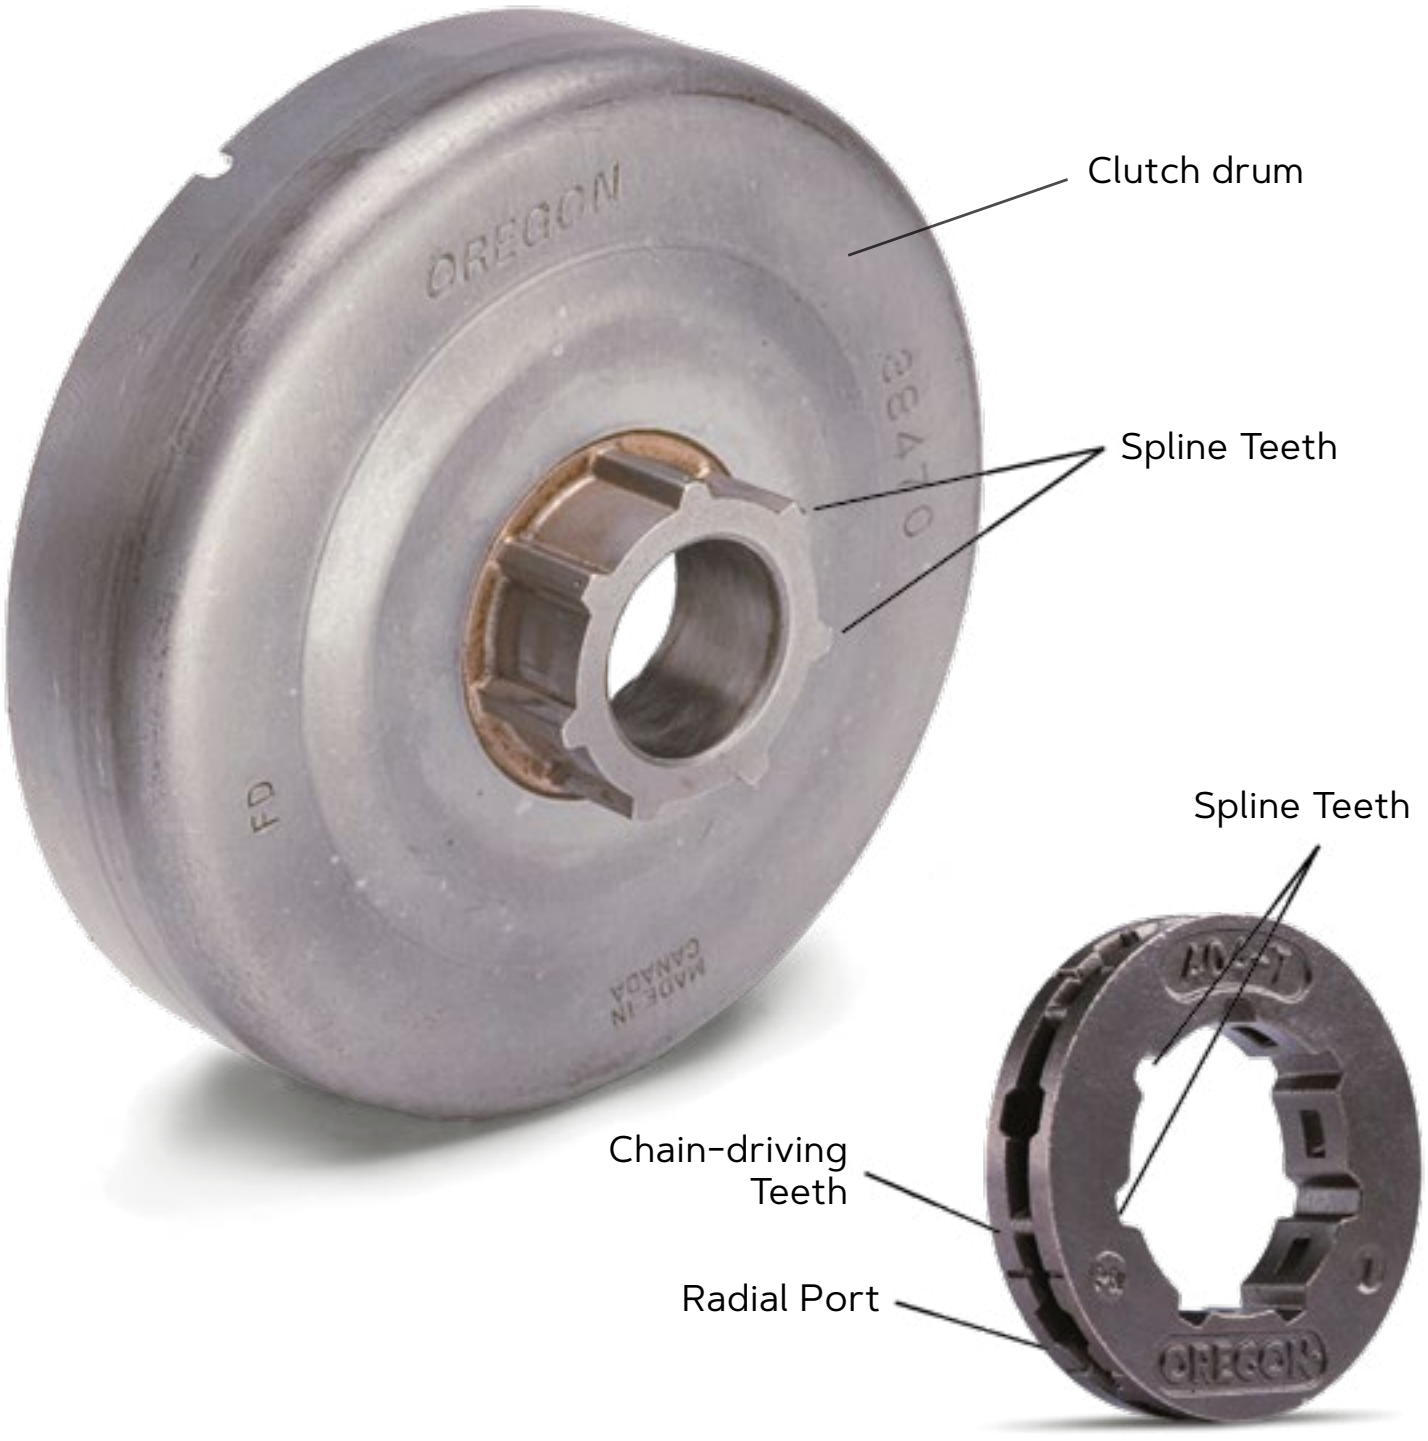





SMALL 7 SPLINE (SM7)		STANDARD 7 SPLINE (SD7)	
.325″	3/8″	3/8″	.404″
7 Tooth	7 Tooth	7 Tooth	7 Tooth
29175X	34162X	26831	10612X
41726X	513470X	38470X	
100791X			
100961X			
108215X			

Attention Dealers

Some Oregon® Power Mate systems have bearings installed, but some do not. Part numbers ending with a number have bearings installed. Part numbers ending with the letter "X" do not. Bearings must be purchased separately for all rim systems having part numbers that end with an X.

Power Mate® Rims

The free floating rim produces the best cutting action in a smooth continuous flow.

- The rim wall supports the chain, greatly diminishing the wear and stress on the chain. Smoother cutting and less chain wear than spur sprockets
- Radial port design uses centrifugal force to throw off sawdust and debris
- Wear-depth indicators show when it's time to replace the rim
- Replacement schedule: every two chain loops

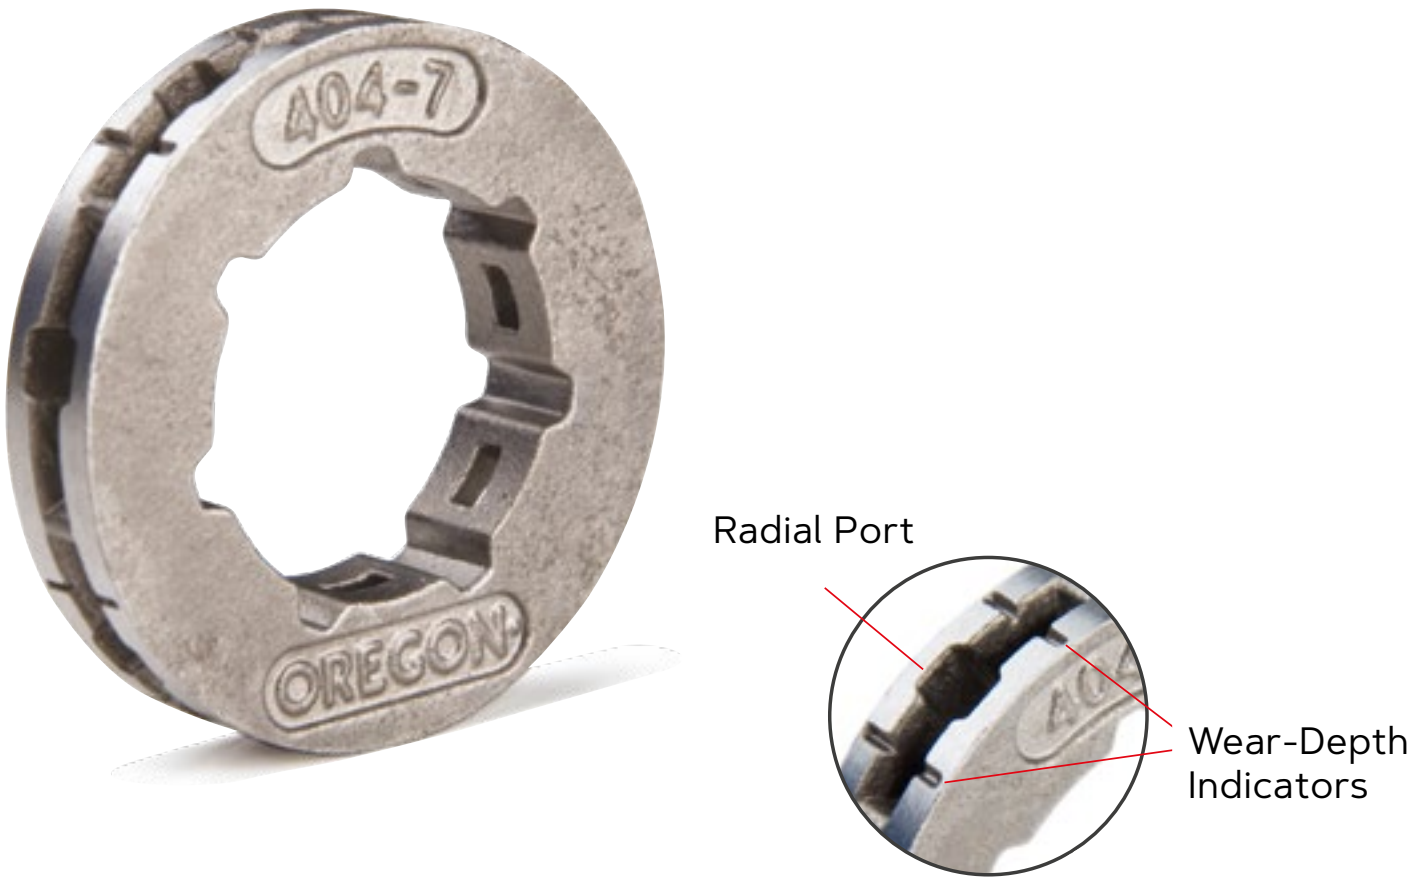

SMALL 7 SPLINE (SM7)

.325″	.325″	3/8″
7 Tooth Radial port Wear-Depth Indicators	**8 Tooth Wear-Depth Indicators**	**7 Tooth Wear-Depth Indicators**
 11892	 11891	 18720

STANDARD 7 SPLINE (SD7)

.325″	3/8″	3/8″	.404″
9 Tooth	**7 Tooth Radial Port Wear-Depth Indicators**	**8 Tooth Wear-Depth Indicators**	**7 Tooth Radial Port Wear-Depth Indicators**
 13624C	 68210	 22273	 22270

Sprocket Additional Components

Bearings

Dust Covers /
Oil Pump Drivers

Washers

Sprocket Type	Pitch - Drive Teeth	Sprocket	Bearing	Additional Components
SPUR® SPROCKET	3/8" – 6	546622 (CS250/CS300)		
	3/8" (90) – 7	571043 (PS250)		
	3/8" (91) – 6	106114	37325	
		570964 (CS1400/CS1500)		
		100962X	37325	
	.325" – 7	108308X	11893	
	3/8" – 7	38145X	37325	
	.404" – 7	32669X	37825	
POWER MATE® SM7	.325" – 7	29175X	11893	
		41726X	37325	
		100791X	37325	
		100961X	37325	
		108215X	11893	
	3/8" – 7	34162X	37325	
		513470X	11893	
POWER MATE® SD7	3/8" – 7	26831	11893	26908 **Washer** 25047 **Dust Cover**
		38470X	37504	
	.404" – 7	10612X	37825	

For Sprockets Applications by saw models, refer to OregonProducts.com

TRUSTED BY

SINCE

PROS

1947

LOGGERS
+
ARBORISTS

™

DESIGNED &
ENGINEERED
IN THE USA

TECHNICAL INFORMATIONS

AdvanceCut HD

SAW CHAIN TROUBLESHOOTING GUIDE

TECHNICAL INFORMATIONS

FOUR COMMON CAUSES OF CHAIN FAILURE

- Incorrect filing
- Lack of lubrication
- Loose chain tension
- Contact with dirt

CUTTER IDENTIFICATION

① Top Plate
② Hook, Cutting Corner
③ Side Plate
④ Gullet
⑤ Depth Gauge
⑥ Heel
⑦ Rivet Hole
⑧ Toe

SHARPENED CUTTERS HAVE:

① Correct angle on top plate (degree of angle depends on chain type)

Razor-edge on top plate (no light should reflect from this edge)

② Slightly protruding "hook" or point (curve on non-chisel chain)

③ Razor-edge (with no nicks) on side plate

⑤ Top of depth gauge at correct height below top plate

Front of depth gauge rounded off

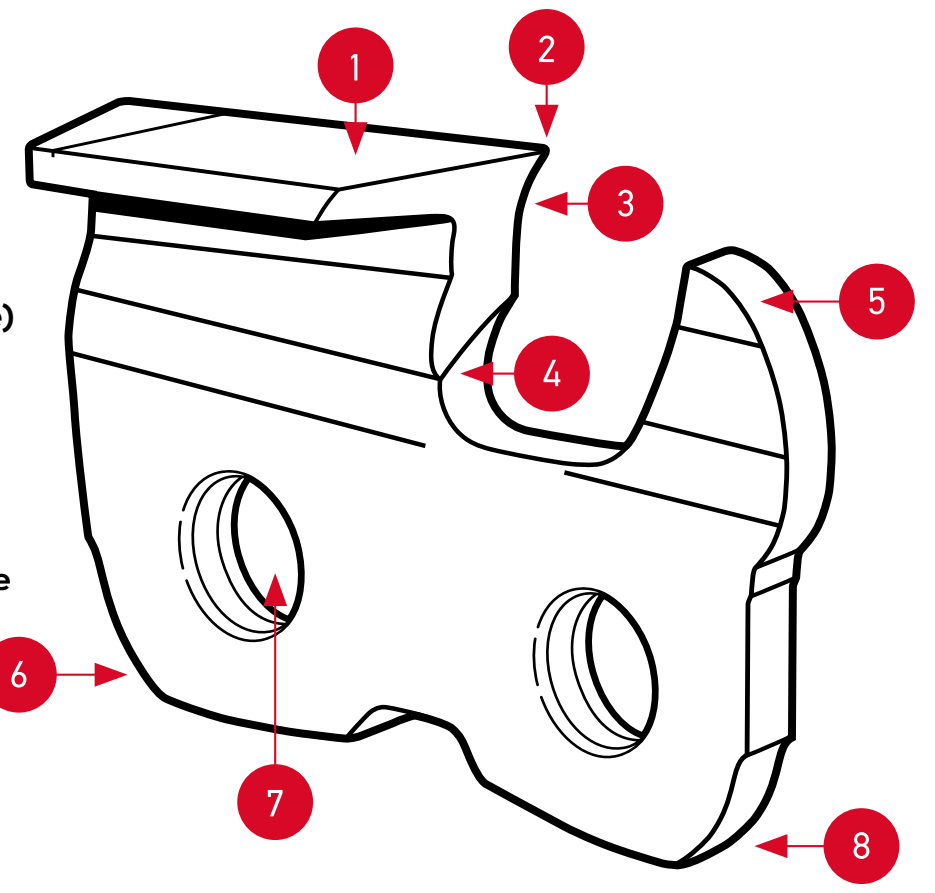

FILING ERRORS

BACKSLOPE ON SIDE PLATE CUTTING EDGE – CUTTER WON'T FEED INTO WOOD OR CUTTING TOO SLOW



Cause : File held too high or too large. Too large grinding wheel or not grinding deep enough.

Solution : Refile cutters to recommended angle using the correct file and filing guide or the right size, properly dressed grinding wheel.

TO MUCH HOOK IN SIDE PLATE CUTTING EDGE – CUTTERS GRAB, CUT ROUGH. CUTTERS DULLS QUICKLY OR WON'T HOLD CUTTING EDGE. TOP PLATE BREAKAGE AND/OR SAW CHAIN STRETCH.



Cause : File held too low or file is too small. Wheel is grinding too deep or is too small.

Solution : Refile to recommended angle with right size file or wheel, properly dressed.

FLAT TOP PLATE CUTTING ANGLE – CHAIN WON'T FEED INTO WOOD, WON'T CUT



Cause : File handle held too high or is too large. Incorrectly sized, dressed and/or positioned Grinding wheel.

Solution : Refile properly at recommended angle

TOO-THIN TOP PLATE CAUSES RAPID DULLING. CUTS FAST FOR A SHORT TIME, THEN DULLS. POOR STAY SHARP.



Cause : File handle held too low

Solution : Refile properly, at recommended angle

TOP PLATE FILING ANGLE LESS THAN RECOMMENDED – SLOW CUTTING, EXCESS WEAR ON CHAIN AND BAR. REQUIRES EXTRA EFFORT TO CUT. POSSIBLE BINDING IN CUT.



Cause : File held at less than recommended top plate filing angle

Solution : Refile at correct angle

TOP PLATE FILING ANGLE MORE THAN RECOMMENDED – SIDE PLATE CUTTING EDGE IS THIN AND DULLS RAPIDLY



Cause : File held at more than recommended angle

Solution : Refile at correct angle

DRIVE LINK WEAR

TANGS WORN STRAIGHT OR CONCAVE

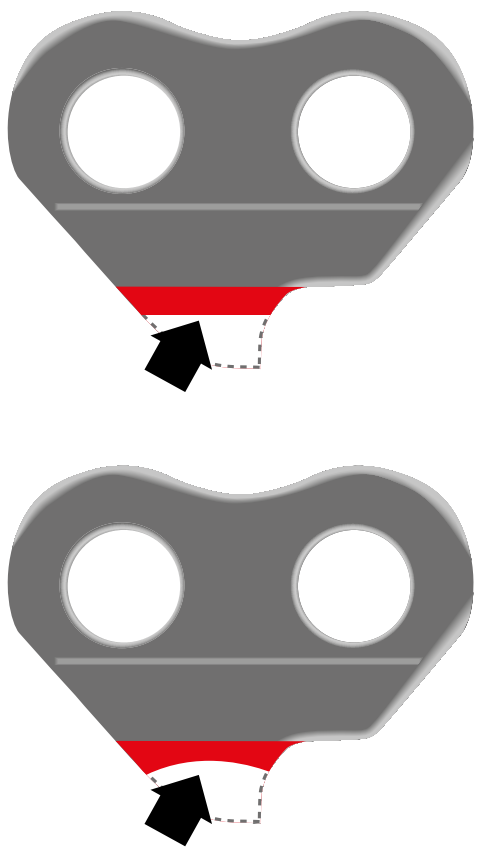

Cause : Straight bottoms are due to shallow guide bar body groove. Concave bottoms are due to shallow guide bar nose groove.

Solution : Regroove bar. Bar may need replacing

Replace saw chain if too worn.

Note : Applies to DuraCut™ bars only. Tendency to throw saw chain from bar. Drive links can't clean guide bar groove.

NICKED BOTTOM OR BACK



Cause : Cutting with loose chain, or wrong pitch sprocket

Solution : Adjust chain tension. Install correct sprocket. File off burrs. Replace damaged drive links or replace chain

BATTERED AND BROKEN BOTTOM
CHAIN JUMPED BAR



Cause : Chain jumped bar. Spur sprocket hit drive links.

Worn or broken drive sprocket and/or loose chain tension results in damage from revolving drive sprocket.

Solution : Replace damaged drive links, sharpen tangs with round file or replace chain. Remove burrs.

Maintain proper tension to prevent chain from climbing out of spur drive sprocket.

Replace drive sprocket.

SIDES WORN ROUND AT BOTTOM
SAW CHAIN CUTS CROOKEDLY



Cause : Chain wobbled in bar groove. Uneven cutters or worn bar rails

Solution : Rework bar rails and groove. Correct chain filing

SCARS ON SIDES



Cause : Loose chain jumping off bar

Solution : Adjust chain tension. Replace bent drive links or replace chain. Refile at correct angle

FRONT POINT TURNED UP



Cause : Drive links bottoming in sprocket. Sprocket worn

Solution : Replace sprocket. Sharpen tangs. Check for burrs

FRONT OR BACK PEENED

CAN RESULT IN CHAIN STRETCH AND TIGHT JOINTS.



Cause : Wrong pitch sprocket or worn out drive sprocket or prolonged chain chatter

Solution : Replace sprocket. Adjust chain tension. Chain may be damaged beyond repair

EXCESS WEAR ON BOTTOM OF ALL CHAIN PARTS

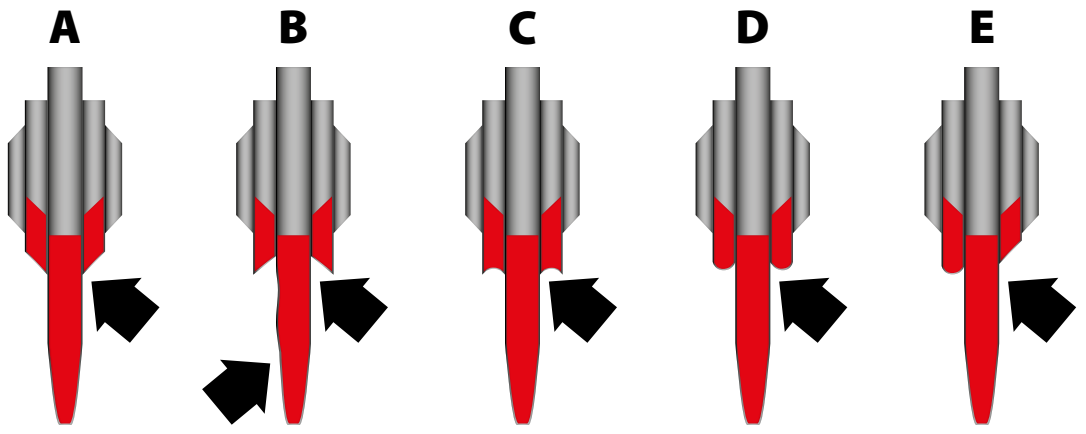

A. Open bar groove **B.** Severe abrasion and wobbly chain on thin bar rails **C.** Rails not flat **D.** Wobbly chain – rails too thick **E.** One rail too thin or soft

Cause : Uneven filing, worn bar rails cause chain to wobble

Solution : File chain properly. Recondition bar rails or replace bar. Replace chain if necessary

CUTTER AND TIE STRAP WEAR

EXCESSIVE HEEL WEAR ON CUTTERS AND TIE STRAPS EXCESSIVE CHAIN STRETCH. CHAIN BREAKAGE.



1. **Causes :** Blunt top plate filing
2. Forcing dull chain to cut
3. Lack of lubrication
4. Low depth gauge settings
5. Forcing chain to cut frozen wood

Solution : File cutters properly. Don't force dull chain to cut. Use oil freely. Replace chain if too damaged

EDGES BURRED AND NOTCH PEENED ON TIE STRAPS



Cause : Chain chatter due to loose chain tension and improper filing and/or worn out drive sprocket

Solution : Correct chain tension. Refile chain properly. Replace sprocket if badly worn

PEENED NOTCH IN TIE STRAP CAUSING TIGHT JOINTS AND BROKEN DRIVE LINKS



Cause : Chain run on badly worn spur sprocket or wrong pitch sprocket

Solution : Replace worn sprocket. Chain may need replacing

PEENING ON BOTTOM OF CUTTERS AND TIE STRAP – CAUSES TIGHT JOINTS



Cause : Loose chain tension. Result of dull cutters and forcing dull chain into wood

Solution : Keep proper tension. Keep cutters sharp. Chain may need replacing

CRACKS UNDER REAR RIVET HOLES ON CUTTERS AND OPPOSING TIE STRAPS



Cause : Excessive pressure on dull or misfiled cutters – common during winter

Solution : File chain correctly. Use oil freely

LIGHT DAMAGE ON CUTTING EDGES OF TOP AND/OR SIDE PLATES



Cause : Excessive pressure on dull or misfiled cutters. Common during winter

Solution : File chain correctly. Use oil freely

SEVERE DAMAGE ON EITHER SIDE OF TOP AND/OR SIDE PLATES CHAIN WON'T CUT STRAIGHT IF DAMAGE ON ONE SIDE ONLY. BINDING OR DRIFTING IN CUT.



Cause : Cutters hit abrasive materials.

Contact with material other than wood such as rock, dirt, or sand. This type of damage occurs when cutting close to the ground.

Solution : File cutters to remove all damage

PEENING ON FRONT CORNER OF CUTTERS AND INTERMEDIATE TIE STRAPS – CAUSES TIGHT JOINTS



Cause : Chain striking bar entry. Sprocket too small or loose chain tension

Solution : Use proper bar and sprocket. Adjust chain tension correctly.

Chains with tight joints cannot be repaired.

EXCESSIVE WEAR ON BOTTOM OF CUTTERS AND TIE STRAPS



Cause : Depth gauges too high. Cutting edge cannot get into wood

Solution : Lower depth gauges to proper setting. Keep cutters filed correctly

CONCAVE WEAR ON BOTTOM OF CUTTERS – CONNECTING TIE STRAPS

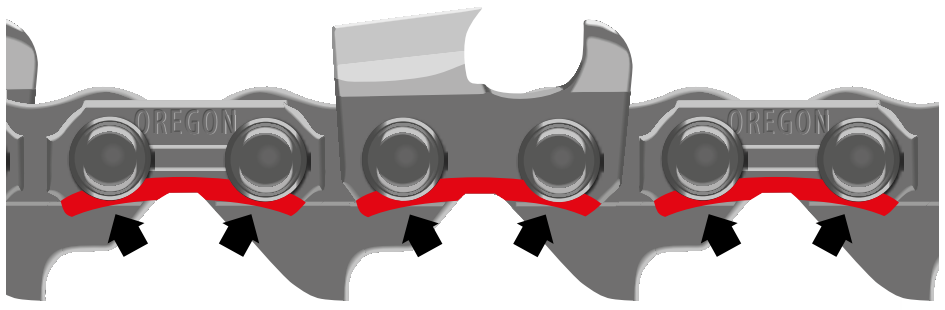

Causes : Chain tension too tight

Normal wear from undercutting (cutting with top of bar)

Solution : Adjust chain tension Reduce cutting with top of bar

BLUNT DEPTH GAUGE CAUSES ROUGH CUTTING



Cause : Uneven filing

Solution : Use correct depth gauge jointer to lower gauges evenly

TIE-STRAPS OR CUTTERS, BROKEN IN THE CENTER



Cause : Incorrect field assembly of saw chain components.

Solution : Replace broken components.

UNEVEN DEPTH GAUGE HEIGHT. CHAIN WON'T CUT STRAIGHT.



Cause : Improperly filed depth gauge

Solution : Round off front corner to maintain original shape

BOTTOMS OF TIE-STRAPS AND CUTTERS WORN OUT OF SQUARE.



Cause : Worn guide bar rails.

Solution : Dress the tops of the guide bar's rails square. If wear is minor, file the bottoms of tie-straps and cutters square. If wear is extensive, replace the saw chain.

DAMAGE TO CUTTERS ON ONE SIDE OF SAW CHAIN

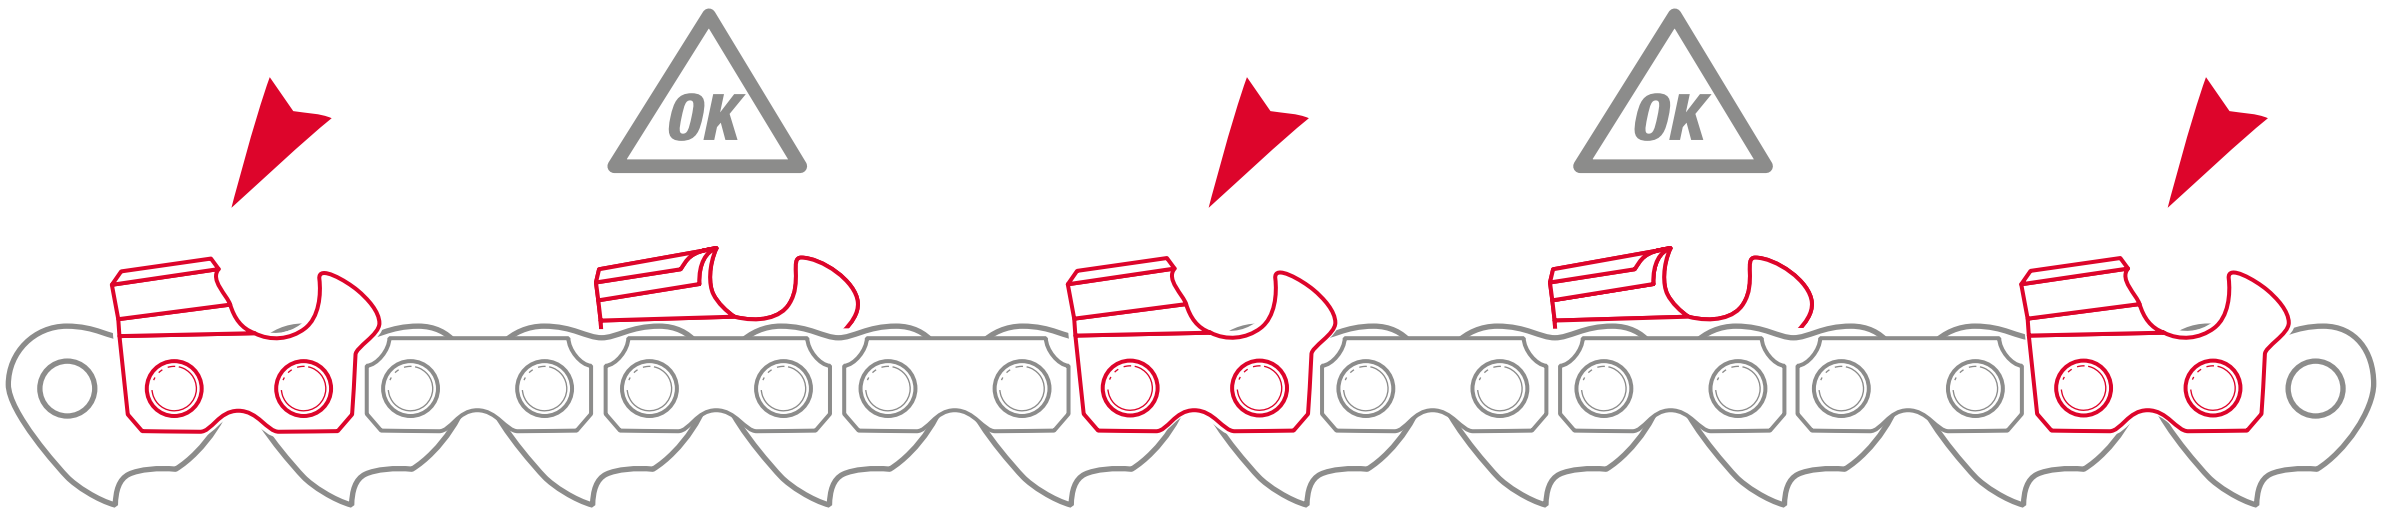

Symptoms : Guide bar and saw chain bind in the cut. Could result in guide bar and saw chain breakage when removing the guide bar from tree. Uneven guide bar rail wear.

Cause : Cutters on one side of saw chain are damaged by hitting the saw box or ground/debris.

Solution : File cutters back enough to remove all damage. Square up guide bar rails if uneven.

DIFFERENT CUTTER TOP-PLATE LENGTHS

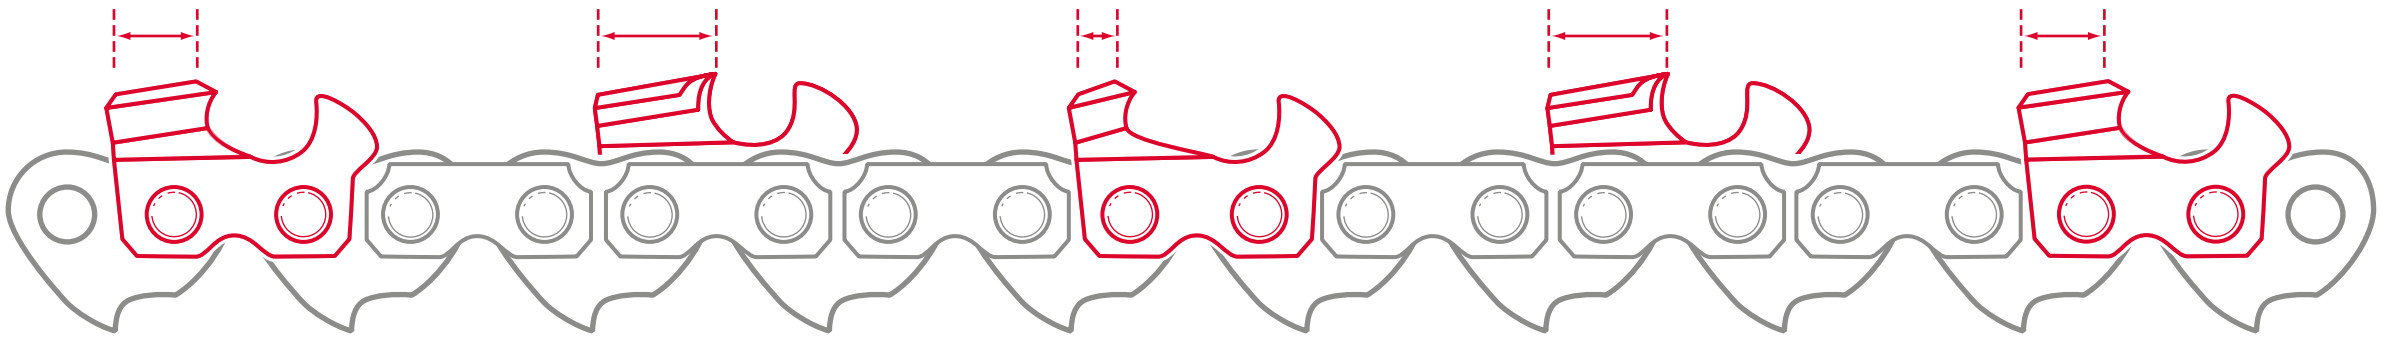

Symptoms : Guide bar and saw chain bind in the cut. Could result in guide bar and saw chain breakage when removing the guide bar from tree. Uneven guide bar rail wear.

Cause : Inconsistent sharpening.

Solution : File cutters back to even cutter top-plate lengths. Square up guide bar rails if uneven.

Oregon is a registered trademark of Oregon Tool Inc. All other marks are property of their respective owners.

GUIDE BAR TROUBLESHOOTING GUIDE

TECHNICAL INFORMATIONS

GUIDE BAR TERMS

1	Guide bar body
2	Guide bar tail
3	Saw chain lead-in
4	Rails
5	Groove
6	Saw chain lubrication hole – A: standard b: LubriTec™
7	Adjustment hole
8	Nose attachment rivet holes
9	Nose sprocket grease hole
10	Nose sprocket
11	Nose rivets

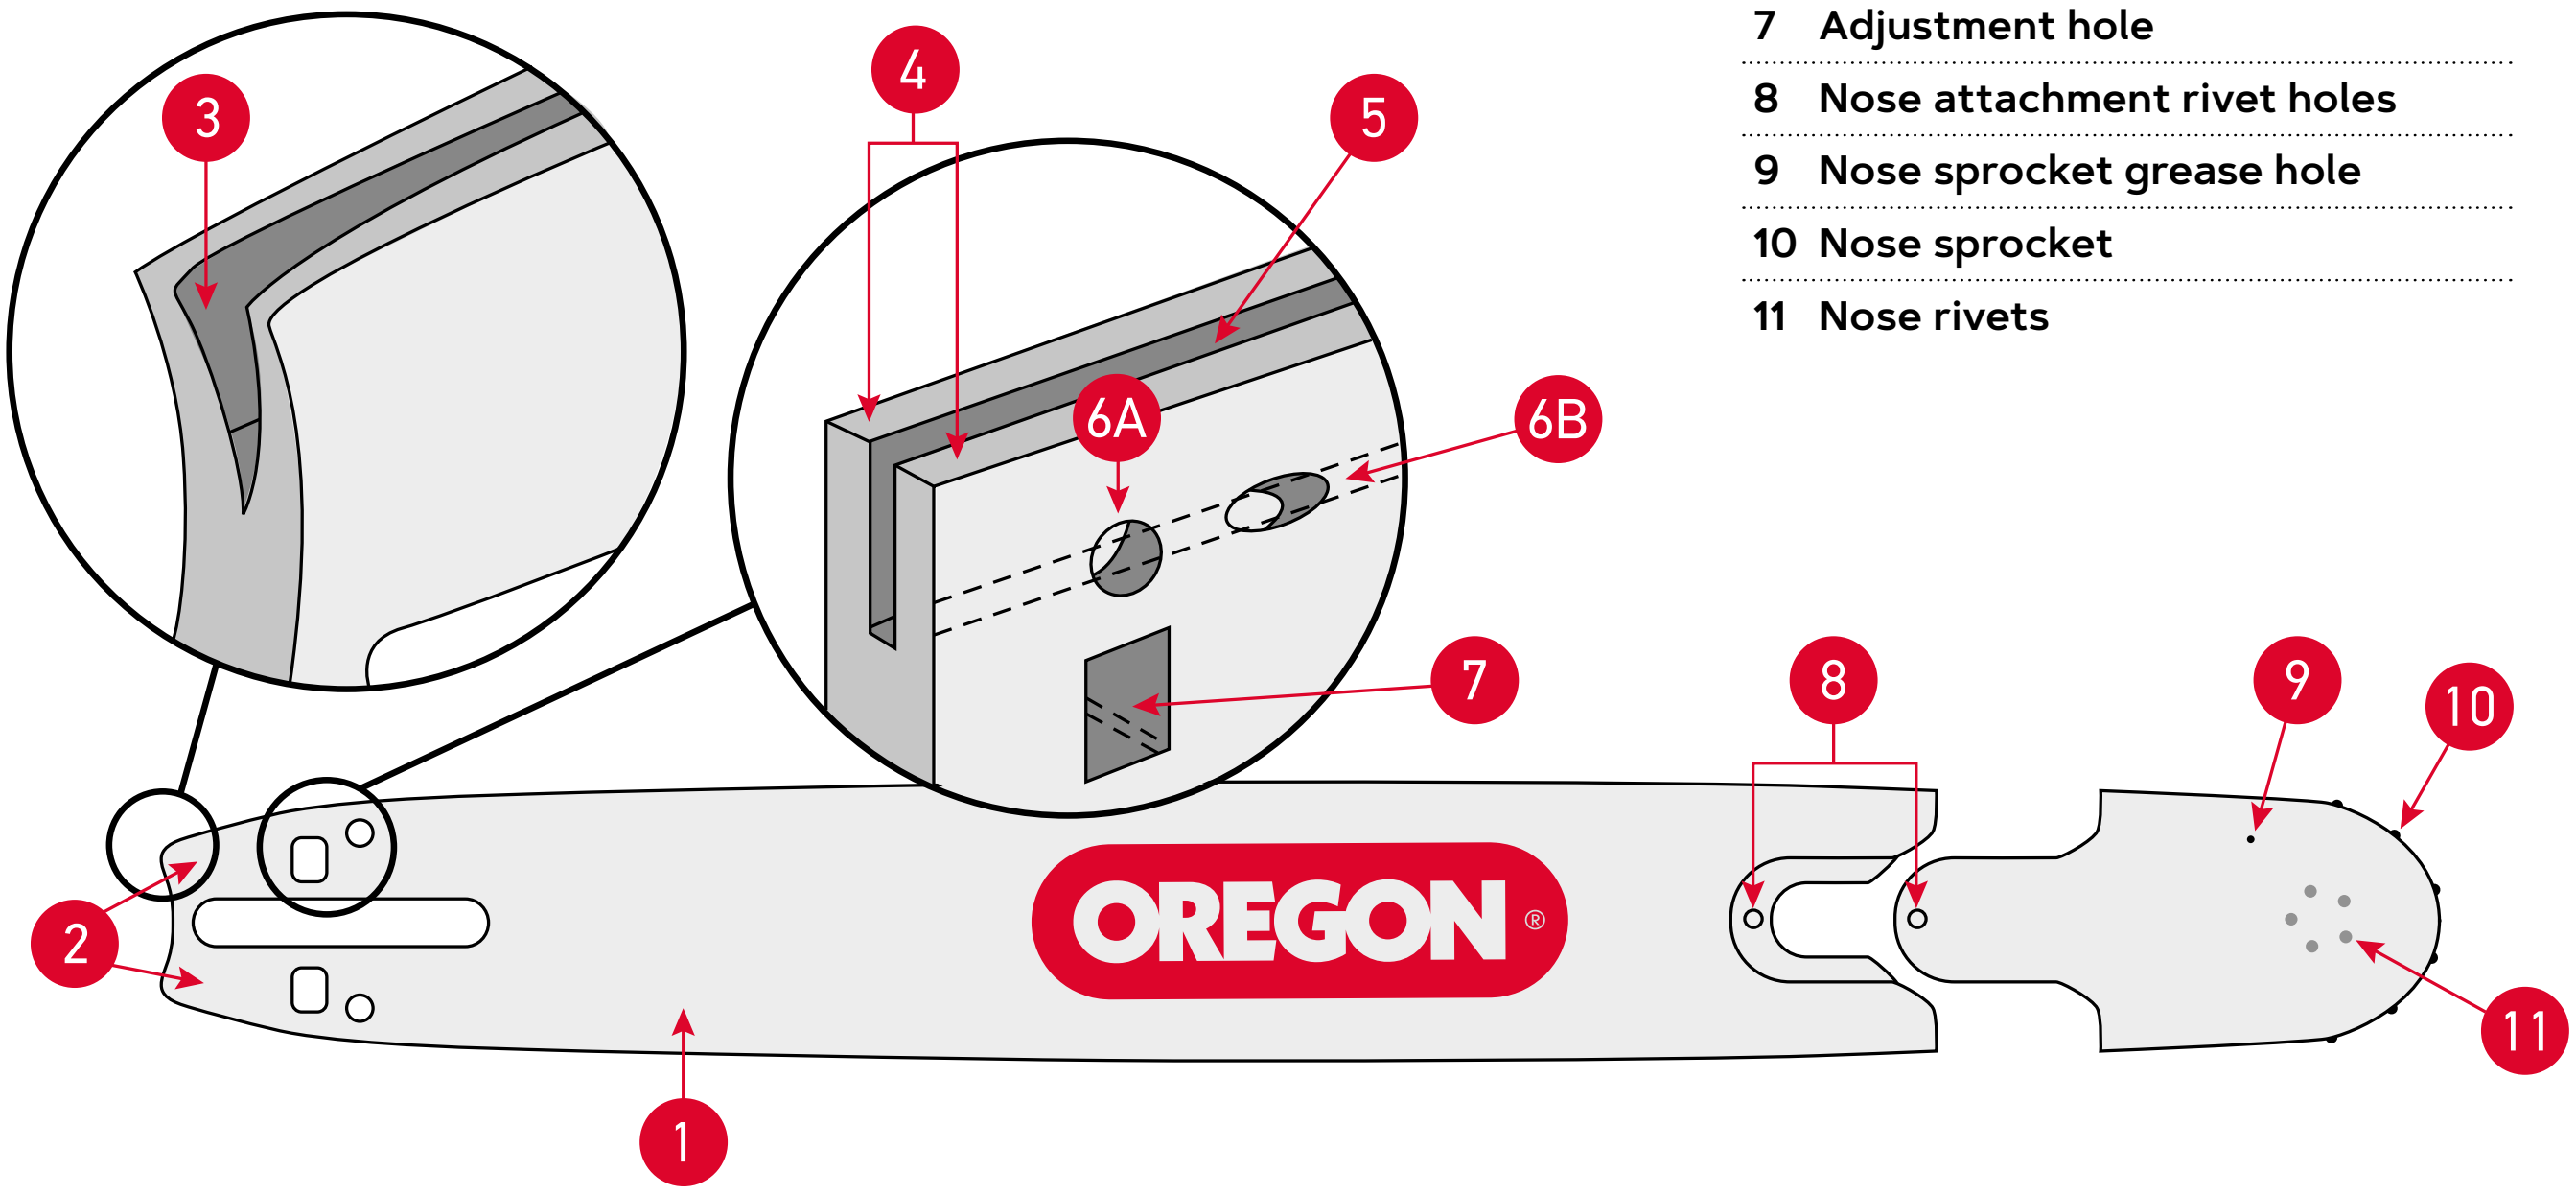

BASIC GUIDE BAR MAINTENANCE TASKS



CHAIN TENSION

Inspect before use and after every hour of use.



BAR CLEANING

Clean bar channel (1), oil hole (2), and grease hole (3), daily.



CHECK FOR DAMAGE

Inspect bar for damage and component wear daily and before each use. Replace as needed.



CHAIN AND BAR OIL

Inspect before use and after every hour of use. For gas saws, add oil when you refuel. For electric saws, check intermittently.



BAR NOSE GREASE

Turn nose sprocket while pumping grease until whole sprocket has new grease. Do not push dirt into hole. Clean grease hole before adding new grease.



WEAR EQUALIZATION

Turn your guide bar over weekly to equalize bar wear.

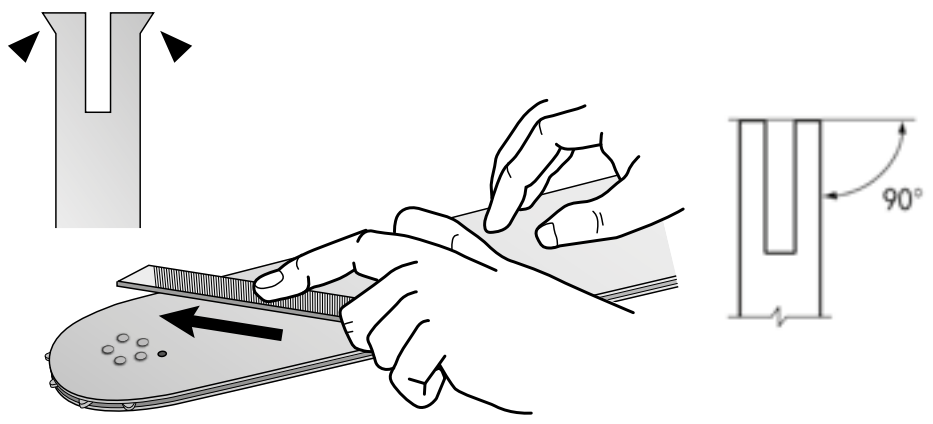

FILE BAR EDGE

File bar edge to 90° with a flat file weekly.

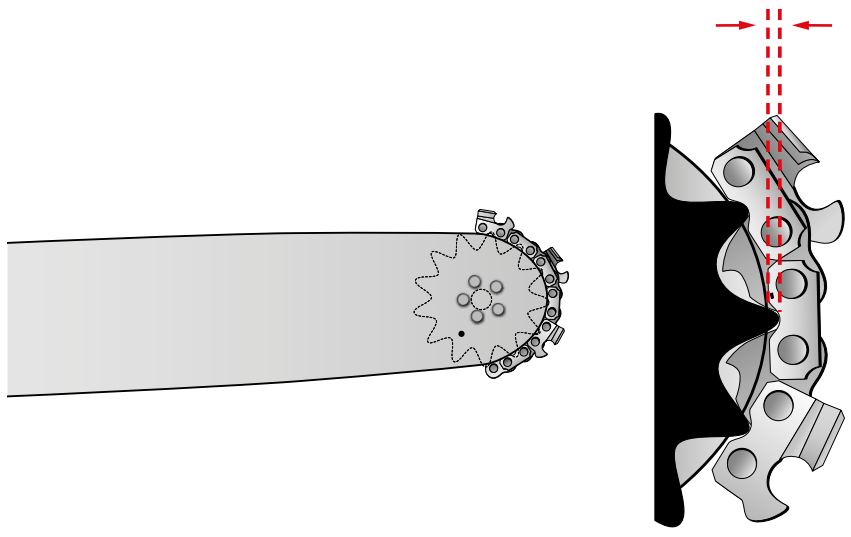

BAR TIP CLEARANCE

On sprocket nose bars, check for clearance around the bar tip between top of rails and the bottom of cutters or tie straps weekly. Replace nose sprockets before cutters or tie straps contact the bar rails.

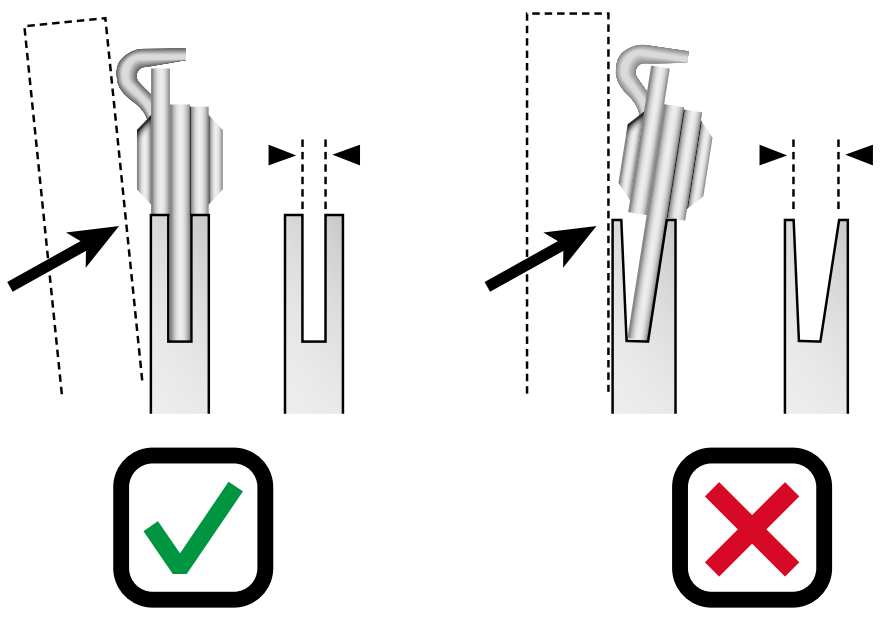

CHAIN LEAN

With chain on the bar, hold a straightedge against the bar body and against a cutter side plate. A good groove will hold the chain straight, leaving a small gap between the straight edge and bar body. A worn groove will let the chain lean until straightedge is flush with bar body. Replace bar if groove is worn. Check weekly.

GUIDE BAR TROUBLESHOOTING

GUIDE BAR RAIL CONDITIONS

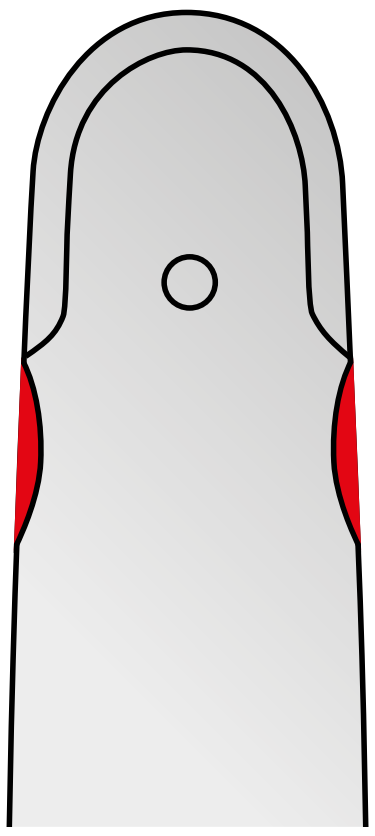

1. CHIPPED RAIL

Symptoms : Material chipping out of one or both rails behind the hard tip.

Cause : Chipping of rails behind hard tip. Continual pressure of bar on one area. Dull chain. Loose bar tension.

Remedy : Flip bar to reduce wear. Replace bar. (This chipping can cause chain damage)

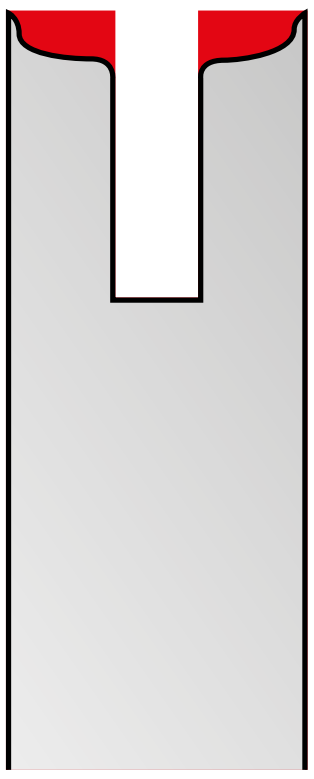

4. WIRE EDGE BAR RAIL

Symptoms : Rail edges may chip if wire edge is not removed.

Cause : Normal wear caused by pressure of chain on edges of bar rails.

Remedy : Use a flat file on edge of bar rail to remove wire edge.

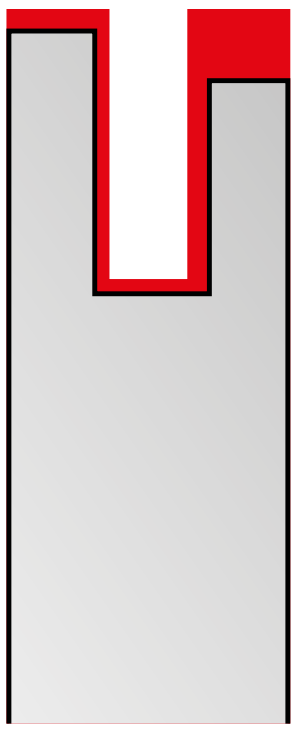

2. THIN RAIL AND LOW RAIL

Symptoms : Thin rail on one or both sides of bar. Rail could be blue color in thin area.

Cause : Chain leaning over, cutting crooked. Forcing dull chain to cut. Damage to cutters on one side of chain.

Remedy : Bar cannot be repaired if rail is thin and uneven. Replace it. Make sure chain doesn't continue to lean. If it does, replace with a new chain.

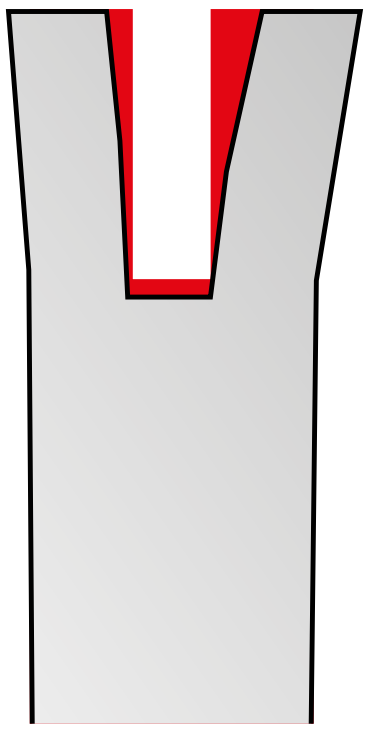

5. SPREAD RAILS (HARVESTER)

Symptoms : Guide bar will not enter log during cut or cannot make complete cut.

Cause : Saw chain was struck broadside or pushed sideways.

Remedy : 1. Hammer rails together with drive link in groove as spacer. Adjust saw return to allow guide bar to go further into saw box. Sharpen delimbing knives. Avoid moving tree/log when guide bar and saw chain are out of saw box.

2. Reduce guide bar feed speed.

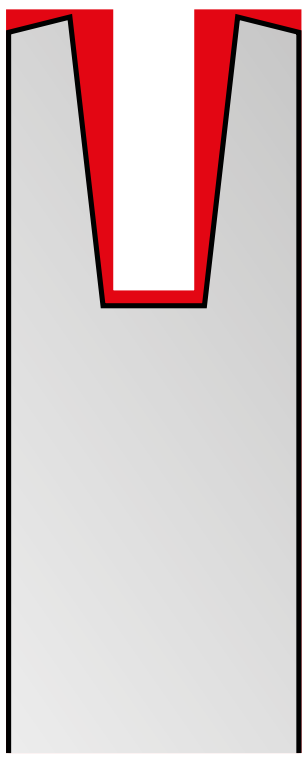

3. WORN BAR RAILS

Symptoms : Shallow groove.

Cause : Worn bar rails are normal for a bar that has been in service for a period of time.

Remedy : Replace bar.

GUIDE BAR NOSE CONDITIONS

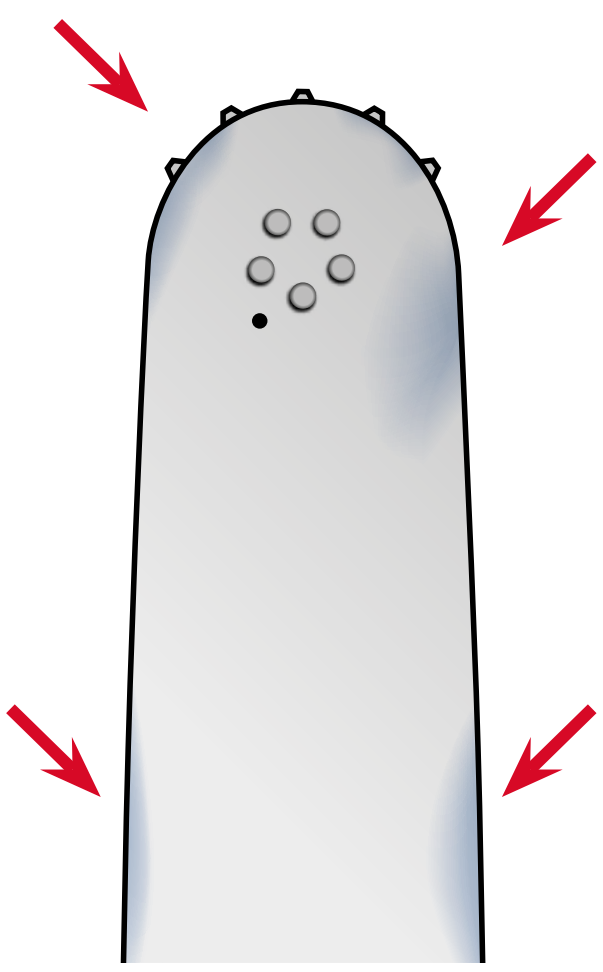

6. BLUE DISCOLORATION ON BAR NOSE

Symptoms : Entire edge turns blue or only in one or two spots. Rails wear quickly. Saw chain drive link damage.

Cause : Nose was pinched. Friction from revolving sprocket caused heat and area turned blue. Could be lack of lubrication.

Remedy : Replace guide bar and saw chain.

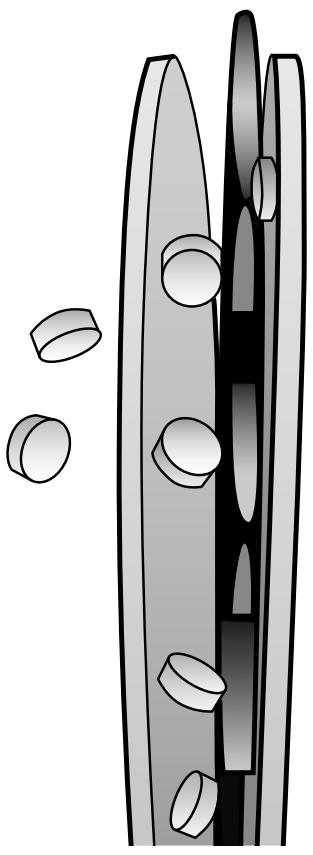

7. SPREAD NOSE RAILS AND BEARING LOSS

Symptoms : Spread nose rails and loss of bearings. Sprocket breakage.

Cause : Chain jumped off bar. Carving with nose. Limb caught nose. Twisting nose. Any operating accident.

Remedy : Replace bar or replace nose of RSN bar. Replace sprocket components. Keep guide bar nose away from objects not intended for cutting.

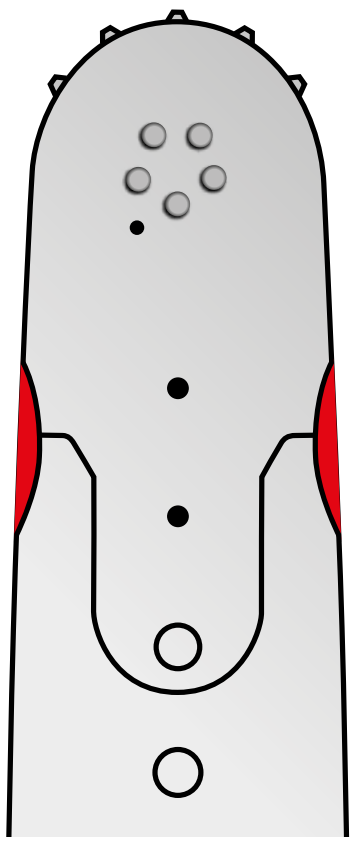

8. CHIPPING AT NOSE CONNECTION (REPLACEABLE NOSE)

Symptoms : Chipping at connection of both body and nose assembly.

Cause : Loose chain tension. Continual pressure in this area. Heavy limbing at this point.

Remedy : Replace nose assembly and dress rail of bar and nose to match.

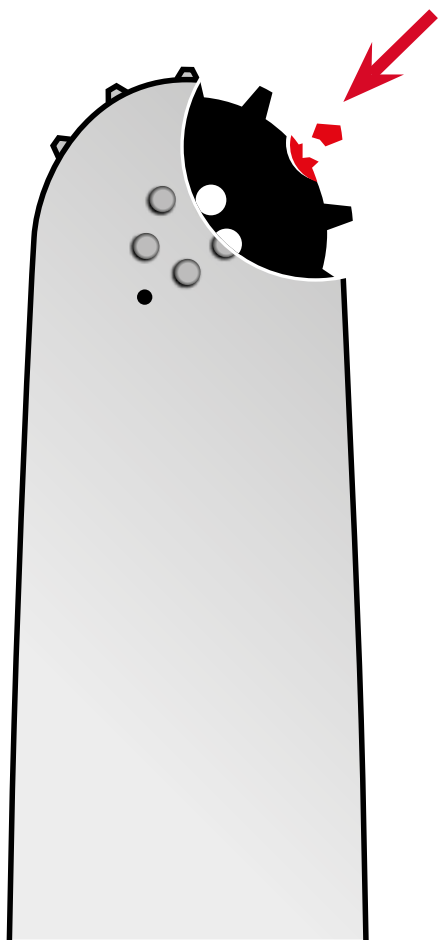

9. SECTION BROKEN OUT OF SPROCKET

Symptoms : Open nose. Broken sprocket. Bearings fall out. One or two broken teeth.

Cause : Irregular operating condition which forced drive link sideways. Throwing the chain when limbing. Chain tension run too loose.

Remedy : Replace bar nose assembly.

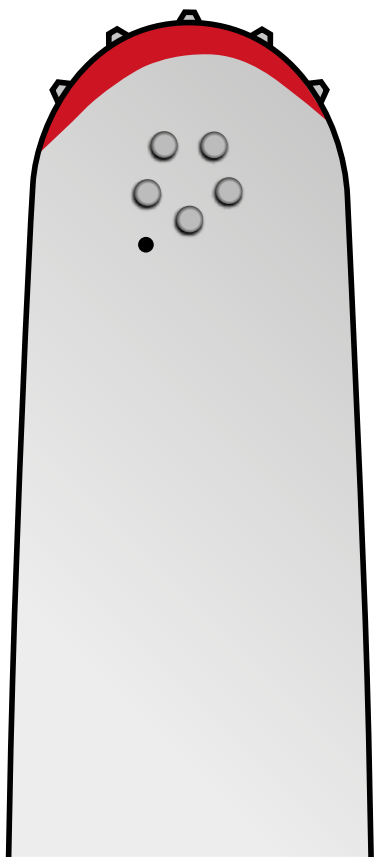

10. NOSE BURNED AT TIP (HARVESTER)

Symptoms : Nose breakage from bearings wearing quickly and jamming.

Cause : High saw chain tension from automatic saw chain tensioners.

Remedy : Decrease the tension applied by automatic saw chain tensioner.

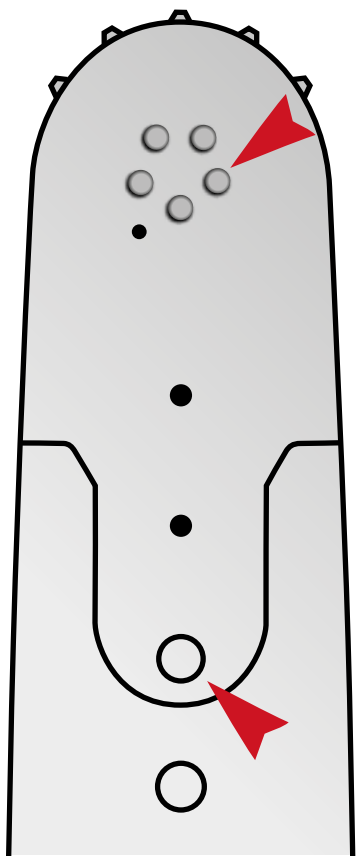

11. LOOSE OR MISSING NOSE/ATTACHMENT RIVETS

Symptoms : Rivets continue to loosen until laminates spread and bearings are lost.

Cause : Guide bar tip flexing during operation from difficulty cutting or accidents.

Remedy : Check rivets every 100 machine hours. Re-hammer loose rivets and replace rivets if rivet head is missing. Always use new rivets.

SPROCKETS TROUBLESHOOTING GUIDE

OREGON®

TECHNICAL INFORMATIONS

SPUR SPROCKET



POWER MATE® RIM SPROCKET

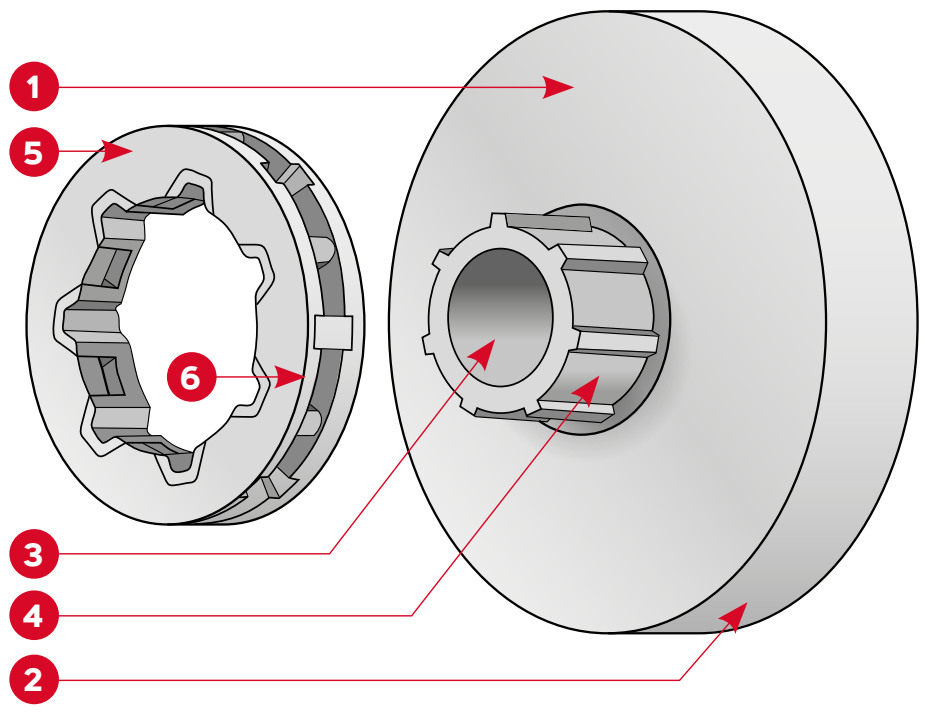

REPLACEMENT

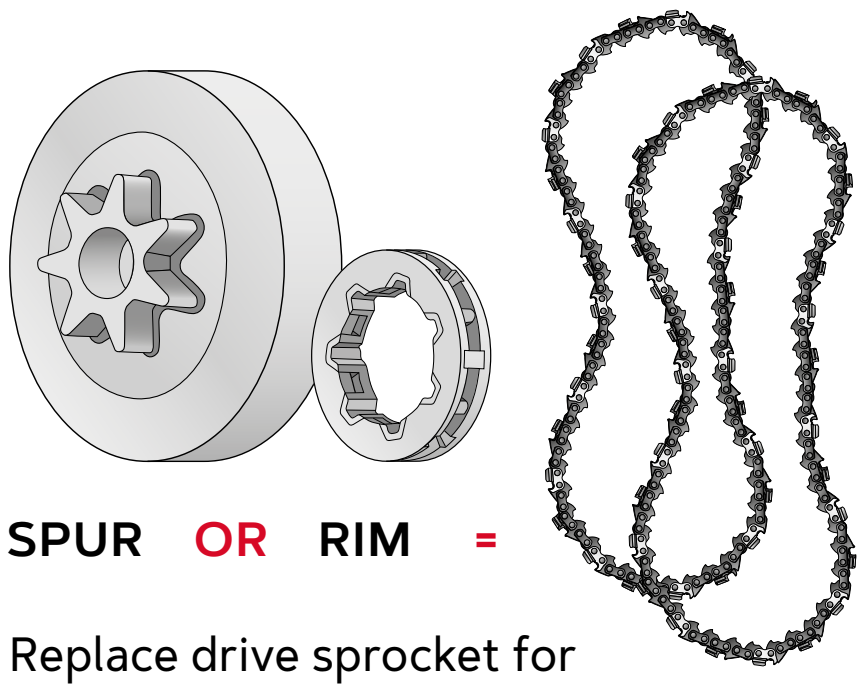

Replace drive sprocket for the life cycle of every two saw chains, or sooner.

DRIVE SPROCKET TERMS

1 CLUTCH DRUM
2 CLUTCH SKIRT
3 BORE
4 SPLINE HUB/ADAPTER
5 RIM SPROCKET
6 WEAR DEPTH INDICATOR

BASIC SPROCKET MAINTENANCE TASKS

RIMS AND SPUR SPROCKET

Visually inspect before use and daily.



POWER MATE SPROCKET

Visually inspect daily and before use.



BAR AND CHAIN OIL

Fill before use. For gas saws, add oil when you refuel. For electric saws, check intermittently.

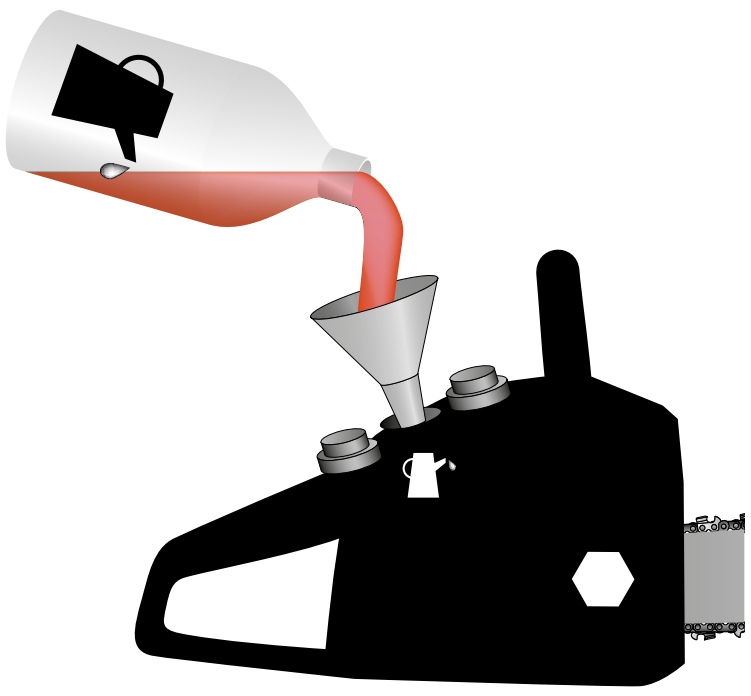

SPROCKET GREASE & MAINTENANCE

Apply clean lithium-based grease to the clutch drum's bearings each time the drive sprocket is removed or weekly.

Do not run old saw chain on a new drive sprocket, or a new saw chain on an old drive sprocket. Use two new saw chains in rotation with each new drive sprocket so all can wear together.

Clean any build-up of sap or debris from splined hub so rim drive sprocket can float freely.

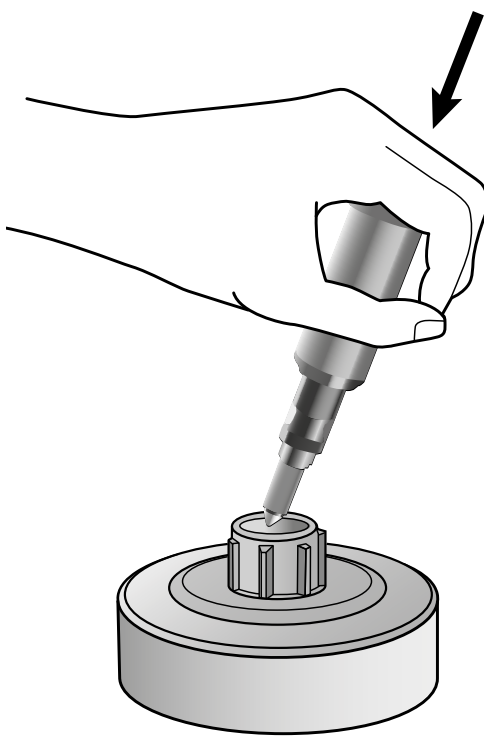

SPROCKET TROUBLESHOOTING

TYPICAL DRUM STRESS

Symptoms : Check daily for cracks, splits, or excessive wear in the sprocket clutch drum.

Remedy : If the drum is cracked, split, broken or shows excessive wear as illustrated below, replace the drum immediately with a new one.

Broken/cracked skirt



Cracked oil pump lug



Worn inner diameter



Worn clutch, worn inner diameter



CHAIN BRAKE STRESS

Symptoms : An overly tightened strap around the drum will cause the strap to rub against the clutch drum which will overheat and soften the metal causing potential drum failure.

Remedy : Always check the brake to make sure it stops the rotating chain when activated. Make certain that the brake strap around the drum is not too tight. Regularly inspect drum, adaptor spline and rim. Replace immediately if damaged.

Skirt Wear/Brake Band



Spline wear / Adapter damage



Worn Rim and Adaptor Spline



RIM AND SPUR SPROCKET DAMAGE

SPUR SPROCKET DAMAGE

Cause : This condition can occur when cutting chain drive links wear through the case-hardened spur teeth.

Symptoms : Cutting chain can be ruined by damaged spurs.

Remedy : If spur sprocket teeth look like this replace immediately.



RIM DAMAGE

Cause : Wear can occur under normal conditions. However, check for excessive rim wear and look for wear on outer diameter.

Symptoms : The reduction in diameter can also allow chain drive links to damage the sprocket adaptor.

Remedy : Replace the rim after two chains and inspect rim regularly.
Oregon rim incorporates wear-depth indicators which helps identify when it's time to replace the rim.



SEVERE RIM DAMAGE

Do not fit cutting chain to rims that are severely worn. Serious chain damage will result and the rim may break.



OREGON®

75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged.
Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents.
Engineering is the bedrock of our reputation.

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C008551

PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-001-EN

OREGON
PowerCut

Discover more of our products at
OregonProducts.com

OREGON®

APPLICATION GUIDE

AG _1.1
EN/EUR

OREGON
DuraCut
OREGON
PowerCut
OREGON

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
ACTIVE							
M.T.P. 2.8 SR	20	8	1/4	1,3		**25AP**	48
	25	10	1/4	1,3		**25AP**	60
28.28, 39.39, 40.40, MT39, MT40	25	10	3/8	1,3		**91P - 91PX - 91VXL**	40
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
51.51 *	33	13	.325	1,3	NARROW KERF	**95TXL**	56
* Pitch and gauge may vary	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	40	16	.325	1,3	NARROW KERF	**95TXL**	66
	45	18	.325	1,3	NARROW KERF	**95TXL**	72
51.51 *, 56.56 *, 62.62 *, MT51 *, MT56 *, MT62 *	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
* Pitch and gauge may vary	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
51.51 *, 56.56 *, 62.62 *, MT51 *, MT56 *, MT62 *	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
* Pitch and gauge may vary	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
ALPINA							
APR 25 C, APR 527 C	25	10	1/4	1,3		**25AP**	60
ACS 531 C	30	12	1/4	1,3		**25AP**	64
AMT 20 Li Kit, AMT 26, AMT 48 Li Kit, APR 25, APR 527, A 2500, C25, MT 2148 Li	20	8	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	33
	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
ACS 40 Li, APR 48 Li	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
ACS 180 E	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
ACS 1.8 E, ACS 2.0 ET, ACS 2.2 ET, EA 1800, EA 2000 Q	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
ACS 200 ET	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
A 3700, A 4000, ACS 38, ACS 531, ACS 538	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	53
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
ACS 41, ACS 41 T, ACS 542	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	40	16	.325	1,3	NARROW KERF	**95TXL**	66
A 4500, ACS 46, ACS 50, ACS 546, ACS 552	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
BLACK + DECKER							
GKC1000L, GK1000 (Alligator)	15	6	1/4	1,3		**25AP**	42
GK1817, GKC1817, GPC1800, GPC1820, GPC1820L20,LPP120	20	8	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	34
GKC3630L20, GKC3630LB	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
GKC1825LB, GKC1825L20, PP610, PS7525	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40

Visit OregonProducts.com/en_eu for other brands and models

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
A318						
A318						
A041	**100SDEA041**	**100SXEA041**				
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
K095		**130MLBK095**		**130TXLBK095**		
K095		**150MLBK095**	**150MPBK095**	**150TXLBK095**		
K095		**160MLBK095**		**160TXLBK095**		
K095		**180MLBK095**	**180MPBK095**	**180TXLBK095**		
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	
Z095				**188VXLHZ095**		
K095				**208VXLHK095**	**208RNDK095**	**208ATMK095**
A041	**080SDEA041**					
A041	**100SDEA041**	**100SXEA041**				
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**				
K041		**130MLBK041**				
K041		**150MLBK041**				
K041		**160MLBK041**				
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	
A041	**124MLEA041**					
A041	**100SDEA041**	**100SXEA041**				

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
CS30, CS35, DN400, DN401, DN402, DN404, DN412, DN416, GK30, GK35, GK120, GK300, GK310, GK320, GK321, GK322, GK330, GK331, GK425, GK430, GK435, GK440, GK534, GK535, GK540, GK1365, GK1430, GK1435, GK1440, GK1630, GK1630T, GK1635, GK1635TX, GK1635T, GK1640, GK1640T, GK1935, GK1940	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	44
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	49
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
GK 1635TX-QS	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	49
CS1835	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
GK1640T	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
BDC20, CS1840, CS2040, GK1940T, GK2240T, GK2240TX	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
CS2245	45	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	62
BOSCH							
UniversalChainPole 18, UniversalChain 18	20	8	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	33
AKE30 Li*, AKE30S, AKE30/17S, AKE30/18S, AKE30-19S, AKE35, AKE35S, AKE35/17S, AKE35/18S, AKE35/19, AKE35/19S, AKE35S/19S, AKE36S, AKE40*, AKE40S*, AKE40SDS, AKE40/17S, AKE40/18S, AKE40/19S*, AKE3000*, AKE3500E*, AKE4000*, 35-19S, 40-19S, 40-19PRO, 35 Uni, Universal 35, UniversalChain 35, UniversalChain 40, Akkusäge 30Li * Gauge may vary and be 1.3mm	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
	35	14	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	52
	40	16	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	56
1586.7, 1586.8, AKE30B, AKE30Li*, AKE30-19Pro, AKE35-19Pro, AKE35B, AKE40-19Pro, AKE40*, AKE40B, AKE40S*, AKE40-19S*, AKE3000*, AKE3500*, AKE4000*, AKE Edition, BKE30, GKE35B, GKE35BC, GKE35BCE, GKE40BC, GKE40BCE PKE25, PKE30B, PKE35B, PKE40B, PKE40 * Gauge may vary and be 1.1mm	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	40	16	3/8 LOW PROFILE	1,3		**on Original Equipement Bar** **# 1.602.317.012** **(307909 & 614912)** **91P - 91PX - 91VXL**	57
AKE45S	45	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	62
DOLMAR							
AS-1212, AS1812, AS1812LG3	16,0	6,5	1/4	1,3		**25AP**	42
AS1925, AS1925C, AS1925CZ, AS3626, AS-3626 C, PS-222 TH*, PS222THC * Pitch may vary	25	10	1/4	1,3		**25AP**	58
	25	10	1/4	1,3		**25AP**	60
AS1925Z, AS1925CZ, AS1925RF, AS1925RT2, AS-3731, AS3835, AS3835Z, AS3935Z, AS4030, ES-2, ES-2A, ES-4 A, ES-4A QS, ES-5 A, ES-5A QS, ES-31A, ES-31, ES-32A QS, ES-33A, ES-34 TLC, ES-36A, ES-37 A, ES-37A QS, ES-38A, ES-39 TLC, ES-40A, ES-41A QS, ES-43 TLC PS-2, PS-3, PS-4, PS-32*, PS-32C*, PS-32 C TLC*, PS-34, PS-36, PS-38A, PS-34*, PS35, PS-45* * Gauge may vary	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	46
	35	14	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	52
	40	16	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	56
Pole Saw EE-150, Pole Saw ME-246-4, PS-CS1 (199930-1)	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	39
AS3626, AS3626LGE, AS3726, PS220TH, PS221TH, PS222TH*, PS311TB25, PS311TH30 * Pitch may vary	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40

Visit OregonProducts.com/en_eu for other brands and models

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
A318	**120SDEA318**					
A318	**140SDEA318**					
A318	**160SDEA318**	**160SXEA318**				
A041	**180SDEA041**					
A041	**084MLEA041**					
A041	**124MLEA041**					
A041	**144MLEA041**					
A041	**164MLEA041**					
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041						
A041	**180SDEA041**					
A041	**100SDAA041**					
A041						
A041	**124MLEA041**					
A041						
A041	**144MLEA041**					
A041	**164MLEA041**					
A218	**100SDEA218**					
A041	**100SDEA041**	**100SXEA041**				

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
100, 100S, 101, 102, 103, 104, 105*, 106, 108*, 275, 285, 290, 295, AS4030ZB, AS4035ZB, ES-3, ES-6 A, ES-6A QS, ES-30, ES-35, ES-40 A, ES-41A QS, ES-42 A, ES-43 TLC, ES-140, ES-151A, ES-152A, ES-152 A QS, ES-153 A, ES-160, ES-161A, ES-162A, ES-162A QS, ES-163A, ES-164 TLC, ES-171A, ES-172A, ES-172A QS, ES-173A, ES-174 TLC, ES-183A, ES-1600, ES-2035A, ES-2035AP, ES-2040A, ES-2130 A, ES-2135A, ES-2135 AP, ES-2136 TLC, ES-2140 A, ES-2140 AP, ES- 2141 TLC, ES-2141KTLC, PS-2, PS-32*, PS-32 C*, PS-32 C TLC*, PS32C35*, PS33, PS-34*, PS-34S*, PS-35, PS-35 C, PS-35 C TLC, PS35C35, PS35CTLC35, PS-39, PS-39ES, PS41, PS-41 QS, PS-45*, PS-45 QS, PS-330, PS-330 QS, PS-340, PS-340 QS, PS-341, PS-341 Happy Start, PS-344, PS-350, PS-350 C, PS-350 SC, PS350SC35, PS-352, PS352-35, PS352TLC35, PS-390, PS-390 QS, PS-400, PS-400 QS, PS-401, PS-401 QS Happy Start, PS420SC40, PS-3300TH, PS-3400TH, PS-3410, PS-3410 TH, PS-3410 TH TLC, PS-3410TH30 * Pitch and gauge may vary	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL OE Drive Link # Recommendation**	46
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	45	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	62
PS-410, PS-411, PS-420, PS-420 C, PS-420 SC, PS420SC38, PS420SCKIT38 * Pitch & motor mount may vary	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	45	18	.325	1,3	NARROW KERF	**95TXL**	72
105*, 108*, 110*, 110i, 110iH, 111*, 115*, 115i, ES-1800, PS-460*, PS-500*, PS-500 C*, PS-550*, PS550-38*, PS-4600*, PS-4600S*, PS-4600 SH, PS-4605*, PS-4605 H*, PS-5000*, PS-5000H, PS-5105*, PS-5105 C*, PS-5105 H, PS-5105 CH*, PS-5105CX*, PS-6100*, PS-6100 H * Pitch & motor mount may vary	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
109, 109 HappyStart, 110*, 111*, 112*, 115*, 115i, 115iH, 115S45, 116, 116 si, 117, 120, 120 si, PS-43, PS-52, PS-460*, PS460-45*, PS-500*, PS-500 C*, PS500C45*, PS-550*, PS550-45*, PS-4600*, PS-4605*, PS4605-45*, PS-5000*, PS-5000 H, PS-5105*, PS-5105 C*, PS-5105 H, PS-5105 CH*, PS5105C4*, PS5105CKIT45*, PS-6000i, PS-6000iH, PS-6100*, PS6100-45, PS6100-53, PS-6800i, PS-6800iH, * Pitch and motor mount may vary	38	15	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	56
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	64
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
A041	**120SDEA041**	**120SXEA041**				
A041						
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041	**180SDEA041**					
K041		**130MLBK041**				
K041		**150MLBK041**				
K041		**180MLBK041**				
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	
K153			**158SLHK153**			
K153			**188SLHK153**	**188VXLHK153**		
K153						

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
PS-630, PS-6400, PS-6400 H, PS-7300, PS-7300 H, PS-7310, PS7310-50, PS-7310 H, PS-7900, PS-7900 H, PS-7910, PS7910-53, PS-7910 H, PS7910-60PM	38	15	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	56
	40	16	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	60
	43	17	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	64
	45	18	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	68
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	80
	60	24	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	84
PS-9000, PS-9010	43	17	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	64
	50	20	3/8	1,5		73EXL - 73LPX - 73DX - 73DPX	72
ECHO							
CS-260TESC, CS-270WES, CS-280TES-C, CS-280WES, CS-281WES, CS-351WES, CS-360TES*, CS-361WES*, CS-362TES, CS-362WES*, CS-2510TESC, CS-2511TES-C	25	10	1/4	1,3		**25AP**	58
	25	10	1/4	1,3		**25AP**	60
* Pitch may vary	30	12	1/4	1,3		**25AP**	68
PPF-225**, PPT-280**, PPT-2620HES**	25	10	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	39
** Gauge may vary	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	44
	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
CS-310ES*, CS-352AC, CS-352ES*, CS-3510AC**, CS-3510ES**, ECCS-58V, DCS58V, DCS-1600	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
	35	14	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	52
* Gauge may vary	40	16	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	56
PPF-225**, PPF-236ES, PPT-265ES, PPT-266, PPT-280**, PPT-300ES, PPT-2620HES**	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	39
	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	44
** Gauge may vary	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
CS-260T, CS-260TES, CS-270WES, CS-280T, CS-280TES, CS-281WES, CS-2510TES, CS-2511TES, CS-2511WES, DCS-2500T	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	30	12	3/8 LOW PROFILE	1,3		**on Original Equipement Bar** **91P - 91PX - 91VXL**	47
CS-285EVL, CS-290EVL, CS-300EVL, CS-302, CS-303, CS-303T, CS-310ES*, , CS-315, CS-320T, CS-320TES, CS-320EVL, CS-328, CS-330EVL, CS-340, CS-341, CS-345, CS-350T, CS-350TES, CS-350WES, CS-351WES, CS-352AC, CS-352ES*, CS-353ES, CS-360TES*, CS-360EVL *, CS-360WES, CS-361WES, CS-362TES, CS-362WES*, CS-370ES*, CS-2400, CS-2600, CS-2800, CS-2900, CS-3000, CS-3050, CS-3400, CS-3450, CS-3500, CS-3510AC*, CS-3510ES*, CS-4400, E155, ECS-150/1850FT, ECS-2000, ECS-3000, ECS-3050,	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	30	12	3/8 LOW PROFILE	1,3		**on Original Equipement Bar** **91P - 91PX - 91VXL**	47
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	35	14	3/8 LOW PROFILE	1,3		**on Original Equipement Bar** **91P - 91PX - 91VXL**	53
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	40	16	3/8 LOW PROFILE	1,3		**on Original Equipement Bar** **91P - 91PX - 91VXL**	57
* Pitch and/or Gauge may vary by year	40	16	3/8 LOW PROFILE	1,3		**on Original Equipement Bar** **91P - 91PX - 91VXL**	58
CS-390ESX, CS-4200ES	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	40	16	.325	1,3	NARROW KERF	**95TXL**	66

Visit OregonProducts.com/en_eu for other brands and models

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
D009		**158SFHD009**	**158SLHD009**	**158VXLHD009**	**158RNDD009**	
D009		**168SFHD009**		**168VXLHD009**	**168RNDD009**	**168ATMD009**
D009				**178VXLHD009**	**178RNDD009**	**178ATMD009**
D009		**188SFHD009**	**188SLHD009**	**188VXLHD009**	**188RNDD009**	**188ATMD009**
D009		**208SFHD009**	**208SLHD009**	**208VXLHD009**	**208RNDD009**	**208ATMD009**
D009						
D009		**248SFHD009**			**248RNDD009**	**248ATMD009**
D033						**173ATMD033**
D033					**208RNDD033**	
A041	**100SDAA041**					
A041						
A041						
A041						
A041						
A041	**124MLEA041**					
A041	**124MLEA041**					
A041	**144MLEA041**					
A041	**164MLEA041**					
A041						
A041	**100SDEA041**	**100SXEA041**				
A041						
A041	**120SDEA041**	**120SXEA041**				
A041	**100SDEA041**	**100SXEA041**				
A041	**120SDEA041**	**120SXEA041**				
A041						
A041	**120SDEA041**	**120SXEA041**				
A041						
A041	**140SDEA041**	**140SXEA041**				
A041						
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041						
A041						
K041		**130MLBK041**				
K041		**150MLBK041**				
K041		**160MLBK041**				

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
CS-4510ES-NC	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	45	18	.325	1,3	NARROW KERF	**95TXL**	72
CS-360EVL*, CS-370ES*, CS-400EVL, CS-420ES, CS-440EVL, CS-450**, CS-452ESX, CS-490ES, CS-500ES, CS-501SX, CS-510, CS-525, CS-550**, CS-3600, CS-3700, CS-3700ES, CS-3900, CS-4000, CS-4010, CS-4050, CS-4200, CS-4400, CS-4500, , CS-4600, CS-4601, CS-4610, CS-5000, CS-5100 * Pitch and/or gauge may vary by year ** Motor mount may vary by year	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
	50	20	.325	1,5		**21BPX - 21LPX - 21LGX**	80
CS-450**, CS-550**, CS-4510ES ** Motor mount may vary by year	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
	50	20	.325	1,5		**21BPX - 21LPX - 21LGX**	80
CS-590, CS-600, CS-600S, CS-605, CS-610, CS-620SX, CS-621SX, CS-680, CS-680S, CS-7310SX, CS-8002	40	16	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	60
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	64
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
	60	24	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	84
EFCO							
MTT 2500, MT 2600* * Pitch may vary	25	10	1/4	1,3		**25AP**	58
	25	10	1/4	1,3		**25AP**	60
EP 90, EP 100, EP 120, PTX 2700, PTX 2710	25	10	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	39
EF 15E, MTi 30	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
MT 2200 Li-ion, MTT 3600	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
MT 2600* * Pitch may vary	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
EF 17E, EF 19E	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	50
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
125, 131, 132, 132 S, 132 SK, 137, 141S, MT 350, MT 350S, MT 371, MTH 400, MTH 402, MT 411*, MT 1800 E, MT 2000 E, MT 3500, MT 3500S, MT 3700, MT 3710*, MTH 4000, MT 4100S, MT 4110* * Pitch may vary	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	53
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
114E, 115, 116E, 117E, 119, 134, 135, 136, 140, 140S	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
137 P.S., MT 3700 P.S. (PowerSharp)	40	16	3/8 LOW PROFILE	1,3		**POWERSHARP**	56
141 SP, MT 411*, MT 440, MT 451, MT 3710*, MT 4100 SP, MT 4110*, MT 4400, MT 4510 * Pitch may vary	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	40	16	.325	1,3	NARROW KERF	**95TXL**	66
	45	18	.325	1,3	NARROW KERF	**95TXL**	72

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
K095		**130MLBK095**		**130TXLBK095**		
K095		**150MLBK095**	**150MPBK095**	**150TXLBK095**		
K095		**180MLBK095**	**180MPBK095**	**180TXLBK095**		
K041		**138PXBK041**				
K041		**158PXBK041**		**158PXLBK041**		
K041		**168PXBK041**		**168VXLGK041**		
K041				**188VXLGK041**		
K041						
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	
K095						
D009		**168SFHD009**		**168VXLHD009**	**168RNDD009**	**168ATMD009**
D176				**188VXLHD176**		
D009		**188SFHD009**	**188SLHD009**	**188VXLHD009**	**188RNDD009**	**188ATMD009**
D009		**208SFHD009**	**208SLHD009**	**208VXLHD009**	**208RNDD009**	**208ATMD009**
D009		**248SFHD009**			**248RNDD009**	**248ATMD009**
A041	**100SDAA041**					
A041						
A318	**104MLEA318**					
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**100SDEA041**	**100SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041						
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041						
A129						
A129	**160SDEA129**					
A041	**160SDEA041**					
K041		**130MLBK041**				
K041		**150MLBK041**				
K041		**160MLBK041**				
K041		**180MLBK041**				

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
MTH 510*, MTH 560*, MTH 5100*, MTH 5600* * Pitch and/or gauge may vary	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	40	16	.325	1,3	NARROW KERF	**95TXL**	66
	45	18	.325	1,3	NARROW KERF	**95TXL**	72
142, 146, 147, 151, 152*, 156*, 162*, 165, MTH 510*, MTH 560*, MTH 5100*, MT 5200, MTH 5600*, MT 6300* * Pitch and/or gauge may vary	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
	50	20	.325	1,5		**21BPX - 21LPX - 21LGX**	78
	50	20	.325	1,5		**21BPX - 21LPX - 21LGX**	80
152*, 156*, 162*, MTH 510*, MTH 560*, MTH 5100*, MTH 5600*, MT 6300* * Pitch and/or gauge may vary	40	16	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	60
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
165 HDS, MT 6500, MT 6510,	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
	60	24	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	84
MT 7200, MT 8200	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
EGO							
PSA1000	25	10	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	40
CS1400, CS1600, CSX3000	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
	35	14	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	52
	40	16	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	56
CS1800E	45	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	62
GREENWORKS							
GD40TCS	25	10	1/4	1,3		**25AP**	58
Pole Saw 20107	20	8	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	33
GD40CS18, GD40CS40* Gauge may vary and be 1.3mm	40	16	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	56
G24PS20, G40PS20, GPS7220	20	8	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	33
G24CS25	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
G24PS20, G40CS30, G40PS20, GCS1840, GCS2046, GD40CS40*, GD60CS40, GD80CS50, GPS7220,1800W 20027 * gauge may vary and be 1.1mm	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	45	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	62
HUSQVARNA							
115iPT4, 120iTK4-P, 327PT5S, 525PT5S, 530iP4, 530iPT5, 530iPX, 536LiP4, 536LiPT5, 536LiPX	25	10	1/4	1,3		**25AP**	58
	30	12	1/4	1,3		**25AP**	64
T525 (Carving) 535i XP **, 536Li XP, T536Li XP ** Until 2019. Pitch & gauge may vary.	25	10	1/4	1,3		**25AP**	60
	30	12	1/4	1,3		**25AP**	68
436Li, 535i XP**, T535i XP**, 536 Li XP, T536Li XP, 120i, 136i ** Until 2019. Pitch & gauge may vary.	25	10	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	40
	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
	35	14	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	52

Visit OregonProducts.com/en_eu for other brands and models

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
K095		**130MLBK095**		**130TXLBK095**		
K095		**150MLBK095**	**150MPBK095**	**150TXLBK095**		
K095		**160MLBK095**		**160TXLBK095**		
K095		**180MLBK095**	**180MPBK095**	**180TXLBK095**		
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	
K095		**208PXBK095**		**208VXLGK095**	**208RNBK095**	
K095						
K095				**168VXLHK095**	**168RNDK095**	**168ATMK095**
K095		**188SFHK095**	**39450**		**188RNDK095**	
K095				**208VXLHK095**	**208RNDK095**	**208ATMK095**
D009		**188SFHD009**	**188SLHD009**	**188VXLHD009**	**188RNDD009**	**188ATMD009**
D009		**208SFHD009**	**208SLHD009**	**208VXLHD009**	**208RNDD009**	**208ATMD009**
D009		**248SFHD009**			**248RNDD009**	**248ATMD009**
D024						
D024		**208SFHD024**				**208ATMD024**
A041						
A041	**124MLEA041**					
A041	**144MLEA041**					
A041	**164MLEA041**					
A041	**180SDEA041**					
A041	**100SDAA041**					
A041	**084MLEA041**					
A041	**164MLEA041**					
A041	**080SDEA041**					
A041	**100SDEA041**	**100SXEA041**				
A041	**100SDEA041**	**100SXEA041**				
A041	**120SDEA041**	**120SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041	**180SDEA041**					
A318	**100SDAA318**					
A318						
A095	**535044**					
A095	**535045**					
A095						
A095	**124MLEA095**					
A095						

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
323P4*, 325P5X*, 327P4*, 327P5X*, 136Li * Gauge may vary depending on year	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
323P4*, 325P5X*, 327P4*, 327P5X* * Gauge may vary depending on year	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
325P4X, T425	20	8	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	32
	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
120, 120 II, 130, 135, 135e, 135 II, 140, 236**, 236e *, 240, 240e *, 315, 315E, 315 EL, 317 (1700W), 317 EL (1700W), 321 (2000W), 321 EL (2000W), 333, 334, 334T, 335XPT, 338XPT, 340i, 418 EL, 420 EL, T435, T525, 525P4S, 525P5S, T540 XP, T540 XP II, 1400 EL, 1600 EL * Until year 2009 (A095) ** Chain pitch may vary by year	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	45	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	60
E16, 136**, 137**, , 141**, 142**, 235**, 236e *, 240**, 240e *, 243, 250PS, E316, 439 * From year 2010 (A041) ** Chain pitch may vary by year	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	45	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	62
535i XP**, T535i XP**, 540i XP, T540i XP ** from 2020	25	10	.325 LOW PROFILE	1,1		**80TXL**	46
	30	12	.325 LOW PROFILE	1,1		**80TXL**	51
	35	14	.325 LOW PROFILE	1,1		**80TXL**	59
	40	16	.325 LOW PROFILE	1,1		**80TXL**	64
33, 36, 40, 41, 42, 44, 45, 49, 50, 51, 55, 57, 133, 134, 136**, 137 e-series**, 141**, 142 e-series**, 234, 235**, 236**, 238, 240**, 242, 242 XP, 246, 254 XP, 257, 261, 262, 336, 339XP, 340, 340 e-series, 345, 345 e-series, 346, 346XP/XPG, 350, 351, 353, 357**, 357XP/XPG**, 359**, 360, 362 XP**, 362XPG**, 435, 435e, 435 e-series, 440, 440e, 440 e-series, 444, 445, 445e, 445 e-series, 450, 450e, 450 e-series, 450 II, 450e II, 450 RANCHER, 455 RANCHER, 455e RANCHER, 455 RANCHER II, 455e RANCHER II, 455 e-series RANCHER, 460, 460 RANCHER, 535FBX (clearing saw), 543XP/XPG, 545, 545 MARK II, 550XP/XPG, 550 XP MARK II, 550 XP TrioBrake, 555, 560 XP, EL16, E1400, 1400E, 1500E, E1600, 1600E ** Chain pitch may vary by year	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	40	16	.325	1,3	NARROW KERF	**95TXL**	66
	45	18	.325	1,3	NARROW KERF	**95TXL**	72
	50	20	.325	1,3	NARROW KERF	**95TXL**	78

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
A095	**124MLEA095**					
A095						
A095	**120SDEA095**	**120SXEA095**				
A041						
A041	**100SDEA041**	**100SXEA041**				
A095						
A095	**120SDEA095**	**120SXEA095**				
A095	**140SDEA095**	**140SXEA095**				
A095	**160SDEA095**	**160SXEA095**				
A095	**180SDEA095**					
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041	**180SDEA041**					
A095				**104TXLNA095**		
A095				**124TXLNA095**		
A095				**144TXLNA095**		
A095				**164TXLNA095**		
K095		**130MLBK095**		**130TXLBK095**		
K095		**150MLBK095**	**150MPBK095**	**150TXLBK095**		
K095		**160MLBK095**		**160TXLBK095**		
K095		**180MLBK095**	**180MPBK095**	**180TXLBK095**		
K095				**200TXLBK095**		

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
33, 36, 40P, 41, 42, 44, 49, 50, 55**, 57, 133, 134, 136**, 137**, 140**, 141**, 142**, 142 e-series, 154, 234, 235, 238, 240**, 242, 242XP/XPG, 246, 246XP/XPG, 254**, 254XP/XPG**, 257**, 261**, 262**, 262XP/XPG**, 339XP, 340, 340e series, 353, 359, 360, 362 XP**, 362XPG**, 365, 435, 435e, 435 II, 435e II, 440e, 444, 445, 445e, 450, 450e, 450 II, 450e II, 455, 455 RANCHER, 455 RANCHER II, 455e RANCHER, 455e RANCHER II, 460, 460 RANCHER, 535FBX, 543XP/XPG, 545, 545 II, 545 MARK II, 550XP/XPG, 550 XP II, 550 XP Triobrake, 550 XP MARK II, 555, 560, 560XP/XPG, 562XP/XPG, 576XP/XPG, EL16, EL1200, EL1400, EL1500, EL1600 ** Chain pitch may vary by year **Note**: many saws fitted in .325 / 1.5mm (21) can be converted to SpeedCut narrow kerf .325 / 1.3mm (95) cutting system. In such a case, both the bar and chain have to be changed	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
	50	20	.325	1,5		**21BPX - 21LPX - 21LGX**	78
55**, 55 RANCHER, 154, 254**, 254 XP/XPG**, 257**, 261**, 262**, 262 XP/XPG**, 357, 357 XP/XPG, 359, 362 XP/XPG**, 455, 455 RANCHER, 455e Rancher, 455e RANCHER II, 455 RANCHER II, 460, 460 RANCHER, 465 RANCHER, 545, 550, 550 XP, 555, 560 XP/XPG ** Chain pitch may vary by year	38	15	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	56
	40	16	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	60
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	64
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
	60	24	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	84
61, 65, 66, 70, 77, 160, 162, 181, 185, 254, 254XP/XPG, 260, 266, 266XP, 268, 268XP, 272, 272XP/XPG, 281, 281XP, 285, 288, 288XP, 298, 298XP, 362XP**, 362 XPG**, 365, 365 XP, 371, 371XP/XPG, 372XP/XPG, 380, 385XP, 390XP, 390XPG, 394, 394XP/XPG, 395, 395XP/XPG, 455, 480, 545, 555, 560XP/XPG, 562XP/XPG, 565, 570 XP, 572 XP, 575 XP, 576XP/XPG, 585, 592 XP, 1100, 2100, 2101, 2100XP, 2101XP, 3120, 3120XP ** Chain pitch may vary by year	33	13	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	52
	38	15	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	56
	40	16	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	60
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	64
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
	55	22	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	76
	60	24	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	84
	65	26	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	89
	70	28	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	92
	75	30	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	102
	90	36	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	115
	107	42	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	135
395 XP, 592 XP, 3120, 3120 XP	55	22	.404	1,6		**59L - 59ACL - 27X**	68
	60	24	.404	1,6		**59L - 59ACL - 27X**	76
	90	36	.404	1,6		**59L - 59ACL - 27X**	104

Visit OregonProducts.com/en_eu for other brands and models

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	
K095		**208PXBK095**		**208VXLGK095**	**208RNBK095**	
K095			**158SLHK095**	**158VXLHK095**		
K095				**168VXLHK095**	**168RNDK095**	**168ATMK095**
K095			**188SLHK095**	**188VXLHK095**		
K095		**188SFHK095**	**39450**		**188RNDK095**	
Z095				**188VXLHZ095**		
K095				**208VXLHK095**	**208RNDK095**	**208ATMK095**
K095					**248RNDK095**	
D009					**138RNDD009**	
D009		**158SFHD009**	**158SLHD009**	**158VXLHD009**	**158RNDD009**	
D009		**168SFHD009**		**168VXLHD009**	**168RNDD009**	**168ATMD009**
D009						
D009		**188SFHD009**	**188SLHD009**	**188VXLHD009**	**188RNDD009**	**188ATMD009**
D009		**208SFHD009**	**208SLHD009**	**208VXLHD009**	**208RNDD009**	**208ATMD009**
D009					**228RNDD009**	
D009		**248SFHD009**			**248RNDD009**	**248ATMD009**
D009					**268RNDD009**	
D009					**288RNDD009**	**288ATMD009**
D009					**308RNDD009**	
D009					**363RNDD009**	**363ATLD009**
D009					**423RNDD009**	
D009						
D009					**243RNFD009**	**243ATMD009**
D009					**363RNFD009**	**363ATLD009**

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
MAKITA							
BUC122RFE, DUC121, DUC122, DUC122Z, DUC122RME, DUC122RTE, UC120D,	16,0	6,5	1/4	1,3		**25AP**	42
BUC250, BUC250RDE, BUC250Z, DCS230T, DCS231T, DCS232T, DUC252 (Carving), UC250D,	25	10	1/4	1,3		**25AP**	60
BUC300, DCS 34, DUC254RF, DUC254RT2, DUC254Z, DUC300, DUC302, DUC302Z, DUC353Z*, DUC353RF2*, DUC355Z, EA3200S*, EA3201S*, EA3202S*, EA3203S*, EA3500S*, EA3501S*, EA3502S*, EA3503S*, UC300D, UC3010A, UC3020A*, UC3040A*, UC3041A*, UC3510A, UC3520A*, UC3540A*, UC3541A*, UC3551A*, UC4010A, UC4020A*, UC4040A*, UC4041A*, UC4051AK * Gauge may vary and be 1.3mm	25	10	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	40
	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	46
	35	14	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	52
	40	16	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	56
3500A, 4000A, 5012B, BUC250, BUC250RDE, BUC250Z, DCS33, DCS34, DCS221TH, DCS230T, DCS231T, DCS232T, DCS330TH, DCS330/S, DCS340, DCS341, DCS344, DCS350, DCS380, DCS390, DCS400, DCS401, DCS2501, DCS3400, DCS3400TH, DCS3410, DCS3410TH, DCS3500, DCS3501, DCS4300i, DCS4610, DES300, DES330S, DES340, DES341, DES350, DES380, DES390, DES400, DES401, DUC252, DUC252PM4, DUC252RM2, DUC252Z, DUC353Z*, DUC353RF2*, DUC254, DUC306PT2B, DUC306ZB, DUC356PT2B, DUC356ZB, EA3100T, EA3110T, EA3200S, EA3200S, EA3200S*, EA3201S*, EA3202S*, EA3203S*, EA3500F, EA3500S*, EA3501F, EA3501S*, EA3502S*, EA3503S*, EA3600F, EA3601F, EA3700T, EA4300F, UC250D, UC3001A, UC3020A*, UC3030A, UC3040A*, UC3041A*, UC3050A, UC3051A, UC3501A, UC3520A*, UC3530A, UC3530AP, UC3540A*, UC3541A*, UC3550A, UC3551A*, UC4001A, UC4020A*, UC4030A, UC4030AP, UC4040A*, UC4041A*, UC4050A, UC4051A, UC4530A, UC4530AP, UC4550A, UC4551A, VC3000A * Gauge can vary and be 1.1mm	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	46
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	45	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	62
DCS410, DCS411, DCS430, DCS520, DCS4300, DCS4300i, DCS4300F45C-KIT, DCS4301, DCS4301-KIT, DCS5200i, EA4300F, EA4301F	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	45	18	.325	1,3	NARROW KERF	**95TXL**	72
DCS43, DCS52, DCS430, DCS431, DCS460, DCS461, DCS500, DCS501, DCS520, DCS4300i, DCS4600S, DCS4600SH, DCS4630, DCS4630-38, DCS5000, DCS5000H, DCS5001, DCS5001H, DCS5121, DCS5200, DCS5200i, DCS6000i, DCS6800i, EA500F, EA5000P, EA5001F, EA5001P	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
Above models can also be fitted in 3/8'' pitch	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
A041						
A041						
A041	**124MLEA041**					
A041						
A041	**144MLEA041**					
A041	**164MLEA041**					
A041	**100SDEA041**	**100SXEA041**				
A041	**120SDEA041**	**120SXEA041**				
A041						
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041	**180SDEA041**					
K041		**130MLBK041**				
K041		**150MLBK041**				
K041		**180MLBK041**				
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
DCS43, DCS52, DCS430, DCS431, DCS460, DCS461, DCS500, DCS501, DCS520, DCS4300i, DCS4600S, DCS4600SH, DCS4630, DCS4630-38, DCS5000, DCS5000H, DCS5001, DCS5001H, DCS5030, DCS5121, DCS5200, DCS5200i, DCS6000i, DCS6800i, EA5000P, EA5001P	38	15	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	56
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	64
Above models can also be fitted in .325'' pitch	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
DCS6000I, DCS6100P, DCS6101P, DCS6400, DCS6400H, DCS6401, DCS6401-45, DCS7300, DCS7300H, DCS7300P, DCS7301, DCS7301P, DCS7301-45, DCS7900, DCS7900H, DCS7900P, DCS7901, DCS7901P, DCS9000, DCS9010, EA5600F, EA7300P, EA7900P	38	15	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	56
	40	16	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	60
	43	17	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	64
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
	60	24	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	84
	70	28	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	92
	70	28	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	94
MCCULLOCH							
Li 58CS	40	16	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	56
CS35, CS 35S, CS 42S, CS 42 STE, CS330, CS340, CS340-16, CS350, CS360, CS360T, CS370, CS380, CS380T, CS390, CS400, CS400T, CS420T, CSE 1835, CSE 1935S, CSE 2020, CSE 2040S, CSE 2040, Inline 1650, Inline 1800, Inline 1800T, Inline 1900, Inline 2200T, MAC 4-18XT, Mac 4-20 XT, Mac 20X Power, Mac 335, Mac 435, MAC418XT, Mac Cat 436, Mac Cat 438, Mac Cat 440, Mac Cat 441, Mac Cat T441, Mac Cat 442, Titanium 420, MAC842	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	45	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	62
CS50S, CS410, CS410T, CS 410 Elite, CS 410 Elite 15, CS450, CS450 elite, CS450 Elite 18, Promac 10-42, Promac 10-49, Xtreme 3,0, Xtreme 3,4	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	45	18	.325	1,3	NARROW KERF	**95TXL**	72
OLEO-MAC							
GST 250, 932 CK	25	10	1/4	1,3		**25AP**	58
	25	10	1/4	1,3		**25AP**	60
GS 260	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
GSi30	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
EP 90, EP 100, EP 120, PPX-271	25	10	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	39
GS 220 Li-ion	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
932 C, 936, 940, GST 360	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
937, 941 C, GS 35, GS 35C, GS 37, GSH 40, GS 41*, GS 180 E, GS 200 E, GS 350, GS 350C, GS 370, GS 371*, GSH 400, GS 410 C, GS 411*	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	53
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
* Pitch may vary	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
937 P.S., GS 370 P.S. (PowerSharp)	40	16	3/8 LOW PROFILE	1,3		**POWERSHARP**	56
GS 41*, GS 44, GS 45, GS 371*, GS 410 CX, GS 411*, GS 440, GS 451, 941 CX	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
* Pitch may vary	40	16	.325	1,3	NARROW KERF	**95TXL**	66
	45	18	.325	1,3	NARROW KERF	**95TXL**	72

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
K153			**158SLHK153**			
K153			**188SLHK153**	**188VXLHK153**		
K153						
D009		**158SFHD009**	**158SLHD009**	**158VXLHD009**	**158RNDD009**	
D009		**168SFHD009**		**168VXLHD009**	**168RNDD009**	**168ATMD009**
D009				**178VXLHD009**	**178RNDD009**	**178ATMD009**
D009		**188SFHD009**	**188SLHD009**	**188VXLHD009**	**188RNDD009**	**188ATMD009**
D009		**208SFHD009**	**208SLHD009**	**208VXLHD009**	**208RNDD009**	**208ATMD009**
D009		**248SFHD009**			**248RNDD009**	**248ATMD009**
D009					**288RNDD009**	**288ATMD009**
D009						
A041	**164MLEA041**					
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041	**180SDEA041**					
K095		**130MLBK095**		**130TXLBK095**		
K095		**150MLBK095**	**150MPBK095**	**150TXLBK095**		
K095		**180MLBK095**	**180MPBK095**	**180TXLBK095**		
A041	**100SDAA041**					
A041						
A041	**100SDEA041**	**100SXEA041**				
A318	**104MLEA318**					
A041	**120SDEA041**	**120SXEA041**				
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041						
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041						
A041	**160SDEA041**					
K041		**130MLBK041**				
K041		**150MLBK041**				
K041		**160MLBK041**				
K041		**180MLBK041**				

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
GSH 51*, GSH 56*, GSH 510*, GSH 560*	33	13	.325	1,3	NARROW KERF	**95TXL**	56
* Pitch and/or gauge may vary	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	40	16	.325	1,3	NARROW KERF	**95TXL**	66
	45	18	.325	1,3	NARROW KERF	**95TXL**	72
938, 947, 952, 956*, 962*, GSH 51*, GSH 56*, GSH 510*, GS 520, GSH 560*	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
* Pitch and/or gauge may vary	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
	50	20	.325	1,5		**21BPX - 21LPX - 21LGX**	78
	50	20	.325	1,5		**21BPX - 21LPX - 21LGX**	80
956*, 962*, 965 HD, GSH 51*, GSH 56*, GSH 510*, GSH 560*	40	16	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	60
* Pitch and/or gauge may vary	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
GS 650, GS 651	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
	60	24	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	84
261, 264, 350, 481, 482, GS 720, GS 820	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
OREGON							
PS600	25	10	1/4	1,3		**25AP**	58
PS250	20	8	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	34
PS750	20	8	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	33
CS1200	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
CS1400	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
CS1500	40	16	3/8 LOW PROFILE	1,3		**POWERSHARP**	56
	45	18	3/8 LOW PROFILE	1,3		**POWERSHARP**	62
CS250	35	14	3/8 LOW PROFILE	1,3		**POWERSHARP**	52
CS300	40	16	3/8 LOW PROFILE	1,3		**POWERSHARP**	56
RYOBI							
OPP1820, OPS1820Li, RPP1815S, RPP182015, RPP182015S, RPP18020Li, RPP182020, RPP182025, RPP182025F	20	8	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	33
RPP720, RPP750S, RPP750450, RPP755E	25	10	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	40
OCS1830, RCS36, RCS36 AKKU, RCS 1830 Akku, RCS18X3050F	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
RY36CSX35A-0, RY36CSX35A-150, RCS36X3550HI	35	14	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	52
35B, CS36C, CS41, CSE385CB, CSE3330, HC31, HC36, HC41, HCS31, HCS36	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	44
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	49
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	55
KS33B-SET, PCN-3335, RCS33, RCS35, RCS40, RCS42, RCS1935B2C, RCS-3335C, RCS3535A, RCS3535B, RCS3535CA, RCS3535CB, RCS3535C2, RCS3835T, RCS 3550 Akku, RCS18352C	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
RCS3840T, RCS4040CA, RCS4240B, RY36CSX40B-0, RY36CSX40B-160	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
ECS2040, RCS1935, RCS2340, RCS3540C, RZC3540C	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
RCS4046C	46	18	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	62

Visit OregonProducts.com/en_eu for other brands and models

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
K095		**130MLBK095**		**130TXLBK095**		
K095		**150MLBK095**	**150MPBK095**	**150TXLBK095**		
K095		**160MLBK095**		**160TXLBK095**		
K095		**180MLBK095**	**180MPBK095**	**180TXLBK095**		
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	
K095		**208PXBK095**		**208VXLGK095**	**208RNBK095**	
K095						
K095				**168VXLHK095**	**168RNDK095**	**168ATMK095**
K095		**188SFHK095**	**39450**		**188RNDK095**	
K095				**208VXLHK095**	**208RNDK095**	**208ATMK095**
D009		**188SFHD009**	**188SLHD009**	**188VXLHD009**	**188RNDD009**	**188ATMD009**
D009		**208SFHD009**	**208SLHD009**	**208VXLHD009**	**208RNDD009**	**208ATMD009**
D009		**248SFHD009**			**248RNDD009**	**248ATMD009**
D024						
D024		**208SFHD024**				**208ATMD024**
A041	**100SDAA041**					
A041	**084MLEA041**					
A041	**080SDEA041**					
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041	**160SDEA041**					
A041	**180SDEA041**					
A041	**140SDEA041**					
A041	**160SDEA041**					
A318	**120SDEA318**					
A318	**140SDEA318**					
A318	**160SDEA318**	**160SXEA318**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041	**160SDEA041**	**160SXEA041**				
A041	**180SDEA041**					

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
SHINDAIWA							
250TCS, 251TCS, 269TCS, 280TCS	25	10	1/4	1,3		**25AP**	58
	25	10	1/4	1,3		**25AP**	60
250TS, 251TS	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
280TS	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	30	12	3/8 LOW PROFILE	1,3		**on Original Equipement Bar 91P - 91PX - 91VXL**	47
251WS, 269TS, 305S, 320TS, 352S, 353S, 360, 360TS, 361WS, 362TS, 362WS	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	30	12	3/8 LOW PROFILE	1,3		**on Original Equipement Bar 91P - 91PX - 91VXL**	47
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	35	14	3/8 LOW PROFILE	1,3		**on Original Equipement Bar 91P - 91PX - 91VXL**	53
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	40	16	3/8 LOW PROFILE	1,3		**on Original Equipement Bar 91P - 91PX - 91VXL**	57
	40	16	3/8 LOW PROFILE	1,3		**on Original Equipement Bar 91P - 91PX - 91VXL**	58
377, 390SX	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	40	16	.325	1,3	NARROW KERF	**95TXL**	66
451S*	33	13	.325	1,3	NARROW KERF	**95TXL**	56
* Chain gauge may vary	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	45	18	.325	1,3	NARROW KERF	**95TXL**	72
389S, 405S, 451S*, 452S, 452GS, 488, 488P, 490, 501SX	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
* Chain gauge may vary	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
	50	20	.325	1,5		**21BPX - 21LPX - 21LGX**	80
598, 600, 600SX, 601SX	40	16	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	60
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	64
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
	60	24	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	84
757, 757C	70	28	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	92
SOLO by AL-KO							
613, 620, 621, CS 4235	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
6436, 6238, 6240, 6442	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	53
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
614, 630, 633, 635, 635 Eco, 636, 637, 640, 643, CC 1936, CC 2740	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
	40	16	3/8 LOW PROFILE	1,3		**on Original Equipement Bar 91P - 91PX - 91VXL**	57

Visit OregonProducts.com/en_eu for other brands and models

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
A041	**100SDAA041**					
A041						
A041	**100SDEA041**	**100SXEA041**				
A041	**100SDEA041**	**100SXEA041**				
A041	**120SDEA041**	**120SXEA041**				
A041						
A041	**120SDEA041**	**120SXEA041**				
A041						
A041	**140SDEA041**	**140SXEA041**				
A041						
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041						
A041						
K041		**130MLBK041**				
K041		**150MLBK041**				
K041		**160MLBK041**				
K095		**130MLBK095**		**130TXLBK095**		
K095		**150MLBK095**	**150MPBK095**	**150TXLBK095**		
K095		**180MLBK095**	**180MPBK095**	**180TXLBK095**		
K041		**138PXBK041**				
K041		**158PXBK041**		**158PXLBK041**		
K041		**168PXBK041**		**168VXLGK041**		
K041				**188VXLGK041**		
K041						
D009		**168SFHD009**		**168VXLHD009**	**168RNDD009**	**168ATMD009**
D176				**188VXLHD176**		
D009		**188SFHD009**	**188SLHD009**	**188VXLHD009**	**188RNDD009**	**188ATMD009**
D009		**208SFHD009**	**208SLHD009**	**208VXLHD009**	**208RNDD009**	**208ATMD009**
D009		**248SFHD009**			**248RNDD009**	**248ATMD009**
D009					**288RNDD009**	**288ATMD009**
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**				
A095	**120SDEA095**	**120SXEA095**				
A095	**140SDEA095**	**140SXEA095**				
A095	**160SDEA095**	**160SXEA095**				
A095						

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
639, 641, 643 IP, 644, 644 SP, 645, 646, 647, 650, 651, 651 C, 651 SP, 652, 654, 656 *, 656 C *, CC 3045, 3351, 3352, 4051, 4256, 6646, 6651, 6656 * * Pitch may vary and be 3/8	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72
656 *, 656 C *, 6656 * * Pitch may vary and be .325	40	16	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	60
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
662, 665, 667, 670, 675, 680, 681, 690	38	15	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	56
	40	16	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	60
	45	18	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	68
	50	20	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	72
	60	24	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	84
	70	28	3/8	1,5		**73EXL - 73LPX - 73DX - 73DPX**	92
STIGA							
SPR 255 C, SPR 276 C	25	10	1/4	1,3		**25AP**	60
SP 316 C	30	12	1/4	1,3		**25AP**	64
MP 500, MP 700, SMT 500 AE, SPR 255, SPR 276, SPS 700 AE	25	10	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	40
SE 1.6, SE 1.8, SE 182, SP 340	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	44
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	50
P382S	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
SPR 500 AE	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
ES 1814, SE 1835	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
A 375, A 405, C1.8 E, C1.8 ET, C2.0 E, C2.0 ET, C2.2 E, C2.2 ET, C38, C38T, CP40, CS48Li14, EA1800, EA2000Q, EL2416Q, ES 2040, ES 2040T, SC48AE, SE 180, SE 180 Q, SE 190, SE 1814 Q, SE 2016 Q, SE 2216 Q, SEV 2416 Q, SP350, SP352, SP375, SP375 Q, XC 238, XC 240	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
ES 2016 Q, ES 2216 Q, SC 80 AE, SE 2240 Q	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
A 3700, A 4000, SP37, SP316, SP372, SP375, SP375Q, SP386	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	53
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
SP246, SP 370, SP 405 Q, SP 410, SP 426	33	13	.325	1,3	NARROW KERF	**95TXL**	56
	38	15	.325	1,3	NARROW KERF	**95TXL**	64
	40	16	.325	1,3	NARROW KERF	**95TXL**	66
PS46, PS52, PS460, PS510, SP 466, SP 526	33	13	.325	1,5		**21BPX - 21LPX - 21LGX**	56
	38	15	.325	1,5		**21BPX - 21LPX - 21LGX**	64
	40	16	.325	1,5		**21BPX - 21LPX - 21LGX**	66
	45	18	.325	1,5		**21BPX - 21LPX - 21LGX**	72

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	
K095				**168VXLHK095**	**168RNDK095**	**168ATMK095**
K095		**188SFHK095**	**39450**		**188RNDK095**	
K095				**208VXLHK095**	**208RNDK095**	**208ATMK095**
D009		**158SFHD009**	**158SLHD009**	**158VXLHD009**	**158RNDD009**	
D009		**168SFHD009**		**168VXLHD009**	**168RNDD009**	**168ATMD009**
D009		**188SFHD009**	**188SLHD009**	**188VXLHD009**	**188RNDD009**	**188ATMD009**
D009		**208SFHD009**	**208SLHD009**	**208VXLHD009**	**208RNDD009**	**208ATMD009**
D009		**248SFHD009**			**248RNDD009**	**248ATMD009**
D009					**288RNDD009**	**288ATMD009**
A041	**100SDEA041**	**100SXEA041**				
A074	**120SDEA074**	**120SXEA074**	**120SPEA074**			
A074	**140SDEA074**	**140SXEA074**	**140SPEA074**			
A074	**160SDEA074**					
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**				
A041	**160SDEA041**	**160SXEA041**	**160SPEA041**			
A041	**120SDEA041**	**120SXEA041**				
A041	**140SDEA041**	**140SXEA041**				
A041	**160SDEA041**	**160SXEA041**				
K041		**130MLBK041**				
K041		**150MLBK041**				
K041		**160MLBK041**				
K095		**138PXBK095**	**138SLBK095**	**138PXLBK095**		
K095		**158PXBK095**	**158SLBK095** **158SLGK095 (*)**	**158PXLBK095** **158VXLGK095 (*)**	**158RNBK095**	
K095		**168PXBK095**	**168SLBK095**	**168PXLBK095** **168VXLGK095 (*)**	**168RNBK095**	
K095		**188PXBK095** **188SFGK095 (*)**	**188SLBK095** **188SLGK095 (*)**	**188PXLBK095** **188VXLGK095 (*)**	**188RNBK095**	

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
STIHL							
HT 56, HT 70, HT 75, HT 100, HT 101*** , HT 130, HT 131***, HTE 60 *** Gauge may vary	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	44
009, 017, 019, 019T, 023L, E14, E140, MS170, MS 170-D, MS 171, MS 180**, MS 180 C-BD**, MS 180 C-BE**, MS 181***, MS 181C-BE***, MS 190***, MS 190T***, MS 192, MS 192C-E***, MS 192T***, MS 193 C-E***, MS 194 C-E, MS 200T***, MS 201T***, MSE 140***, MSE 140 C-BQ, MSE 141, MSE 141 C, MSE 141 C-Q, MSE 170***, MSE 170C-Q, MSE 170C-BQ ** 1.1 mm gauge as from year 2014. 1.3 mm gauge until year 2013. *** Gauge may vary	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	44
	35	14	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	50
	40	16	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	55
009, 010, 011, 012, 015, 018/CQT, 020, 020T, 021/CQT, 023/C, 023/CQT, 025, AV Electronic, E10, E14, E160, E180/CQT, HT 101***, HT 131***, MS 180**, MS 180 C-BD**, MS 180 C-BE**, MS 181***, MS 181 C-BE***, MS 190***, MS 190T***, MS 191, MS 191T, MS 192C-E***, MS 192T***, MS 192TC-E, MS 193 C-E***, MS 193T, MS 200, MS 200T***, MS 201, MS 201 C-M, MS 201T***, MS 201TC-M, MS 210, MS 210 C-BE, MS 210 C-BQ, MS 211, MS 211C-BE, MS 230, MS 230 C-BE, MS 231 *, MS 231 C-BE *, MS 241 *, MS 241C-BEM *, MS 241C-M *, MS 241C-MQ *, MS 241C-M VW *, MS 250, MS 250 C-BE, MS 251 *, MS 251 C-BE *, MSA 220 C-B, MSE 140***, MSE 160, MSE 160 C-BQ, MSE 170***, MSE 180, MSE 180 C-BQ, MSE 190 C-B, MSE 190C-Q, MSE 190C-BQ, MSE 200, MSE 200 C-BQ, MSE 210, MSE 230 * Chain pitch and/or gauge may vary by year ** 1.3 mm gauge until year 2013. 1.1 mm gauge as from year 2014 *** Gauge may vary	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	44
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	50
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	55
MSE 210 C B, MSE 210 C BQ, MSE 230 C B, MSE 230 C BQ Above models with rapid chain tensioner & 7 tooth sprocket take an extra drive link	30	12	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	45
	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	51
	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	56
MS 251 * * Chain pitch and/ or gauge may vary by year	35	14	.325	1,3	NARROW KERF	**95TXL**	56
	40	16	.325	1,3	NARROW KERF	**95TXL**	62
MS 251 C-BE * * Chain pitch and gauge may vary by year	35	14	.325	1,3	NARROW KERF	**95TXL**	57
	40	16	.325	1,3	NARROW KERF	**95TXL**	63
MS 261, MS 261 C-BM, MS 261 C-M, MS 261 C-M VW, MS 271, MS 271 C-BE New fit up as from 2020	35	14	.325	1,3	NARROW KERF	**95TXL**	60
	38	15	.325	1,3	NARROW KERF	**95TXL**	62
	40	16	.325	1,3	NARROW KERF	**95TXL**	67

Visit OregonProducts.com/en_eu for other brands and models

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
A074	**124MLEA074**					
A074	**124MLEA074**					
A074	**144MLEA074**					
A074						
A074	**120SDEA074**	**120SXEA074**	**120SPEA074**			
A074	**140SDEA074**	**140SXEA074**	**140SPEA074**			
A074	**160SDEA074**	**160SXEA074**	**160SPEA074**			
A074	**120SDEA074**	**120SXEA074**	**120SPEA074**			
A074	**140SDEA074**	**140SXEA074**	**140SPEA074**			
A074	**160SDEA074**	**160SXEA074**	**160SPEA074**			
A074						
A074						
A074						
A074						
D025						
D025						
D025						

(*) .325"-12T bar alternative

	CM	INCH	INCH	MM	NARROW KERF	OREGON	#
MS 231 *, MS 241 *, MS 241 C-M *, MS 251 *	35	14	.325	1,6		**22BPX - 22LPX - 22LGX**	56
* Chain pitch and/ or gauge may vary by year	40	16	.325	1,6		**22BPX - 22LPX - 22LGX**	62
	45	18	.325	1,6		**22BPX - 22LPX - 22LGX**	68
MS 231 C-BE *, MS 251 C-BE*, MS 251 C-BEQ *	35	14	.325	1,6		**22BPX - 22LPX - 22LGX**	57
	40	16	.325	1,6		**22BPX - 22LPX - 22LGX**	63
* Chain pitch and/ or gauge may vary by year	45	18	.325	1,6		**22BPX - 22LPX - 22LGX**	68
032*, 034*, 036*, 039*, MS 240, MS 260, MS 260 C-B, MS 260-W, MS 260-DW, MS 260 C-BW, MS 261, MS 261 C-BE, MS 261 C-Q, MS 261 C-M, MS 261 C-M VW, MS 261 C-BM, MS 261-VW, MS 270, MS 270 C-B, MS 271, MS 271 C-BE, MS 280, MS 280 C-B, MS 280 C-BQ, MS 280 I, MS 280 C-BI, MS 280 C-BQI, MS 291 *, MS 360*	33	13	.325	1,6		**22BPX - 22LPX - 22LGX**	56
	38	15	.325	1,6		**22BPX - 22LPX - 22LGX**	62
	40	16	.325	1,6		**22BPX - 22LPX - 22LGX**	67
	45	18	.325	1,6		**22BPX - 22LPX - 22LGX**	74
* Chain pitch may vary by year	50	20	.325	1,6		**22BPX - 22LPX - 22LGX**	81
029, 031, 032*, 034*, 036*, 038, 039*, 041, 042, 044, 045, 046, 048, 056, 064, 066, MS 290, MS 291 *, MS 310, MS 311, MS340, MS 341, MS 360*, MS 361, MS 361 C-B, MS 361 C-BQ, MS 361 C-Q, MS 361-W, MS 361-VW, MS 362, MS 362 C-B, MS 362 C-Q, MS 362 C-M, MS 362 C-MQ, MS 362 C-M VW, MS 362 V-W, MS 390, MS 391, MS 400 C-M, MS 440, MS 440-D, MS 440-W, MS 441, MS 441 C-M, MS 441 C-M W, MS 441-W, MS 441 C-Q, MS 460, MS 460-D, MS 460-W, MS 461, MS 462 C-M, MS 462 C-M VW, MS 650, MS 660, MS 660-W, MS 661, MS 661 C-M, MS 661 C-M VW, MSE 220 C-Q **, MSE 250, MSE 250 C-BQ, MS 500i, MS 500i W	38	15	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	56
	40	16	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	60
	45	18	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	66
	50	20	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	72
	55	22	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	77
	60	24	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	84
	70	28	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	91
* Chain pitch may vary by year ** 57 drive link for 15 bar	90	36	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	114
	105	42	3/8	1,6		**75EXL - 75LPX - 75DX - 75DPX**	135
07S, 08, 08S, 050, 051, 075, 076, 084, 088, E30, MS 780, MS 880, MS 881	43	17	.404	1,6		**59L - 59ACL - 27X**	60
	53	21	.404	1,6		**59L - 59ACL - 27X**	68
	63	25	.404	1,6		**59L - 59ACL - 27X**	80
070, 090	63	25	.404	1,6		**59L - 59ACL - 27X**	84
	75	30	.404	1,6		**59L - 59ACL - 27X**	92
	90	36	.404	1,6		**59L - 59ACL - 27X**	104
	104	42	.404	1,6		**59L - 59ACL - 27X**	122
WORX							
WG349E, WG349E.9	20	8	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	33
WG322, WG322.9, WG322E.1, WG322E.9, WG323, WG323.9	25	10	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	40
WG381, WG381E, WG381E.1, WG381.9	30	12	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	45
WG384, WG384.9, WG384E.9, WG384E9	35	14	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	52
WG385E, WG385.9	40	16	3/8 LOW PROFILE	1,1	NARROW KERF	**90PX**	56
WG303, WG303E, WG303.1	40	16	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	57
WG305, WG305E, WG305.1, WG305.2	35	14	3/8 LOW PROFILE	1,3		**91P - 91PX - 91VXL**	52

Visit OregonProducts.com/en_eu for other brands and models

	SINGLE RIVET SDA - SDE - MLE	ADVANCECUT SX - SF - PX - MLB	ADVANCECUT HD SP - SL - MP	CONTROLCUT PXL SPEEDCUT TXL VERSACUT VXL	POWERCUT RN	DURACUT AT
A074						
A074			**163SLBA074**	**163PXLBA074**		
A074		**183PXBA074**		**183PXLBA074**		
A074						
A074			**163SLBA074**	**163PXLBA074**		
A074		**183PXBA074**		**183PXLBA074**		
D025				**133PXLBD025**		
D025		**153SFGD025**		**153VXLGD025**		
D025		**163SFGD025**		**163VXLGD025**	**163RNBD025**	**163ATMD025**
D025		**183SFGD025**		**183VXLGD025**	**183RNBD025**	**183ATMD025**
D025				**203VXLGD025**		**203ATMD025**
D025		**153SFHD025**		**153VXLHD025**		
D025		**163SFHD025**	**163SLHD025**	**163VXLHD025**	**163RNDD025**	**163ATMD025**
D025		**183SFHD025**	**183SLHD025**	**183VXLHD025**	**183RNDD025**	**183ATMD025**
D025		**203SFHD025**	**203SLHD025**	**203VXLHD025**	**203RNDD025**	**203ATMD025**
D025					**223RNDD025**	
D025		**243SFHD025**			**243RNDD025**	**243ATMD025**
D025					**283RNDD025**	
D025					**363RNDD025**	**363ATMD025**
D025					**423RNDD025**	
E031						
E031						
E031						
E099						**253ATLE099**
E099						**303ATLE099**
E099						**363ATLE099**
E099						
A041	**084MLEA041**					
A041						
A041	**124MLEA041**					
A041	**144MLEA041**					
A041	**164MLEA041**					
A041	**160SDEA041**	**160SXEA041**				
A041	**140SDEA041**	**140SXEA041**				

(*) .325"-12T bar alternative

OREGON®

75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged.
Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing,
and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C008551

PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-002-EN

OREGON
PowerCut

Discover more of our products at
OregonProducts.com

CHAIN AND BAR MAINTENANCE

CBM_1.2
EN/EUR

OREGON
OREGON
ORE

werCut™
OREGON
OREGON

OREGON®

Oregon® understands that the needs of woodcutters – professionals and novices – are as diverse as the terrains and environments in which they work.

To keep your saw's performance at its best, Oregon offers a wide range of professional-grade maintenance tools & accessories.

Quality and Performance can only last through an equal high standard of maintenance. This is why at Oregon® we spend as much attention & time providing you with professional grade maintenance tools & accessories.

WORKSHOP CHAIN MAINTENANCE

Chain Grinders

The Oregon Chain Grinder range provides benefits for both dealers and professional end users seeking an efficient, consistent and high-quality grind in less time. Oregon grinders combine premium quality and ease of use to deliver precise and accurate sharpening on all chain pitches.

Whether you are looking for the convenience and space optimization of a bench minigrinder or the heavy duty, high-volume efficiency of a hydraulic assisted model, there is always an Oregon chain grinder to suit your sharpening needs.

COMPACT BENCH GRINDER

- Single phase, direct-drive, one-way, 230V AC, 50 Hz, 85 watt
- The compact alternative to full-size bench grinders
- Ideal for chain saw owners and small workshops
- Precise grinding and durable

		÷2	
Grinder	590181	1/4" ▶.404"	1,1▶ 2,0mm

Grinding wheels	106547P	1/4", 3/8" Low Pro
	106548P	.325", 3/8", .404"

PROFESSIONAL COMPACT BENCH GRINDER

- Single-phase, direct-drive, one-way, 230V-AC, 50 Hz, 214 watt
- Long lasting motor.
- Precise grinding and durable.
- Built-in-light
- One-way motor rotation for safe operation
- Easy-to-use adjustments
- Bench or wall mount

		÷2	
Grinder	410-230	1/4" ▶.404"	1,1▶ 2,0mm

Grinding wheels	32659P	1/4", 3/8" Low Pro
	32660P	.325", 3/8", .404"
	32661P	depth gauge all chain types

PROFESSIONAL BENCH GRINDER

- Single-phase, direct-drive, one-way, 230V-AC, 50 Hz, 214 watt
- Torsion spring for comfort grinding
- Indexing chain stop assembly
- Advanced vise setting for precision grinding
- Built-in light
- Bench or wall mount

	OREGON	÷2	
Grinder	520-230	1/4" ▶.404"	1,1 ▶ 2,0mm

Grinding wheels	32659P	1/4", 3/8" Low Pro
	32660P	.325", 3/8", .404"
	OR534-516	3/4"
	32661P	depth gauge all chain types

PROFESSIONAL HYDRAULIC ASSIST BENCH GRINDER

- Single-phase, direct-drive, one-way, 230V-AC,50 Hz, 214 watt
- Hydraulic assist for automatic vise clamping
- Precise and accurate sharpening
- Grinds all chains up to 3/4" pitch
- Wide clamping area and clear markings for easy adjustment
- Built-in 15 watt light
- Bench or wall mount

	OREGON	÷2	
Grinder	620-230	1/4" ▶ 3/4"	1,1 ▶ 3,1mm

Grinding wheels	32659P	1/4", 3/8" Low Pro
	32660P	.325", 3/8", .404"
	OR534-516	3/4"
	32661P	depth gauge all chain types

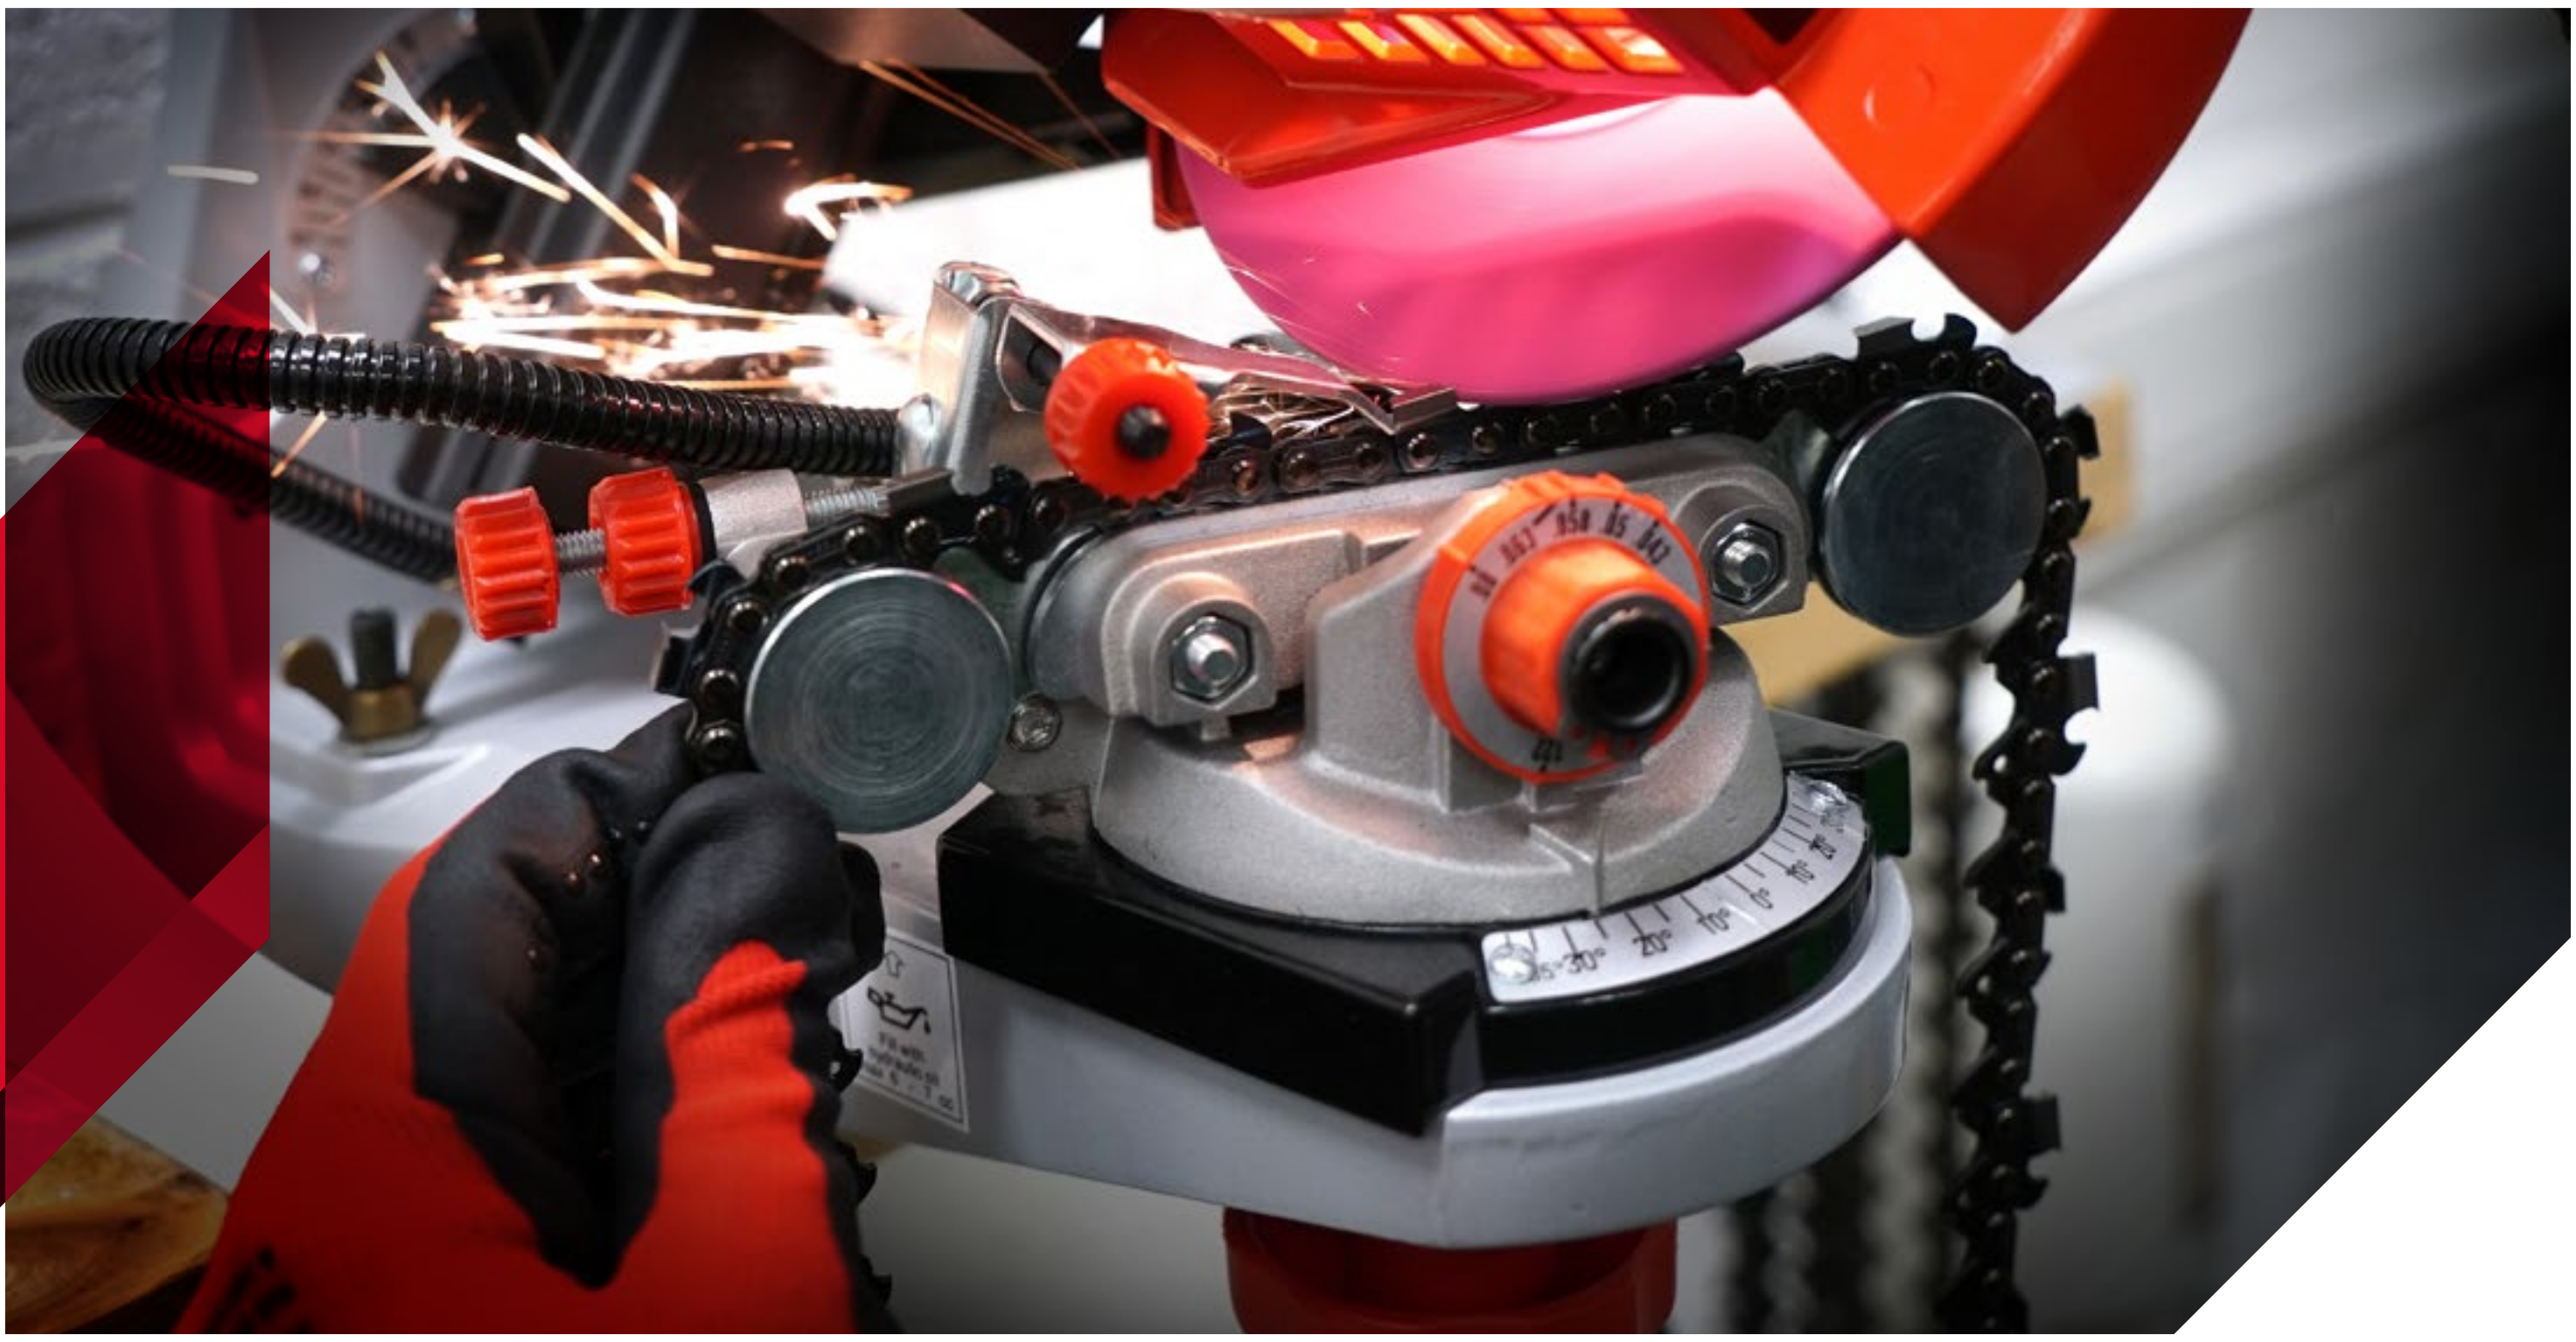

ROUND FILES

PRODUCT NAME	OREGON	÷2	MM	INCH	SPECIFICATIONS	
Round File (12 pack)	14012		3,2	1/8	• Superior performance and long stay-sharp • Sharp teeth with smooth bite • 12/box • Swiss-made	25
	70504	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32		
	70511	3/8" LowPro 90	4,5	11/64		
	70503	.325"	4,8	3/16		
	70505	3/8" .404"	5,2	13/64		
	70502	3/8" .404"	5,5	7/32		
	70501		6,4	1/4		
Round File (4X3 pack)	70504T	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32	• 4x3 Pack include 4 convenient vinyl packs with 3 files each	20
	70511T	3/8" LowPro 90	4,5	11/64		
	70503T	.325"	4,8	3/16		
	70505T	3/8" .404"	5,2	13/64		
	70502T	3/8" .404"	5,5	7/32		
Round File (3-pack blister)	Q70509C	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32	• High performance and long stay-sharp • Sharp teeth with smooth bite • Resists clogging	55
	Q70512C	3/8" LowPro 90	4,5	11/64		
	Q70508C	.325"	4,8	3/16		
	Q70507C	3/8" .404"	5,5	7/32		

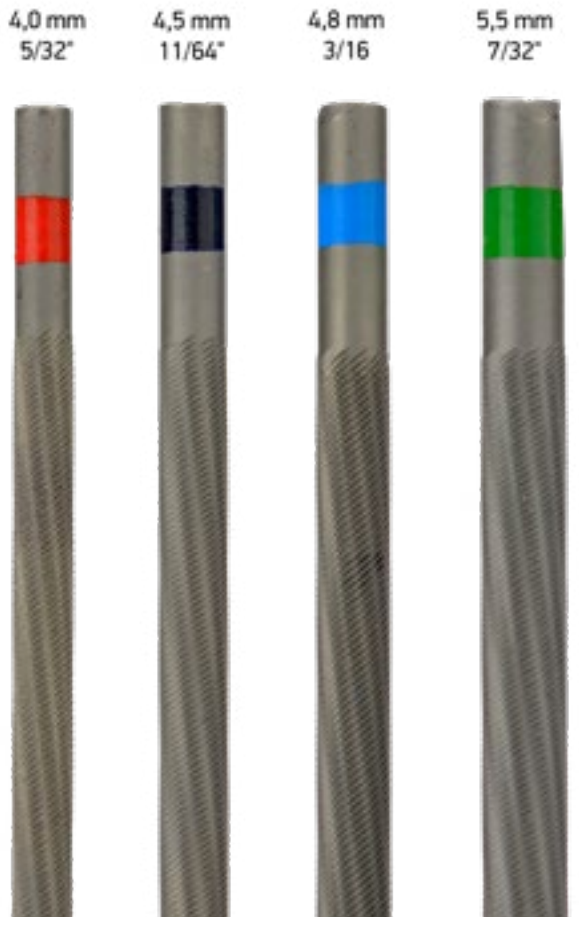

OREGON
A5
4,5 mm

PRODUCT NAME	OREGON	÷2	MM	INCH	SPECIFICATIONS	
FLAT FILES						
Flat File 12 pack	12211				• Agressive flat file for chain cutter depth gauge maintenance • For use in combination with an Oregon depth gauge tool • Superior performance and long stay-sharp • Sharp teeth with smooth bite • 12/box • Swiss-made	25
DEPTH GAUGE TOOLS						
	27530	1/4" .325" LowPro 3/8" LowPro 90-91 .325"	0,63	.025	• Makes accurate and consistent depth gauge setting easy for safety and performance • 22291 (10-pack)	20
	22291	.404"	0,76	.030		
WOODEN FILE HANDLE						
	534370				• Fits round and flat files	240
FILE HOLDERS						
	Q16265C	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32	• Grips file securely and keeps it at the correct depth • Lines on the frame for easy file alignment	20
	Q29192C	3/8" LowPro 90	4,5	11/64		
	Q18228C	.325"	4,8	3/16		
	Q13252C	3/8" .404"	5,5	7/32		

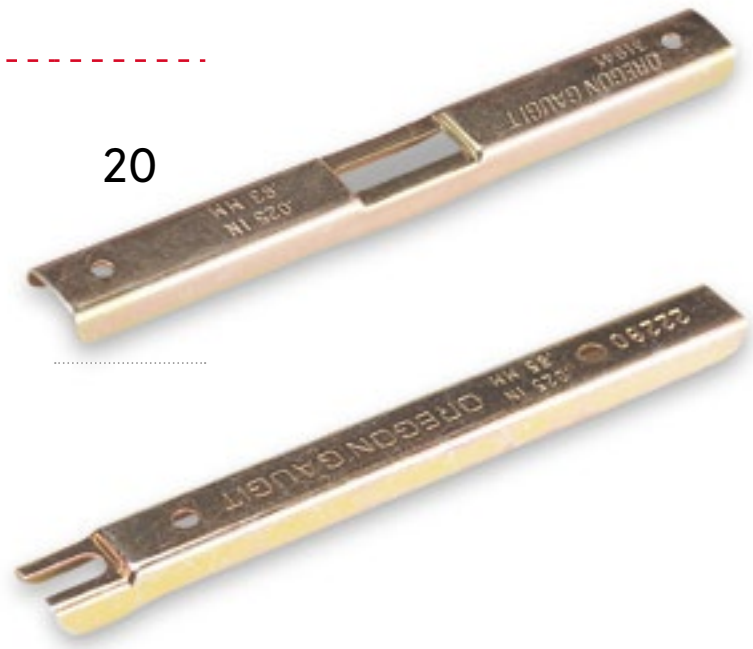

SHARPENING KITS

PRODUCT NAME	OREGON	÷2	MM	INCH	SPECIFICATIONS	
Display Pack	**Q90405**	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32	• Kits include: • Fully assembled file guide with file and wooden handle for chain top-plate maintenance • Assembled wooden handle and flat file and one depth gauge tool for chain depth gauge maintenance. • Bar groove cleaner to clean guide bars groove and oil holes • .025" depth gauge tool • 90406 Kit includes the .030" depth gauge tool	16
	Q105860	3/8" LowPro 90	4,5	11/64		
	Q90407	.325"	4,8	3/16		
	Q90404	3/8"	5,5	7/32		
	90406	.404" (26, 27X/R)	5,5	7/32		
Pouch	**558488**	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32	• Easy-to-carry rolled-up pouch • Highly visible red colour • Easy to attach on waist belt • Pouch includes: • Bar, chain and file measuring tool • User manual • Fully assembled file guide with file and wooden handle for chain top-plate maintenance • Assembled wooden handle and flat file and one depth gauge tool for chain depth gauge maintenance. • Bar groove cleaner to clean guide bars groove and oil holes • .025" depth gauge tool	16
	558549	3/8" LowPro 90	4,5	11/64		
	558550	.325"	4,8	3/16		
	558551	3/8"	5,5	7/32		

OREGON
OREGON

OREGON
OregonProducts.com
OREGON
OREGON
OREGON

ELECTRIC SURE SHARP

PRODUCT NAME	OREGON	÷2	MM	INCH	SPECIFICATIONS	
12V Grinder	**585015**	1/4" .325" LowPro 3/8" LowPro 91 3/8" LowPro 90 .325" 3/8" .404"			• Fast grinding • Runs on standard 12-Volt auto-type battery or using cigarette lighter plug • Includes 4 sizes of grinding stones (4.0 mm, 4.5 mm, 4.8 mm and 5.5 mm) • Includes battery clips and collet wrench • Spindle lock for easy stone replacement • 5-meter long power cord	6
Grinding stones 3 pack	**31397**	1/4" .325" LowPro 3/8" LowPro 91	4,0	5/32	• Fits 585015 Sure Sharp grinder	10
	32628	3/8" LowPro 90	4,5	11/64		
	31396	.325"	4,8	3/16		
	31398	3/8" .404"	5,5	7/32		

MAGNETIC FILE ANGLE PLATES

	90610				• Attaches to the guide bar with two integrated magnets • Lines on the plate help to align the file correctly • 90610 has 25° angle marks on one side and 30° angle marks on the other • 90610A has 30° and 35° angle marks	1
	90610A					

PRODUCT NAME	OREGON	SPECIFICATIONS	
FILING CLAMP	26368A	• To be secured on a wood stump for for easy and precise chain maintenance	12
FILING GUIDE	557849	• Easy to install on the saw guide bar with the chain in place • For accurate and consistent sharpening • File not included	6

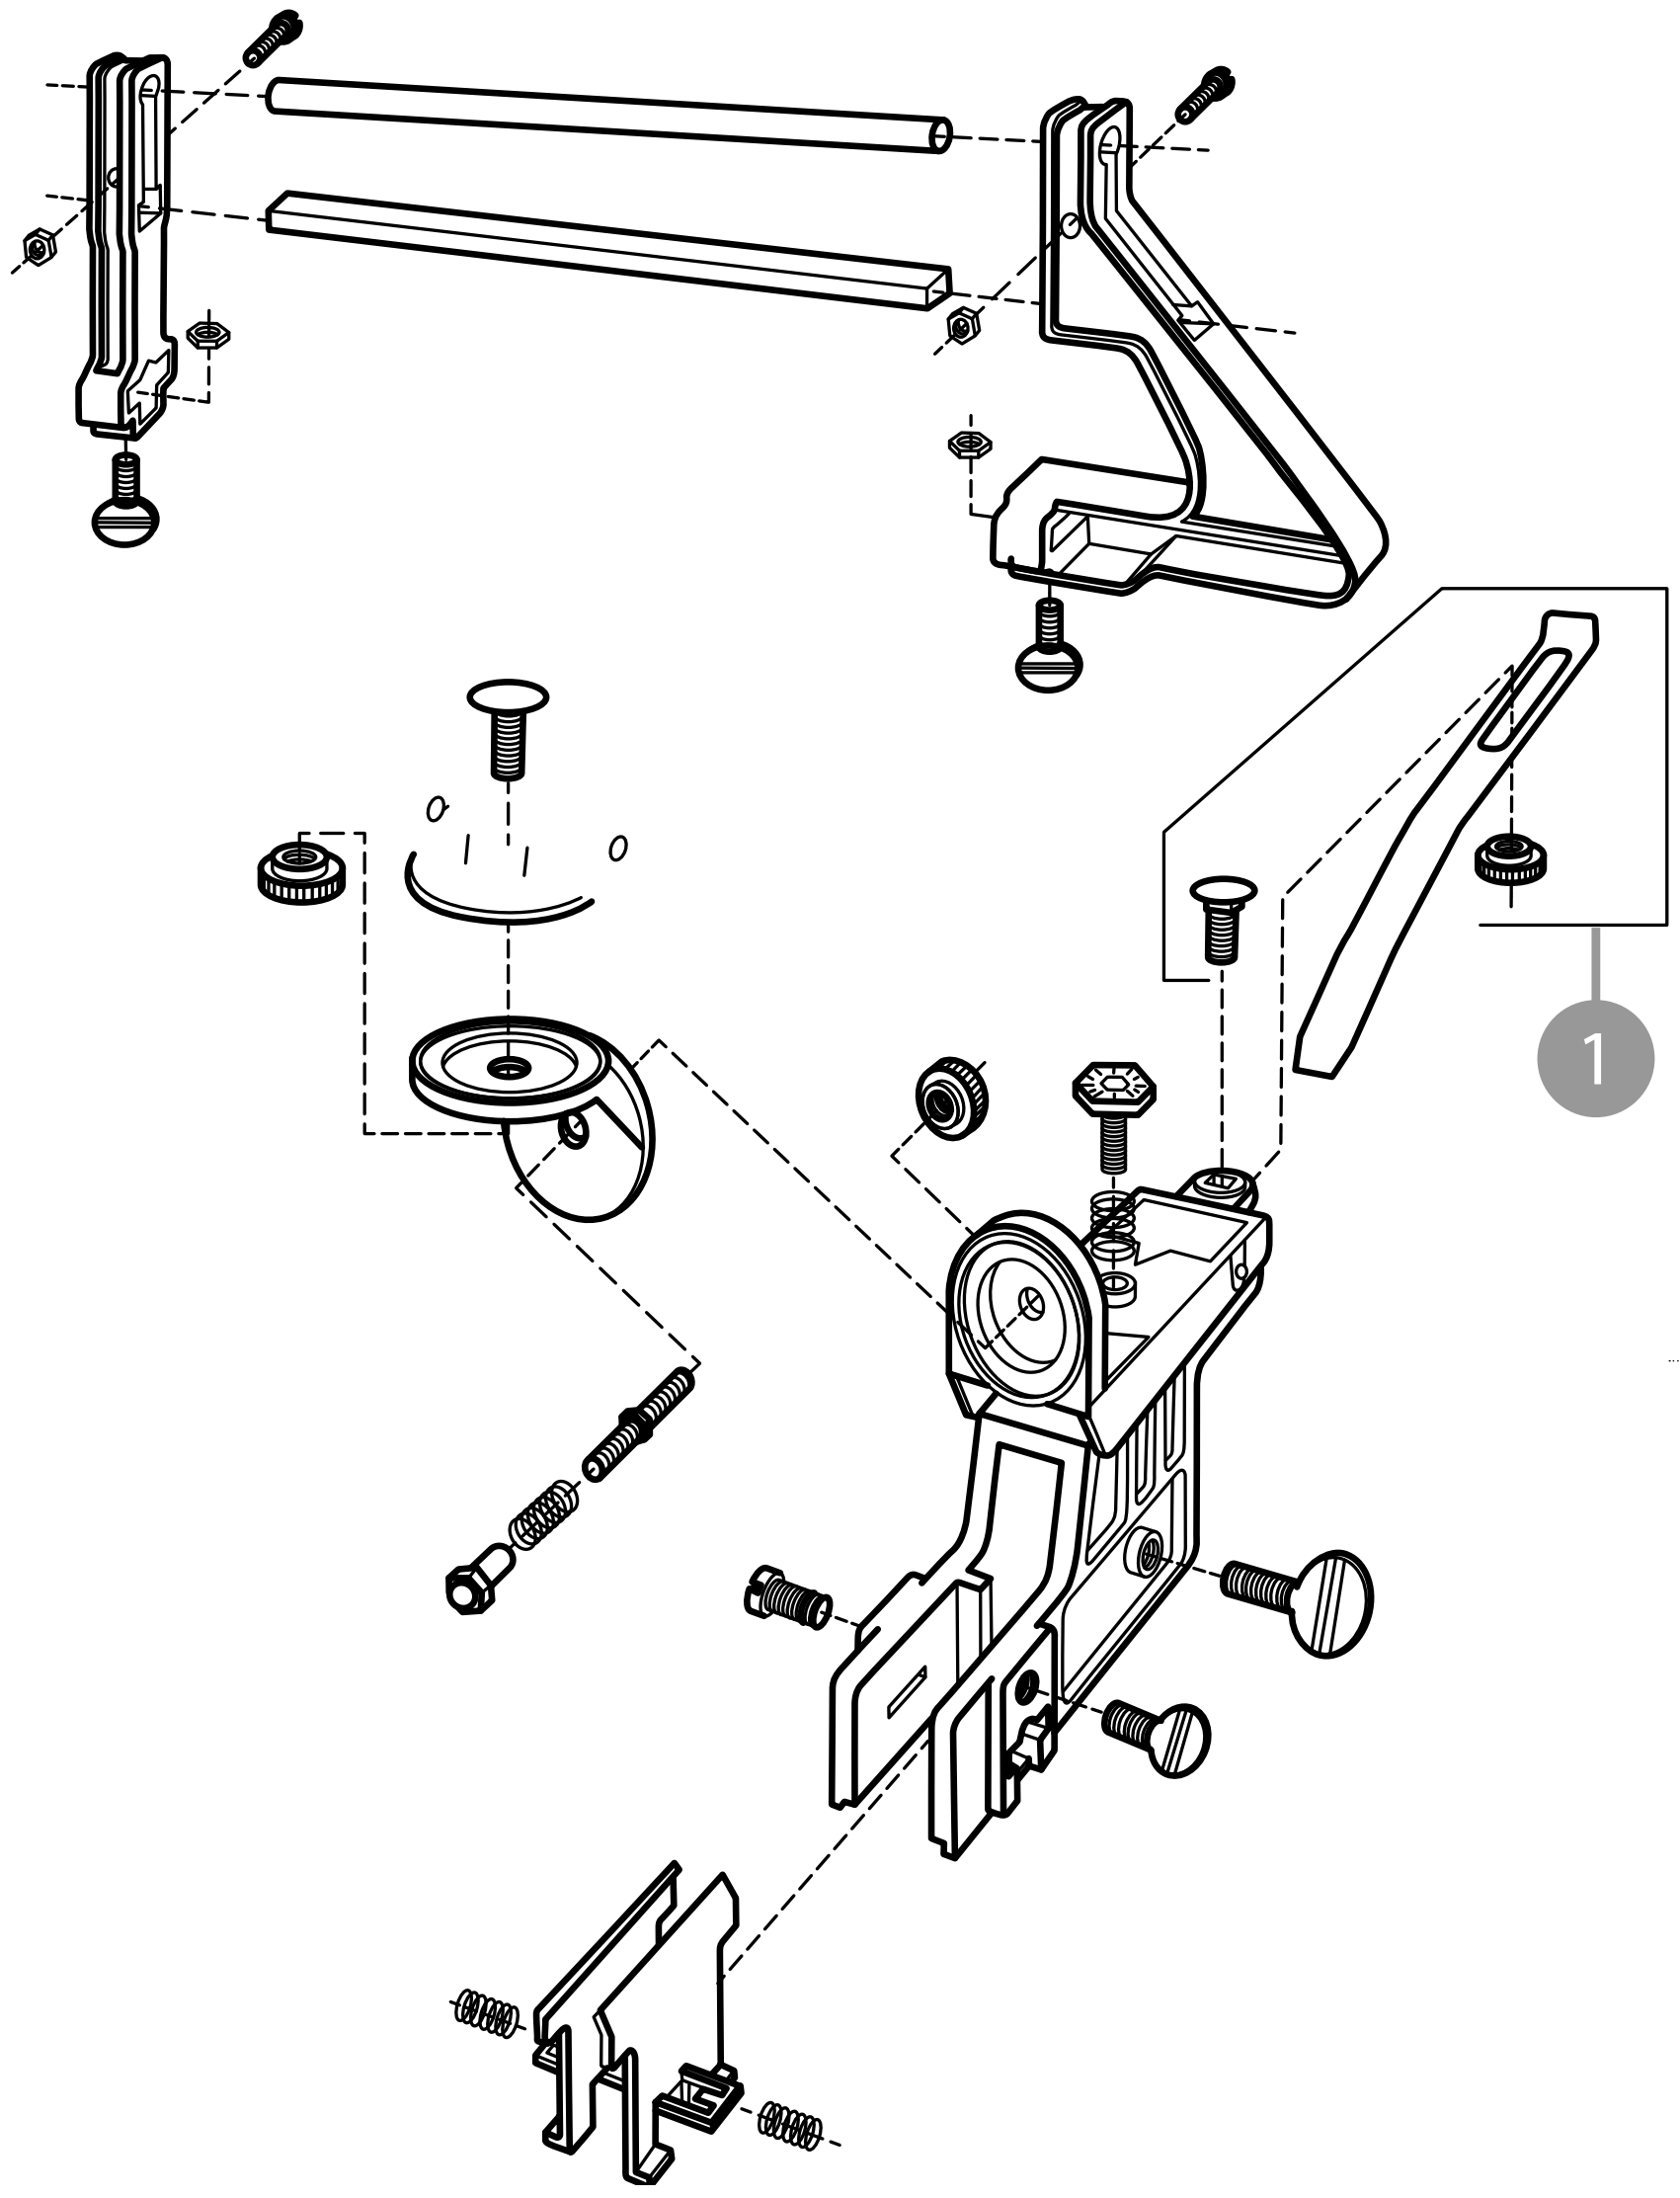

N°	DESCRIPTION	OREGON
1	STOP-SPRING KIT	39495

PRODUCT NAME	OREGON	SPECIFICATIONS	📦

CHAIN MEASURING TOOL

Pocket-size Chain measuring tool	556418	Pocket-sized gauge for quick and easy identification. Measures the following: A. Chain pitch B. Chain gauge C. Bar groove width D. File size	50

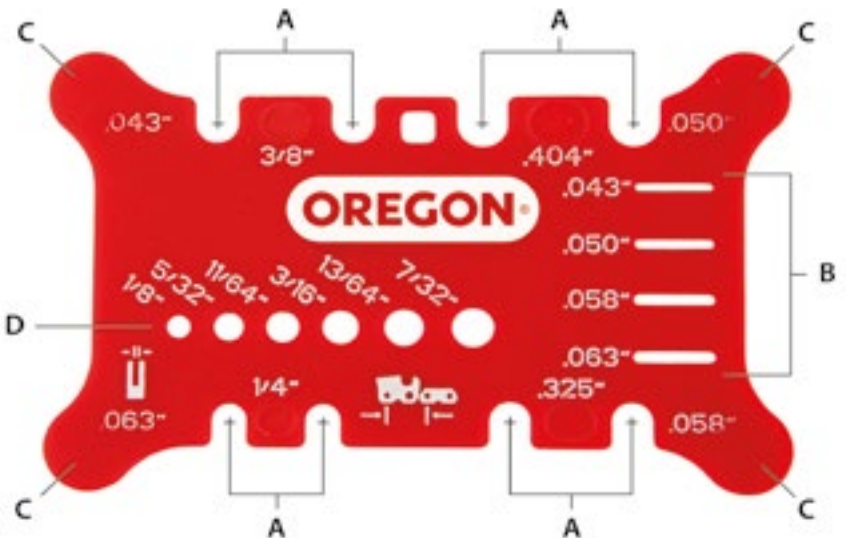
C
A
A
C
.043"
.050"
3/8"
.404"
OREGON
.043"
.050"
.058"
.063"
.325"
B
D
5/32"
1/8"
11/64"
3/16"
13/64"
7/32"
1/4"
.063"
.058"
C
A
A
C

GREASE GUN

Grease gun	21939	- To grease bar noses - Reduces friction and enhances performance in a variety of chainsaw applications - Helps prevent premature wear 	250
Grease gun and grease sachet (blister pack)	90484		20
Red fluid grease sachet	90476		100

OREGON
90484
Grease Gun
Pompe à graisse
Fettpresse
Fettspruta
Engrasador
OREGON
Red Fluid Grease

OREGON
50ml
Red Fluid Grease
90476
OregonProducts.com

BAR GROOVE CLEANER

	13616	- Cleans bar grooves and oil holes	300

BAR COVERS

	38614	- 35 cm - Protects chain and bar from damage and accidental contact	48
	28934	- 40 cm - Protects chain and bar from damage and accidental contact	24
	28933	- 50 cm - Protects chain and bar from damage and accidental contact	24

PRODUCT NAME	OREGON	÷2	MM	INCH	SPECIFICATIONS	

CHAIN GRINDERS

Compact Bench grinder	590181	1/4", .325" LowPro 3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404"	1,1 mm ▼ 2,0 mm	.043" ▼ .08"	• Single phase, direct-drive, one way, 230V-AC, 50 Hz, 85 watt • Manual chain clamping vise • Ideal for chainsaw owners and small workshops • Includes two grinding wheels (3,2 mm and 4,7mm) • Net weight 2 kg	6

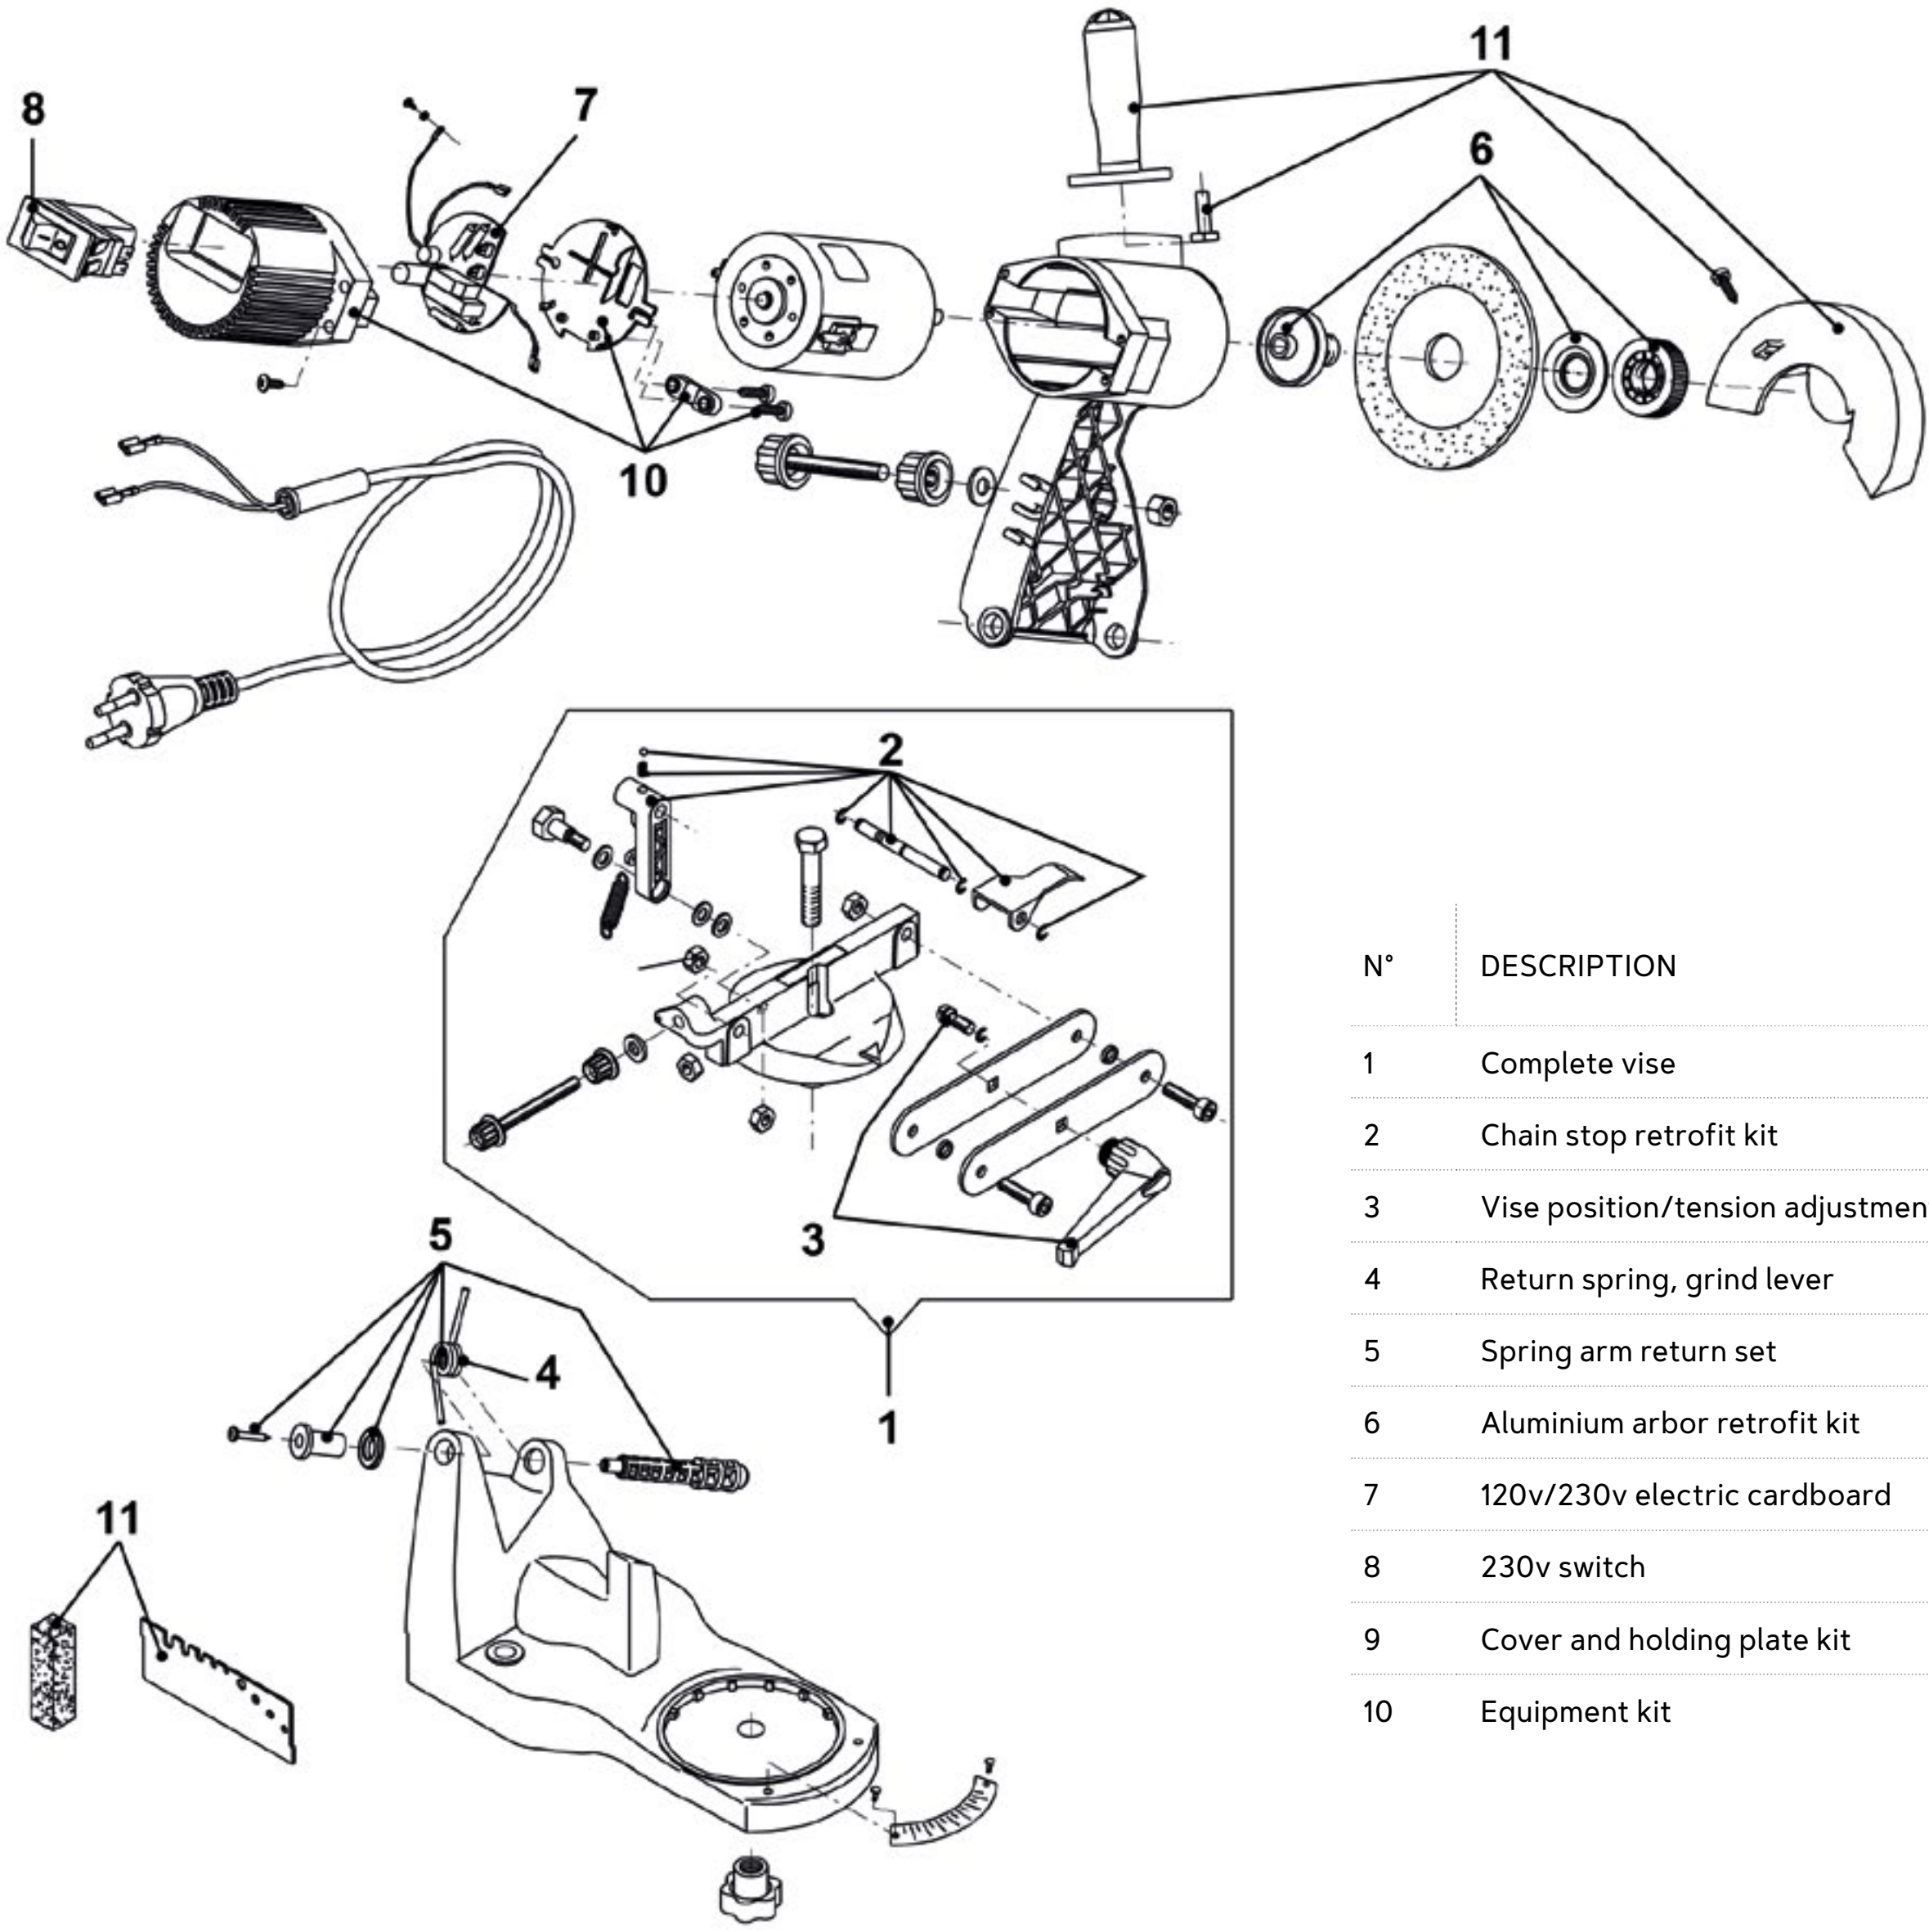

N°	DESCRIPTION	OREGON
1	Complete vise	108476
2	Chain stop retrofit kit	110579
3	Vise position/tension adjustment knob	109171
4	Return spring, grind lever	109175
5	Spring arm return set	537888
6	Aluminium arbor retrofit kit	111941
7	120v/230v electric cardboard	519971
8	230v switch	295387A
9	Cover and holding plate kit	111014
10	Equipment kit	554650

PRODUCT NAME	OREGON	÷2	MM	INCH	SPECIFICATIONS	
Professional Compact Bench Grinder	410-230	1/4", .325" LowPro 3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404"	1,1 mm ▼ 2,0 mm	.043" ▼ .08"	• Single phase, direct-drive, one way, 230V-AC, 50 Hz, 214 Watt • Sharpens up to .404" pitch chain • Manual chain clamping vise • Includes three grinding wheels (3,2mm, 4,7mm, 8 mm) • Easy to use adjustments • Built-in light and one-way motor rotation for safe operation • 7,3 kgs weight and 41 cm height.	4

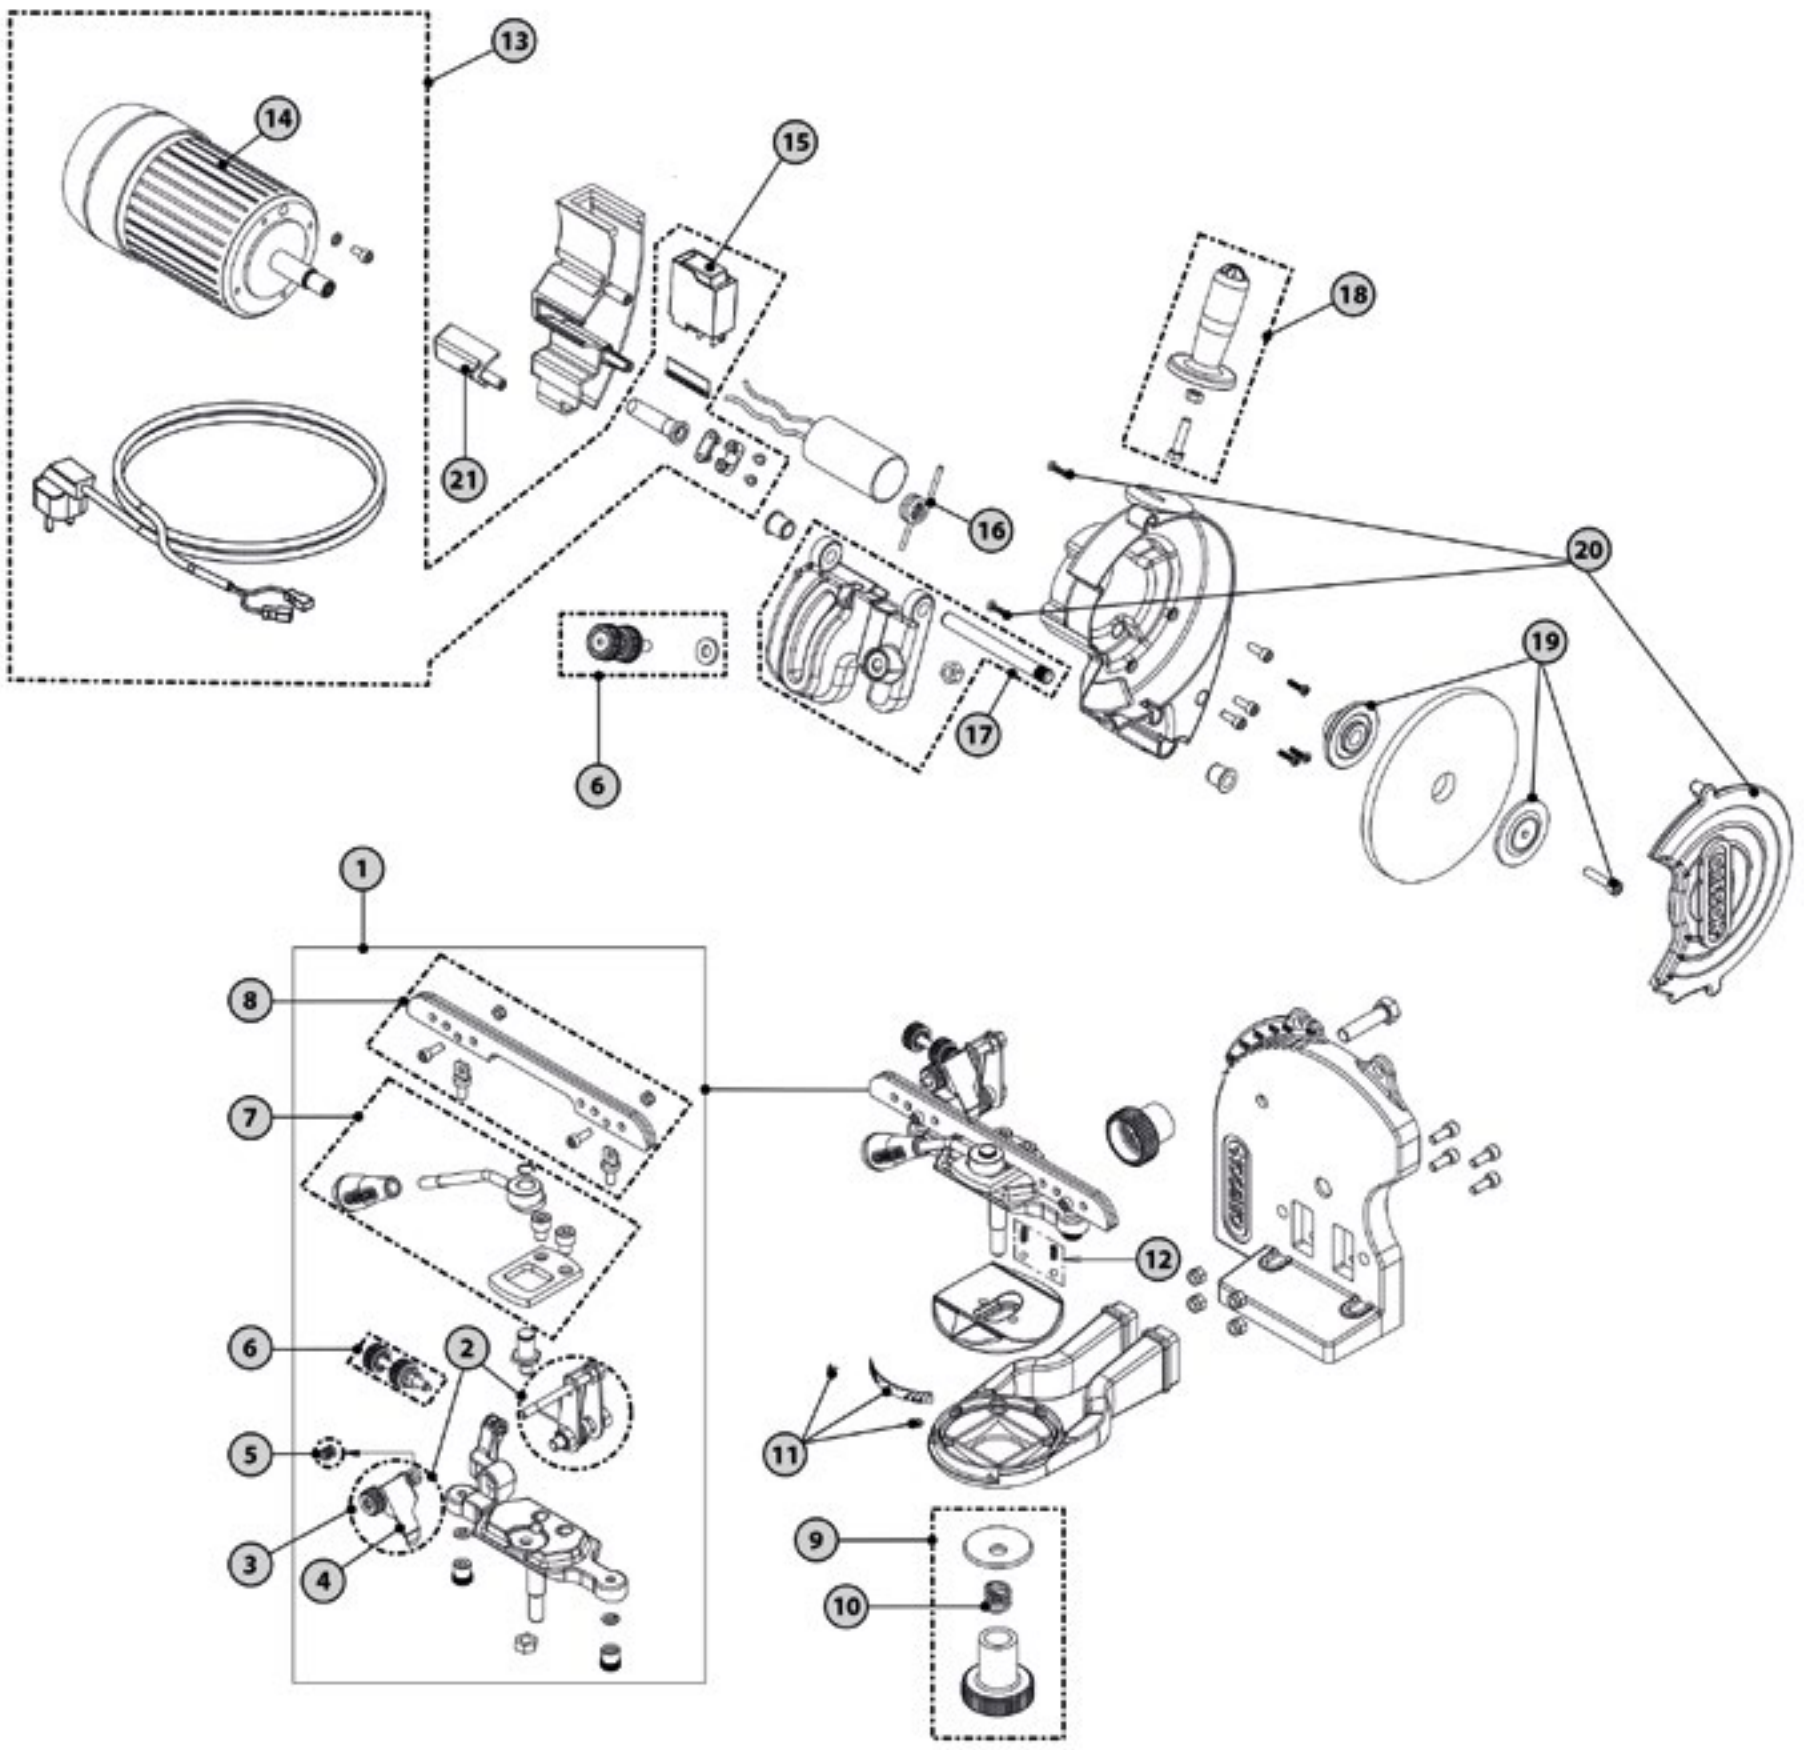

N°	DESCRIPTION	OREGON
1	Complete vise assembly	572119
2	Chain hold kit	537411
3	Chain stop vise assembly	522688
4	Chain stop (5 pk)	32677
5	Pawl center spring kit (5 pk)	32681
6	Adjustment knobs kit	572522
7	Lever vise assembly chain locking	572202
8	Vise jaws	572203
9	Vise locking kit	572524
10	Spring	35590
11	Scales	572525
12	Spring and ball kit	32678
13	E-motor, switch, cables kit	581321
14	End motor cap	572526
15	Switch 230v (new type)	295387A
16	Spring arm return	572527
17	Bracket arm support	572529
18	Handle kit	105538
19	Motor flange kit	537409
20	Metal shield	572528
21	Led light and cover	582332

PRODUCT NAME		÷2	MM	INCH	SPECIFICATIONS	
Professional Bench Grinder	520-230	1/4", .325" LowPro 3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404"	1,1 mm ▼ 2,0 mm	.043" ▼ .08"	• Single phase, direct-drive, one way, 230V-AC, 50 Hz, 214 Watt • Sharpens up to .404" pitch chain (for 3/4" chain, use Oregon 571887 adaptor kit) • Manual chain clamping vise • Forward/aft sliding vise for a perfect centering and accurate grinding • Includes three grinding wheels (3,2mm, 4,7mm, 8 mm) • Easy to use adjustments • One-way motor rotation for safe operation • Built-in light for better visibility • 7,3 kgs weight and 41 cm height (3/4 pitch adaptor kit for 520-230 not included)	4
	571887	3/4"		.122"	• 3/4" adaptor kit for bench grinder 520-320	

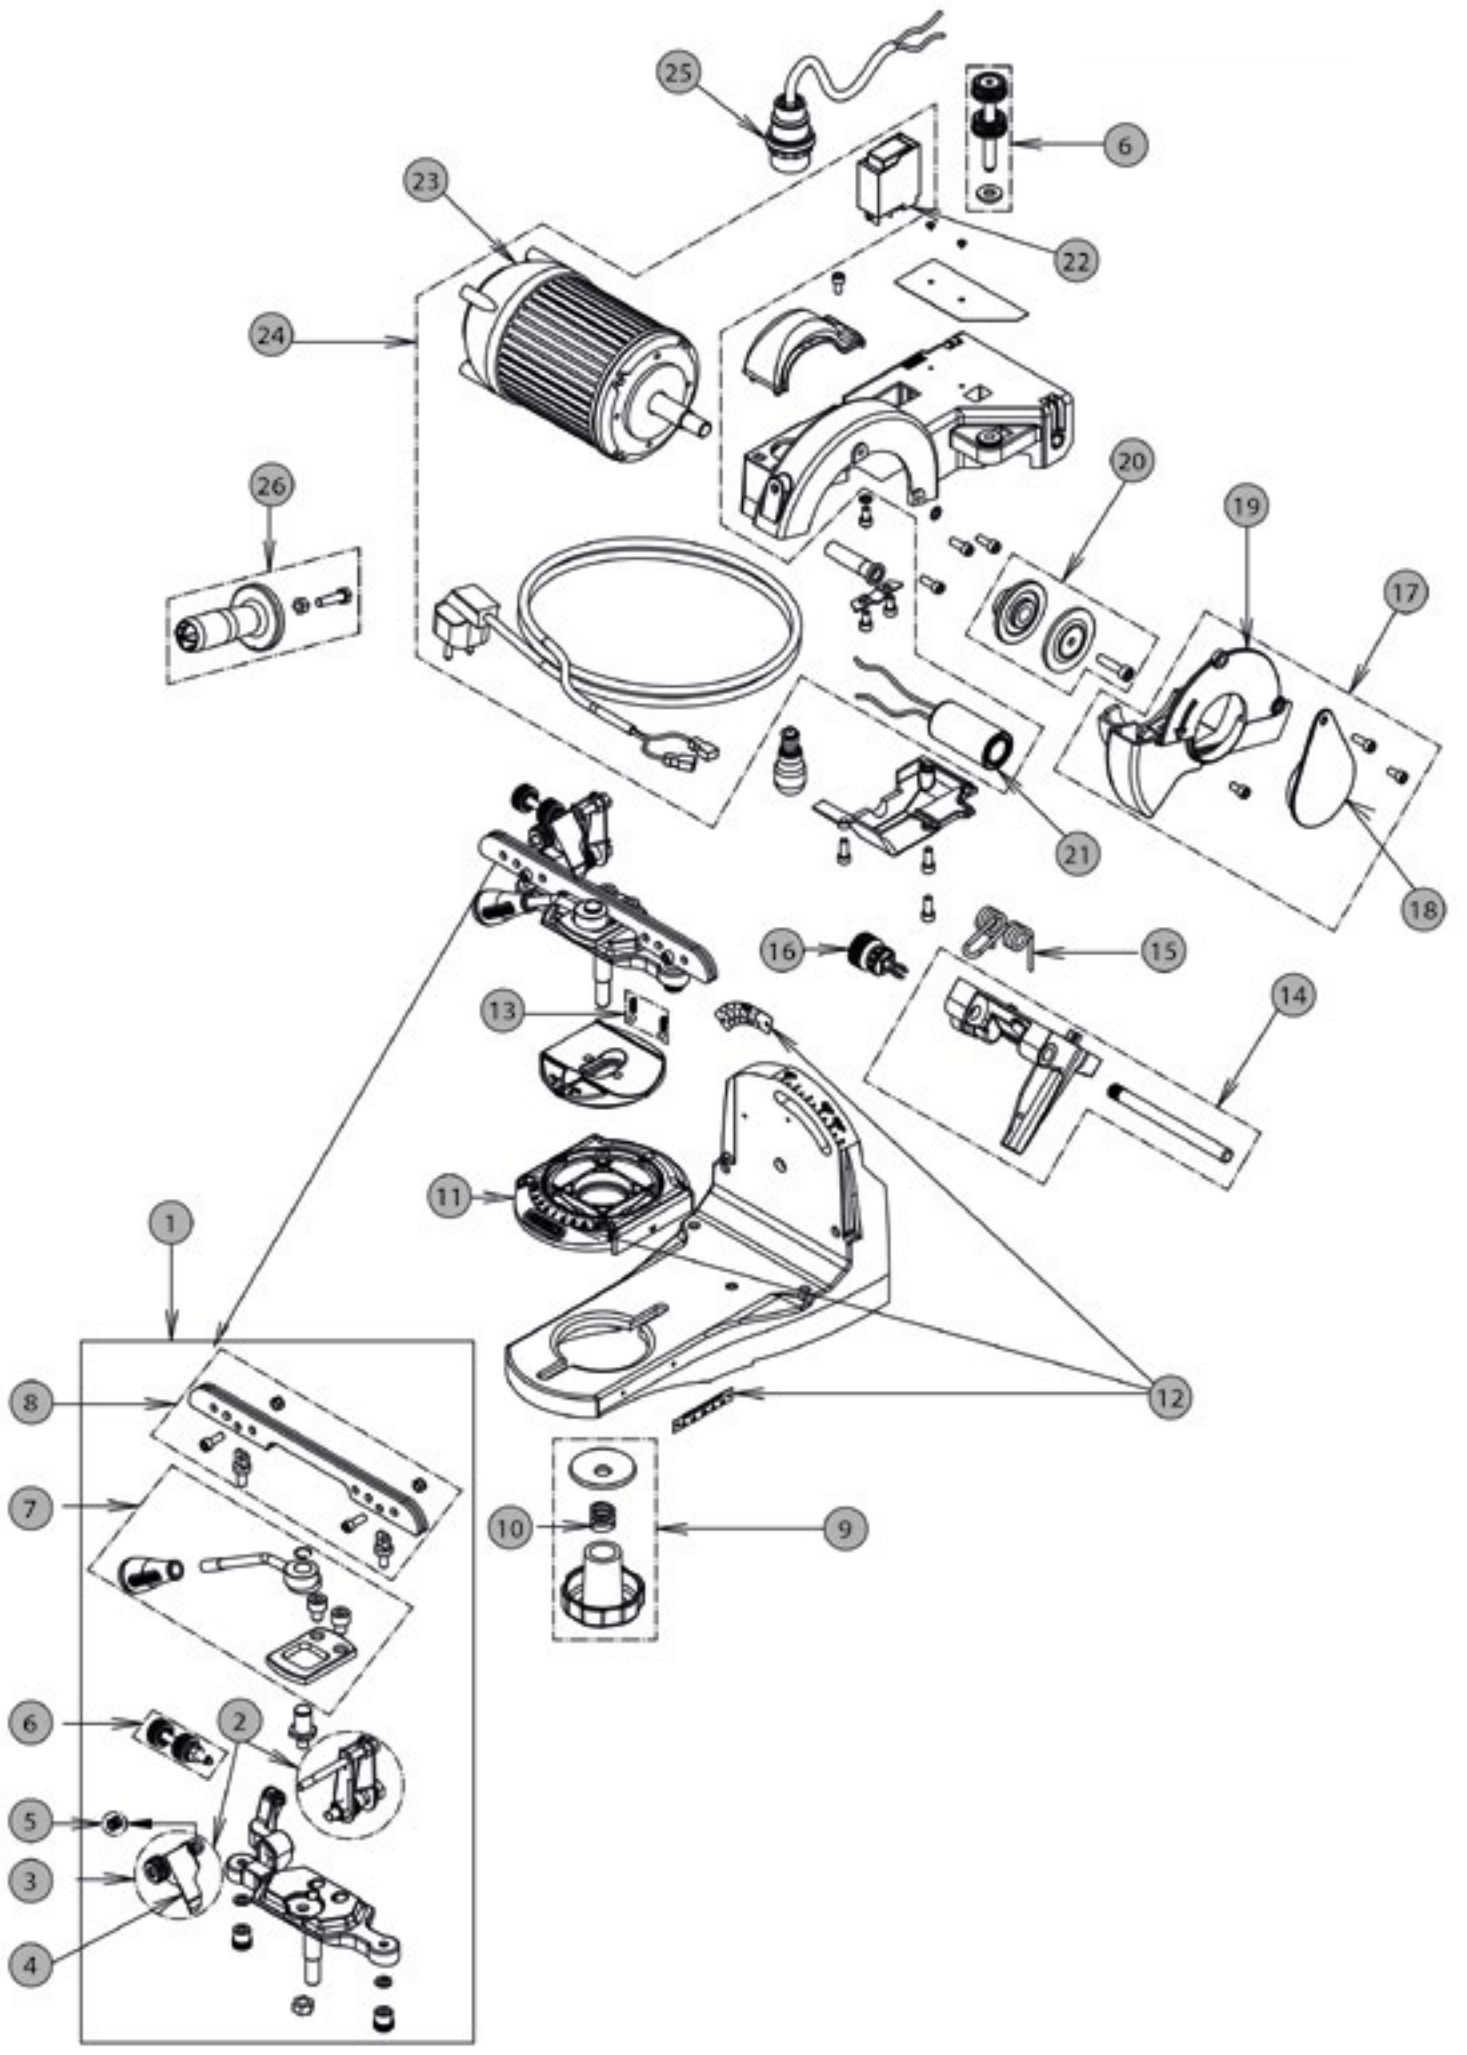

N°	DESCRIPTION	OREGON
1	Complete vise assembly	572119
2	Chain hold kit	537411
3	Chain stop vise assembly	522688
4	Chain stop	32677
5	Pawl center spring kit	32681
6	Adjustment knobs kit	537412
7	Lever vise assembly chain locking	572202
8	Vise jaws	572203
9	Vise locking kit	537413
10	Spring	35590
11	Sliding support	522685
12	Scales kit	537410
13	Spring and ball kit	32678
14	Bracket arm support	522649
15	Spring arm return	522651
16	Safety pin	522670
17	Shield wheel protector	554651
18	Shield kit	105654
19	Metal shield	109248
20	Motor flange kit	537409
21	Capacitor	295386A
22	Switch	295387A
23	End motor cap	37947
24	Complete electrical assembly	581054
25	Light socket	108505
26	Handle kit	105538

PRODUCT NAME	OREGON	÷2	MM	INCH	SPECIFICATIONS	
Professional Hydraulic assist Bench Grinder	620-230	1/4", .325" LowPro 3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404" 3/4"	1,1 mm ▼ 3,1 mm	.043" ▼ .122"	• Single phase, direct-drive, one way, 230V-AC, 50 Hz, 214 Watt • Hydraulic assist for hands-free automatic vise clamping • Delivers precision and accuracy on all chain pitches up to 3/4" • Wide clamping area and clear markings for easy adustments • Includes three grinding wheels (3.2mm, 4.7mm, 8 mm) • Built-in 15 watt light for better visibility • 7,7 kg weight and 48 cm height	1

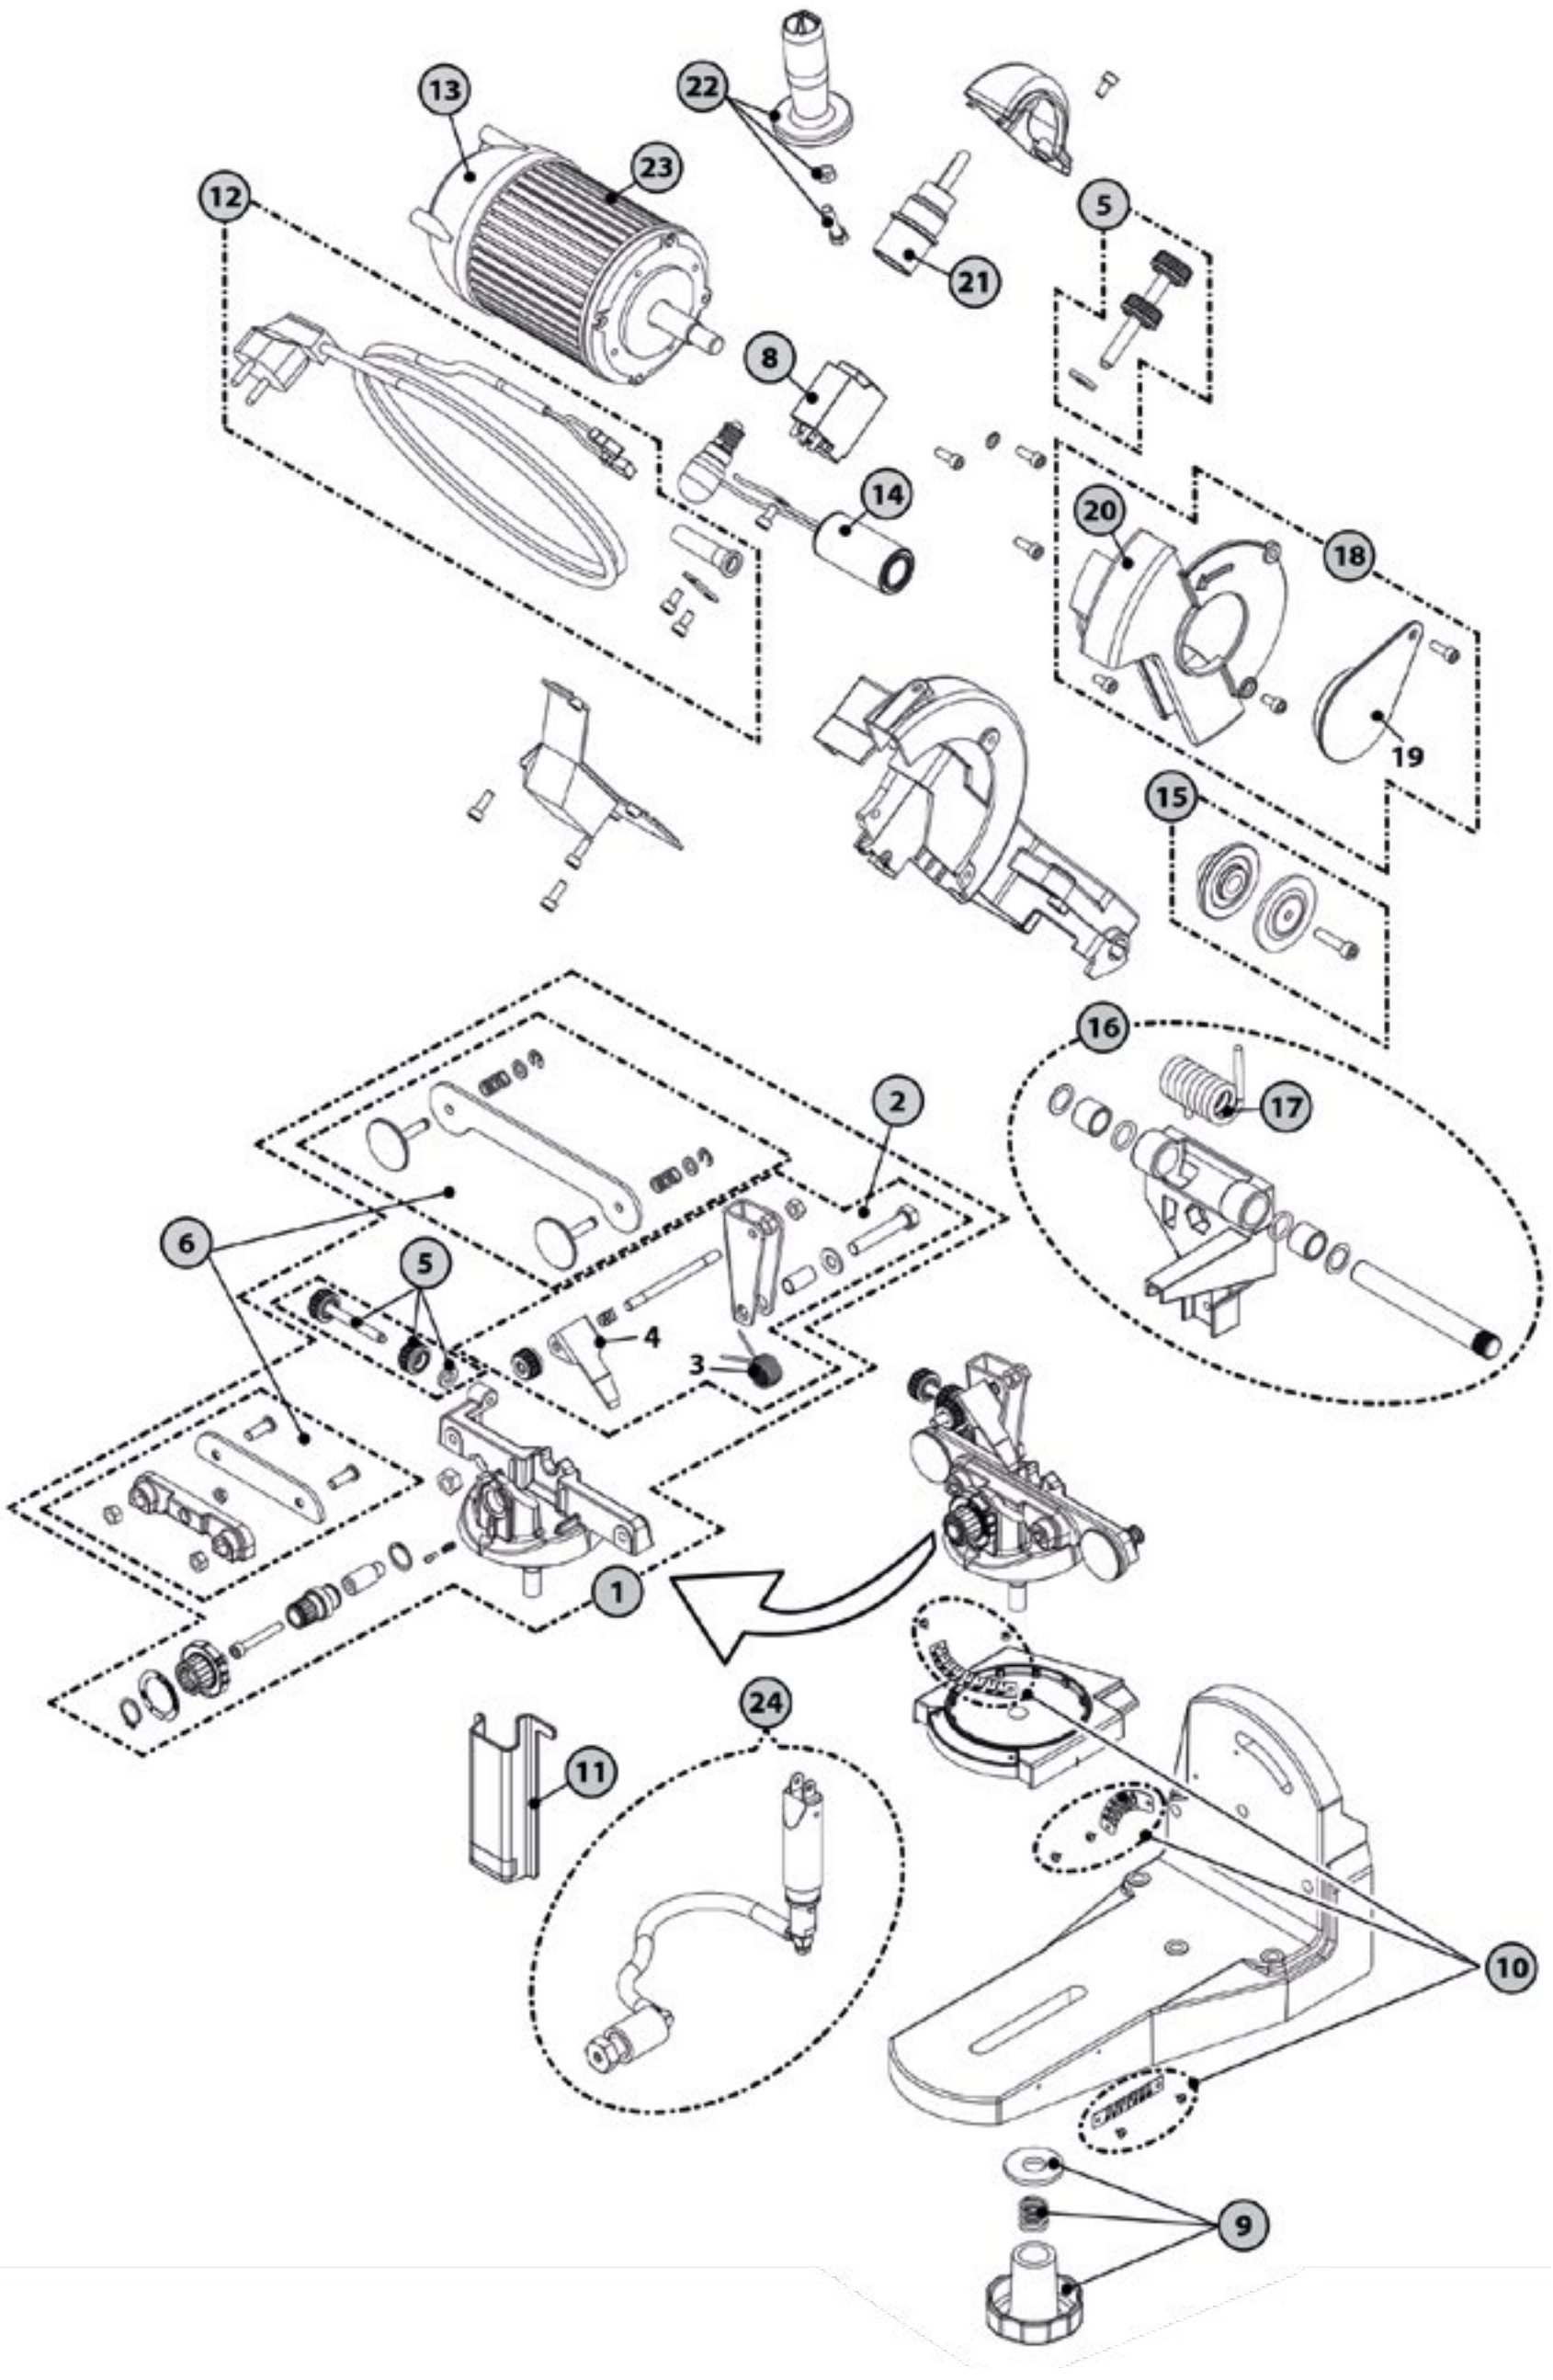

N°	DESCRIPTION	OREGON
1	Vise support	546949
2	Vise adjust. Spring	546945
3	Chain stop spring	35606
4	Longer pawl	546948
5	Adjustment knobs, kit	537412
6	Complete vise kit	546947
7	Switch 230v	295387A
8	Vise locking kit	537413
9	Scales kit	537410
10	Cylinder protection	546952
11	Cable kit complete with plug - 230v	295389A
12	End motor cap	37947
13	Capacitor 230v	295386A
14	Motor flange kit (outer and inner)	537409
15	Arm support assembly	546951
16	Head return spring	546946
17	Shield wheel protector	554651
18	Shield kit	105654
19	Metal shield	109248
20	Light socket e14 w/wires - 230v	108505
21	Handle kit	105538
22	E-motor 230v	295388A
23	Complete hydraulic a.Bly	546950

105MM GRINDING WHEELS

PRODUCT NAME	OREGON		MM			SPECIFICATIONS	
5-pack	106547P	1/4" .325" LowPro 3/8" LowPro 90 3/8" LowPro 91	105	22,2	3,2	• Resists burning of the cutters and leaves a precision finish • Suitable for Oregon 590181 Compact Bench Grinder • Grinding wheel 106547P can also be used for 325" pitch chain as an alternative	5
4-pack	106548P	.325" 3/8" .404"	105	22,2	4,7		
3-pack	106549P	All*	105	22,2	6		

***DEPTH GAUGE GRIND ONLY**

OREGON
106547
31A60J7V86
EN 12413
Max 50 m /s Max 9100 rpm
GRINDING WHEEL
105 x 3.2 x 22.2mm
(4-1/8'' x 1/8'' x 7/8'')

145MM GRINDING WHEELS

PRODUCT NAME	OREGON	÷2	MM			SPECIFICATIONS	
5-pack	**32659P**	1/4" .325" LowPro 3/8" LowPro 90 3/8" LowPro 91	145	22,3	3,2	• High quality corundrum (Aluminium oxide) grinding wheels • Medium density for "lightly" damaged chains • Resists burning of the cutters and leaves a precision finish • Suitable for Oregon 620-230, 520-230 and 410-230 chain grinders • Grinding wheel 32659P can also be used for 325" pitch chain as an alternative	5
4-pack	**32660P**	.325" 3/8" .404"	145	22,3	4,7		
3-pack	**32661P**	All*	145	22,3	6		
1-pack	**OR534-516**	3/4"	145	22,3	7,9		

***DEPTH GAUGE GRIND ONLY**

OREGON
32659P
31A60J7V86
EN 12413
OregonProducts.com
Max 50 m /s Max 9100 rpm
GRINDING WHEEL
5¾" x 3/16" x 7/8"
145 mm x 4.8 mm x 22.3 mm

CHAIN BREAKER

PRODUCT NAME	OREGON	÷2		SPECIFICATIONS	
Chain breaker	24548B	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404"	1,1 mm ▼ 2,0 mm	• Complete product including punch 38594 and anvil 111939 • Easy operating lever action and ergonomic handle	10
Punch	109644	1/4" 3/8" LowPro 90		• Punch for chain breaker 24548B	
	38594	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325", 3/8", .404"			
Anvil	111939	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325", 3/8", .404"		• Slotted anvil for chain breaker 24548B	1
	105530	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325", 3/8", .404"		• Adjustable anvil for chain breaker 24548B	

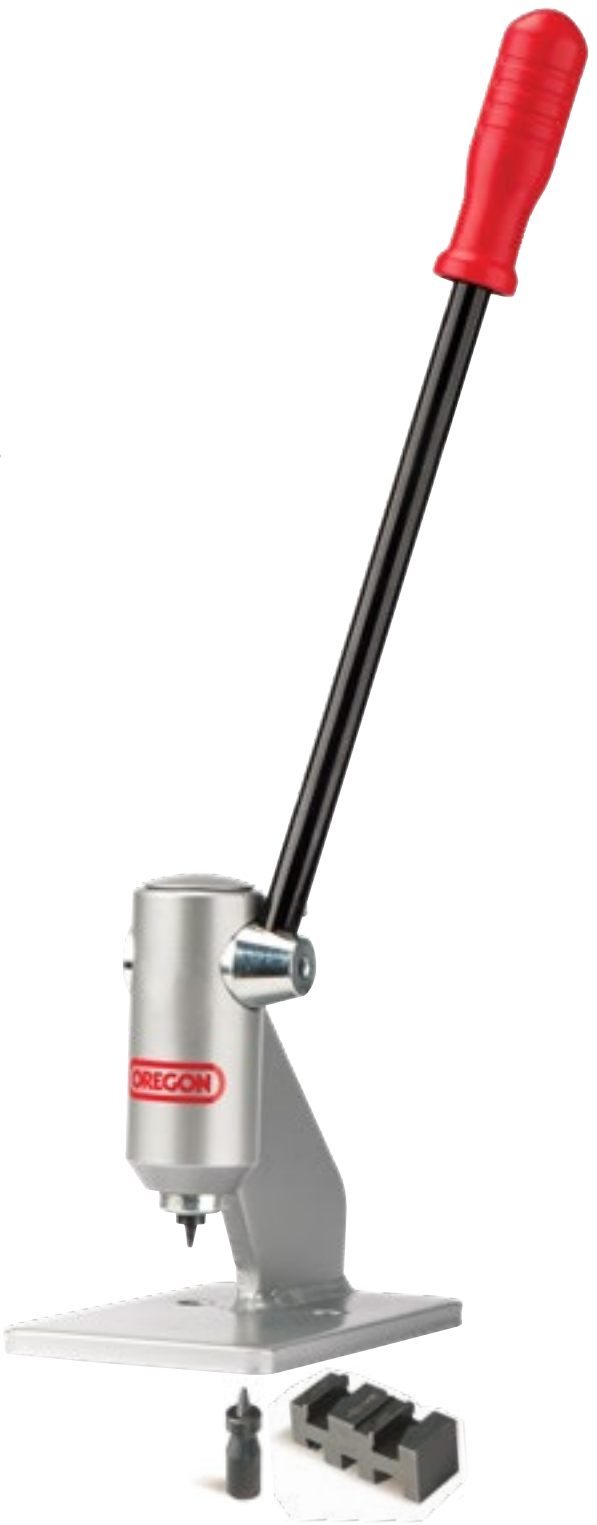

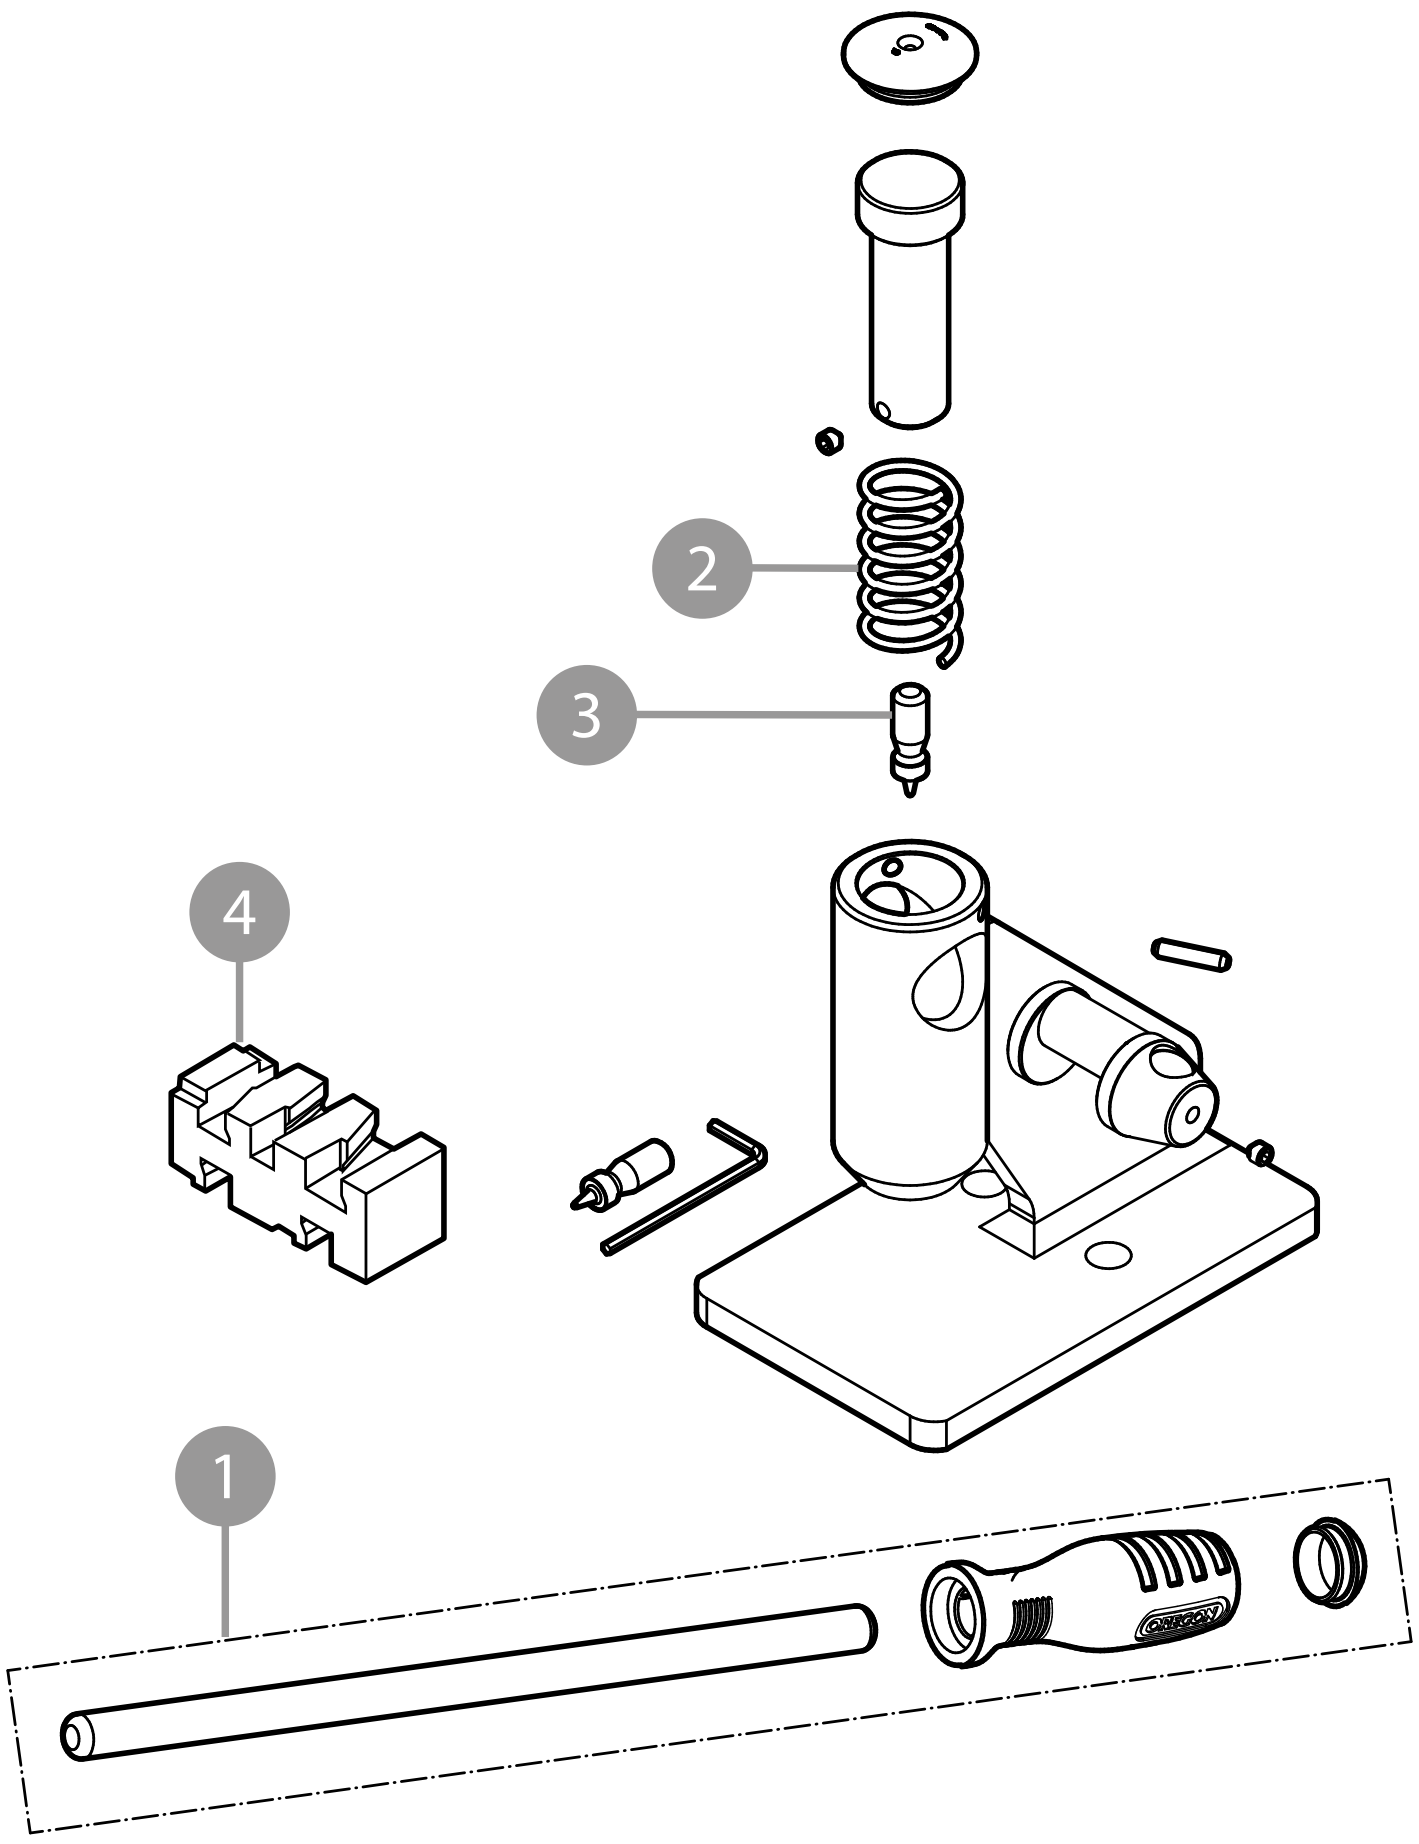

N°	DESCRIPTION	OREGON
1	Handle assembly	572121
2	Spring	38593
3	Standard punch	38594
4	5 Slots anvil	111939

PRODUCT NAME	OREGON	÷2		SPECIFICATIONS	

HEAVY-DUTY CHAIN BREAKER

Heavy-duty Chain breaker	24548-SI	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404" 3/4"	1,1 mm ▼ 3,1 mm	• Multi-purpose tool to break all chain pitches (including 3/4") • Can also be used to drive out bar nose rivets, including those on big 3/4" pitch harvester bars • Heavy-duty materials and top quality components for a long service time • Includes punches for all chain types • Anvils for 3/4" pitch chain (25049) and for harvester bar noses (505033) must be purchased separately	1

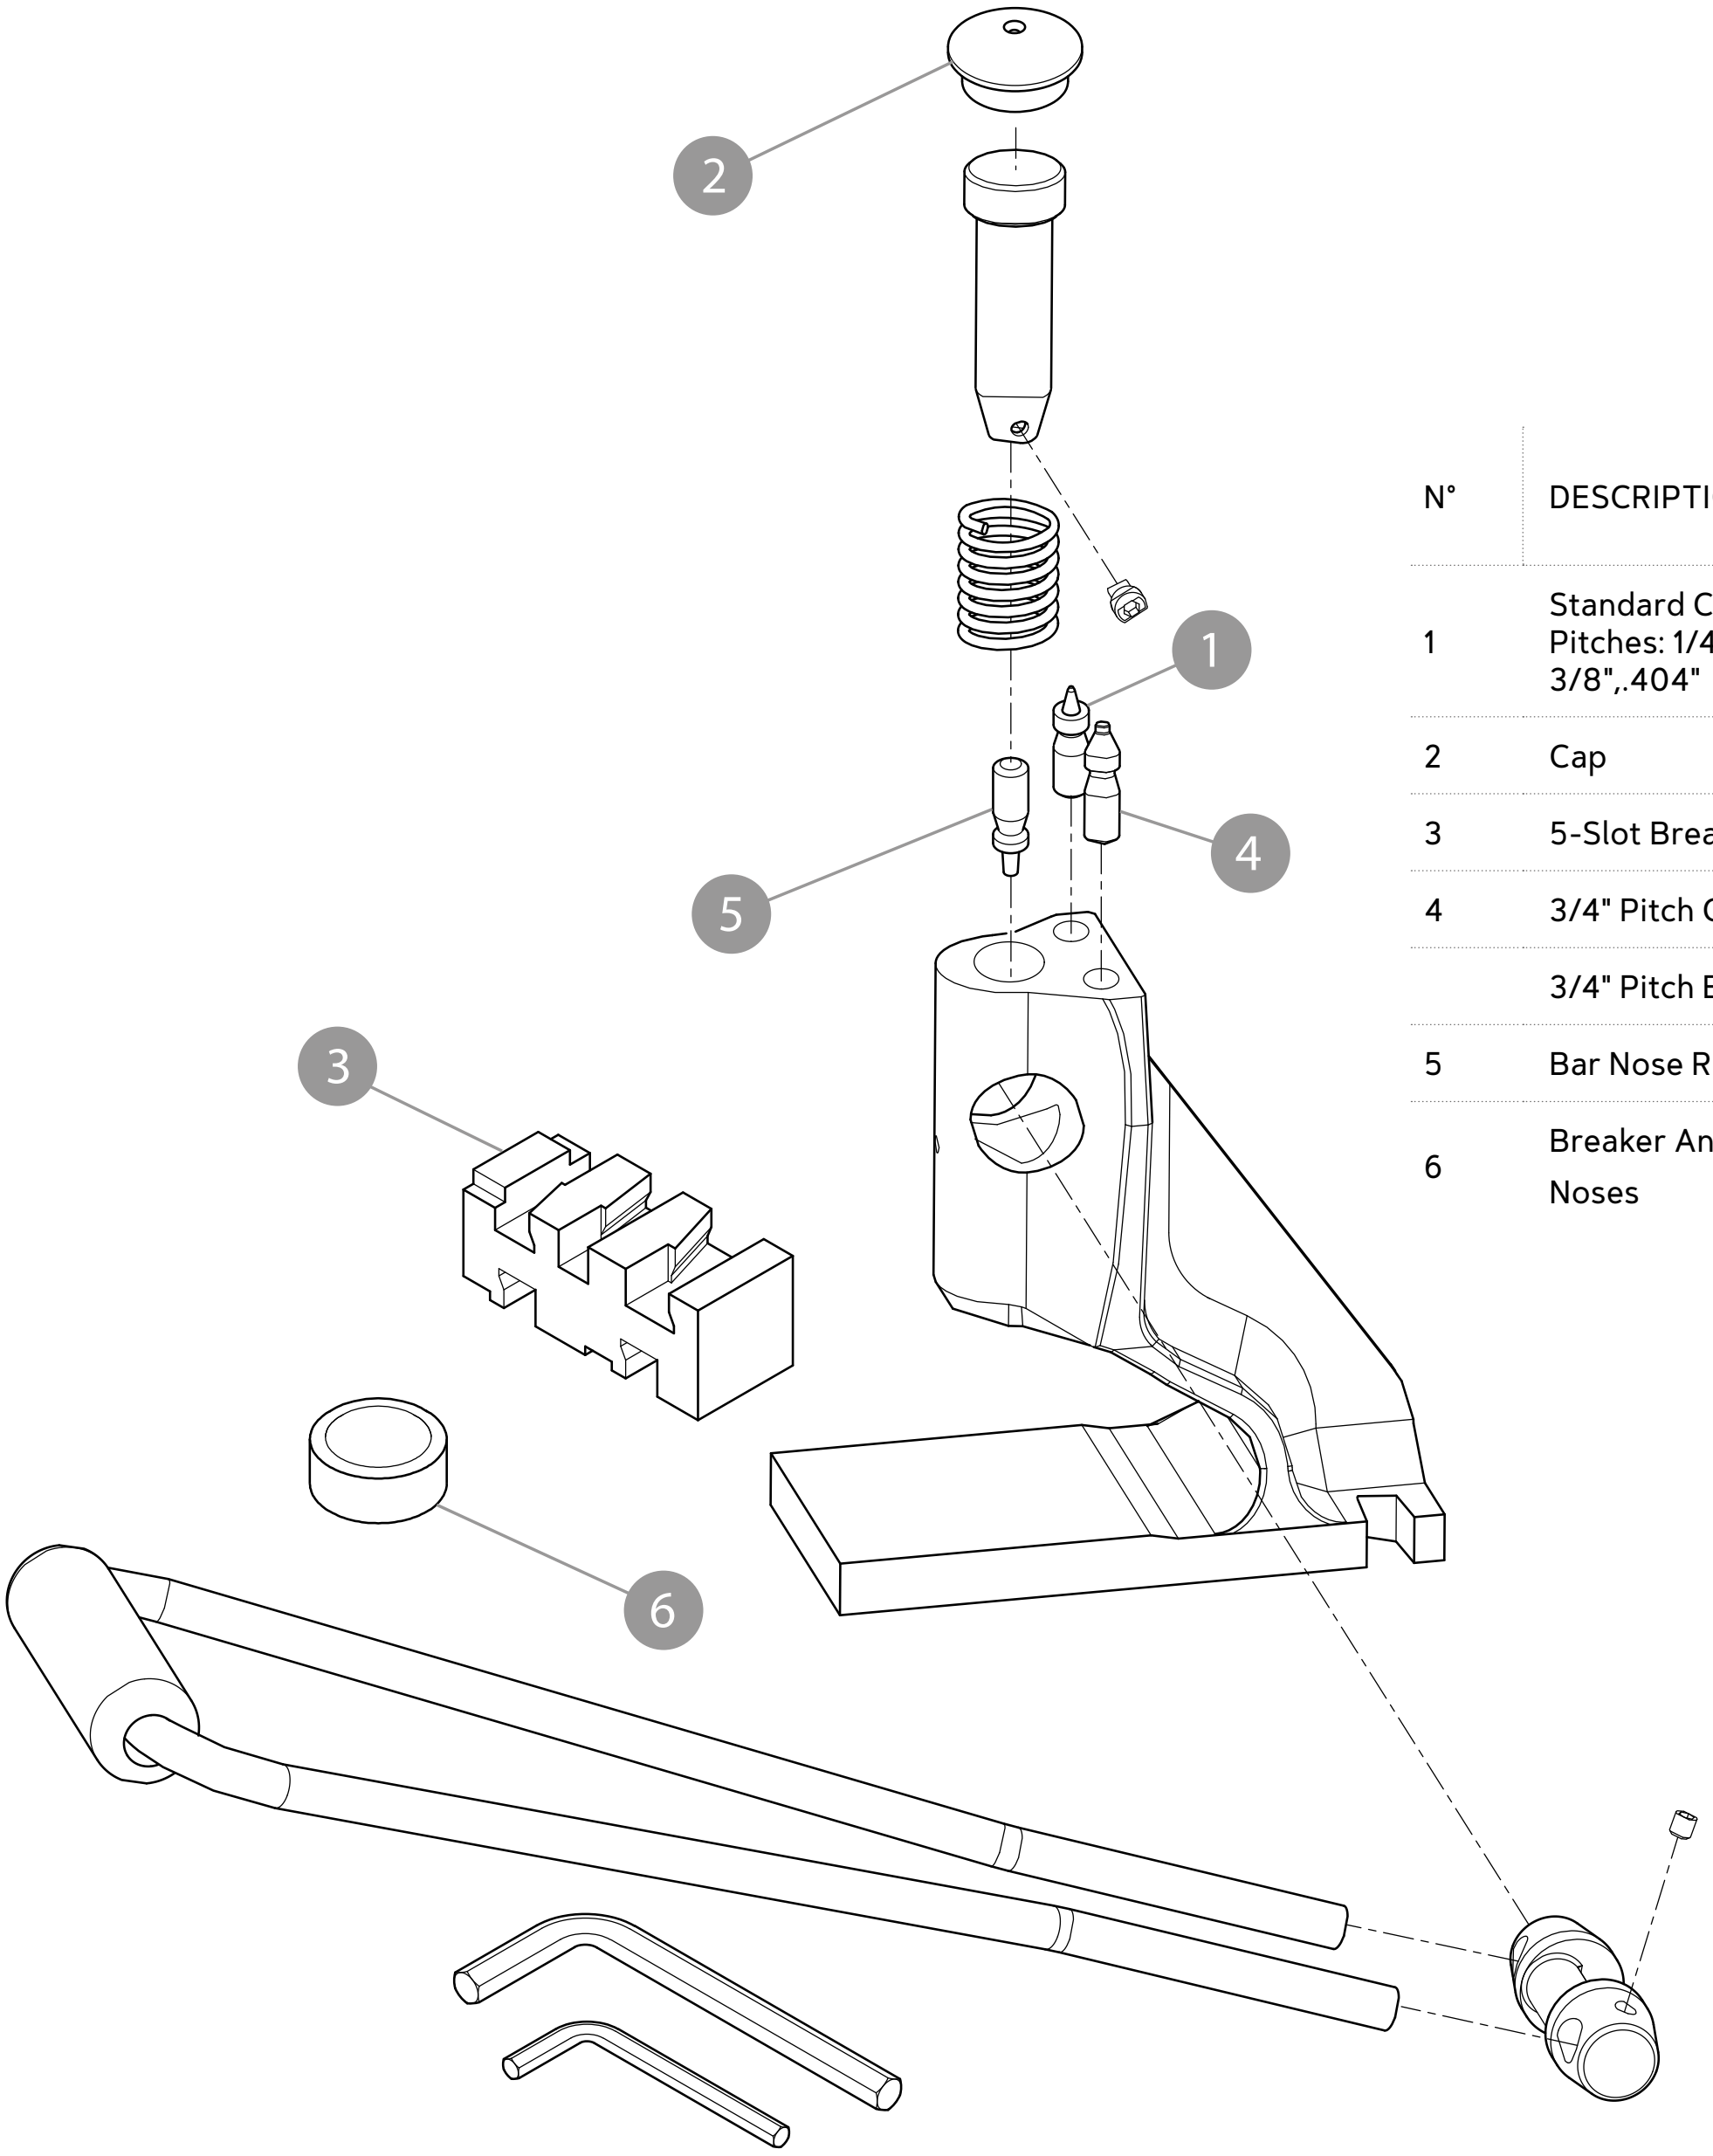

N°	DESCRIPTION	OREGON
1	Standard Chain Punch for Chain Pitches: 1/4", 3/8 Low Profile, .325", 3/8",.404"	38594
2	Cap	38595
3	5-Slot Breaker Anvil	111939
4	3/4" Pitch Chain Punch	110438SI
	3/4" Pitch Breaker Anvil	25049
5	Bar Nose Rivet Punch	102623SI
6	Breaker Anvil for Harvester Bar Noses	505033

PRODUCT NAME	OREGON	÷2		SPECIFICATIONS	
Rivet spinner	24549B	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404"	1,1 mm ▼ 2,0 mm	• Complete product including spinner anvils and take-up handles • Ergonomic handle design • Produces consistent rivet spins and minimizes risk of chain breakage	10
	38599	3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404" 1/2"		• Take-up Handle for 3/8", 3/8" (91/90), 404", 1/2"chains	

MANUAL RIVET SPINNER

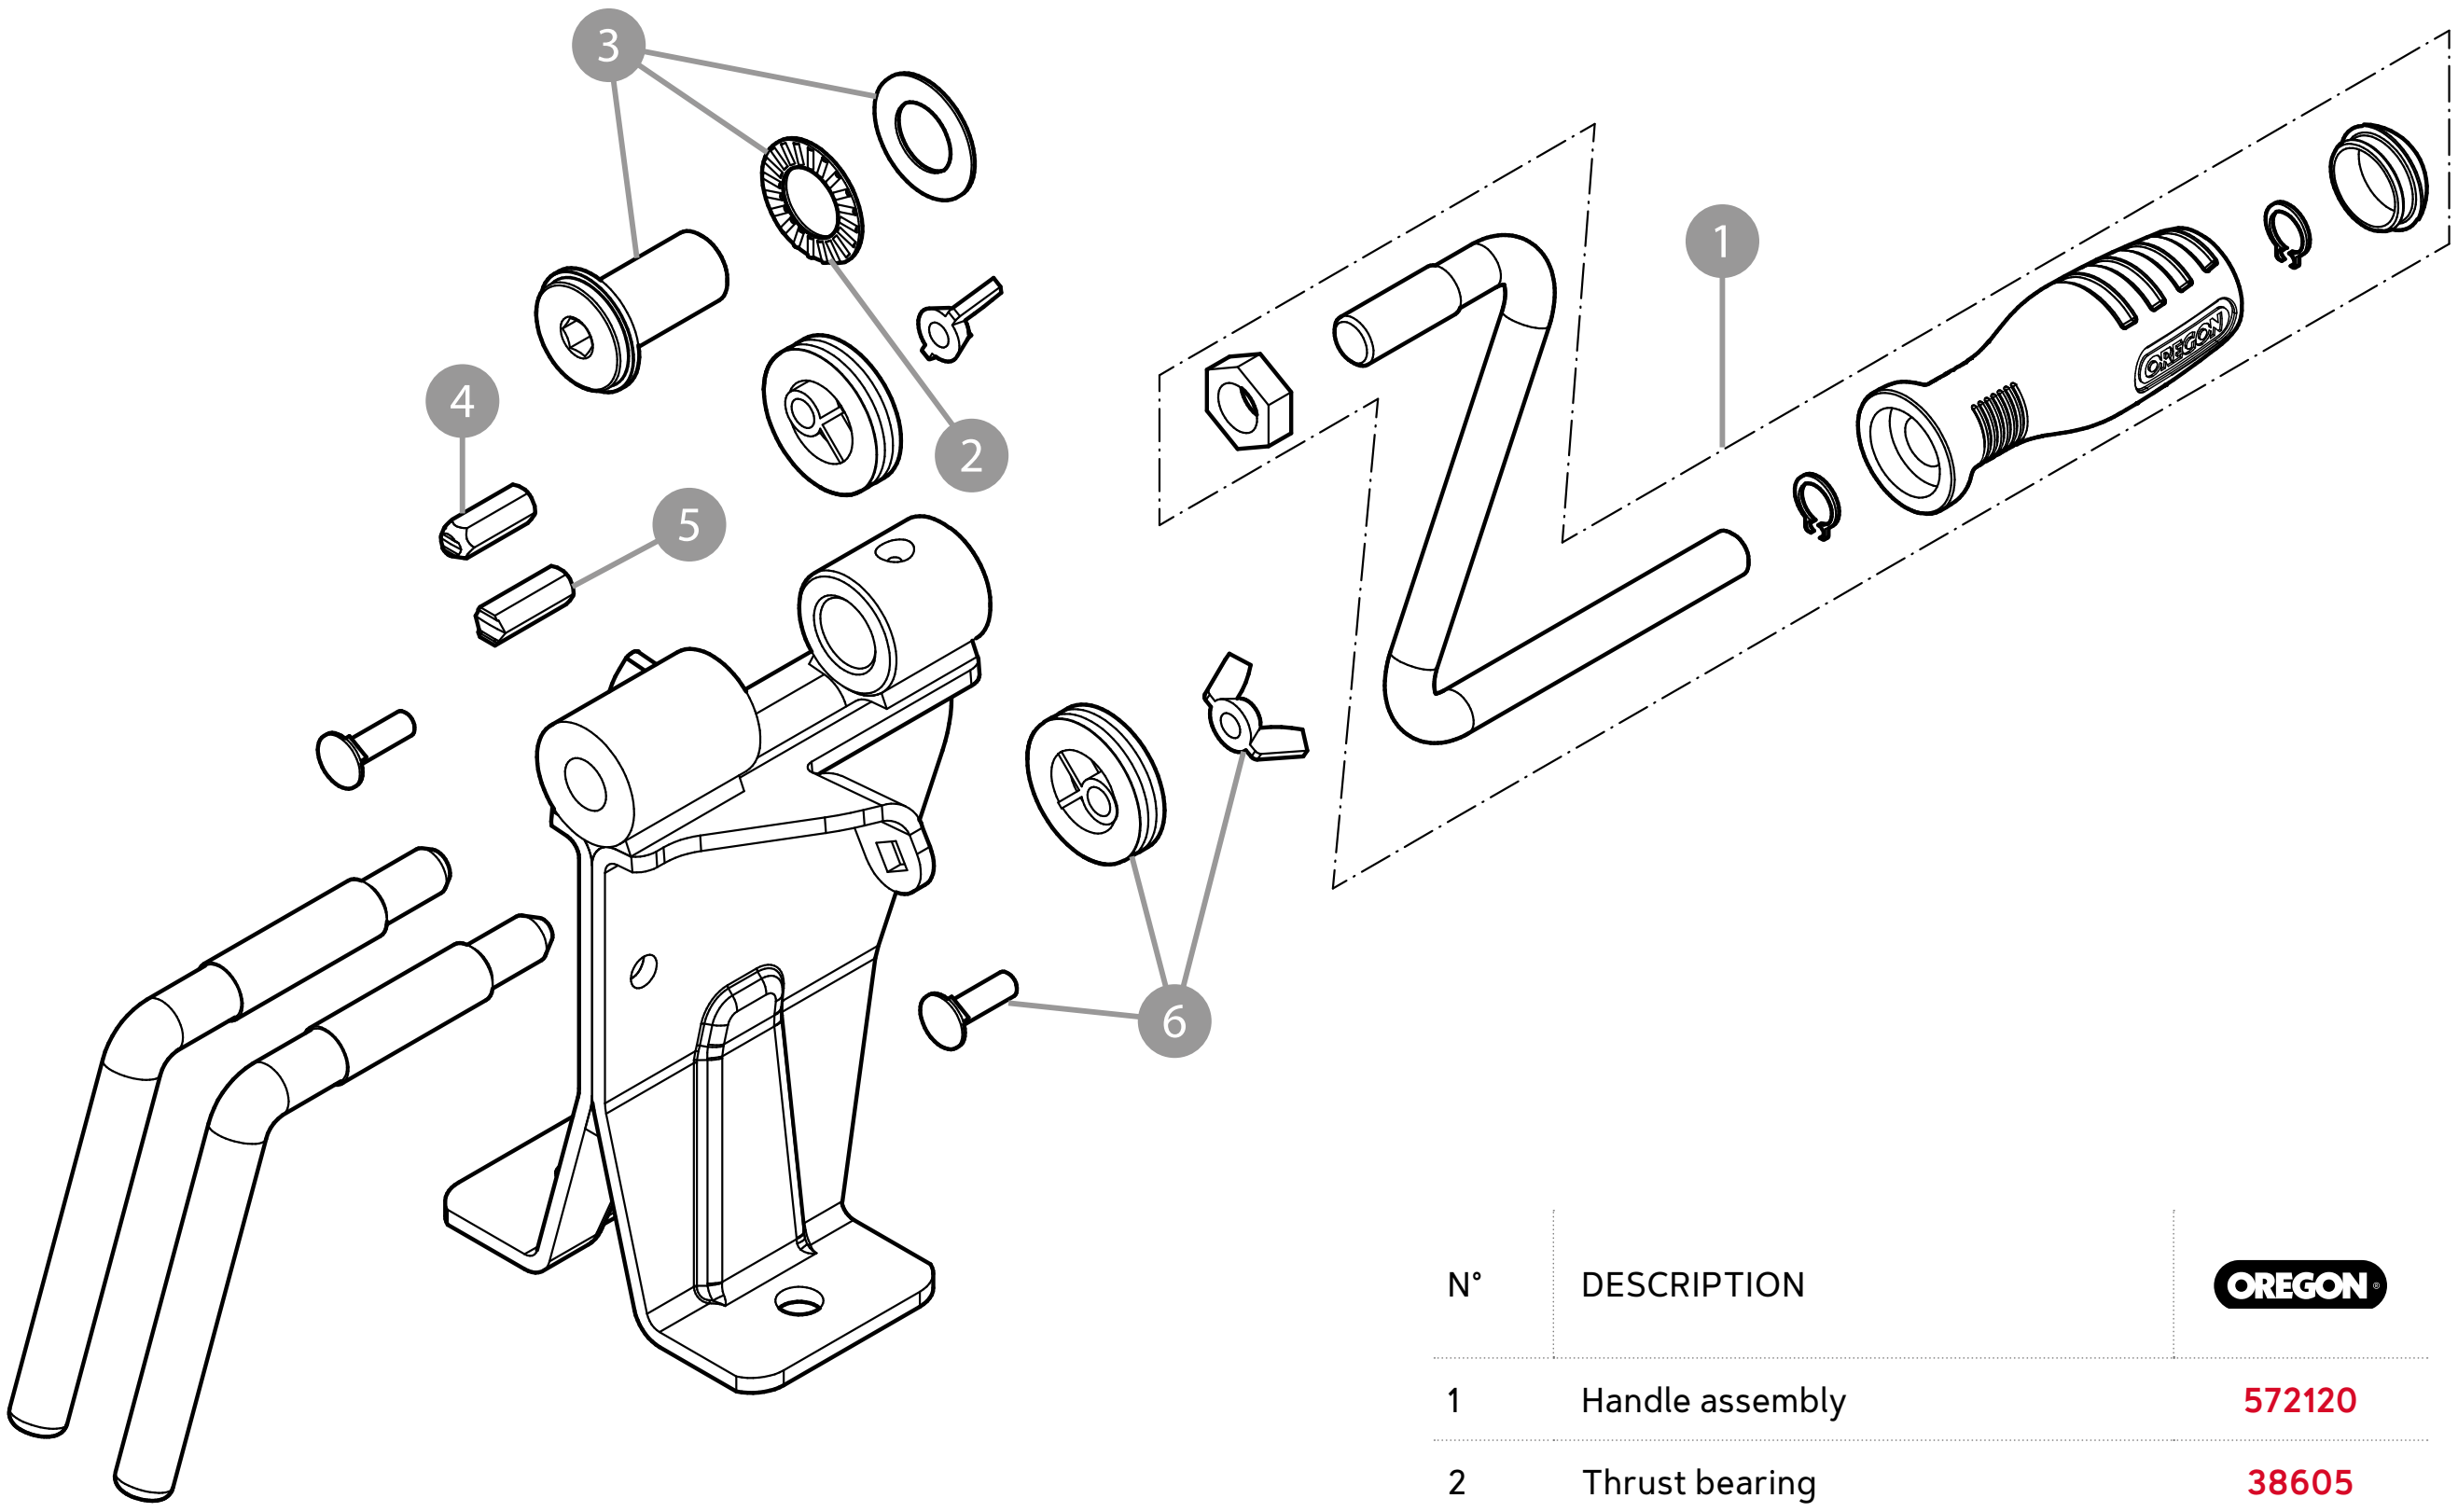

N°	DESCRIPTION	OREGON
1	Handle assembly	572120
2	Thrust bearing	38605
3	Sleeve + bearing + washer	38604
4	A" spinner anvil for for 3/8" and .404" pitch chains	38597
5	"B" Spinner anvil for 1/4", 3/8" LowPro 90-91, .325"	38598
6	Chain support disc.+Bolt+nut	38603

HEAVY-DUTY RIVET SPINNER

PRODUCT NAME	OREGON	÷2		SPECIFICATIONS
Heavy-duty Rivet spinner	24549-SI	1/4" 3/8" LowPro 90 3/8" LowPro 91 .325" 3/8" .404" 3/4"	1,1 mm ▼ 3,1 mm	• Designed to meet all rivet spinning needs • Spins all chain rivets up to .404" pitch • Adapts easily for spinning 3/4" pitch rivets when used with the 3/4" pitch adapter 108742si

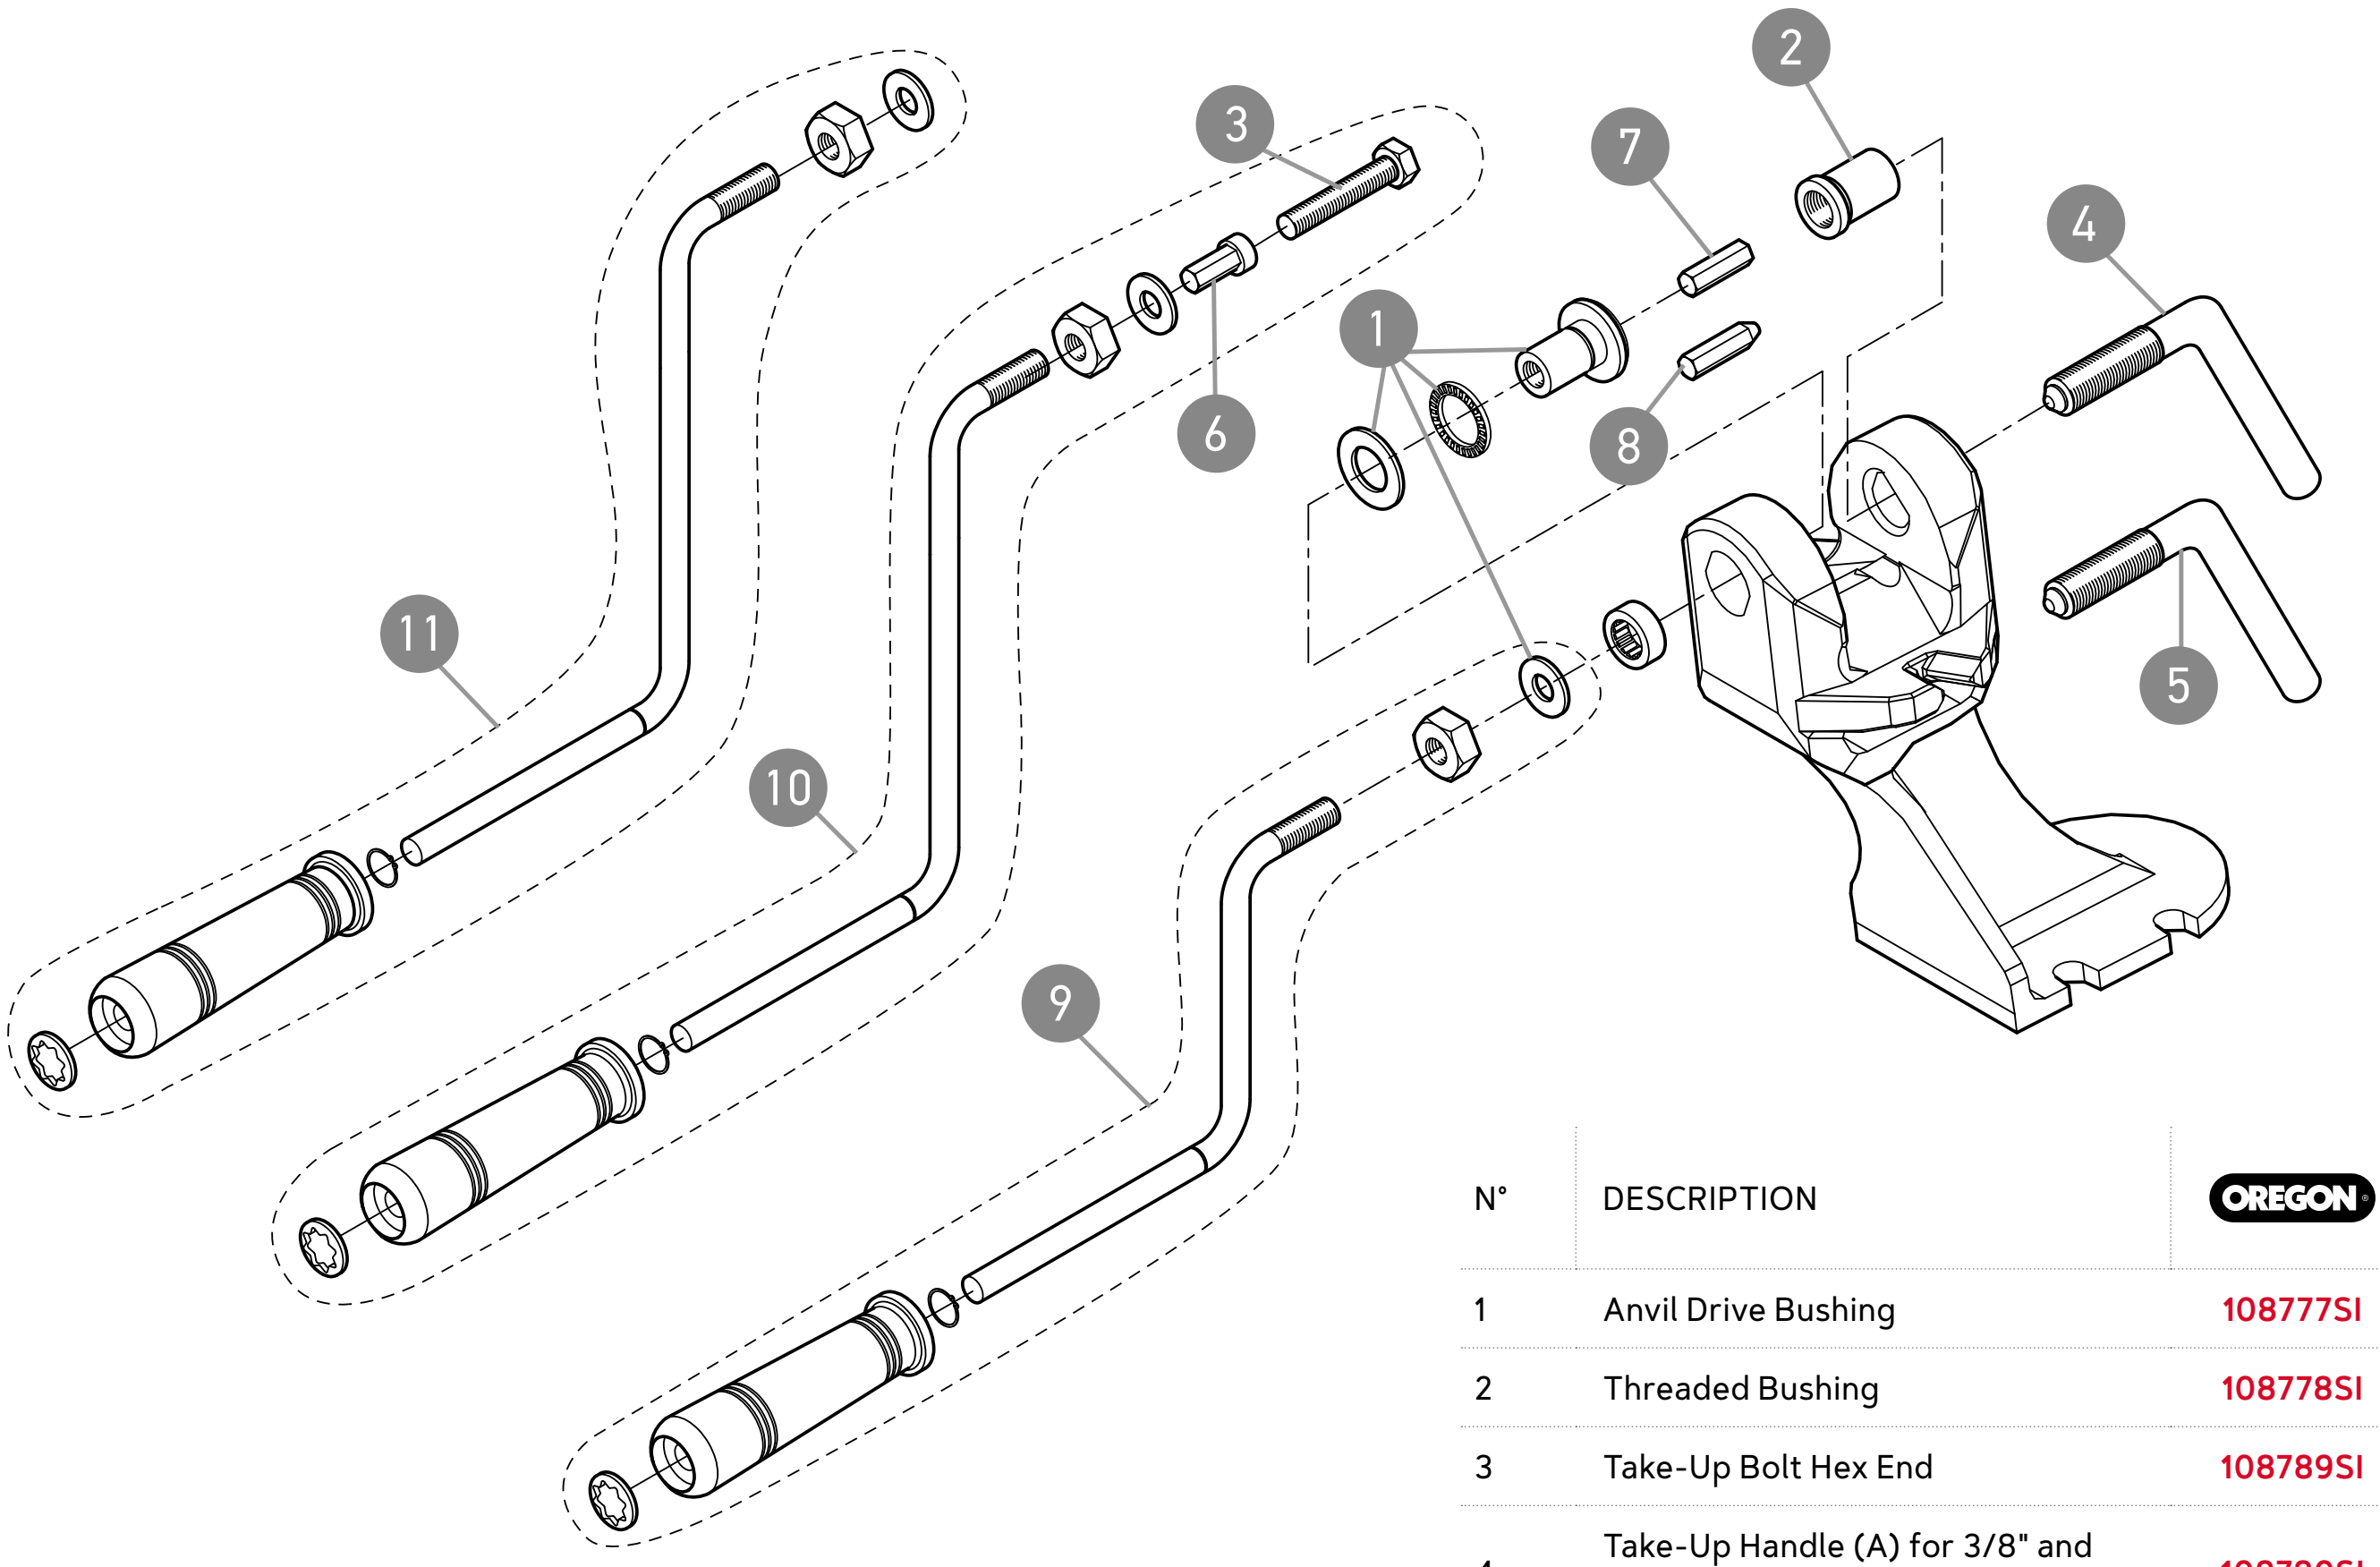

N°	DESCRIPTION	OREGON
1	Anvil Drive Bushing	108777SI
2	Threaded Bushing	108778SI
3	Take-Up Bolt Hex End	108789SI
4	Take-Up Handle (A) for 3/8" and .404" Saw Chain	108780SI
5	Take-Up Handle (B) for 1/4", 3/8" Low Profile™ and .325" Saw Chain	108781SI
6	3/4" Pitch Spinner Anvil	108790SI
7	Spinner Anvil (A) for 3/8" and .404" Saw Chain	38597
8	Spinner Anvil (B) for 1/4", 3/8" Low Profile and .325" Saw Chain	38598
9	Handle Assembly	108779SI
10	3/4" Pitch Adapter Kit (This item is not sold with the tool)	108742SI
11	Extra-Long Handle	108788SI

FILING SPECIFICATIONS

TECHNICAL INFORMATIONS

PROPER SHARPENING GEOMETRY FOR ALL OREGON® SAW CHAIN

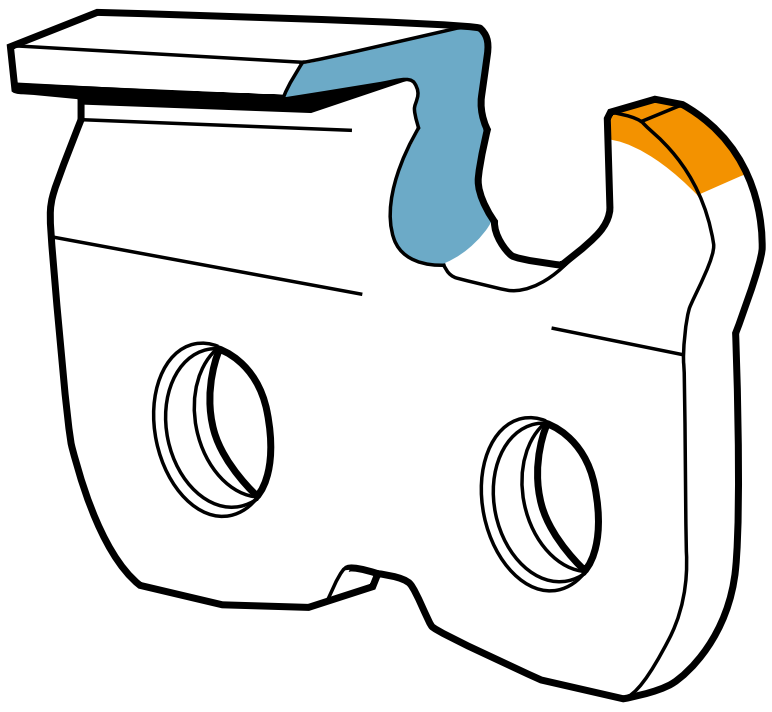

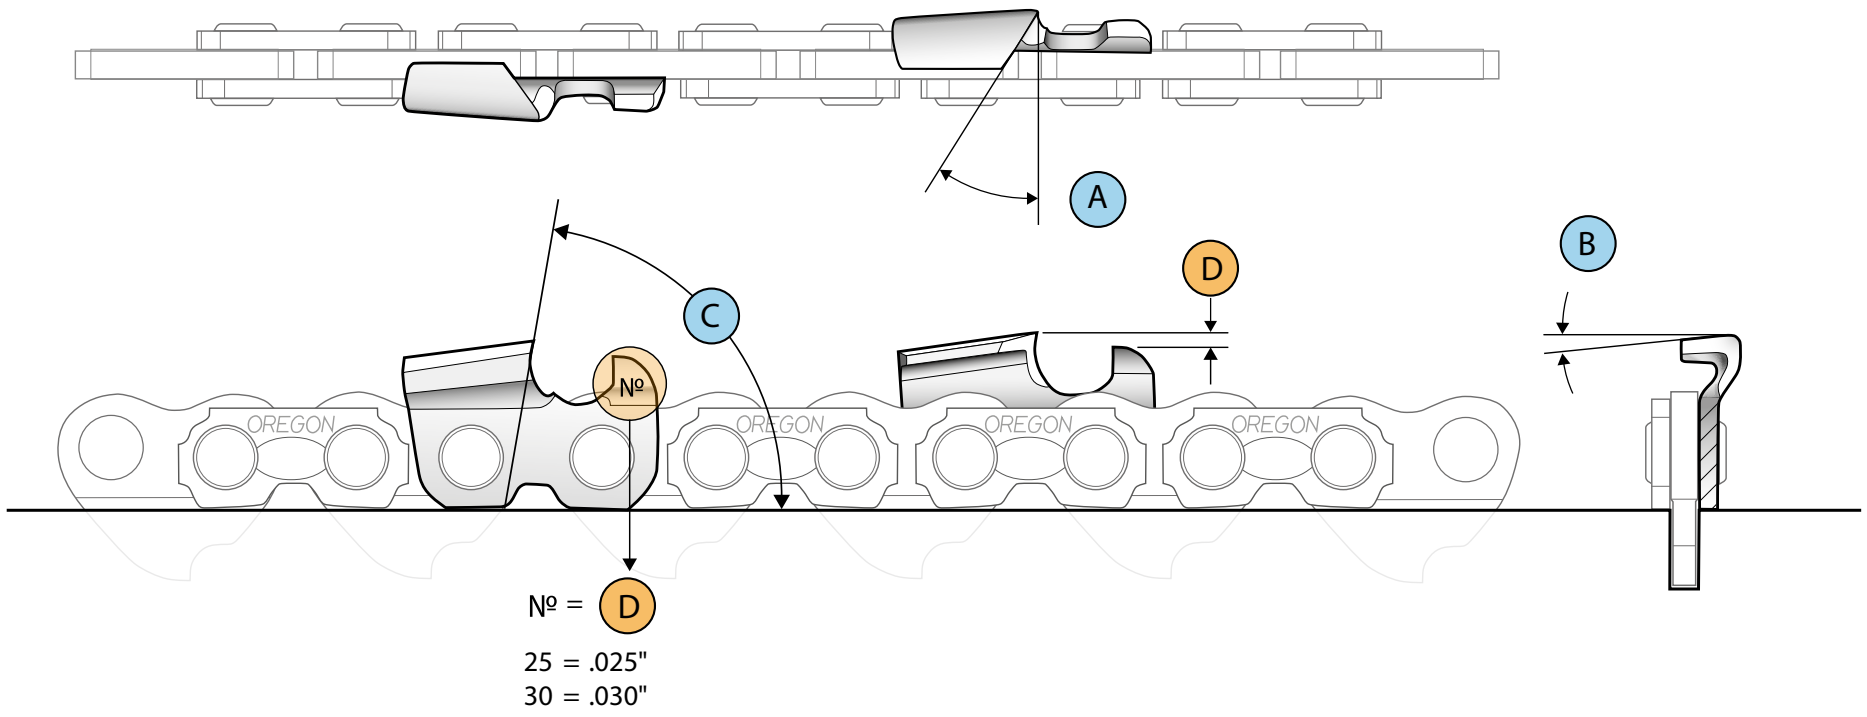
A
D
B
C
Nº
OREGON
Nº = D
25 = .025"
30 = .030"

Ⓐ Top Plate Filing Angle
Ⓑ File Down Angle
Ⓒ Hook angle
Ⓓ Depth Gauge Setting

ROUND FILES

	12 Pack	3 Pack	File Holder	Sharpening Kit	Sharpening Kit + Pouch
5/32" - 4,0 mm	70504	Q70509C	Q16265C	Q90405	558488
11/64" - 4,5 mm	70511	Q70512C	Q29192C	Q105860	558549
3/16" - 4,8 mm	70503	Q70508C	Q18228C	Q90407	558550
7/32" - 5,5 mm	70502	Q70507C	Q13252C	Q90404 90406	558551

FLAT FILE

12211 (12-Pack)

DEPTH GAUGE TOOLS

27530 (1 each)
.025"

.025 IN
.63 MM
OREGON GAUGE
OREGON GAUGE

22291 (10-Pack)
.030"

Ⓐ Top Plate Filing Angle
Ⓑ File Down Angle
Ⓒ Hook angle
Ⓓ Depth Gauge Setting











			Ⓐ	Ⓑ	Ⓒ	Ⓓ
1/4" LOW PROFILE	24AP	1/8" 3,2 mm	30°	10°	85°	.020"
1/4"	25AP	5/32" 🔴 4,0 mm	30°	10°	85°	.025"
.325" LOW PROFILE	80TXL	5/32" 🔴 4,0 mm	30°	10°	70°	.025"
3/8" LOW PROFILE	90PX	11/64" ⚫ 4,5 mm	30°	0°	75°	.025"
	91P, 91PX, 91VXL, M91VXL	5/32" 🔴 4,0 mm	30°	0°	80°	.025"
	91R	5/32" 🔴 4,0 mm	5°	0°	85°	.025"
.325"	95TXL/VPX, M95VPX 20, 21, 22BPX	3/16" 🔵 4,8 mm	30°	10°	70°	.025"
	20, 21, 22LPX/LGX M20, 21, 22LPX	3/16" 🔵 4,8 mm	25°	10°	60°	.025"
3/8"	72, 73, 75EXL/EXJ LGX/LPX M72, M73, M75LPX	7/32" 🟢 5,5 mm	25°	10°	60°	.025"
	72, 73, 75 DX/DPX	7/32" 🟢 5,5 mm	30°	10°	80°	.025"
	72, 73, 75RD	7/32" 🟢 5,5 mm	10°	10°	75°	.025"
.404"	26, 27X	7/32" 🟢 5,5 mm	30°	10°	65°	.030"
	27R	7/32" 🟢 5,5 mm	10°	10°	75°	.030"
	58, 59L	7/32" 🟢 5,5 mm	25°	10°	60°	.025"
	59ACL	7/32" 🟢 5,5 mm	35°	10°	90°	.035"
	18HX, 19HX	7/32" 🟢 5,5 mm	35°	10°	80°	.050"
3/4"	11H	5/16" 🟢 7,9 mm	30°	0°	80°	.070"

❶ When using an Oregon® file holder, ALWAYS hold it level, 0-degrees flat on the Top Plate.

❷ Flat File must be used in combination with Oregon Depth Gauge Tools.

GRINDING SPECIFICATIONS

TECHNICAL INFORMATIONS

PROPER GRIND ANGLES FOR ALL OREGON® SAW CHAIN

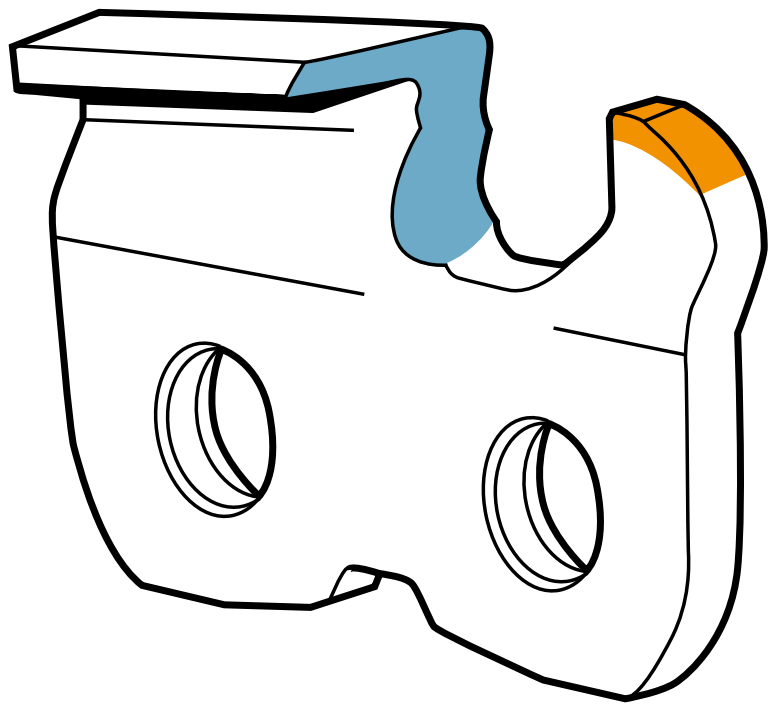

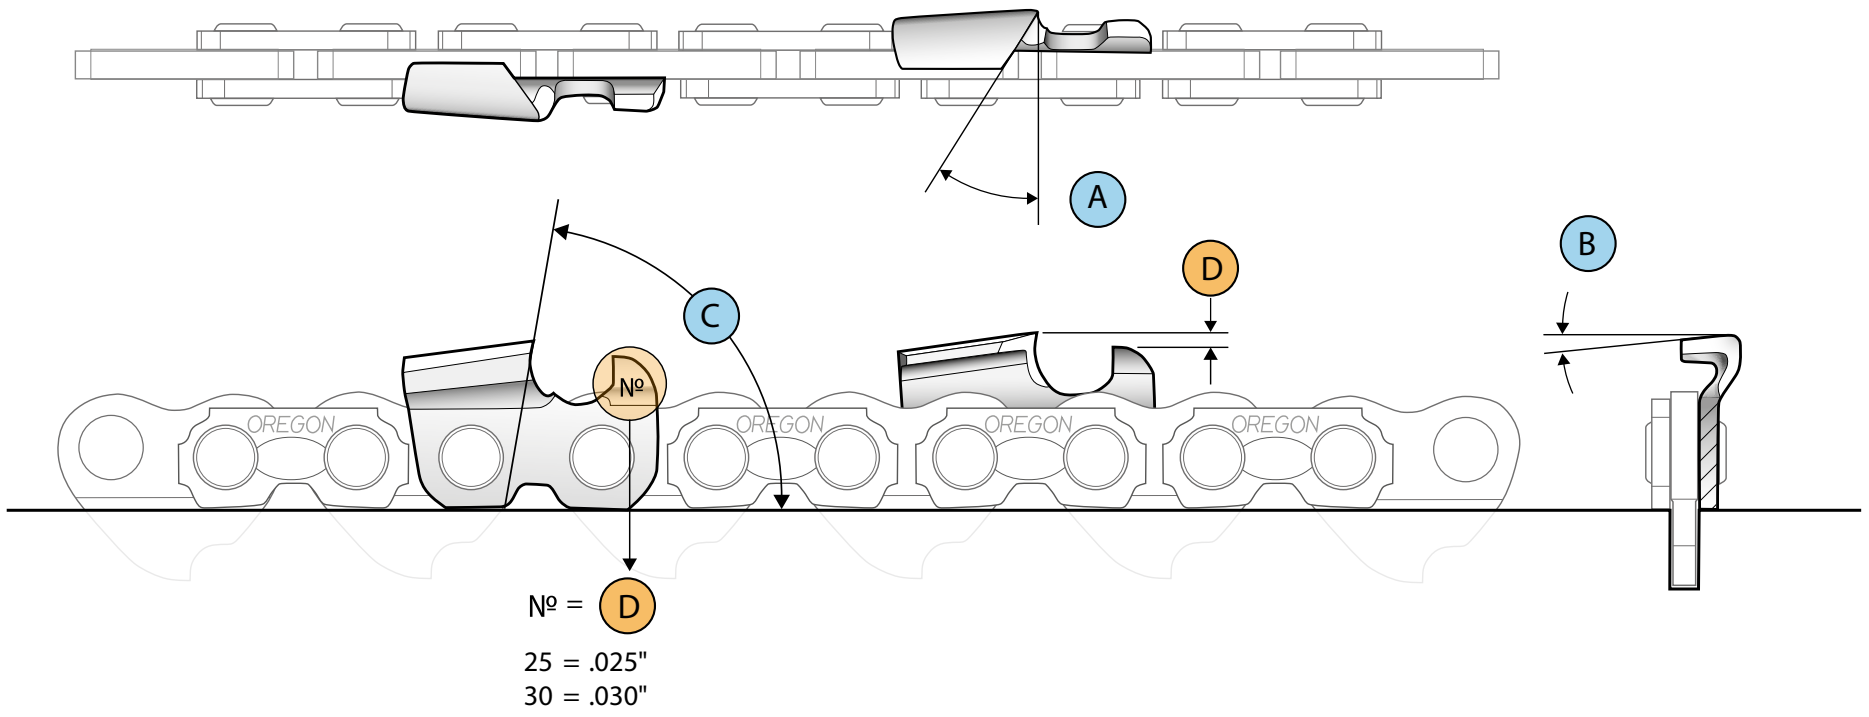

Ⓐ Top Plate Filing Angle
Ⓑ File Down Angle
Ⓒ Hook angle
Ⓓ Depth Gauge Setting

Compact bench grinder

590181

1/4″ ▶.404″ 1,1▶ 2,0

105 mm

Professional compact bench grinder

410-230

1/4″ ▶.404″ 1,1▶ 2,0

145 mm

Professional bench grinder

520-230

1/4″ ▶.404″ 1,1▶ 2,0
(3/4) 3,1

145 mm

Professional hydraulic assist bench grinder

620-230

1/4″ ▶ 3/4″ 1,1▶ 3,1

145 mm

Ⓐ Top Plate Grinding Angle
Ⓑ Vise Tilt Angle
Ⓒ Grinding Wheel Angle
Ⓓ Depth Gauge Setting

Chain Type

		145 mm	105 mm	|←X→| 	Ⓐ 	Ⓑ 	Ⓒ 	Ⓓ 	
1/4" LOW PROFILE	24AP	**32659P**	**106547P**	3,2 mm	30°	10°	55°	.020"	**27530**
1/4"	25AP	**32659P**	**106547P**	3,2 mm	30°	10°	55°	.025"	**27530**
.325" LOW PROFILE	80TXL	**32659P**	**106547P**	3,2 mm	30°	10°	70°	.025"	**27530**
3/8" LOW PROFILE	90PX 91P, 91PX 91VXL, M91VXL	**32659P**	**106547P**	3,2 mm	30°	0°	55°	.025"	**27530**
	91R	**32659P**	**106547P**	3,2 mm	5°	0°	55°	.025"	**27530**
.325"	95TXL/VPX, M95VPX 20, 21, 22BPX	**32660P**	**106548P**	4,7 mm Alternative 3,2 mm	30°	10°	55°	.025"	**27530**
	20, 21, 22LPX/LGX M20, 21, 22LPX	**32660P**	**106548P**	4,7 mm Alternative 3,2 mm	25°	10°	55°	.025"	**27530**
3/8"	72, 73, 75EXL/EXJ LGX/LPX M72, M73, M75LPX	**32660P**	**106548P**	4,7 mm	25°	10°	55°	.025"	**27530**
	72, 73, 75 DX/DPX	**32660P**	**106548P**	4,7 mm	30°	10°	55°	.025"	**27530**
	72, 73, 75RD	**32660P**	**106548P**	4,7 mm	10°	10°	50°	.025"	**27530**
.404"	26, 27X	**32660P**	**106548P**	4,7 mm	30°	10°	55°	.030"	**22291** 10-PACK
	27R	**32660P**	**106548P**	4,7 mm	10°	10°	50°	.030"	**22291** 10-PACK
	58, 59L	**32660P**	**106548P**	4,7 mm	25°	10°	55°	.025"	**27530**
	59ACL	**32660P**	**106548P**	4,7 mm	30°	10°	60°	.035"	-
	18HX, 19HX	**32660P**	**106548P**	4,7 mm	35°	10°	60°	.050"	**38850** 10-PACK
3/4"	11H	**OR534-516**	–	7,9 mm	30°	0°	50°	.070"	-

EGON
PowerCut

OREGON®

75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged.
Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents.
Engineering is the bedrock of our reputation.

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C008551

PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-003-EN

OREGON
PowerCut

Discover more of our products at
OregonProducts.com

TOOLS AND ACCESSORIES

TA_1.2
EN/EUR

OREGON®

NEW
HAND SAWS

Superior cutting performance and ergonomics

Get your cutting done easier and faster. The new Oregon® arborist saws provide superior cutting performance and ergonomics to increase work efficiency and minimise fatigue.

CURVED HAND SAW 33CM/13"

(Includes Scabbard for Blade)

600136

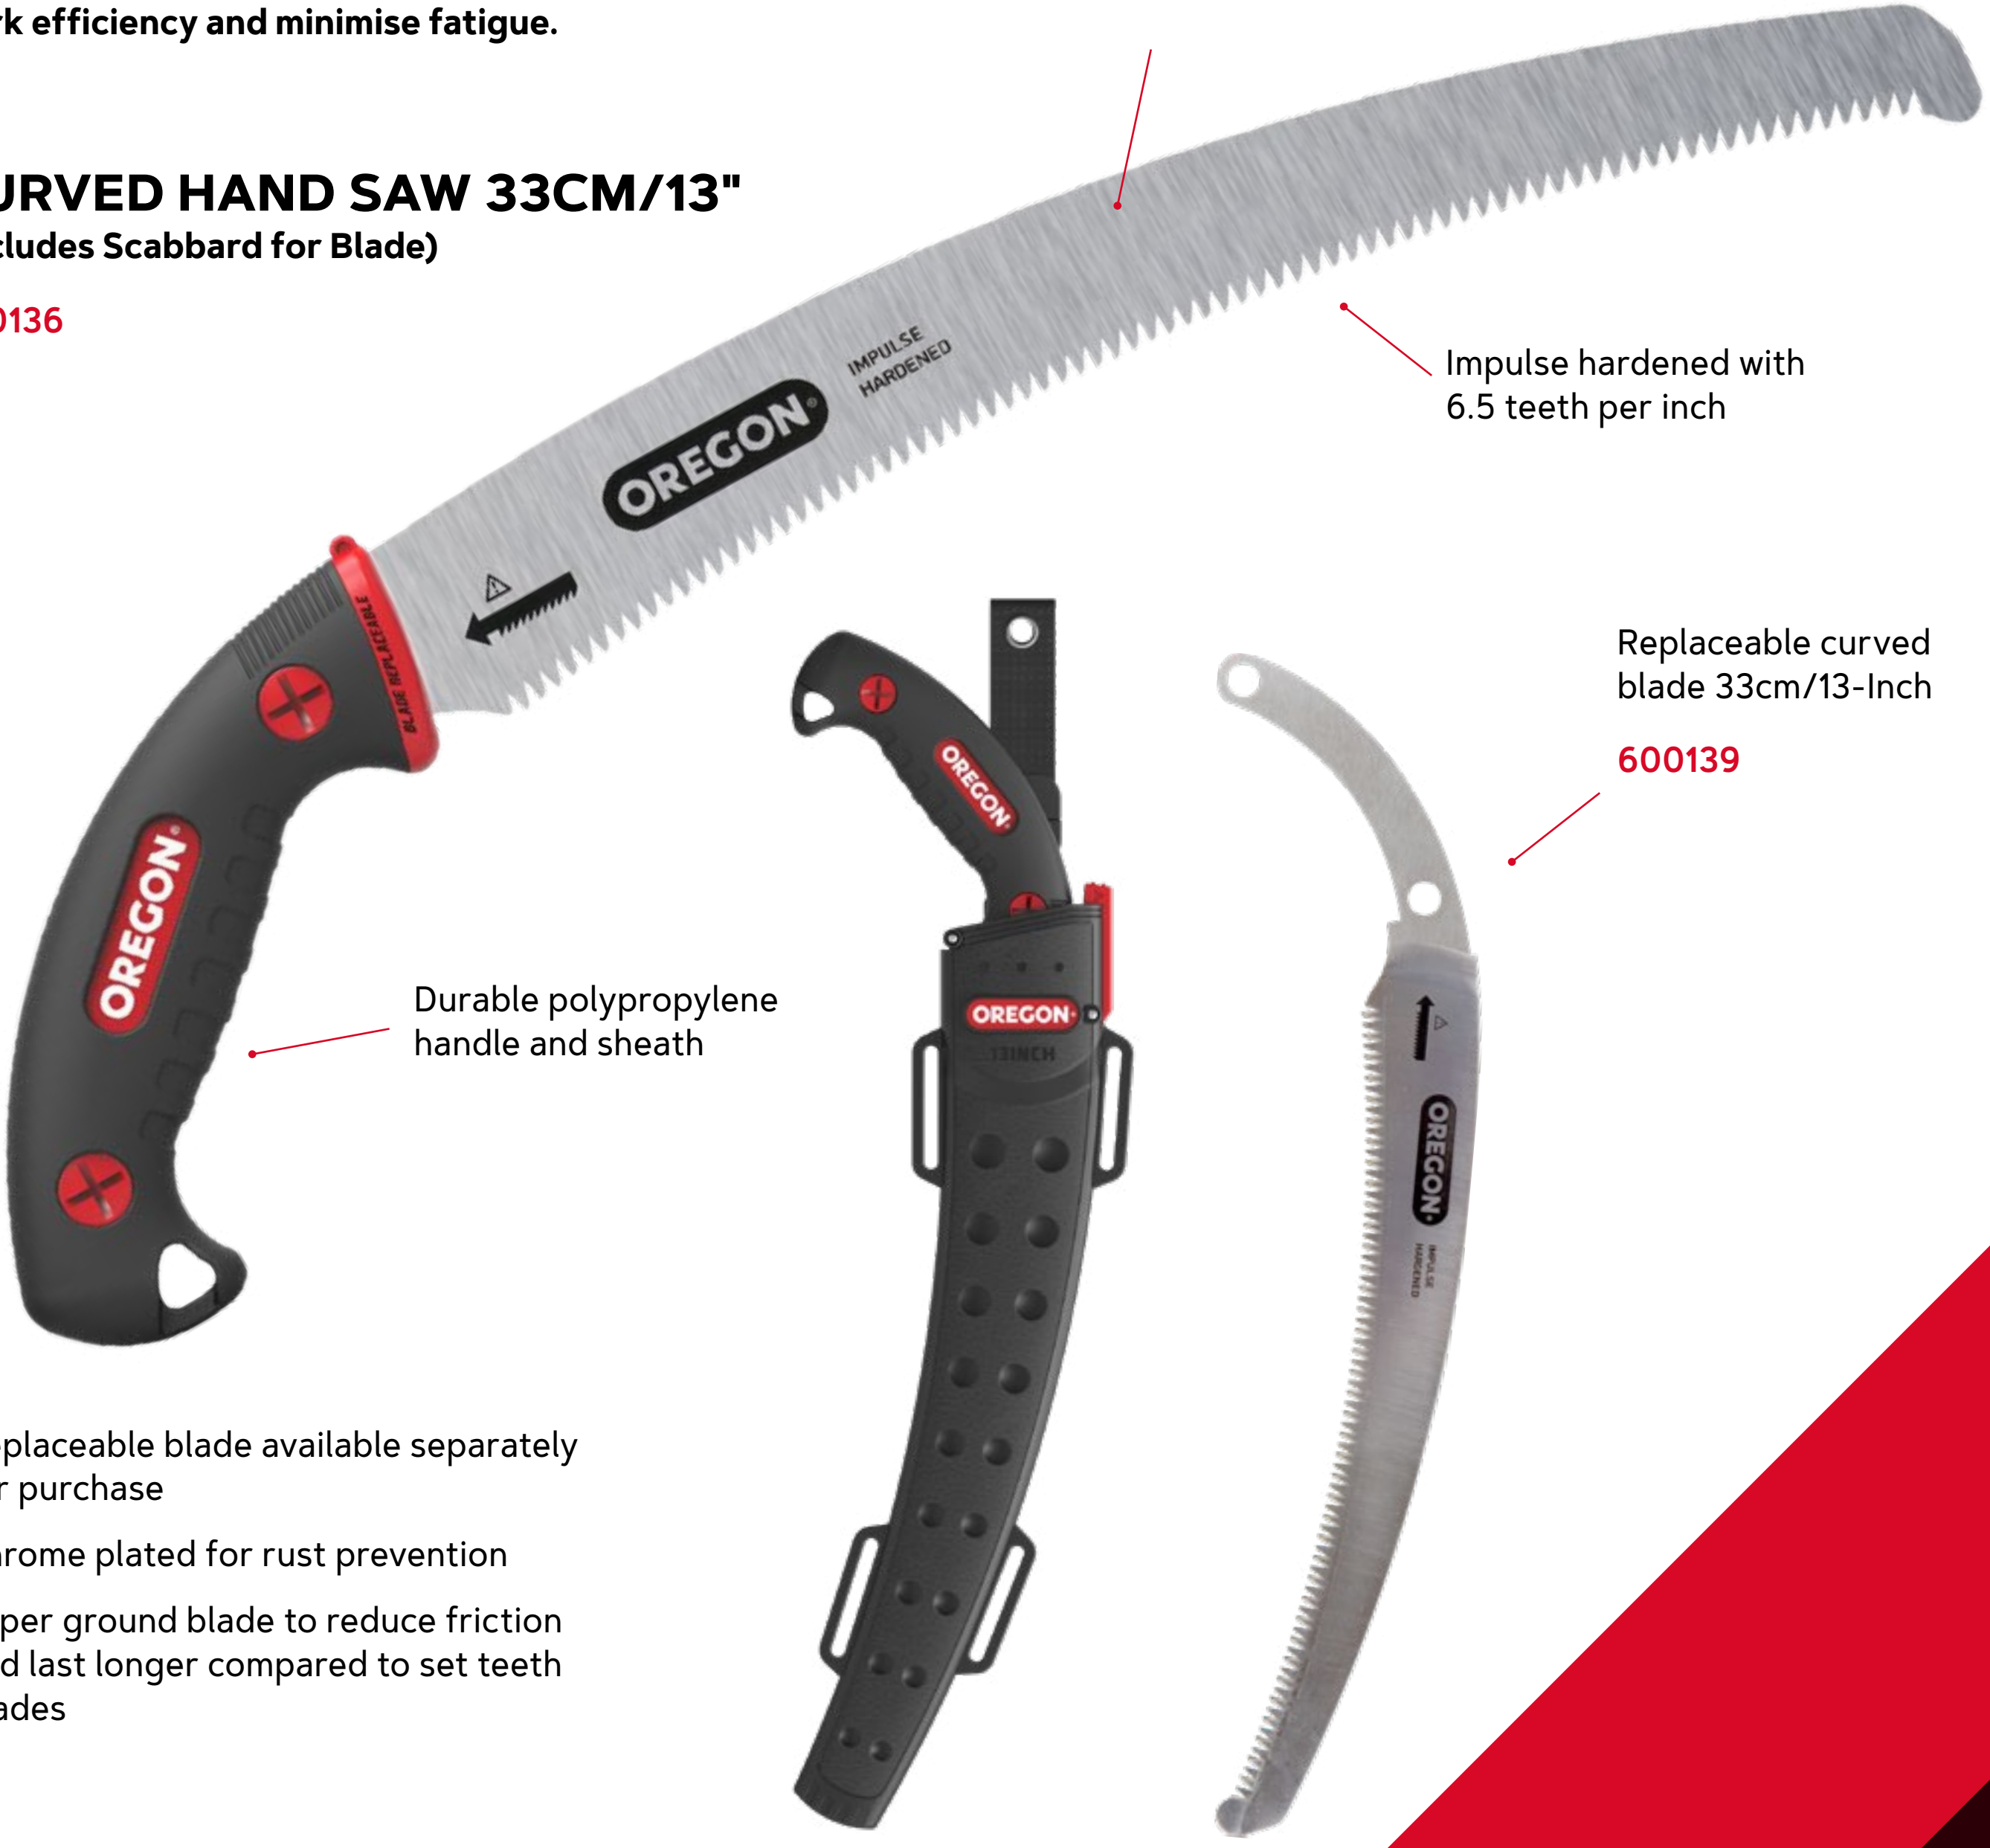
IMPULSE HARDENED
OREGON
BLADE REPLACEABLE
OREGON
OREGON
OREGON
13INCH
OREGON
IMPULSE HARDENED

Japanese premium high carbon steel

Impulse hardened with 6.5 teeth per inch

Replaceable curved blade 33cm/13-Inch

600139

Durable polypropylene handle and sheath

- Replaceable blade available separately for purchase
- Chrome plated for rust prevention
- Taper ground blade to reduce friction and last longer compared to set teeth blades

STRAIGHT HAND SAW 30CM/12"

(Includes Scabbard for Blade)

600138

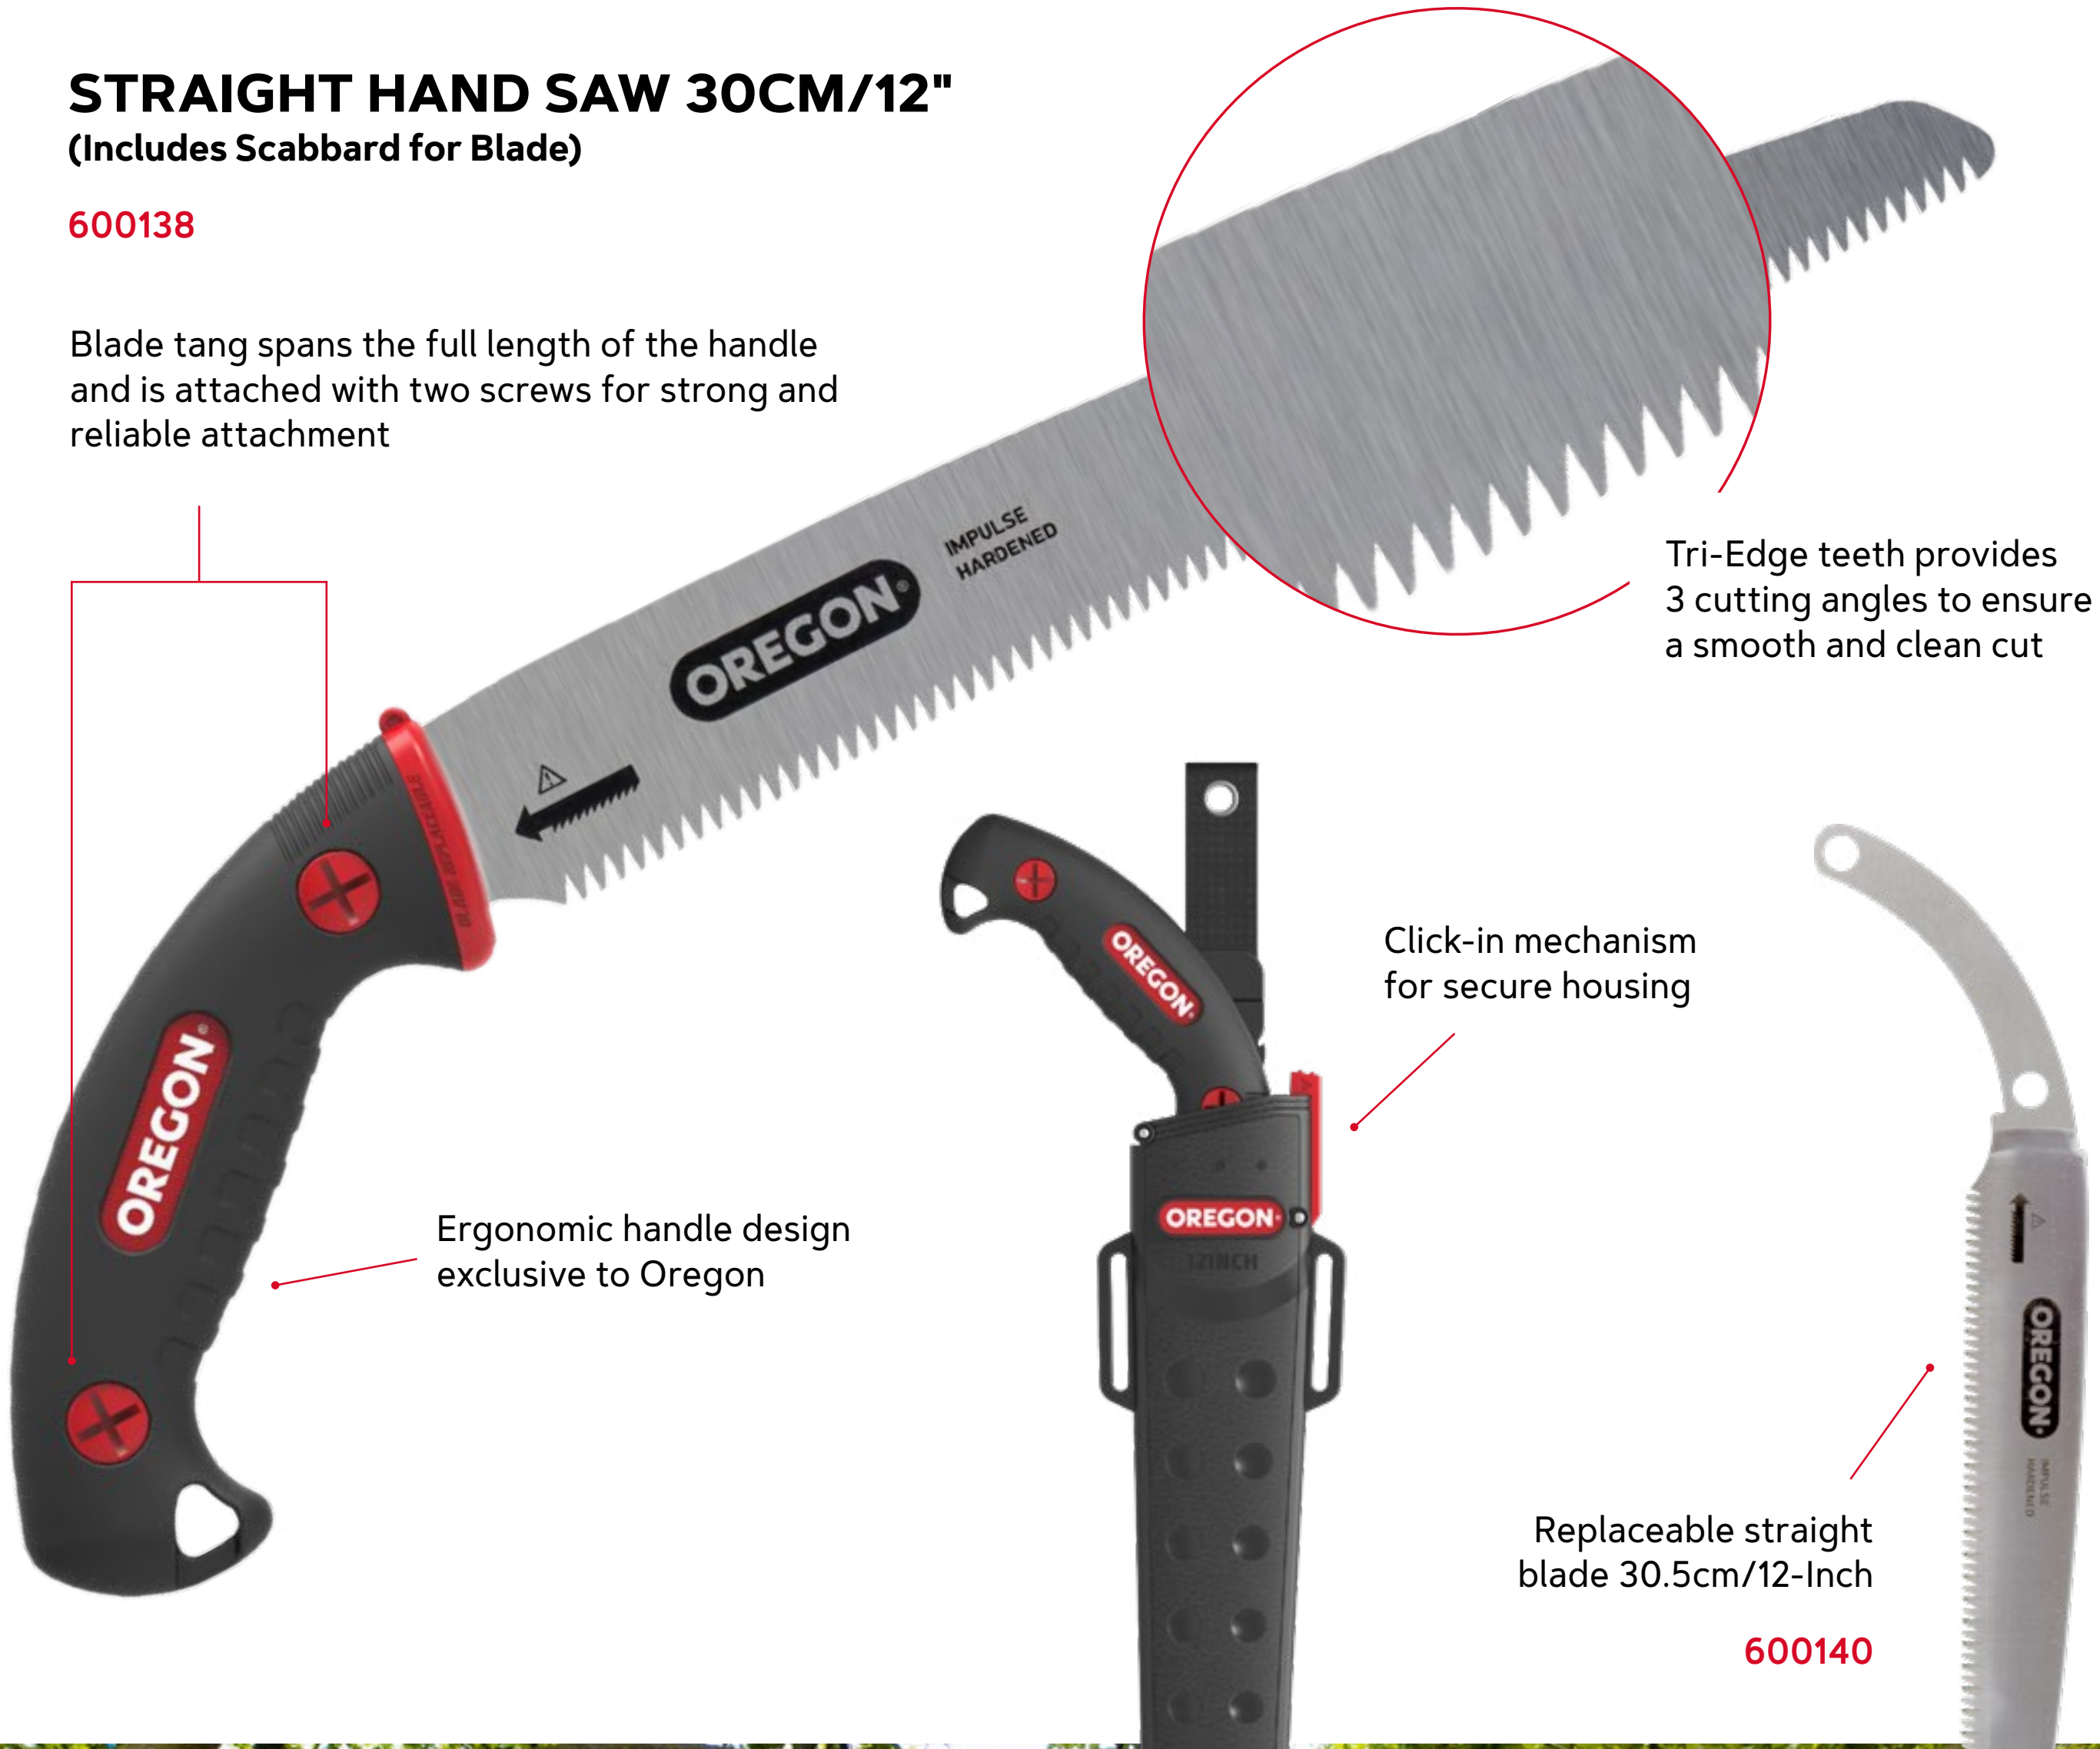
OREGON
IMPULSE HARDENED
OREGON
OREGON
OREGON
12INCH
OREGON

Blade tang spans the full length of the handle and is attached with two screws for strong and reliable attachment

Tri-Edge teeth provides 3 cutting angles to ensure a smooth and clean cut

Click-in mechanism for secure housing

Ergonomic handle design exclusive to Oregon

Replaceable straight blade 30.5cm/12-Inch

600140

MARKING SPRAY

Luminous and durable marking

Featuring a wide variety of classic and fluorescent colors, Oregon marking sprays are specifically designed for outdoor applications, providing an excellent resistance to ultraviolet and adverse weather conditions and a durability of up to **2 years**. Their ergonomic and multi-directional cap can be used upside down and the color dries fast even on wet surfaces, making them an extremely versatile product for all working conditions.

The Oregon multipurpose marking sprays are suitable for a wide variety of applications, including tree and log marking, road works, building, construction...

2 YEARS

OREGON
OREGON

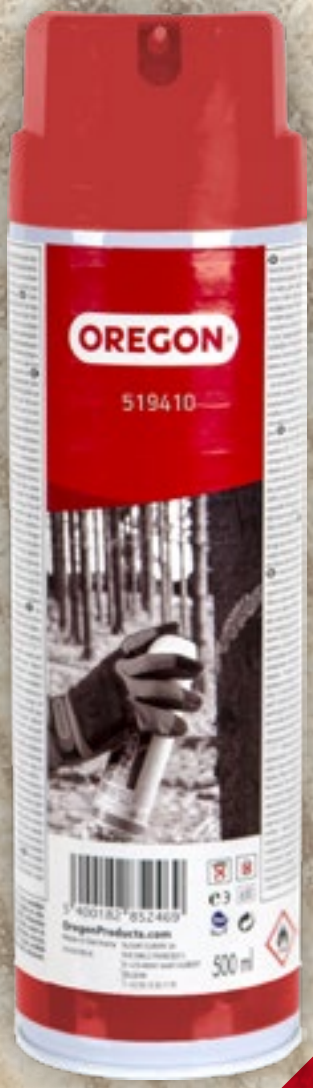
OREGON
519410
500 ml

519410

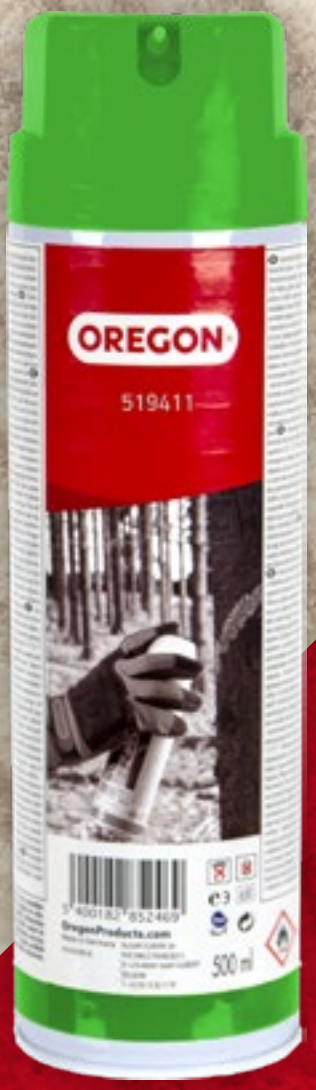
OREGON
519411
500 ml

519411

519412

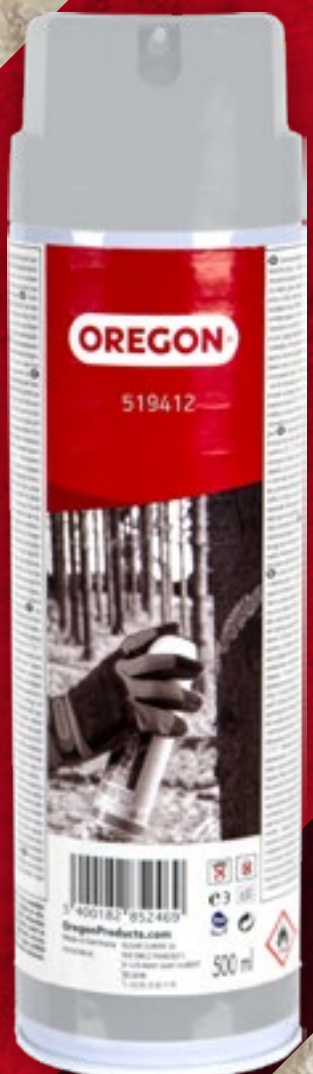
OREGON
519412
500 ml

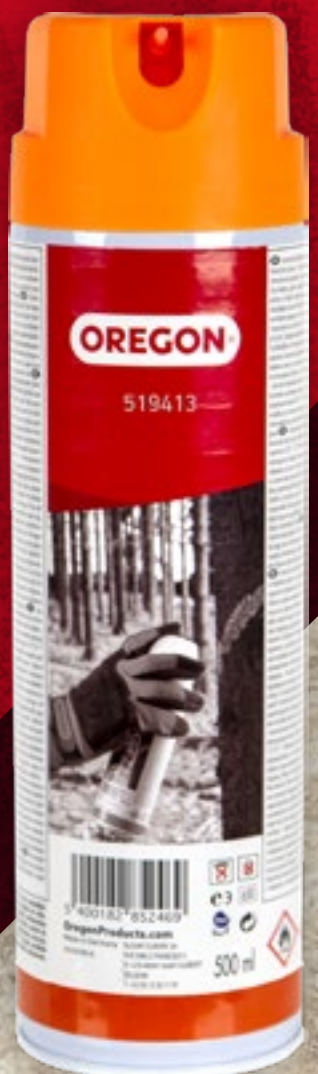
OREGON
519413
500 ml

519413

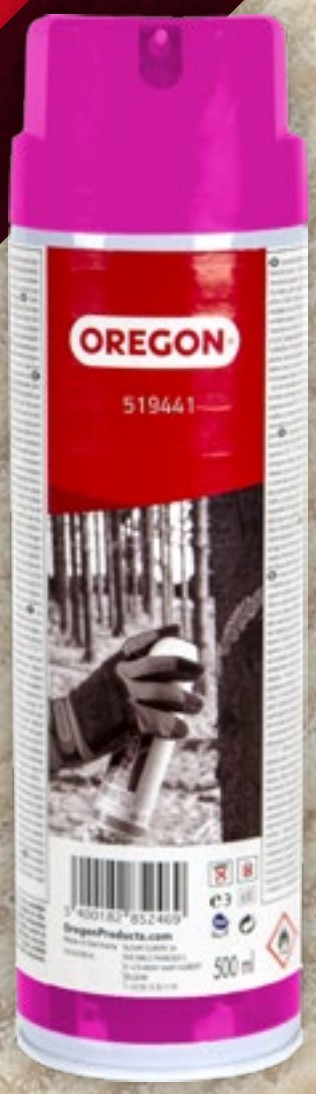
OREGON
519441
500 ml

519441

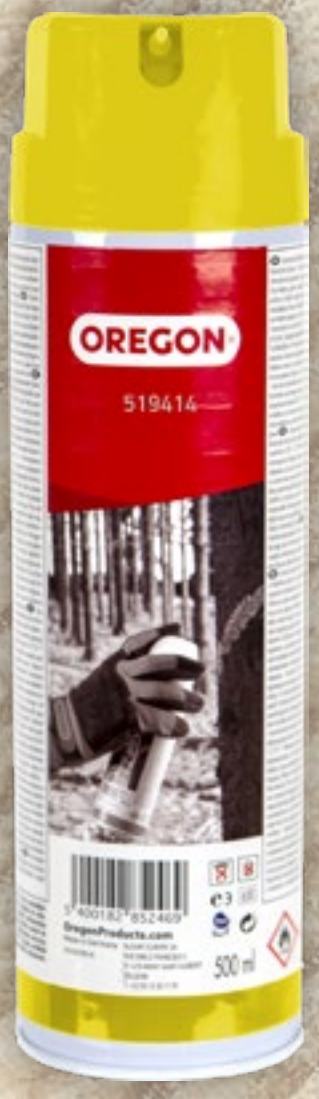
OREGON
519414
500 ml

519414

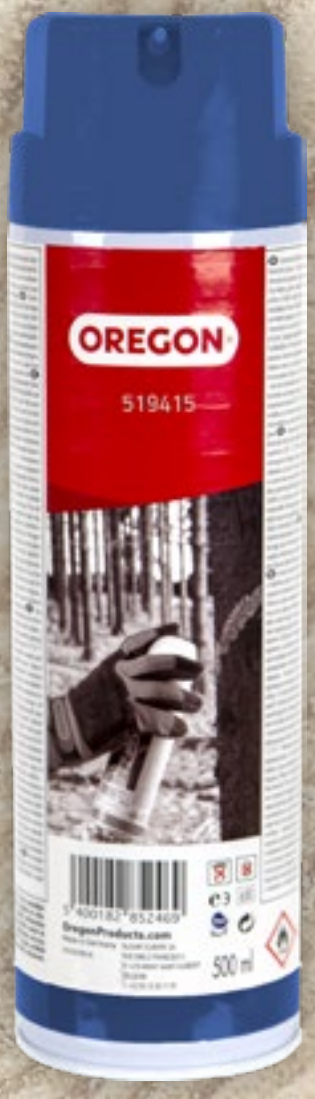
OREGON
519415
500 ml

519415

TOOL BELTS

PRODUCT NAME	OREGON	SPECIFICATIONS	📦
Tools belt with harness and holster set	584147	• Polyester fabric belt with high resistance to abrasion • Comfortable foam belt • Adjustable harness on front and back • Reflective stripes for higher visibility • Marking spray holster • Spanner, wedge & lifting tongs holster • File holder, flat file, spanner, safety aid kit and logger tape holster • Hook, wedge and logger tape holster	10

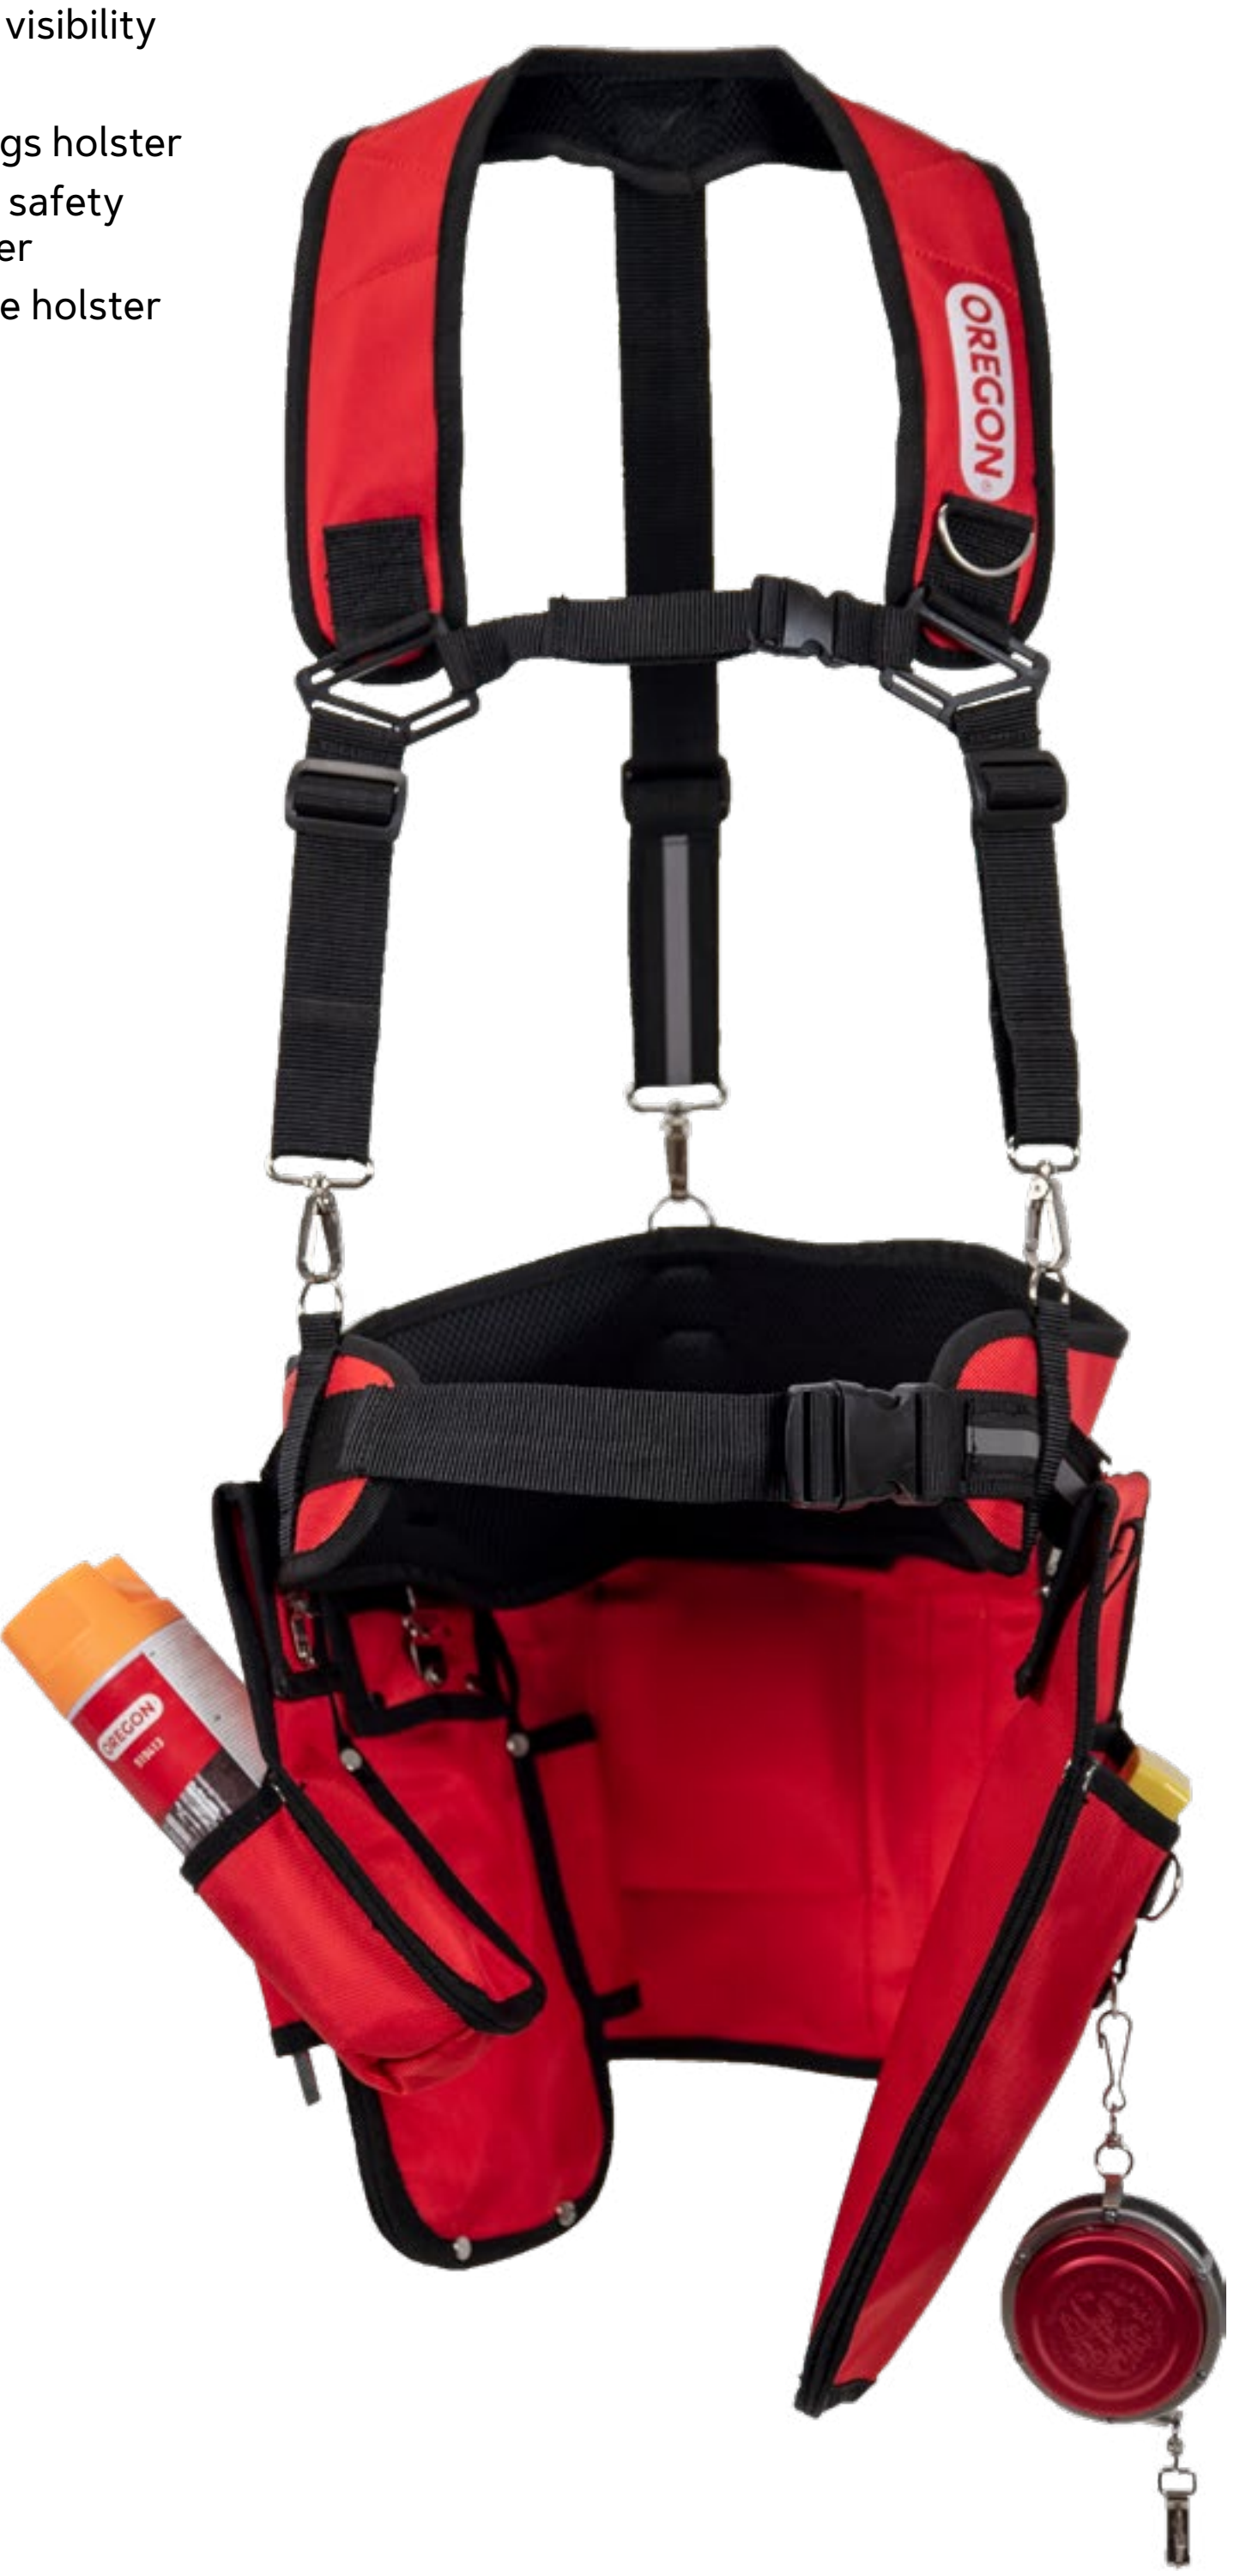

PRODUCT NAME	OREGON	SPECIFICATIONS	

MARKING SPRAYS

Red fluo	519410	• 500ml cans • Temporary marking up to 2 years • Ergonomic and multi-directional cap, can be used upside down • Very good resistance to ultraviolet and adverse weather conditions • Free of fluorocarbons and heavy metals • Rapid drying even on wet surfaces • Reliable operation with a constant flow	12
Green fluo	519411		
White	519412		
Orange fluo	519413		
Yellow fluo	519414		
Blue fluo	519415		
Pink fluo	519441		

MARKING CRAYONS

White	295364	• Pack of 12 crayons • Diameter 12mm; length 120mm • Six-sided shape to prevent rolling • Allows writing and marking on: wood, metal, stone, concrete, tiles, ceramic, plastic, glass, rubber…	36
Blue	295360		
Red	295361		
Green	295362		
Yellow	295363		
Black	295365		
Crayon holder	520272	• For round and hexagonal 10-12mm crayons • Avoids dirty hands when using the crayon • Made of durable metal, fits into pocket with clip	10

LOGGER TAPES

PRODUCT NAME	OREGON	M	SPECIFICATIONS	
Logger Tape	106510	15m	• Heavy-duty gears for smooth operation • Powerful auto-rewind spring • Strong, nylon coated metal tape with clear graduations and markings • Release nail to better secure tape end on wood • Hanger suitable for use with tool holster 41898 and tools belt 584147	24
	106512	20m		24
	106513	25m		12

N°	DESCRIPTION	106510 15m	106512 20m	106513 25m
1	Post screw	106482	106482	106482
2	Gear housing with bearing		106473	106474
3	Main shaft and gear	106477	106477	106477
4	Idler gear and pinion	106478	106478	106478
5	Idler bearing with screw, nut			
6	Gear cover plate	106466	106466	106467
7	Nylon guide post with screws	106480	106480	106480
8	Spacer post with 2 screws	106495	106495	106495
9	Tape refill screw	106483	106483	106483
10	Release hook	106492	106492	106492
11	Tape refill blade with release hook	106459	106461	106463
12	Spool with pinion gear			106476
13	Spring cover plate with bearing	106468	106468	106469
14	Spring assembly complete			
15	Hanger and swivel clip	106494	106494	106494
16	Locking ring	106464	106464	106465
17	1/2 metre plastic end			
17	1 metre plastic end			
18	Hinge			
19	Rubber stop			
20	Extra long eyelets			
Not illustrated	Tape repair end 19" with release hook	106489	106489	106489
	25 metre bulk leader tape		106490	106490

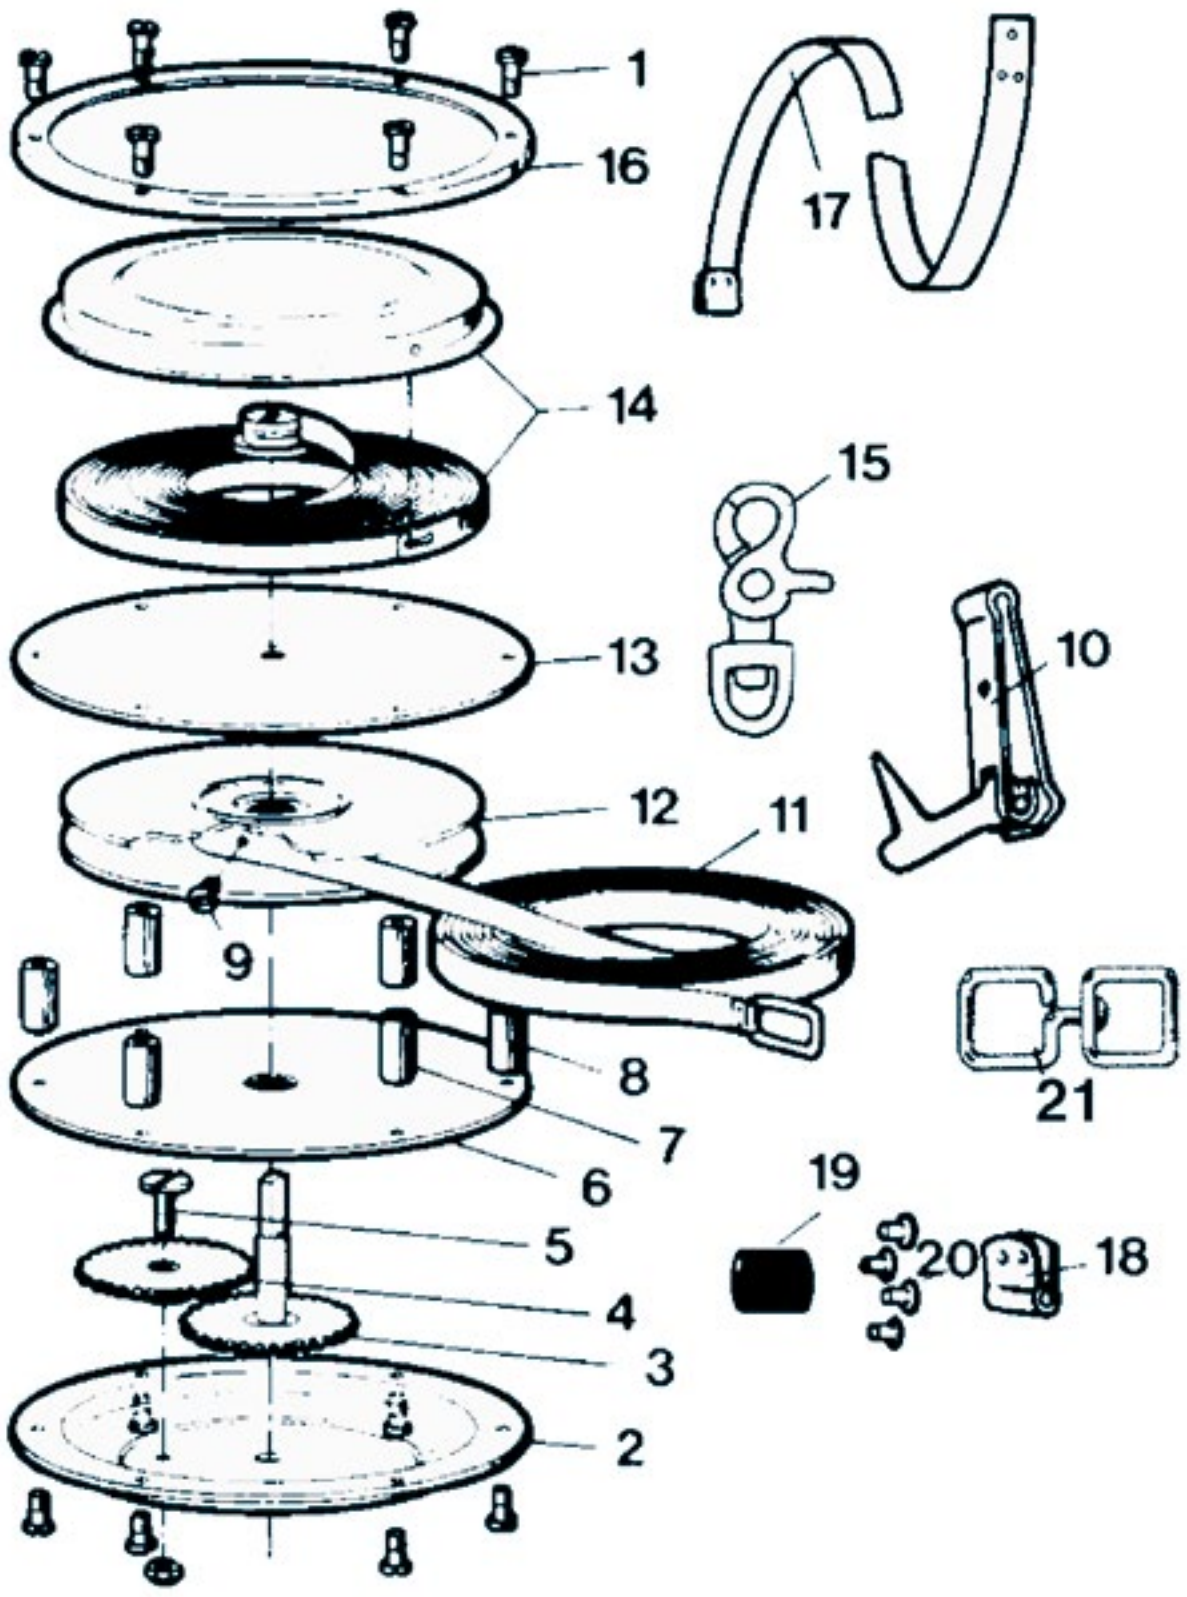

PRODUCT NAME	OREGON	CM	INCH	SPECIFICATIONS	
Plastic Felling Wedges	561109	14	5 1/2″	• Strong, tough and lightweight • Serrations hold wedge in the tree securely • Highly resistant polyamid material for 561109 and 570726	180
	570726	20	8″		12
	23560	25	10″		12
	26782	30	12″		12

PLASTIC FELLING WEDGES

FELLING LEVERS

PRODUCT NAME	OREGON	SPECIFICATIONS		
Felling Lever	536304	• Heavy-duty forged lever • Sliding, forged cant hook • Bent handle provides extra leverage • Comfortable non-slip handle • Length: 80 cm • Weight: 2,4 kg	10	
	536305	• Heavy-duty forged lever • Sliding, forged cant hook • Bent handle provides extra leverage • Comfortable non-slip handle • Length: 130 cm • Weight: 3,5 kg		
	541248	• Sliding Part	1	

LIFTING PICKS

PRODUCT NAME	OREGON	SPECIFICATIONS		
Lifting Pick	536319	• Ergonomic, lightweight aluminium handle • Sharp tip grips the wood easily • Non-slip handle with stop end • Notches for extra grip in frozen wood • Length: 50 cm • Weight: 0,45 kg	40	
	536320	• Ergonomic, lightweight aluminium handle • Sharp tip grips the wood easily • Non-slip handle with stop end • Notches for extra grip in frozen wood • Length: 70 cm • Weight: 0,54 kg		

LIFTING HOOKS

PRODUCT NAME	OREGON	SPECIFICATIONS	📦	
Lifting hook	536308	• Forged steel hook • Non-steel ergonomic plastic handle • Weight: 0.35 kg	40	
Lifting hook with transverse handle	536307	• Forged steel hook • Non-steel ergonomic plastic handle • Weight: 0.45 kg	30	

LIFTING TONGS

PRODUCT NAME	OREGON	SPECIFICATIONS	📦	
Lifting Tong	536321	• Forged steel tong • 180mm jaw opening • Non-slip ergonomic leather handle • Weight: 0.485 kg	30	
	536306	• Forged steel tong • 265 jaw opening for handling large logs • Non-slip comfortable handle • Weight: 0.95 kg	20	

SAW HORSES

PRODUCT NAME	OREGON	SPECIFICATIONS	📦	
Eco saw horse	584145	• Foldable and light, easy to carry and store • Maximum load 80kg • Adjustable height and width • With teeth to keep the wood stable when cutting	1	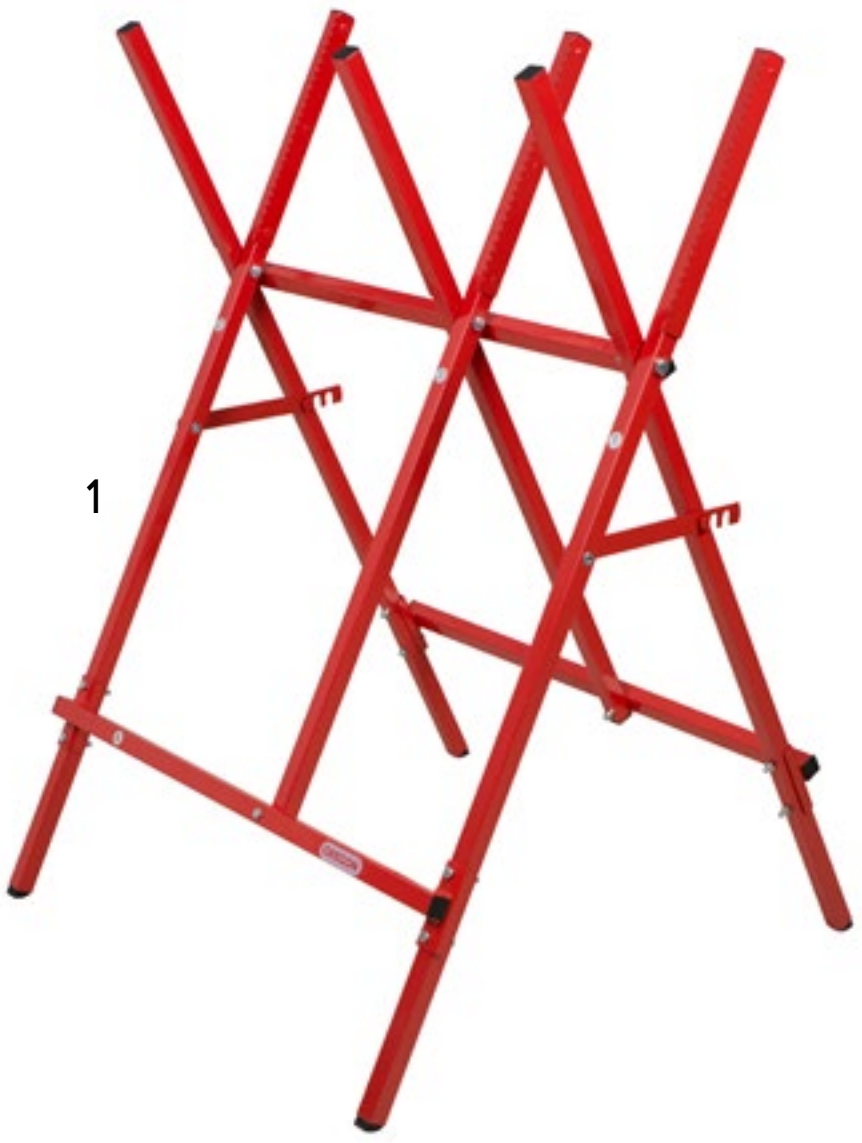
Heavy duty saw horse	584146	• Highly stable construction and design • Laminated steel to provide high resistance • High wood capacity load (maximum 160 kg) • Easy to mount	1	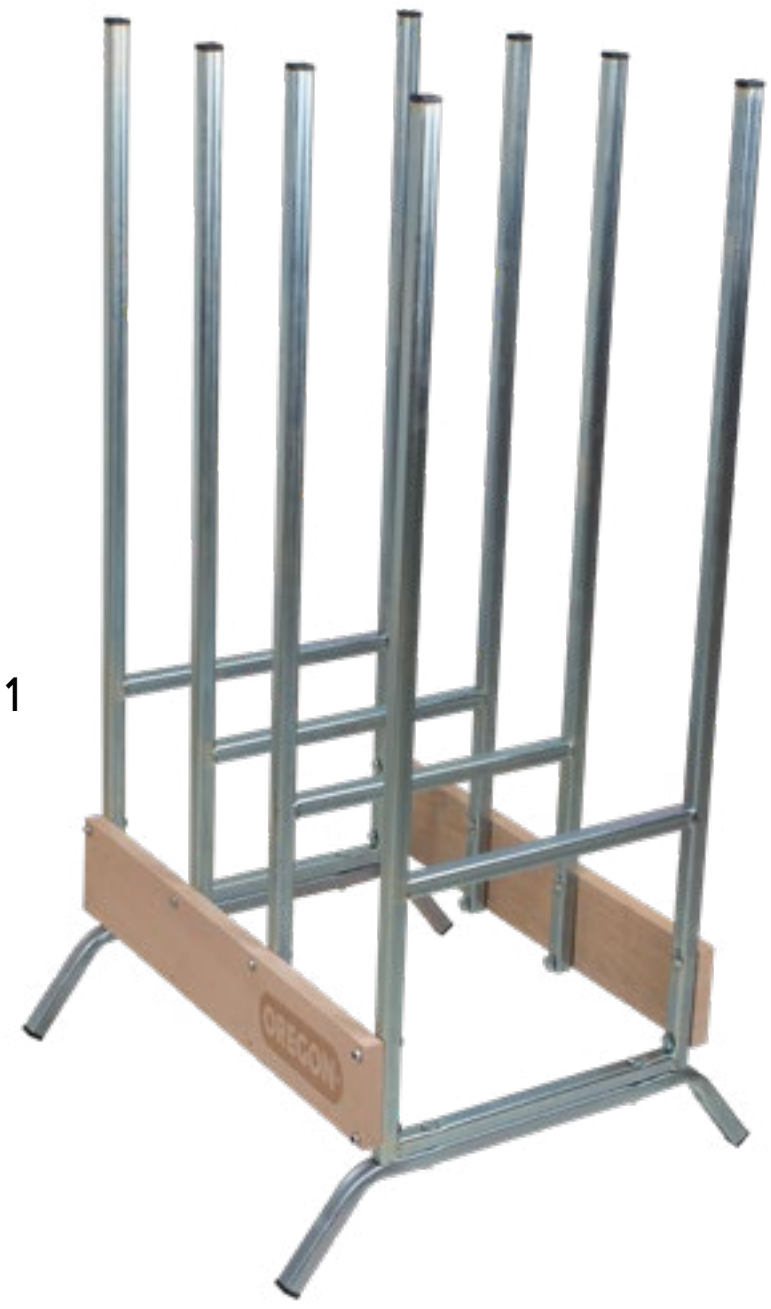

HAND SAWS

PRODUCT NAME	OREGON	MM	INCH	SPECIFICATIONS	📦
Curved hand saw	600136	33	13	• Japanese premium high carbon steel • Impulse hardened with 6,5 teeth per inch • Chrome plated for rust prevention • Tri-edge teeth with 3 cutting angles for a smooth and clean cut • Ergonomic handle • Includes scabbard with leg straps	10
Straight hand saw	600138	30,5	12		
	600139	33	13	• Curved replacement blade	
	600140	30,5	12	• Straight replacement blade	
	600137			• Replacement Nuts for handle	

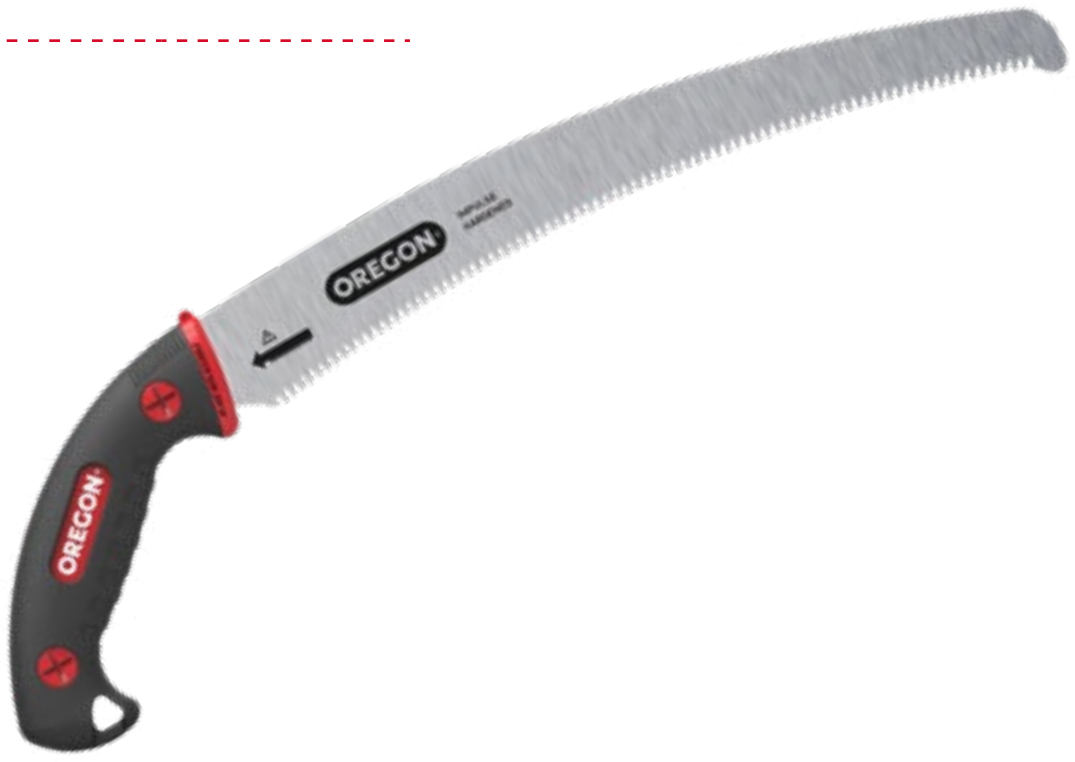

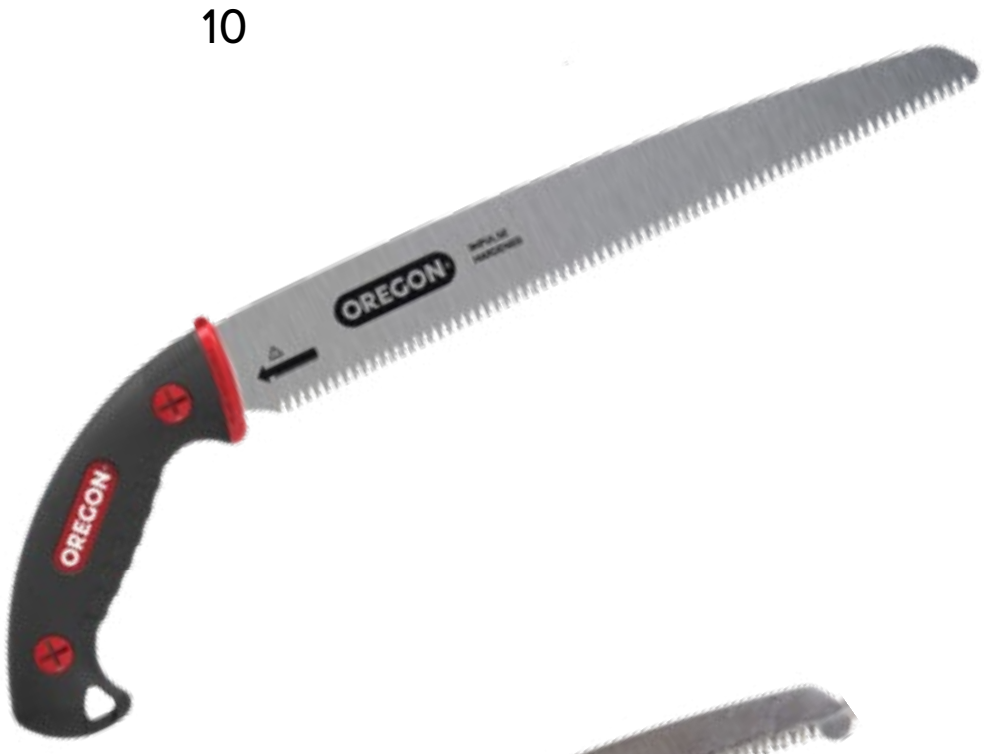

FUEL & CHAIN OIL COMBI-CANS

PRODUCT NAME	OREGON	CAPACITY	SPECIFICATIONS	📦
Combi-can Red	562410	3L + 1,5L	• Holds 3 litres of fuel and 1,5 litres of chain oil • Measuring scale on both cans • Safety cap	6
Combi-can White	562409	3L + 1,5L		
Combi-can Red	562407	5L + 3L	• Holds 5 litres of fuel and 3 litres of chain oil • Measuring scale on both cans • Safety cap	4
Combi-can White	562408	5L + 3L		
Combi-can Red	562405	6L + 3L	• Holds 6 litres of fuel and 3 litres of chain oil • Measuring scale on both cans • Safety cap • Large handle. Easy to transport even with logger gloves • Low profile for high stability • Tool bag available (542035)	6
Combi-can White	562406	6L + 3L		
Safety spout	562611		• Universal safety spout for fuel	10
	562612		• Universal safety spout for chain oil	



PRODUCT NAME	OREGON	CAPACITY	SPECIFICATIONS	📦
FUEL-CANS			**NOT SOLD IN U.K.**	
Fuel can 5L Red + flexible spout	042-970	5 L	• Conform to rigorous UN/ BAM Safety regulations	12
Fuel can 5L Green + flexible spout	042-971	5 L	• Conform to rigorous UN/ BAM Safety regulations	12
Fuel can 5L White + flexible spout	042-972	5 L	• Conform to rigorous UN/ BAM Safety regulations	12
Fuel can 10 L Red	042-973	10 L	• Conform to rigorous UN/ BAM Safety regulations	6
Fuel can 10 L Black	042-974	10 L	• Conform to rigorous UN/ BAM Safety regulations	6
Fuel can 20 L Black	042-975	20 L	• Conform to rigorous UN/ BAM Safety regulations	4
Funnel with filter	042-978	16cm	• Suitable for use with Oil and Fuel • Plastic	1

SPRAYERS

PRODUCT NAME	OREGON	CAPACITY	SPECIFICATIONS	📦
Sprayers 16 L	518769	16 L	• Non-Pressurised tank type. Working capacity 16 or 20 litres • Pressurised chamber capacity 0.9 Litres • Max working pressure 0.2 – 0.3 Mpa • Maximum pressure 1.0 Mpa • Includes lance and 2 adjustable spray nozzles • Total length of flexible tube and spray lance +/- 2.0 Metres • Shoulder strap, spare seal kit included • Easy to store • Complies with 2006/42/EC • 3.6 kgs (16 L) 3.7 kgs (20L)	1
Sprayers 20 L	518771	20 L		1
	525753		• Seals, Gaskets, Nozzle and elbow kit	1
	572030		• Metal Wand	
	572037		• Hose	
	572018		• Air chamber pressure lid	
	572017		• Tank lid with diaphragm	
	572031		• Sealing washer for tank lid	
	572049		• Felt washer for air chamber pressure lid	
	572015		• Pump repair kit	

OREGON
518769 16L
CE
OREGON
518771 20L
CE

HARNESS

PRODUCT NAME	OREGON	SPECIFICATIONS	📦
Pro Harness	539172	• For intensive use • Ergonomic harness with cushioned shoulder strap • Cushioned waist belt • Fully adjustable – evenly spreads the load over both shoulders • Back ventilation hole • Safety quick release system • Thigh protection pad with release hook	10
Light Harness	Q539173	• For occasional use • Light, double shoulder strap with thigh pad • Easy to adjust • Safety quick release system	28

OREGON®

75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged.
Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents.
Engineering is the bedrock of our reputation.

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C008551

PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-004-EN

OREGON
PowerCut

Discover more of our products at
OregonProducts.com

HARVESTER CHAINS AND GUIDE BARS

HAR_1.2
EN/EUR

OREGON
SpeedMax XL

90m
OREGON

OREGON®

SHARPER BY NATURE

1946 ushered in a better way of woodcutting when logger Joseph Buford Cox realised how easily timber-beetle larvae can chew through timber, creating the first revolutionary Oregon saw chain that duplicated their alternating C-shaped jaws in steel. From the invention of modern saw chain to research innovations that reduce injury-causing kickback, Oregon has always been the industry leader. There's a reason we're the world's number-one in saw chain, guide bars, sprockets, forestry accessories, lawnmower blades and outdoor equipment parts.

UPTIME IS THE BOTTOM LINE.

We made SpeedMax™ XL for those who live to get the job done right — every cut, every day.

DETAILS AND DEPENDABILITY

They put more wood on the ground. They keep you in the cab. It all translates into more uptime, all the time.

That's why we've been working for generations to deliver faster, stronger, longer-lasting cutting systems for the most demanding timber harvesters in the world.

Oregon is the only manufacturer to design a complete saw chain, guide bar and sprocket cutting system for industrial harvesting equipment.

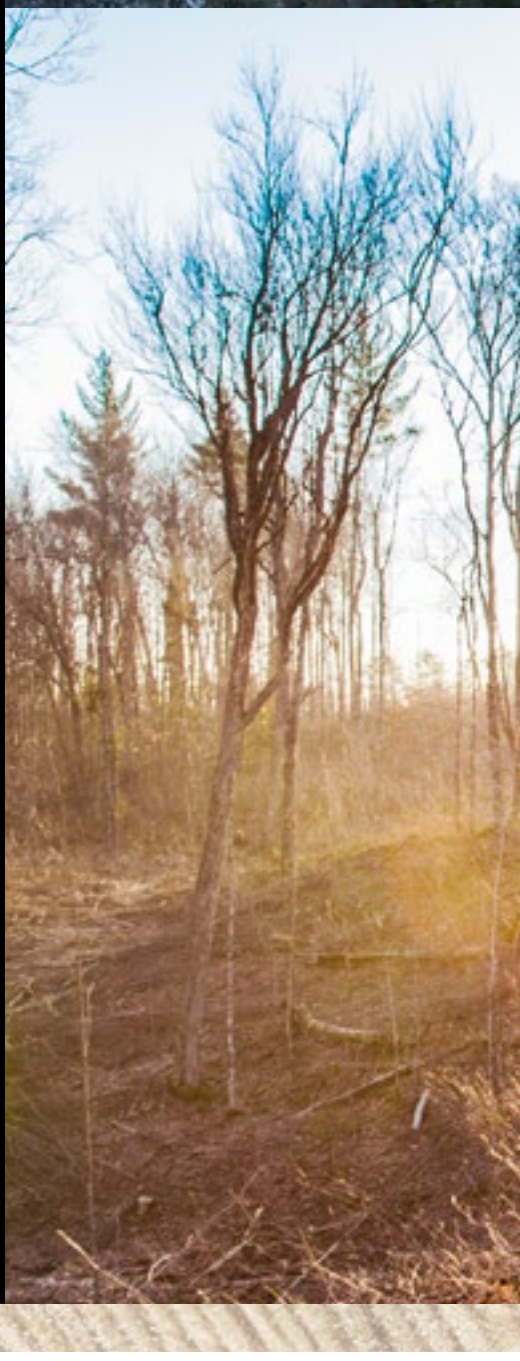

SpeedMax™ XL
.404" Harvester
LubriTec
Jet-Fit
OREGON®

SPEEDMAX XL™ GUIDE BAR
with Replaceable Sprocket Nose

SPEEDMAX™ XL

BUILT FOR YOUR TOUGHEST DAY.

The SpeedMax XL Cutting System offers more uptime because it is faster, stronger, and long-lasting. It's a complete chain, bar, and sprocket system that delivers precise, engineered components working together to deliver unparallel efficiency, performance, and durability.

FASTER.
STRONGER.
LONG-LASTING.

19HX SAW CHAIN

Optimized for high-flow, high-power heads and saw motors for faster cutting speed. Featuring tall chamfer chisel cutters that combine best-in-class durability with improved chip clearance to deliver faster and more consistent cuts.

CUTTING SYSTEM

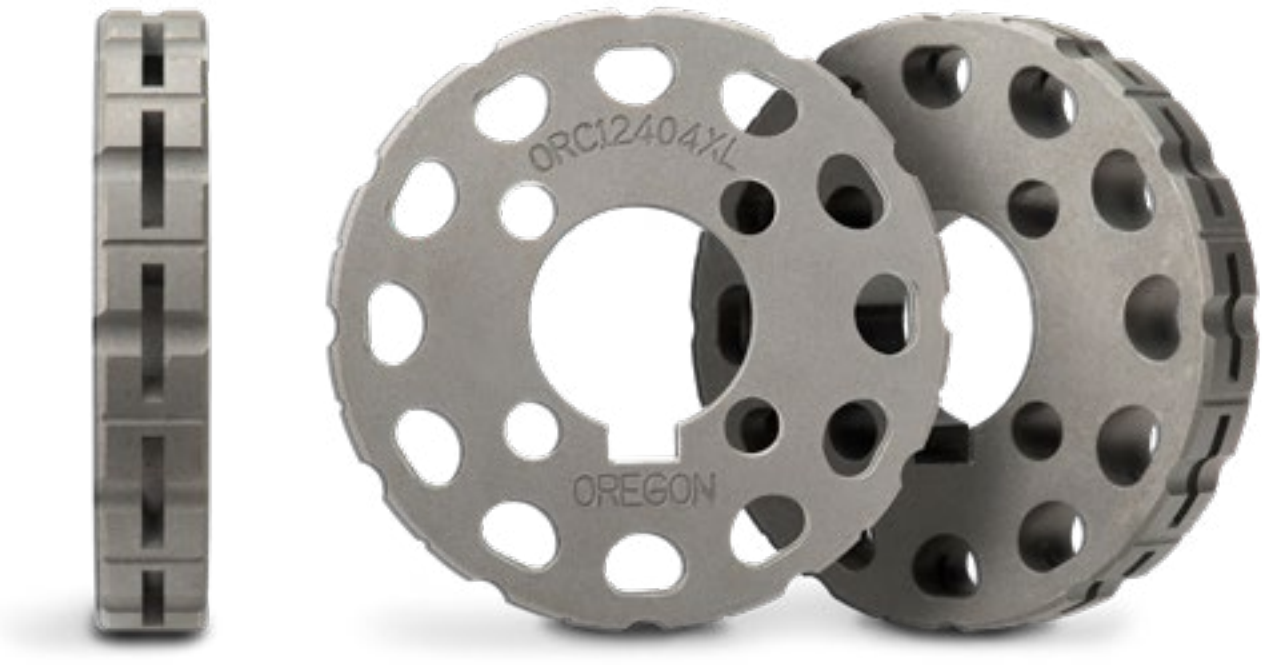

.404" XL RIM SPROCKET

INVENTORS OF THE MODERN SAW CHAIN

Almost 75 years ago, Joseph Buford Cox witnessed the sawing motion of a timber beetle larvae burrowing through a piece of wood. Curious, Joe took the larvae back to his Portland, Oregon, basement for a closer inspection. By observing C-shaped jaws under a magnifying glass, he designed, manufactured and patented the "chipper saw chain" and started the Oregon Saw Chain Company in 1947. Today, all the saw chain produced in the world utilizes the design Joe Cox developed in the 40s. Our founder's ingenuity in finding inspiration from nature to design a more efficient tool is a big part of who we are, but we are still going to push our talent, creativity and imagination to continually reimagine and redefine what is possible.

JOESPH B. COX
FOUNDER

OREGON®

TRUSTED BY
PROS™
SINCE
1947
OREGON®

DESIGNED &
ENGINEERED
IN THE USA

HARVESTER CHAINS

Saw Chain Terminology

PARTS OF A SAW CHAIN

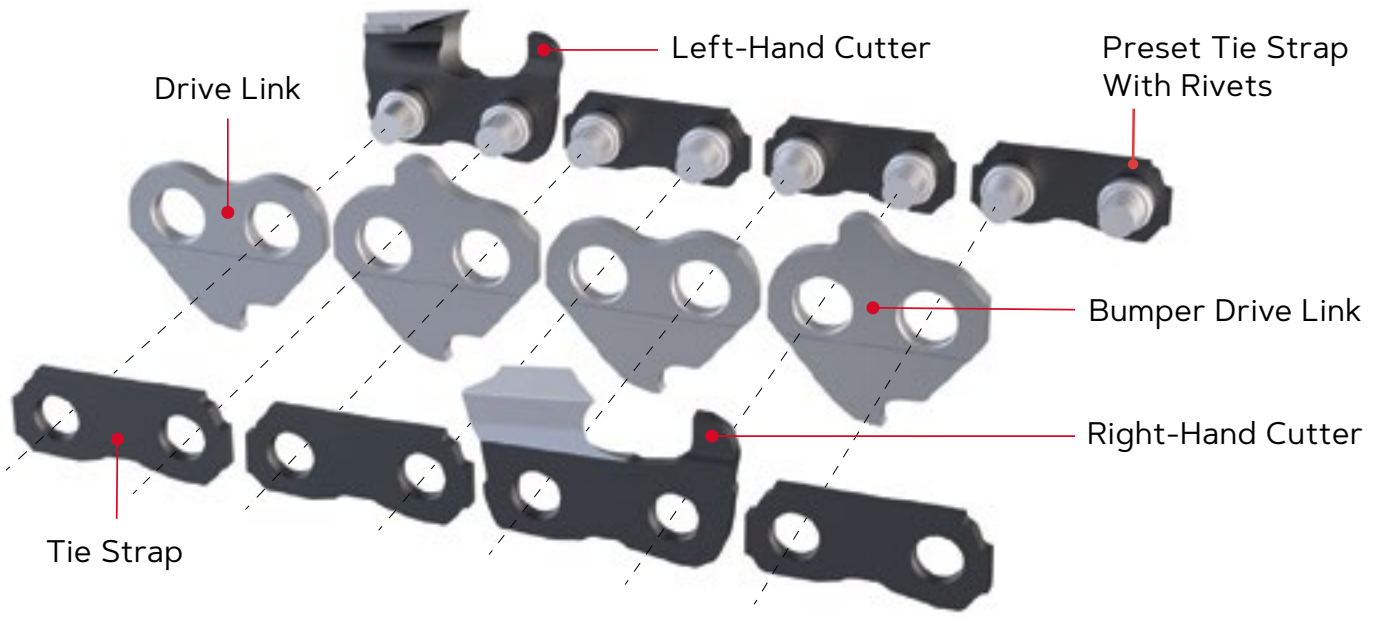
Drive Link
Left-Hand Cutter
Preset Tie Strap With Rivets
Bumper Drive Link
Right-Hand Cutter
Tie Strap

PARTS OF A CUTTER


Cutting Corner
Depth Gauge
Gullet
Toe
Top Plate
Side Plate
Rivet Hole
Heel

PARTS OF A RIVET



A harvesting machine is only as good as its cutting attachments. That's why discerning consumers choose Oregon®. Our harvester bars, chains and sprockets make your machine rise to its potential -maximizing your cutting efficiency while minimizing your down time.



PATENTED STEEL

All of our harvester chain is built with patented Oregon® OCS-01 steel, which was developed specifically for use in high performance applications.



INDUCTION HARDENING

Induction Hardening: Increase the longevity of your bar with precision heat-treated rails. Our induction hardening process offers superior resistence to wear and chipping.



JET-FIT™

The Jet-Fit bar-mount system reduces bar change-out time to seconds. The tail slots make fitting simple. Solid-body Jet-Fit bars offer the same durability and reliability as solid harvester bars with standard mounts.



STUMP SPRAY

Stump Spray helps to control stumprotting fungus (Heterobasidion annosum). Oregon developed Stump Spray bars with harvester operators and forest research agencies to better protect conifers.

SpeedMax™ XL
.404" Harvester
LubriTec
Jet-Fit
OREGON

LubriTec™
OILING SYSTEM

You want tools to work smarter and last longer. We designed LubriTec to deliver the best possible lubrication for your saw chain. Keeping lubrication where it's needed most means a longer lasting saw chain and guide bar and less down time. Here's how it works:

LUBRITEC FOR THE CHAIN

- Lubricant is held inside LubriTec reservoirs.
- Oil flows freely into and around the saw chain parts and the guide bar. Oil is held in the high-friction zone where the saw chain and guide bar groove walls make contact.
- The presence of lubricant lowers friction during the start-up period before the saw's oiling system reaches its peak function.
- LubriTec strengthens the saw chain tie straps and reduces their tendency to flex during operation, making a more stable and durable saw chain.

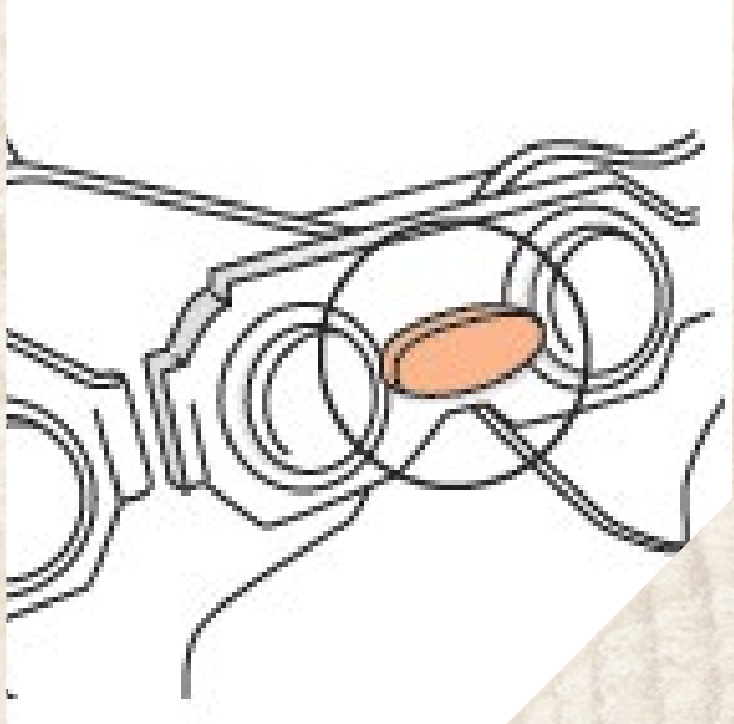

LUBRITEC FOR THE GUIDE BAR

- Our LubriTec guide bar dam is cleverly designed to keep lubricant where it's needed most. It looks like a small barrier and is found in the bottom of the guide bar's groove, just behind the oil hole. It both increases available oil and reduces oil hole plugging. Resulting in better overall lubrication.
- The LubriTec angled oil hole virtually eliminates guide bar oil hole plugging. The oil hole slopes up toward the top of the guide bar and forward toward the nose. It's approximately 40% smaller in diameter than a standard hole, increasing velocity as oil enters the guide bar. It also helps clear sawdust and debris away from the hole during operation.

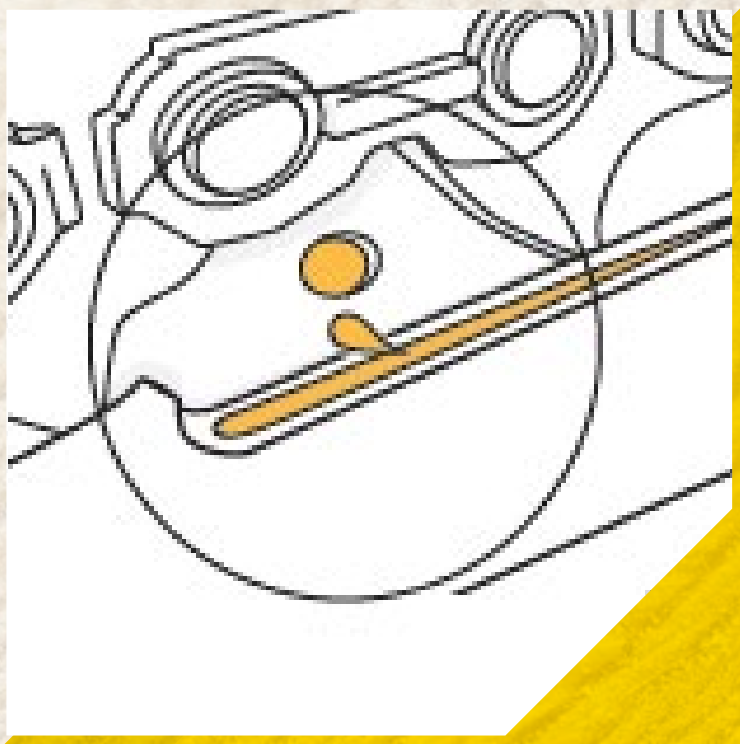

Chain part numbers and family overview

OREGON
50
19X

19 HX 086 E

CHAIN PITCH AND GAUGE			CHAIN FAMILY		LENGTH number of drivelinks		PACKAGING TYPE
.404"	18	.080" 2,0mm	HX	Harvester	086	86	E Loops
	19	.080" 2,0mm	H	Harvester	050	50 ft	R 100 ft Reels
3/4"	11	.122" 3,1mm	BC	Harvester	100	100 ft	

OREGON
OREGON

Chain spare parts

.404"	18HX	.080" (2,0 mm)	512890	512891	518812	512893	512892
	19HX	.080" (2,0 mm)	597691	597692	597693	597694	597695
3/4"	11H	.122" (3,1 mm)	P107541	P107542	P24569	P24577	P107543

19HX
CHAMFER CHISEL®

- A tall and aggressive chamfer chisel cutter designed to deliver faster cutting speed.

- Patented saw chain steel provides proven Oregon durability, especially in cold cutting conditions.

- Oregon's largest and thickest .404 components designed to provide superior strength and durability.

- Blued cutters provide superior corrosion resistance.

18HX

18X
18X
18X
18X
18X
OREGON
OREGON
OREGON

18HX features Micro Chisel Cutters with small-radius working corners for precision performance and easy maintenance. 18HX introduces thicker coined drive links for increased strength, larger rivets for lowered saw chain stretch, and a wider kerf for reduced guide bar bending. 18HX delivers plenty of power and reliable cutting performance with less horsepower output.

.404"	80 : 2,0 mm	4,7 mm	5,5 mm	35°	60°	1,27 mm

53	55	58	66	70	71	72
18HX053E	18HX055E	18HX058E	18HX066E	18HX070E	18HX071E	18HX072E
74	75	76	77	78	79	80
18HX074E	18HX075E	18HX076E	18HX077E	18HX078E	18HX079E	18HX080E
81	82	85	86	87	88	89
18HX081E	18HX082E	18HX085E	18HX086E	18HX087E	18HX088E	18HX089E
90	91	92	93	94	95	96
18HX090E	18HX091E	18HX092E	18HX093E	18HX094E	18HX095E	18HX096E
97	98	99	100	101	102	103
18HX097E	18HX098E	18HX099E	18HX100E	18HX101E	18HX102E	18HX103E
104	105	108	109	1480		
18HX104E	18HX105E	18HX108E	18HX109E	18HX100R		

19HX

19X
19X
19X
19X
19X
OREGON
OREGON
OREGON

19HX features a new, taller and more aggressive Chamfer Chisel, designed to deliver faster cutting speed and improved chip clearance. 19HX introduces Oregon's thickest and largest components featured on a saw chain, delivering unparalleled cutting speed over the 18HX. 19HX delivers faster, more consistent cuts in all types of wood due to its high-flow, high-power heads and saw motors. Best used with high horsepower output machines.

.404"	80 : 2,0 mm	4,7 mm	5,5 mm	35°	60°	1,27 mm

73	74	82	85	86	87	88
19HX073E	19HX074E	19HX082E	19HX085E	19HX086E	19HX087E	19HX088E
89	90	91	93	94	95	96
19HX089E	19HX090E	19HX091E	19HX093E	19HX094E	19HX095E	19HX096E
97	100	101	102	103	104	105
19HX097E	19HX100E	19HX101E	19HX102E	19HX103E	19HX104E	19HX105E
109	110	1480				
19HX109E	19HX110E	19HX100R				

11H

60
OREGON
OREGON
11
11
11

Semi Chisel chains offer superior strength and durability. Featuring 3/4″ pitch and a rounded edge on the cutters, the Semi Chisel is perfect for high-performance tasks.

3/4″		122 : 3,1mm	7,9 mm	7,9 mm	30°	50°	1,52mm

45	46	52	55	60	75	383
11H045E	11H046E	11H052E	11H055E	11H060E	11H075E	11H050R

11BC

60
OREGON
OREGON
11
11
11

The Chipper Chisel delivers a reliable stay-sharp performance. The 3/4″ pitch and .122″ gauge chain are durable,and the large cutters take bigger bites out of the toughest wood.

3/4″		122 : 3,1mm	7,9 mm	7,9 mm	30°	50°	1,52mm

383
11BC050R

TRUSTED BY
SINCE
PROS
1947
TM
OREGON®

DESIGNED &
ENGINEERED
IN THE USA

HARVESTER GUIDE BARS

SpeedMax™ XL
.404" Harvester
LubriTec
Jet-Fit
OREGON

Guide bar part numbers and family overview

Oregon bar part numbers are printed on the bar package and etched onto the bar body.

Solid Harvester
.404" Harvester
LubriTec
OREGON
18HX

75 2 RH F L149

	LENGTH CM	GAUGE INCHES (MM)	BAR TYPE	PITCH	BAR MOUNT
.404"	42 48 54 59 60 64 67 75 80 82 90 00 (100) 13 (113)	**2** .080" (2,0mm)	**HS** Solid harvester **HL** Stump Spray Left Hand **HR** Stump Spray Right Hand **RH** Solid Harvester RSN **SM** SpeedMax™	**F** .404"	B149 B163 D104 D149 D163 L104 L114 L149 L163 L172 M104 N104 N114 P149 Q104 Q114 Q149 Q163 R104 R114 R149 S149 S163
3/4"	36" 40" 45" 61"	**1** 1.22" (3,1mm)	**SN** Solid Harvester RSN	**C** 3/4"	K225 T138

SpeedMax™ XL

SpeedMax™ XL
.404" Harvester
LubriTec
Jet-Fit
OREGON

Minimize the time between cuts and reduce vibration for your entire cutting system. The SpeedMax XLReplaceable Sprocket Nose (RSN) guide bar features a wider and stronger body with a re-engineered tail contour that is less likely to throw chain.

.404″	54-100cm	2,0mm	LubriTec™ OILING SYSTEM

Q
12-13T

	54cm	59cm	60cm Jet-Fit™	64cm	64cm Jet-Fit™	67cm Jet-Fit™	75cm
PN	542SMRQ104	592SMRQ104	602SMRQ163	642SMRQ114	642SMRQ163	672SMRQ163	752SMRQ114

	75cm Jet-Fit™	80cm	82cm Jet-Fit™	90cm	90cm Jet-Fit™	100cm
PN	752SMRQ149	802SMRQ114	822SMRQ149	902SMRQ114	902SMRQ149	002SMRQ114

R
14-16T

	64cm	67cm Jet-Fit™	75cm	75cm Jet-Fit™	80cm	82cm Jet-Fit™	90cm Jet-Fit™
PN	642SMRR104	672SMRR163	752SMRR114	752SMRR149	802S MRR114	822SMRR149	902SMRR149

S
17-18T

	60cm Jet-Fit™	67cm Jet-Fit™	75cm Jet-Fit™	82cm Jet-Fit™	90cm Jet-Fit™
PN	602SMRS163	672SMRS163	752SMRS149	822SMRS149	902SMRS149

P
14-16T

	75cm Jet-Fit™	82cm Jet-Fit™
PN	752SMRP149	822SMRP149

R
14-15T

	75cm SpeedMax™ LH Spray
PN	752SLRR149

Nose kit for SpeedMax™ XL	SMR14T
Rivets kit for SpeedMax™ XL	578147

Solid Harvester RSN

Solid Harvester
.404" Harvester
OREGON
18HX

The Solid Harvester Replacement Sprocket Nose (RSN) guide bar delivers a superior performance for high-speed mechanical harvesting conditions.

.404″			
	64-82cm	2,0mm	LubriTec™ OILING SYSTEM

Nose kit for (RSN) .404″ 537245

L
11-12T

	75cm	75cm Jet-Fit™	82cm Jet-Fit™
PN	752RHFL114	752RHFL149	822RHFL149
	90cm		
	902RHFL114		

B
13-14T

	75cm Jet-Fit™	82cm Jet-Fit™
PN	752RHFB149	822RHFB149

N
14-15T

	64cm	80cm
PN	642RHFN104	802RHFN114

D
16-18T

	75cm Jet-Fit™	82cm Jet-Fit™
PN	752RHFD149	822RHFD149

Solid Harvester RSN 3/4″

Oregon® 3/4″ Harvester Replacement Sprocket Nose (RSN) guide bars fit a broad range of timber harvesting equipment. Built tough using specialized ⅜″ thick alloy-steel with precision-milled grooves. Replacement nose kits are available to maximize bar life.

3/4″			
	28-61″	3,1mm	LubriTec™ OILING SYSTEM

Nose kit for (RSN) 3/4″ 40603A

T
9-10T

	28″	36″	40″	45″	61″
PN	281SNCT138	361SNCT138	401SNCT138	451SNCT138	611SNCT138

Solid Harvester

Solid Harvester
.404"
LubriTec
OREGON
18HX

Oregon® Solid Harvester (Sprocket-Nose) guide bars deliver superior performance in demanding, high-speed conditions. This bar resists chipping and features outstanding spring-back. High-grade alloy-steel material and induction-hardened bar rails make it tough and durable.

.404″ | 42-113cm | 2,0mm

Sprocket kit .404″ Solid Harvester 101918

L

11-12T

	55cm Jet-Fit™	60cm Jet-Fit™	75cm	75cm Jet-Fit™	82cm Jet-Fit™
PN	552HSFL163	602HSFL163	752HSFL114	752HSFL172 752HSFL149	822HSFL149

	88cm	90cm	90cm Jet-Fit™	113cm
PN	882HSFL114	902HSFL114	902HSFL149	132HSFL114

B

13-14T

	67cm Jet-Fit™	75cm Jet-Fit™	82cm Jet-Fit™
PN	672HSFB163	752HSFB149	822HSFB149

N

14-15T

	90cm
PN	902HSFN114

D

15-18T

	75cm Jet-Fit™	82cm Jet-Fit™
PN	752HSFD149	822HSFD149

M

9-10T

	42cm	48cm
PN	422HSFM104	482HSFM104

Stump Spray

Solid Harvester
.404"
OREGON
18HX

Prevent stump-rotting fungus with the Stump Spray feature on this Solid Harvester guide bar. The bar incorporates all the other patented features of the .404″ Solid Harvester guide bar.

.404″ | 75cm | 2,0mm

Left hand

L

11-12T

	75cm Jet-Fit™
PN	752HLFL149

Jet-Fit™ Tail Mounts

B 149

⚙	13, 14
1	.586” x 3,288” 14,9 x 83,5 mm
2	.413” x .542” 10,5 x 13,8 mm
3	.492” 12,5 mm

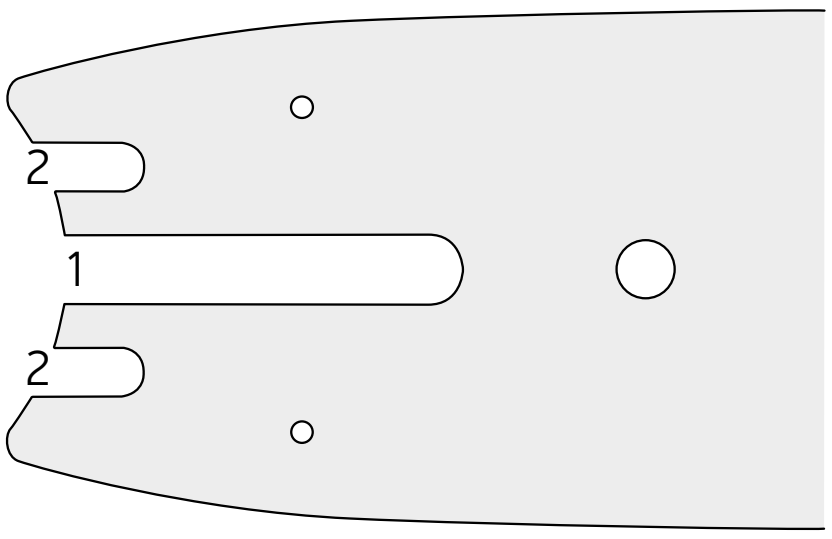

B 163

⚙	13, 14
1	.586” x 3,288” 14,9 x 83,5 mm
2	.413” x .542” 10,5 x 13,8 mm

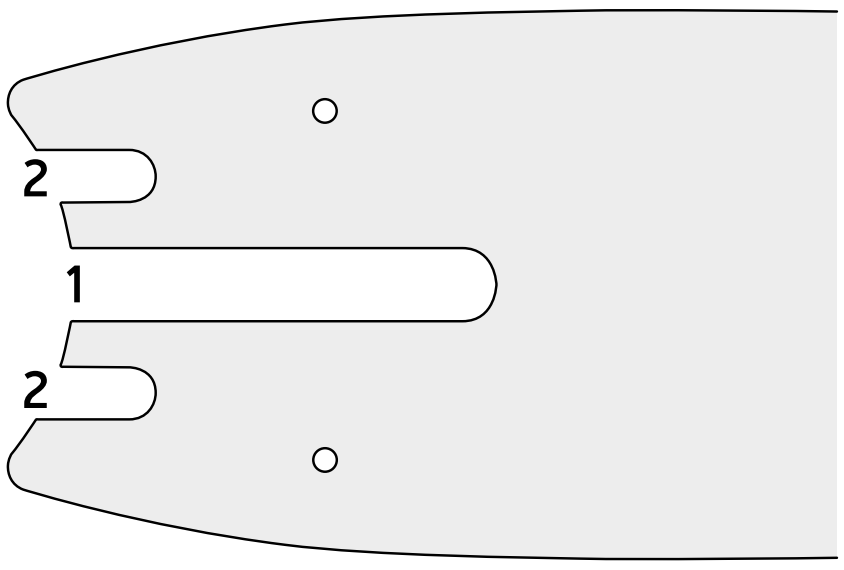

D 149

⚙	16, 17, 18
1	.586” x 3,288” 14,9 x 83,5 mm
2	.413” x .542” 10,5 x 13,8 mm
3	.492” 12,5 mm

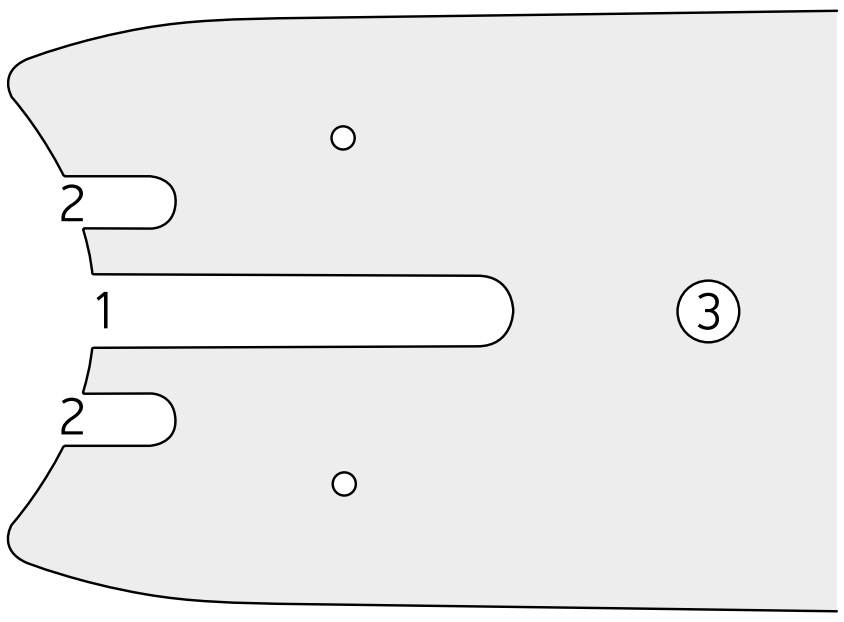

L 149

⚙	11, 12
1	.586” x 3,288” 14,9 x 83,5 mm
2	.413” x .542” 10,5 x 13,8 mm
3	.492” 12,5 mm

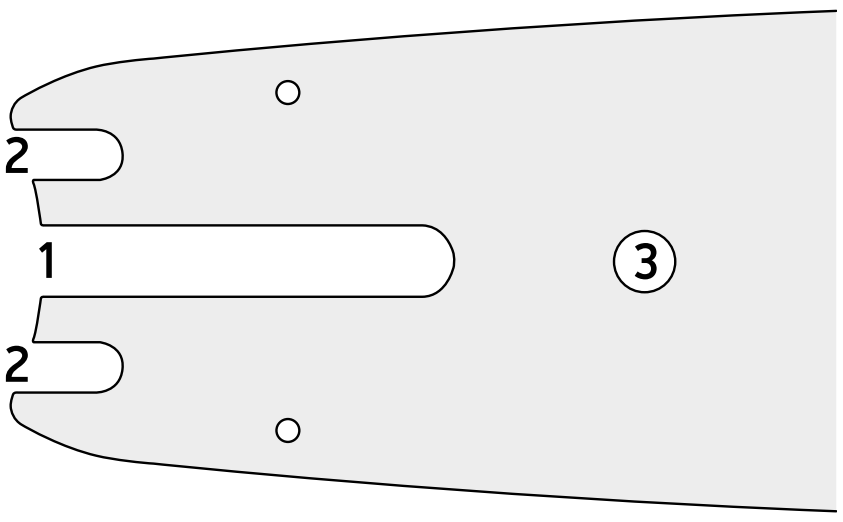

L 163

⚙	11, 12
1	.586” x 3,288” 14,9 x 83,5 mm
2	.413” x .542” 10,5 x 13,8 mm

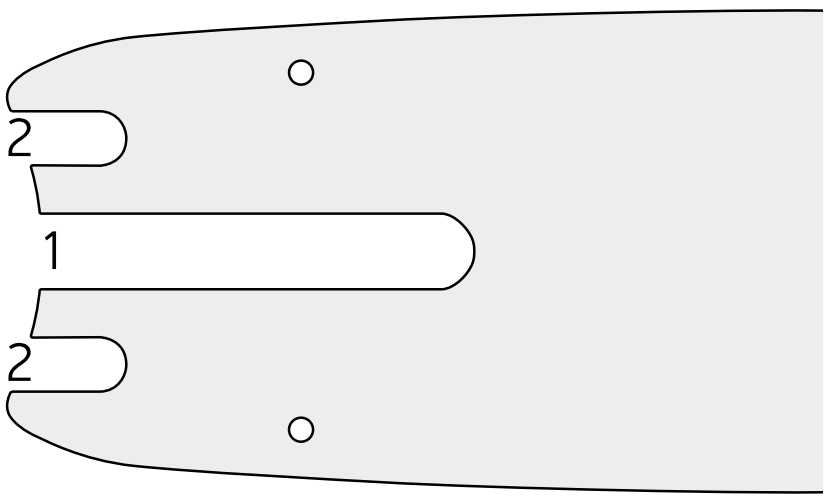

Q/R/P/S 149

⚙	Q: 12, 13 R: 14, 15 P: 15, 16 S: 17, 18
1	.586” x 3,288” 14,9 x 83,5 mm
2	.413” x .542” 10,5 x 13,8 mm
3	.492” 12,5 mm

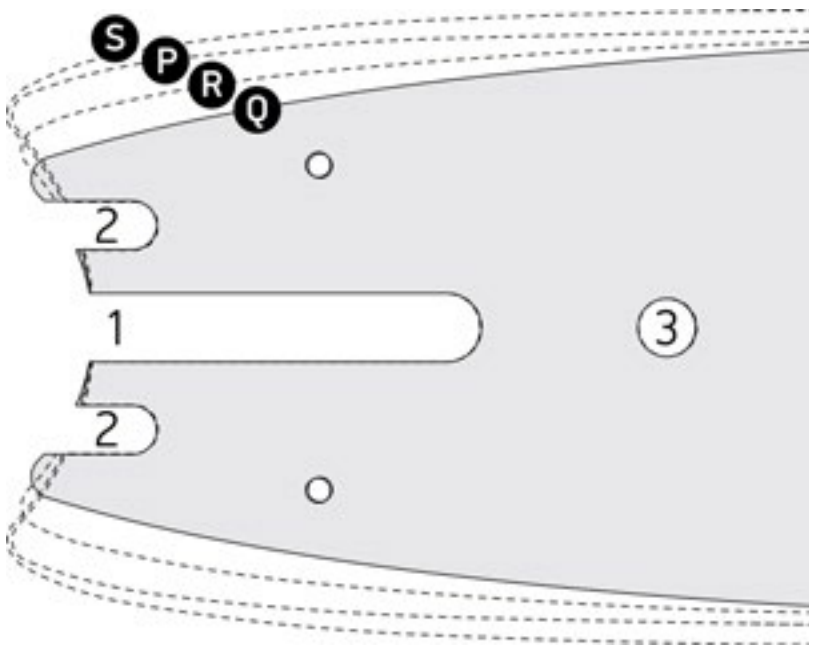

Q/S 163

⚙	Q: 12, 13 S: 17, 18
1	.586” x 3,288” 14,9 x 83,5 mm
2	.413” x .542” 10,5 x 13,8 mm

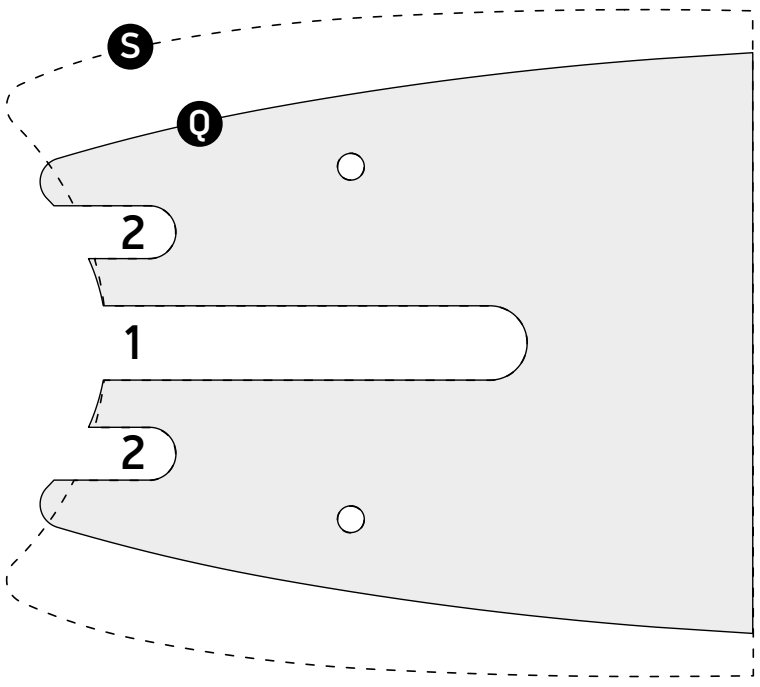

.404″

Standard Tail Mounts

L 104

⚙	11, 12
1	.399″ x 3,338″ 10 x 84,8 mm
2	.404″ x .555″ 10,3 x 14,1 mm

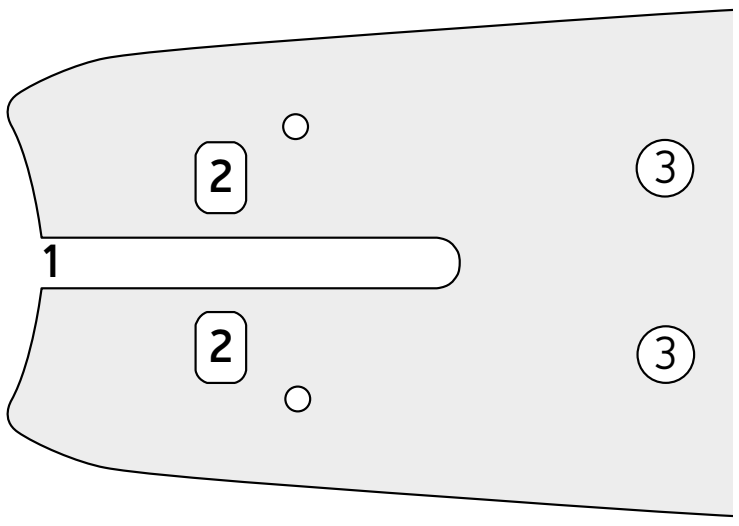

L 114

⚙	11, 12
1	.399″ x 3,338″ 10 x 84,8 mm
2	.404″ x .555″ 10,3 x 14,1 mm
3	.435″ 11 mm

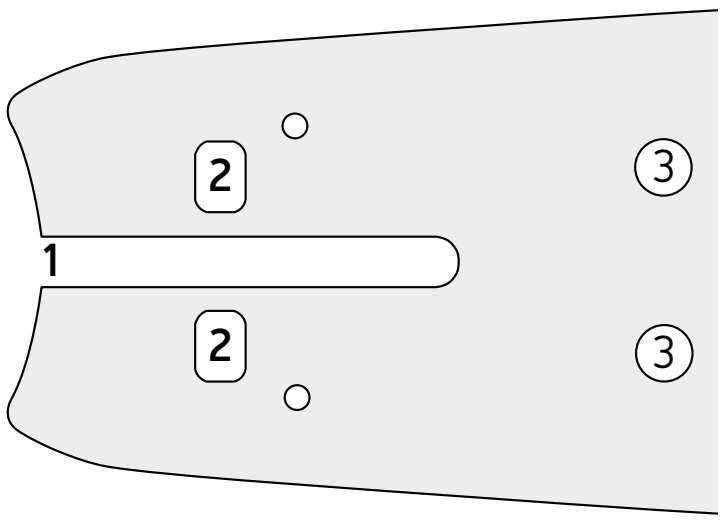

M 104

⚙	9, 10
1	.399″ x 3,338″ 10 x 84,8 mm
2	.404″ x .555″ 10,3 x 14,1 mm

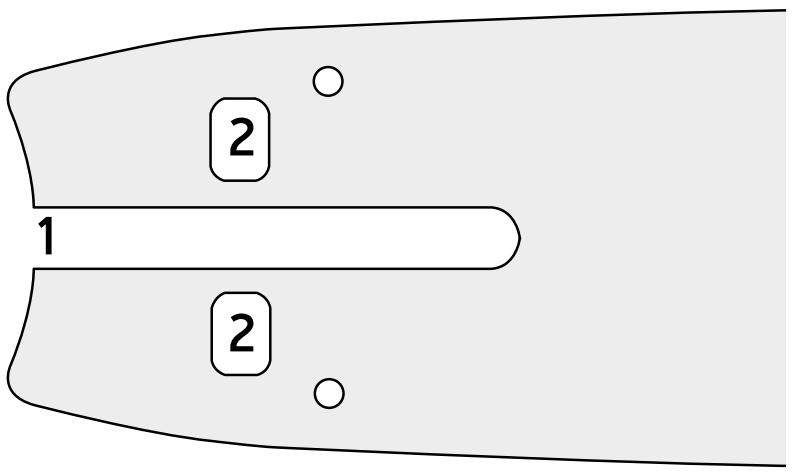

N 104

⚙	14, 15
1	.399″ x 3,338″ 10 x 84,8 mm
2	.404″ x .555″ 10,3 x 14,1 mm

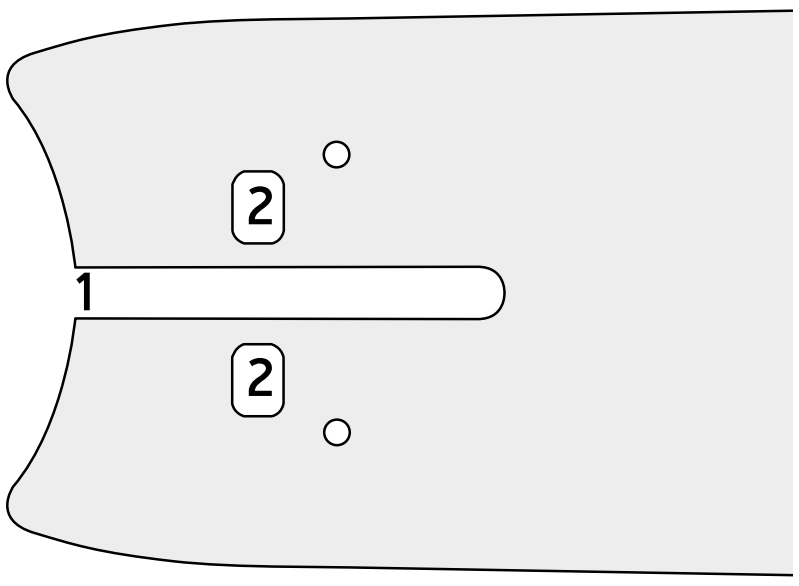

N 114

⚙	14, 15
1	.399″ x 3,338″ 10 x 84,8 mm
2	.404″ x .555″ 10,3 x 14,1 mm
3	.435″ 11 mm

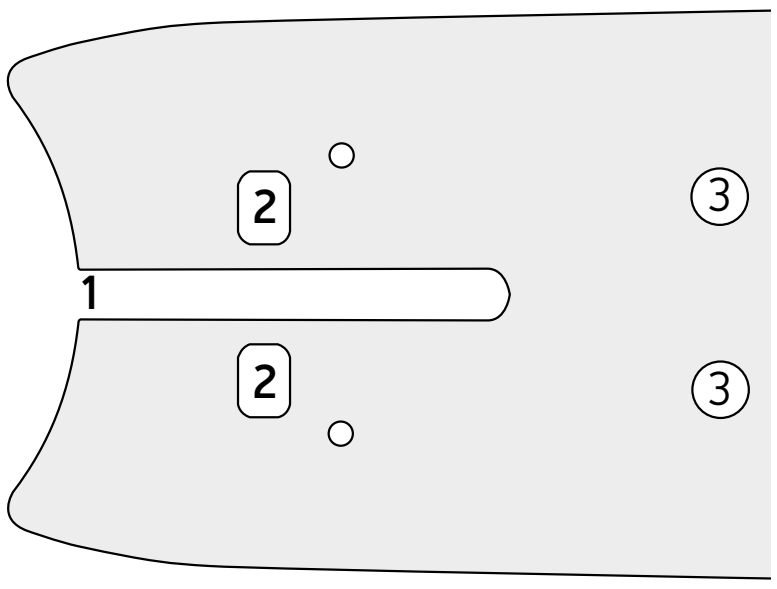

3/4″

T 138

⚙	9, 10
1	.635″ x 7,410″ 16,1 x 188,2 mm
2	.650″ 16,5 mm

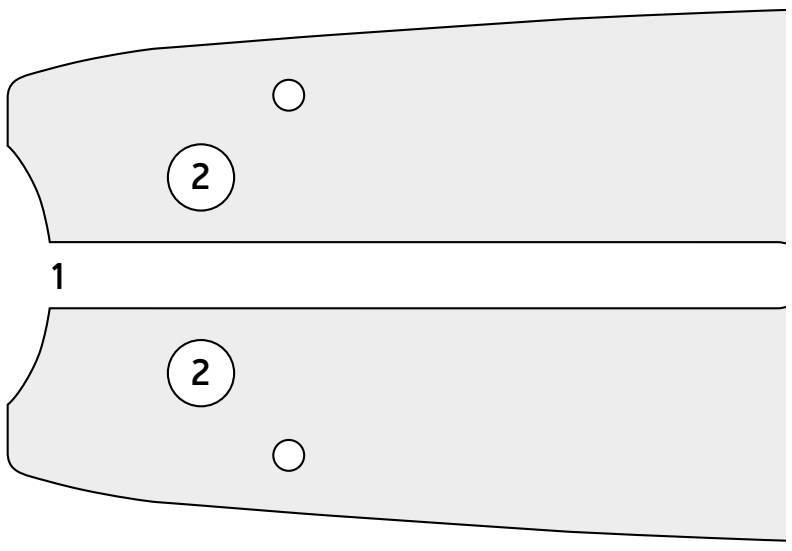

TRUSTED BY

SINCE 1947

PROS™

OREGON®

DESIGNED &
ENGINEERED
IN THE USA

HARVESTER DRIVE SPROCKETS

ORC12404XL
OREGON

DRIVE SPROCKETS

.404"

Our precision-balanced rim sprockets are machined from durable solid-billet steel. They feature a raised-tooth design with a precision match to Oregon .404 chains to reduce chain stretch, and improved debris ejection with tapered side-ports. Patent-pending wear-marks indicate when to replace worn sprockets.

ORC12404XL
OREGON

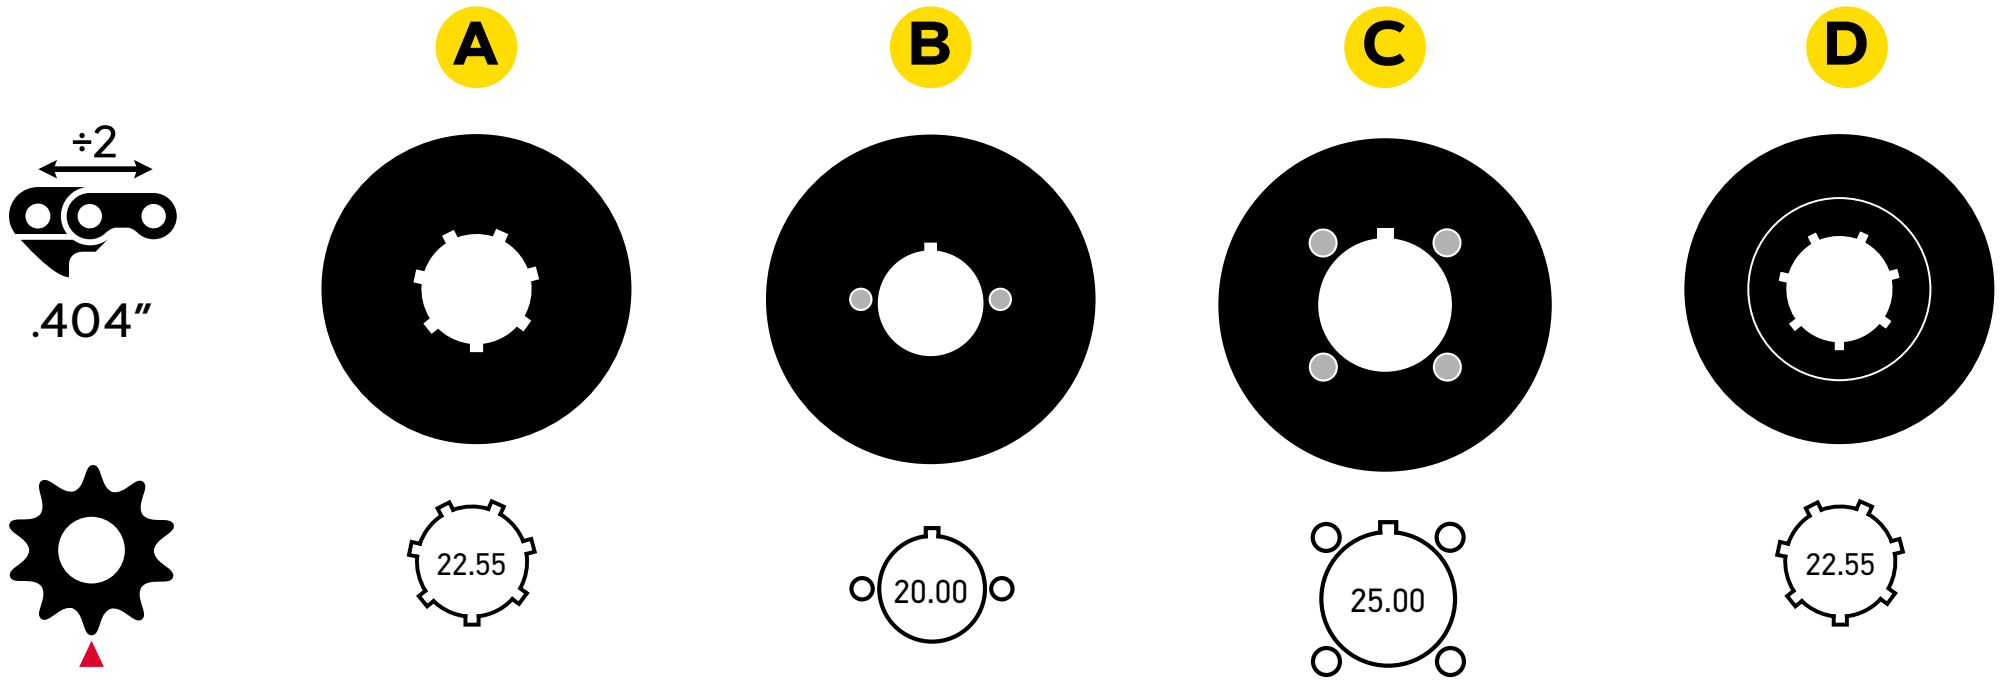

	A	B	C	D
10				
11		ORB11404XL	ORC11404XL	
12		ORB12404XL	ORC12404XL	
13			ORC13404XL	
14		ORB14404XL	ORC14404XL	ORD14404XL
15			ORC15404XL	
16			ORC16404XL	
17			ORC17404XL	
18			ORC18404XL	

Shims

Type	PN
Shims type C 0,5mm 3-pack	OR-C050-3



It may be necessary to use shims to ensure that the guide bar and harvester drive sprocket are correctly aligned.

A worn drive sprocket causes increased wear on the saw chain and the guide bar.
Sprockets should therefore be checked and replaced regularly.

TECHNICAL INFORMATION

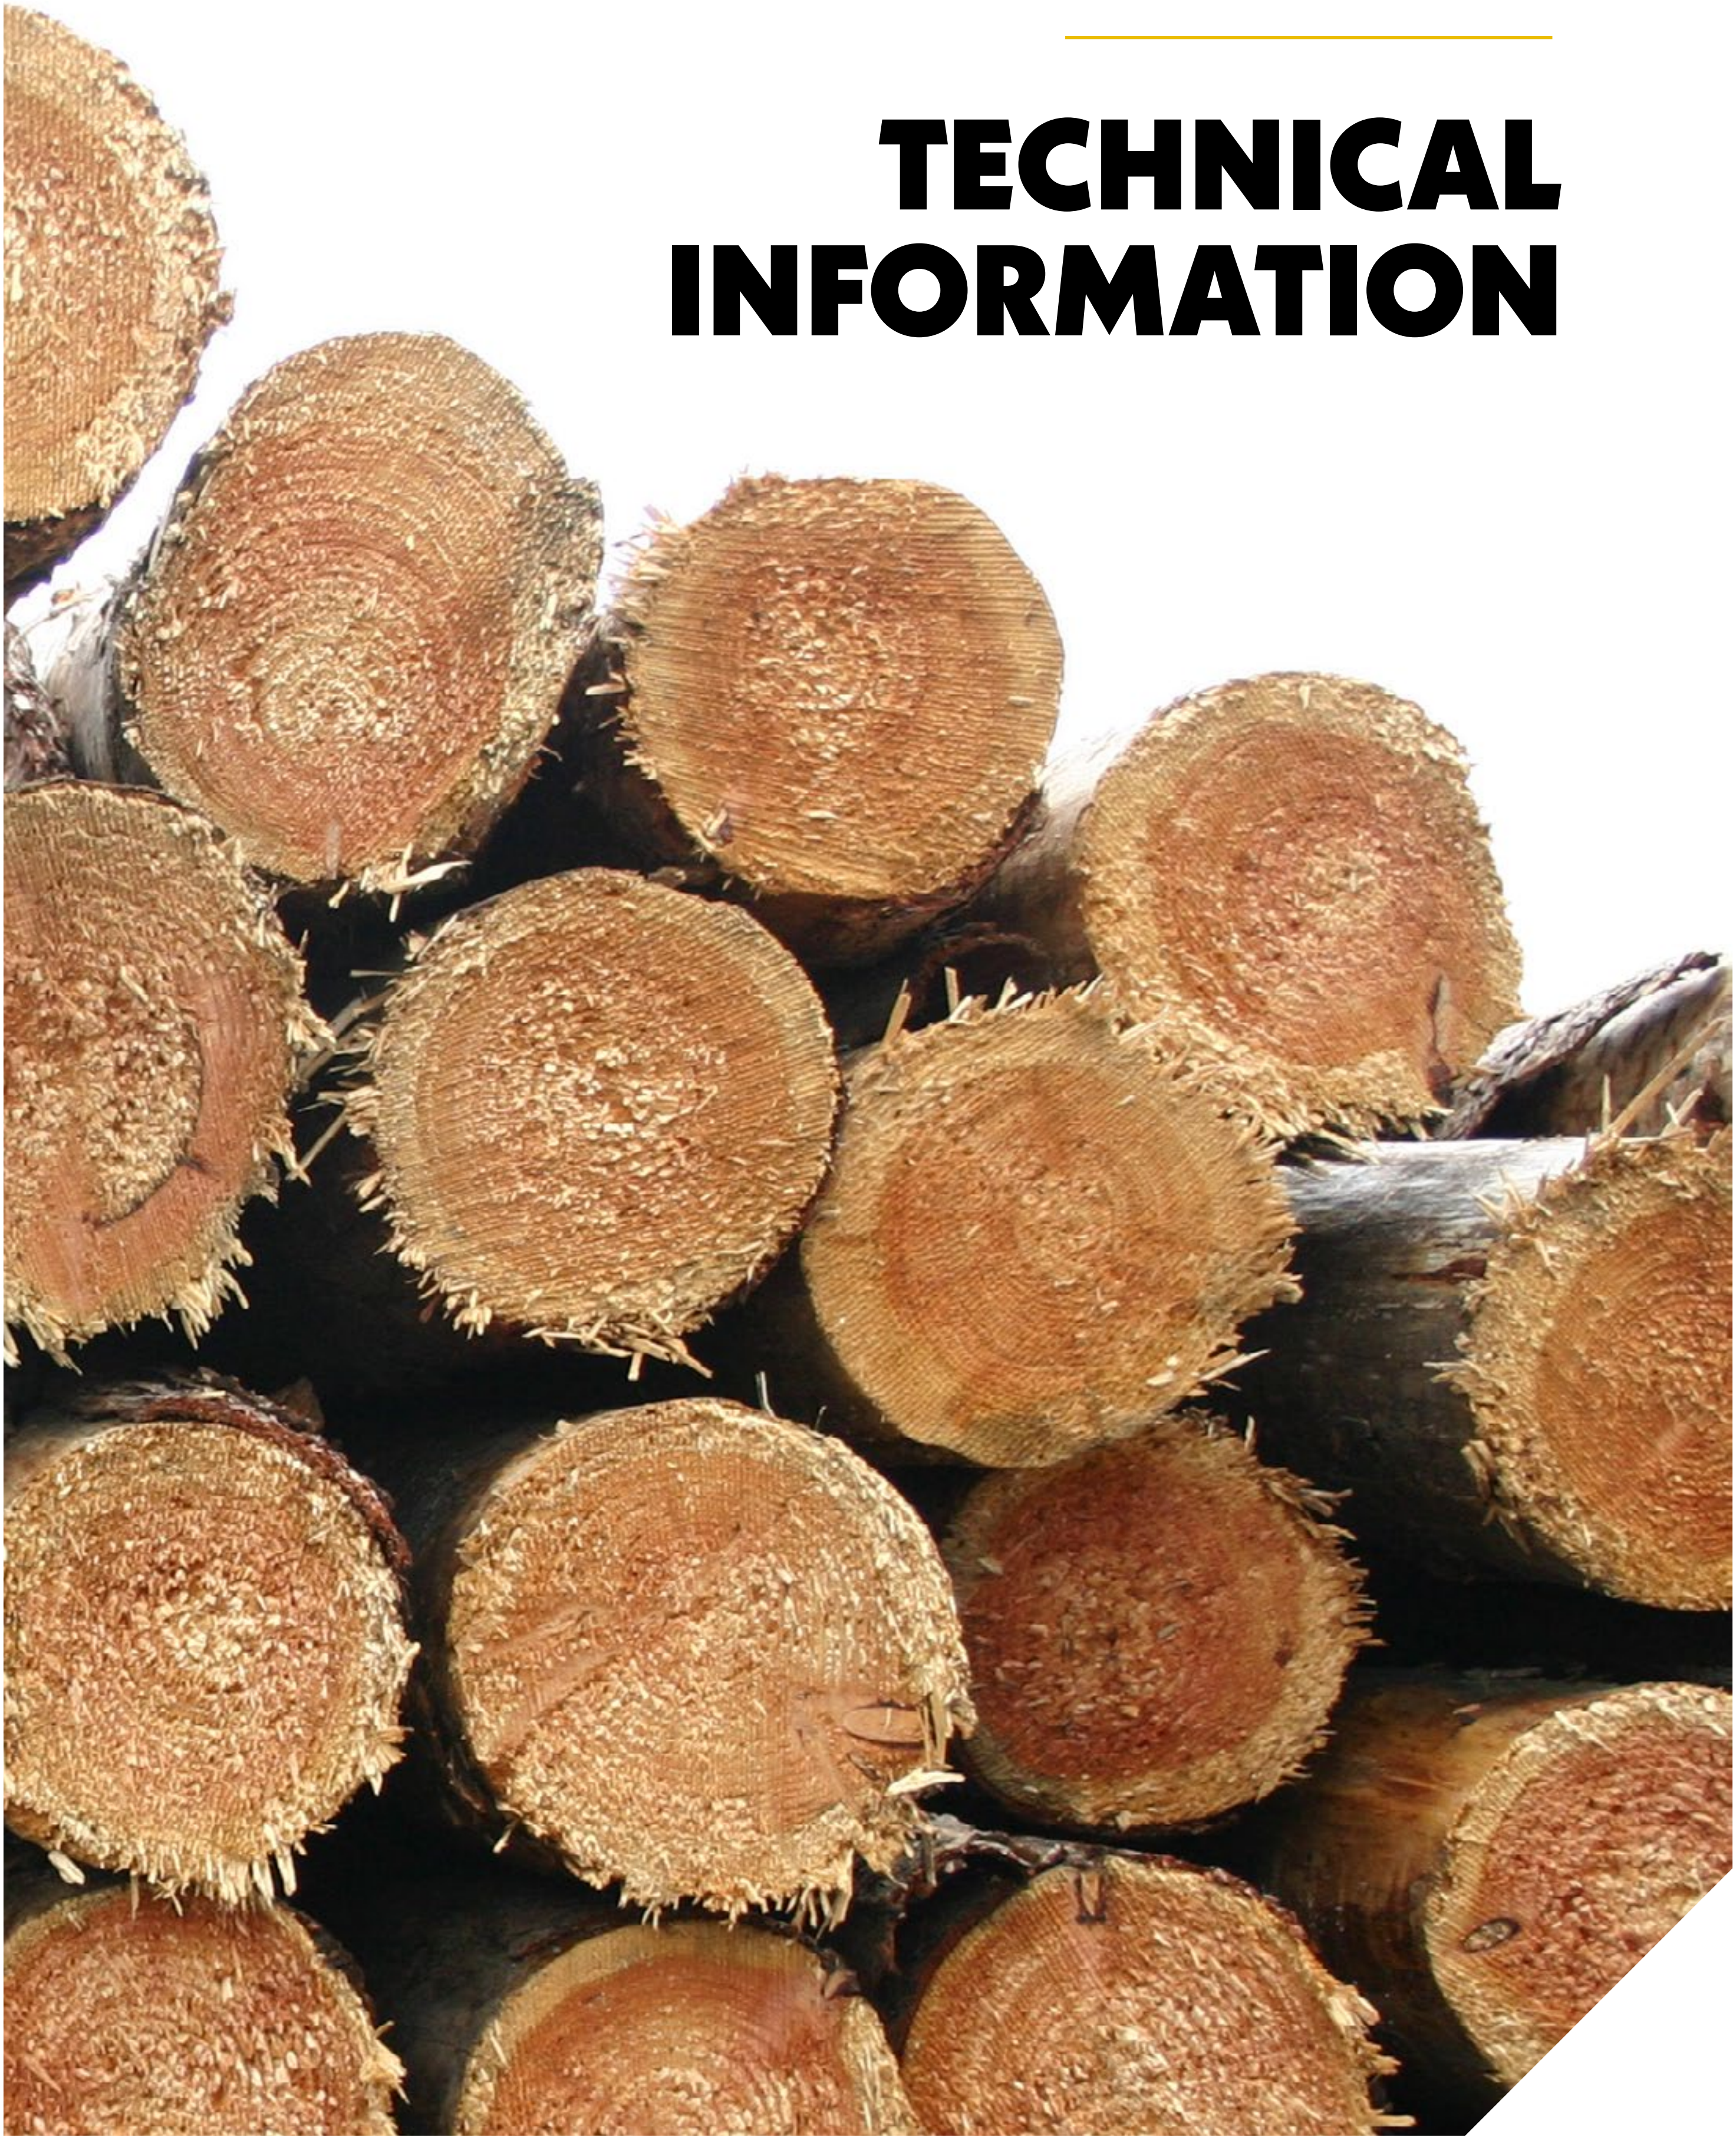

Harvester Multi-Purpose Maintenance Tools

.404” 533689


ALIGN HOLE OVER
RIVET HEAD ON CHAIN
11 H
11 BC
GRINDING WHEEL PROFILE
RIVET HEAD EDGE HERE NEW CHAIN
RIVET HEAD EDGE HERE DISCARD CHAIN
BAR CLEANOUT
BAR SPROCKET ALIGNMENT



A. Bar Alignment Tool



B. Bar Groove Cleaner



C. Bar Straightener



D. Bar Groove Depth Gauge



E. Chain Stretch Gauge



F. Grinding Wheel Dress Gauge

Chain Speed, Feed Force, Service Life & Safety: It is well recognized that higher chain speeds and/or feed forces (with attendant power input) generally equate to faster cutting speeds. It is also well recognized that faster chain speeds equate to a shorter service life of the chain, bar, and sprocket. In general, higher chain speeds result in increased wear, shorter service life, and increased occurrence of chain breakage and potential injury.

For more information on safety-related subjects including "how to" details on the maintenance, inspection, and replacement of chains, bars, and sprockets; chain-speed calculations; chain sharpening; and trouble-shooting your harvester chain, bar, and sprocket - Oregon® urges operators and dealers to use the Oregon® Harvester Handbook, available from your authorized Oregon® distributor, or by visiting Oregon® directly at www.OregonProducts.com.

⚠ Important Safety Information

For maximum protection, machines should be equipped with the appropriate safety attachments (Figure 1). Please follow the recommendations contained in your equipment’s operator manuals.

Figure 1

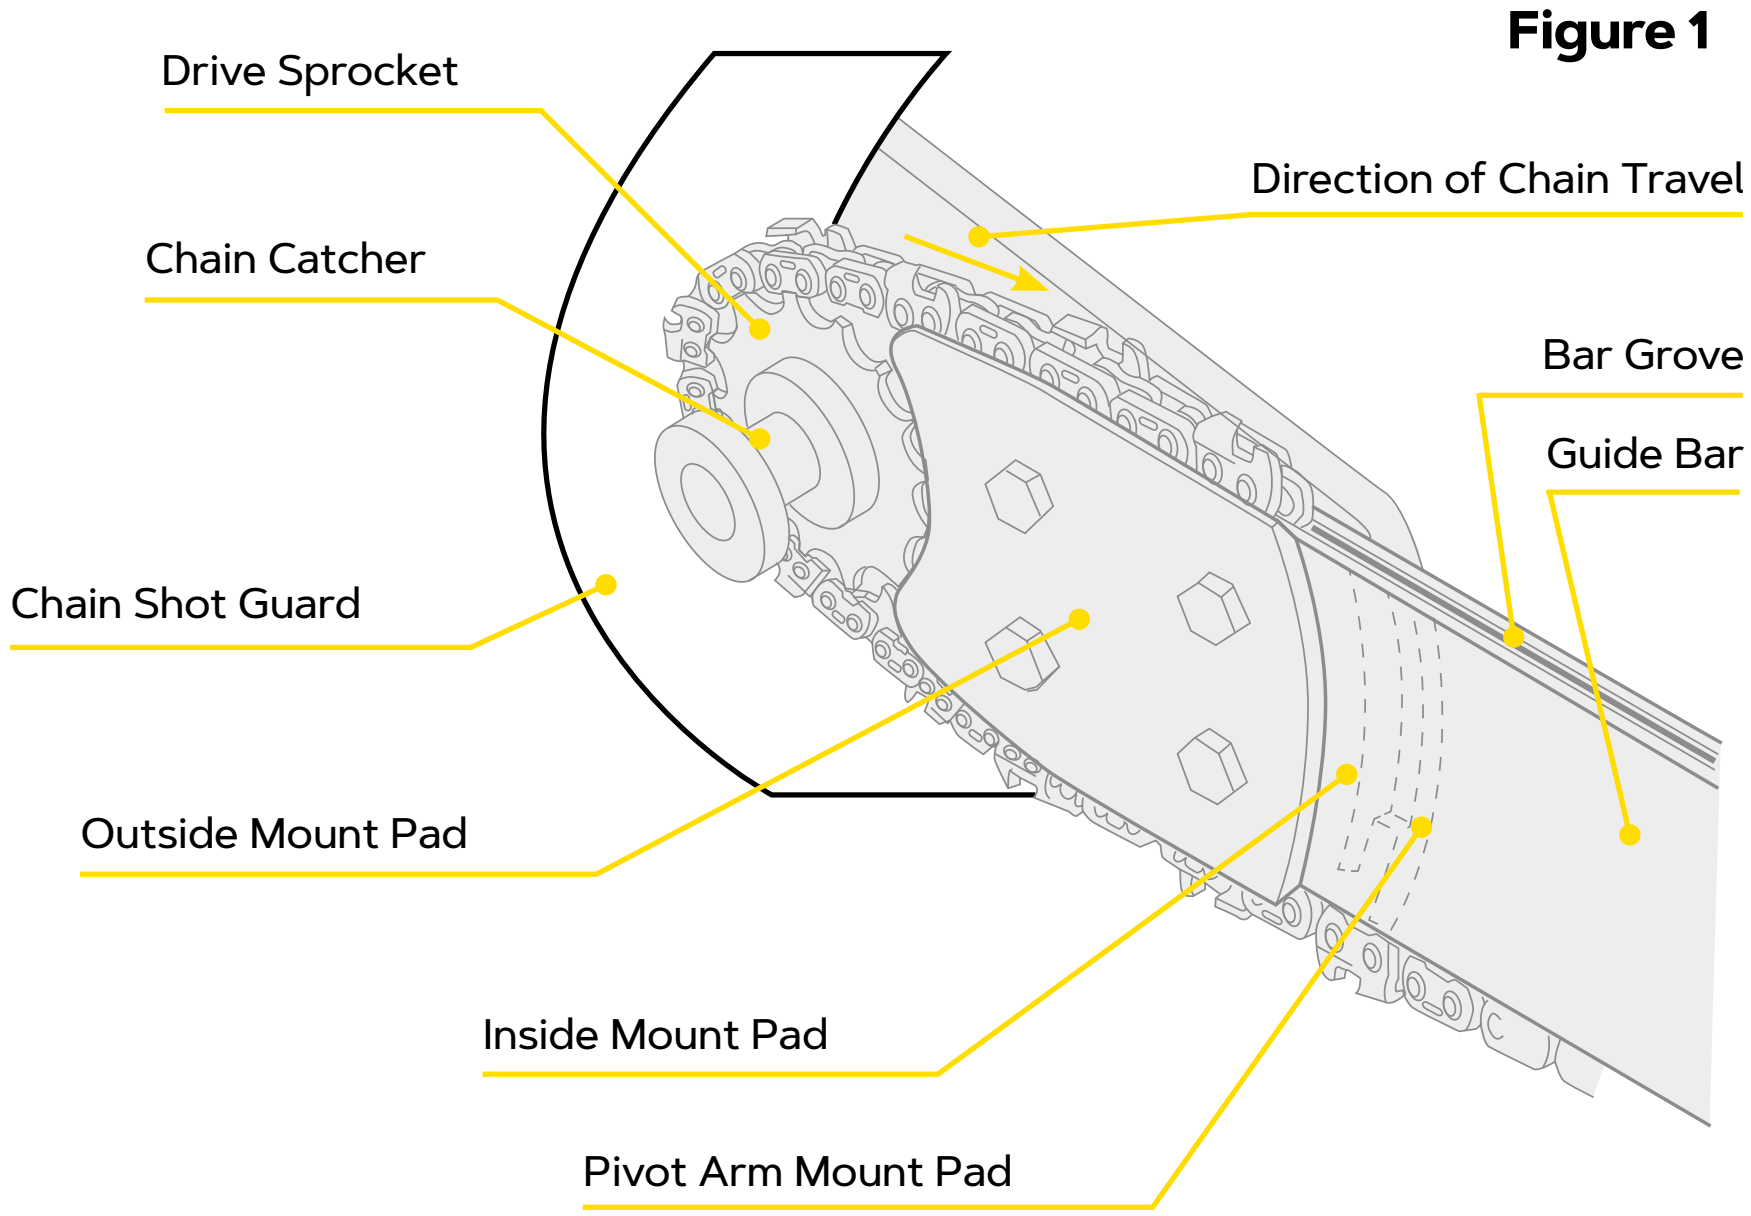
Drive Sprocket
Direction of Chain Travel
Chain Catcher
Bar Grove
Guide Bar
Chain Shot Guard
Outside Mount Pad
Inside Mount Pad
Pivot Arm Mount Pad

Chain Shot Safety Information

⚠ Chain shot can cause saw chain parts to be thrown in many directions along the cutting plane of the guide bar. The "Shot Cone Zone" reflects where saw chain pieces usually travel in the event of a broken/shot chain (Figure 2).

1

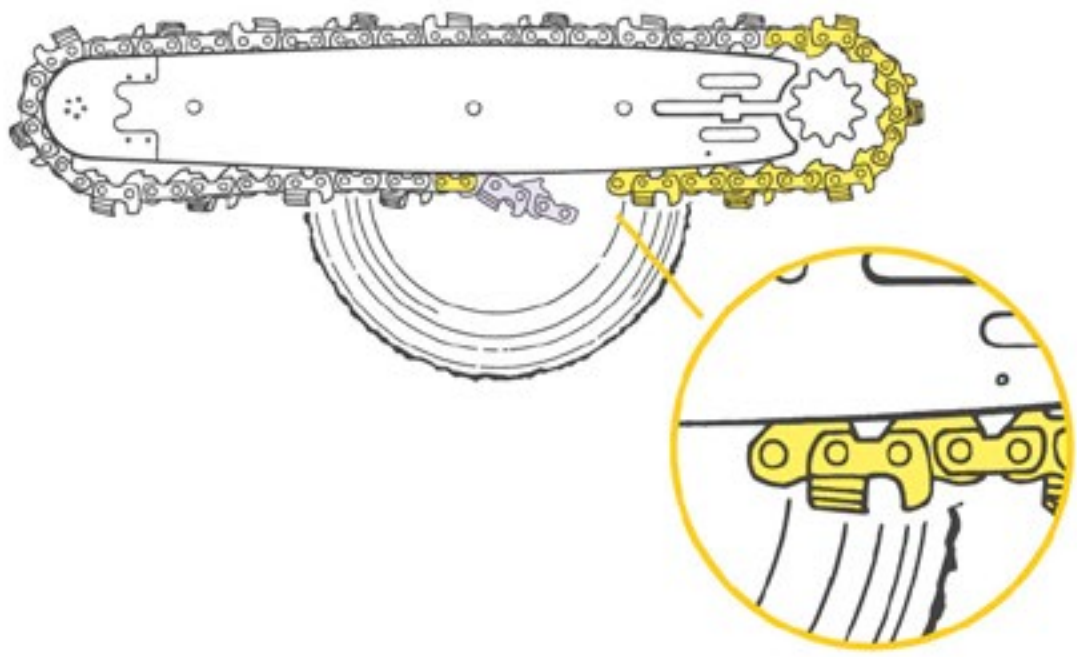

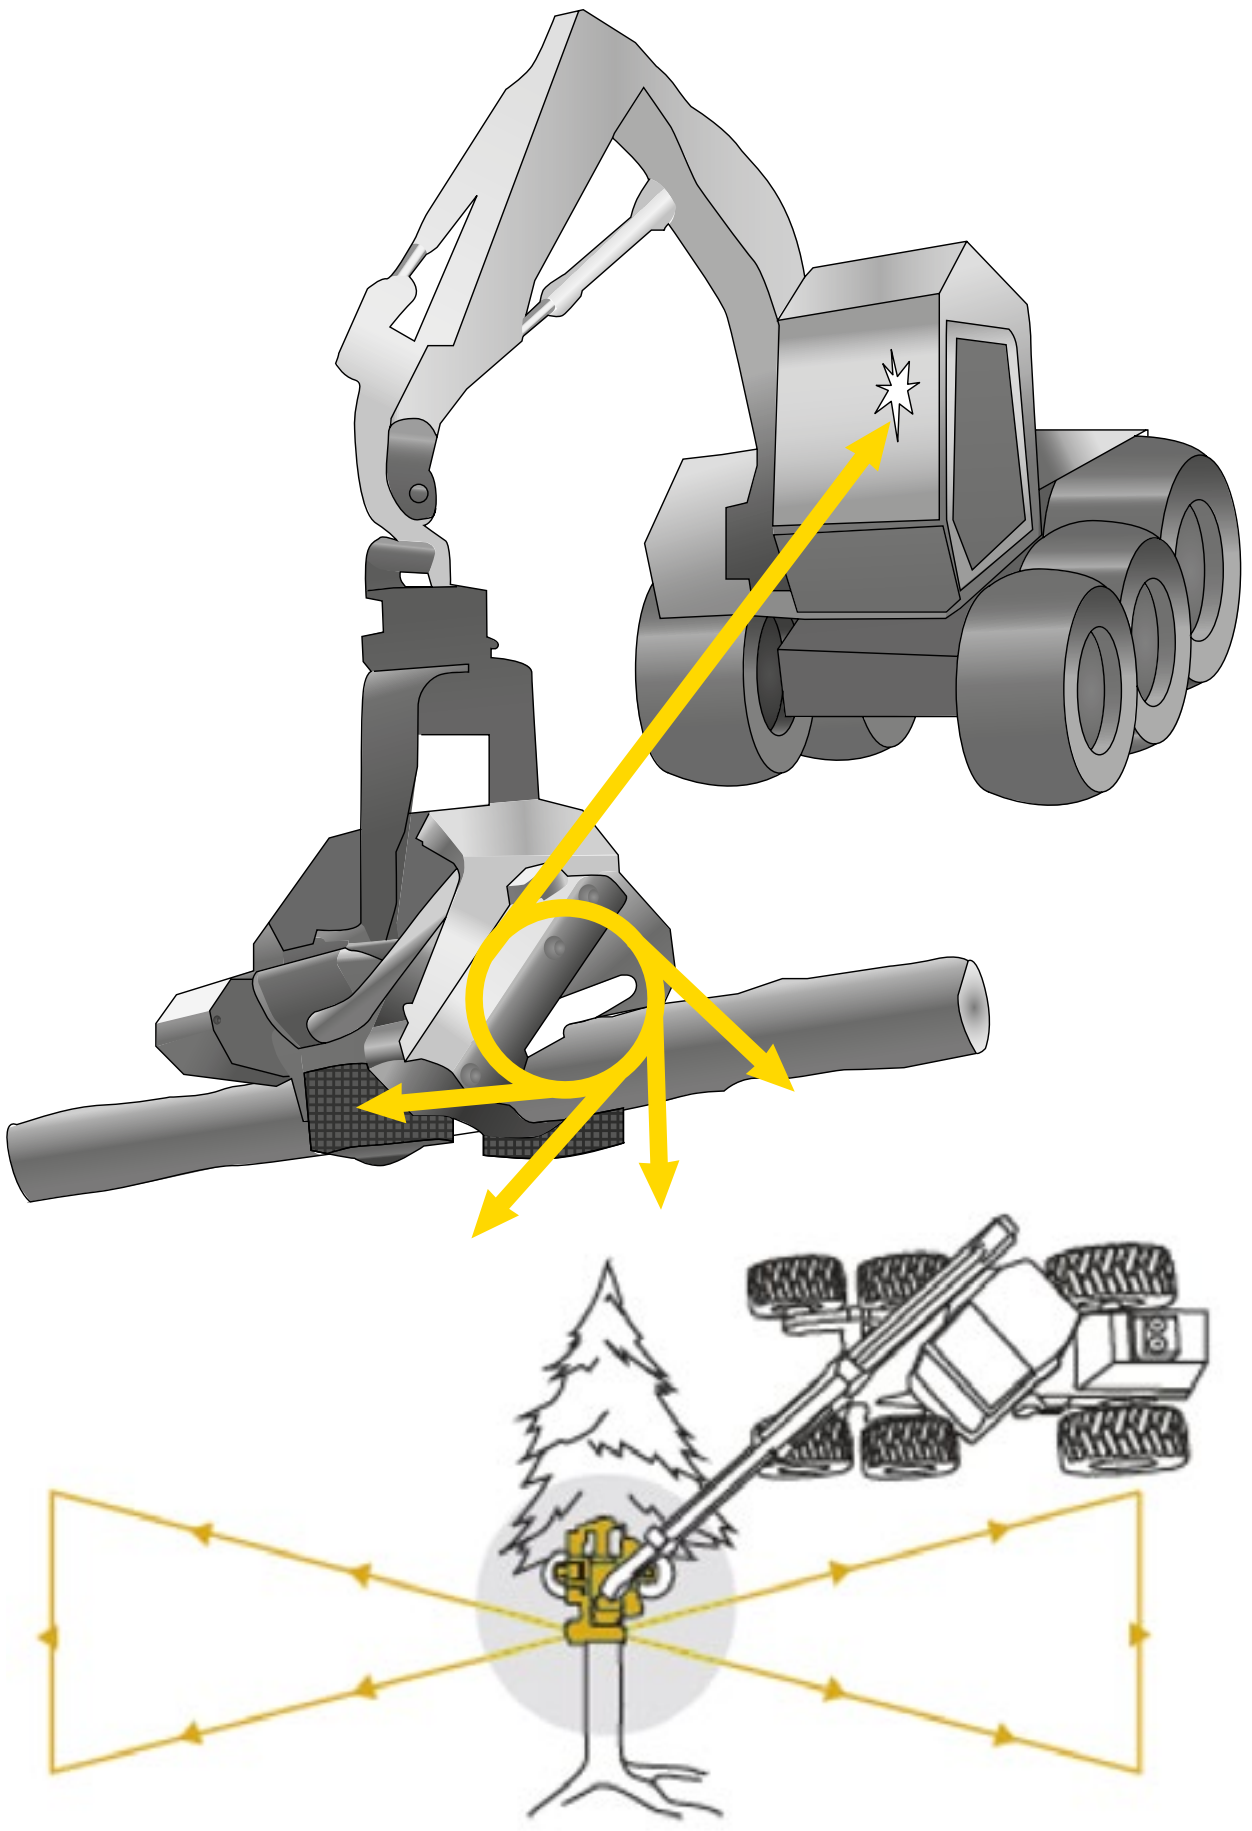

2

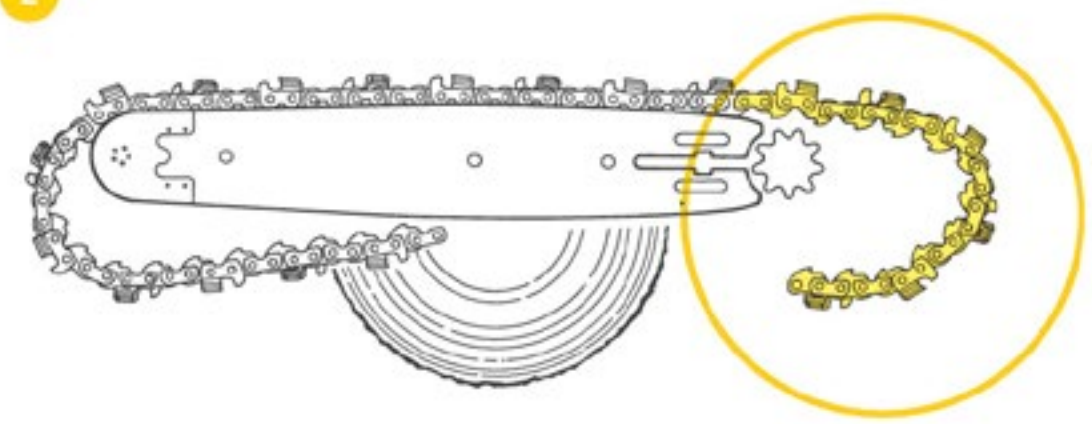

WARNING: There is risk of serious injury or death to the machine operator, ground personnel and bwystanders from chain shot. Chain shot occurs when a piece or pieces of cutting chain from the end of a broken saw chain in mechanized timber harvesting or processing is ejected at a high velocity. Chain shot typically originates near the drive end of the cutting system but can also originate from the guide bar tip area. Saw chain pieces usually travel in the cutting plane of the guide bar, but can deviate to either side. Do not use saw chain that:

- Has broken twice.
- Is severely damaged.
- Has excessive saw chain stretch.
- Has broken or cracked components.
- Has loose rivet joints—if you can rotate the rivets with your fingers, they are too loose.

Guards & Shields: Because of the high speeds, high stress, heavy loads, wear factors, and varying levels of repair and maintenance given to saw chain-based mechanized wood harvesters/processors, there is a possibility that saw chain or saw chain pieces can be thrown from the machine at high speed and velocity. Machine operators, ground personnel, and bystanders are exposed to a risk of serious injury or death. Equipment should be equipped with appropriate guards, shields, and window enclosures. Care should be taken to minimize the exposure of the machine operator, ground personnel, and bystanders to the cutting plane of the guide bar. Bystanders and ground personnel should be kept at least 300 feet way.

Chain Shot Guard: A chain shot guard is a piece of material mounted behind the drive sprocket.
This guard performs two functions:

- Absorbs the energy of a broken saw chain coming into contact with the saw box, and is designed to prevent saw chain parts from breaking off and being ejected.
- Acts as an extension of the saw box, designed to reduce the opportunity for thrown saw chain or saw chain parts to escape the saw box (Figure 1).

Operational Recommendations:

- Never engage in a cut with ground personnel or bystanders in the shot cone zone.
- Always engage in a cut as close to the ground as possible.
- Always keep bar and chain pointed away from the cab and operator.

TRUSTED BY
SINCE
PROS
1947
™
OREGON®

DESIGNED &
ENGINEERED
IN THE USA

OREGON®

HARVESTER APPLICATION GUIDE

	cm/ inch	÷2	#	⚙	Jet-Fit™	Solid Harvester	Solid Harvester RSN	SpeedMax™	Stump Spray
AFM									
45 Corona	64	.404"	78	ORC13404XL			642RHFN104	642SMRR104	
45 Corona, 45L, 50 Corona, 50L	67	.404"	81	ORC14404XL	●	672HSFB163		672SMRR163	
50, 60, 60 Combi	75	.404"	88	ORC14404XL	●	752HSFB149	752RHFB149	752SMRR149	
60 EUCA	67	.404"	81	ORC14404XL	●	672HSFB163		672SMRR163	
75 FH	82	.404"	95	ORC14404XL	●	822HSFB149	822RHFB149	822SMRR149	
ECO LOG									
HH 45	54	.404"	66	ORC12404XL				542SMRQ104	
HH 55, HH65	64	.404"	75				642RHFN104	642SMRR104	
HH 75	75	.404"	86					752SMRR114	
HH 300	59	.404"	69	ORC12404XL				592SMRQ104	
HH 500	64	.404"	74	ORC12404XL				642SMRQ114	
HH 700	75	.404"	85	ORC12404XL			752RHFL114	752SMRQ114	
HH 701	80	.404"	90	ORC12404XL				802SMRQ104	
Log Max 4000	59	.404"	70	ORC12404XL				592SMRQ104	
Log Max 5000, 6000, 7000	64	.404"	74	ORC12404XL			642RHFN104	642SMRR104	
	75	.404"	85	ORC12404XL				752SMRR114	
	80	.404"	90	ORC12404XL				802SMRQ104	
Huldtins Super Cut	75	.404"	85	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	
	82	.404"	93	ORC12404XL	●		822RHFL149	822SMRQ149	
HULTDINS									
F28, F28S	42	.404"	52	ORC11404XL		422HSFM104			
Super Cut 100	75	.404"	88	ORC14404XL	●	752HSFB149	752RHFB149	752SMRR149	
	82	.404"	95	ORC14404XL	●	822HSFB149			
	90	.404"	102	ORC14404XL	●			902SMRR149	
Super Saw 550	90	.404"	99	ORC14404XL		902HSFL114			
	100	.404"	109	ORC14404XL		002HSFL114			
Super Cut 300	40"	3/4"	60						
Superfell 851 / FL85	40"	3/4"	60				401SNCT138		
	45"	3/4"	67				451SNCT138		
HYPRO									
500, 755	54	404	66	ORB12404XL				542SMRQ104	

	cm/ inch	÷2	#	⚙	Jet-Fit™	Solid Harvester	Solid Harvester RSN	SpeedMax™	Stump Spray
JOHN DEERE									
570, 730,731, 732, 732B, 735	42	.404”	53	ORB10404XL		422HSFM104			
740, 735/45, 743, 750GP, 870	54	.404”	64	ORB11404XL				542SMRQ104	
742.	59	.404”	70	ORB12404XL				592SMRQ104	
745.	64	.404”	74	ORC11404XL				642SMRQ114	
746, 732 C	59	.404”	69	ORB11404XL				592SMRQ104	
762, 746 B, 746 C	64	.404”	74	ORB12404XL				642SMRQ114	
642, 755, 755 B, 756, 756 B	75	.404”	84	ORB12404XL			752RHFL114	752SMRQ114	
750, 754, 758, 762 B	75	.404”	85	ORC11404XL			752RHFL114	752SMRQ114	
762 C	80	.404”	90	ORC12404XL				802SMRQ104	
670, 260, 706/250, 707/280	75	.404”	85	ORB11404XL			752RHFL114	752SMRQ114	
770, 772, 773 Grip Saw	75	.404”	85	ORC12404XL			752RHFL114	752SMRQ114	
705/270, 705/260, 706/206 S	75	.404”	85	ORB12404XL			752RHFL114	752SMRQ114	
H412	60	.404”	72	ORC12404XL	●	602HSFL163		602SMRQ163	
H414	67	.404”	79	ORC12404XL	●			672SMRQ163	
	75	.404”	87	ORC13404XL	●	752HSFB149	752RHFB149	752SMRR149	
H415	82	.404”	96	ORC13404XL	●	822HSFB149	822RHFB149	822SMRR149	
	90	.404”	101	ORC13404XL	●			902SMRR149	
H 480 Super Cut	75	.404”	86	ORB12404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
	82	.404”	93	ORB12404XL	●		822RHFL149	822SMRQ149	
732C Super Cut	55	.404”	67	ORB11404XL	●	552HSFL163			
742 Super Cut	60	.404”	70	ORB11404XL	●	602HSFL163		602SMRQ163	
742 Super Cut, 754 Super Cut	67	.404”	78	ORB11404XL	●			672SMRQ163	
745 Super Cut	75	.404”	85	ORC11404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
752 Super Cut	75	.404”	86	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
H 752 Super Cut	60	.404”	70	ORC11404XL	●	602HSFL163		602SMRQ163	
	67	.404”	78	ORC11404XL	●			672SMRQ163	
	75	.404”	86	ORB12404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
758 Super Cut, 758 HD Super Cut, 762 Super cut	75	.404”	86	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	752HLFL149
	82	.404”	93	ORC12404XL	●		822RHFL149	822SMRQ149	
Fiber Pack	40”	3/4”	58				401SNCT138		

	cm/ inch	÷2	#		Jet-Fit™	Solid Harvester	Solid Harvester RSN	SpeedMax™	Stump Spray
KESLA / PATU, FORESTRI									
Patu 30	38″	3/8″	56			158RNDD009			
Pattu fall grip	43″	3/4″	64						
Patu / 400 RH / 405 RH	54	.404″	65	ORC13404XL				542SMRQ104	
Patu. LF40 / 355 RH	48	.404″	58	ORC10404XL		482HSFM104			
405 RH / 410 SH	54	.404″	64	ORC12404XL				542SMRQ104	
Foresteri 20 RH, 22 RH, 25 RH, 30 RH	64	.404″	76	ORC14404XL			642RHFN104	642SMRR104	
	75	.404″	87	ORC14404XL				752SMRR114	
505 RH, 506 SH	75	.404″	87	ORC14404XL				752SMRR114	
L-F Delimber	54	.404″	65	ORC12404XL				542SMRQ104	
KETO									
50. Forst	42	.404″	53	ORB10404XL		422HSFM104			
51, 51LD, 51Viktor, 100	54	.404″	64	ORB11404XL				542SMRQ104	
100, 150	64	.404″	74	ORC14404XL			642RHFN104	642SMRR104	
150, 500L/LS, 525, 525 TS	75	.404″	85	ORC11404XL			752RHFL114	752SMRQ114	
500 HD	80	.404″	90	ORC11404XL				802SMRQ104	
525 Top Saw	42	.404″	52			422HSFM104			
750, 1000 Top Saw	48	.404″	58			482HSFM104			
1000, 750, 750 TS	40″	3/4″	60				401SNCT138		
800 Seprim	40″	3/4″	60				401SNCT138		
KOMATSU									
901, 935, 701/GM 626, 711/GM626	42	.404″	53			422HSFM104			
935, 942, 945, 948, 330	54	.404″	64					542SMRQ104	
	64	.404″	74					642SMRQ114	
945, 955, 960	64	.404″	74					642SMRQ114	
960, 965, 900T, 902H, 993, 994, 985 S2	64	.404″	76				642RHFN104	642SMRR104	
	75	.404″	87					752SMRR114	
990, 990S-2	64	.404″	74					642SMRQ114	
985TVIGG, 940, 955, After # 220	64	.404″	74					642SMRQ114	
960 Tensioner	64	.404″	76				642RHFN104	642SMRR104	
330.1	54	.404″	64	ORB11404XL				542SMRQ104	

	cm/ inch	÷2	#		Jet-Fit™	Solid Harvester	Solid Harvester RSN	SpeedMax™	Stump Spray
KOMATSU (suite)									
330.2, 330.2DUO, 340	54	.404"	66	ORC12404XL				542SMRQ104	
	59	.404"	70	ORC12404XL				592SMRQ104	
	64	.404"	74	ORC12404XL				642SMRQ114	
370.2	82	.404"	96	ORC14404XL	●	752HSFB149	752RHFB149	752SMRR149	
360, 360.2, 370, 370E	75	.404"	89	ORD14404XL	●	752HSFB149	752RHFB149	752SMRR149	
	82	.404"	96		●	822HSFB149		822SMRR149	
	90	.404"	104		●			902SMRR149	
350, 365, C144	67	.404"	82	ORC14404XL	●	672HSFB163			
	75	.404"	89	ORC14404XL	●	752HSFB149	752RHFB149	752SMRR149	
	82	.404"	96	ORC14404XL	●	822HSFB149	822RHFB149	822SMRR149	
Top Saw 370	54	.404"	65						
Top Saw 385, 385 Maxi, 395	54	.404"	65	ORB11404XL					
380	75	.404"	87		●	752HSFB149	752RHFB149	752SMRR149	
385	34"	3/4"	54						
385 Maxi	90	.404"	103	ORD14404XL	●			902SMRR149	
S82	67	.404"	82		●	672HSFB163		672SMRR163	
395	38"	3/4"	60						
LOGMAX									
728, 425, 626, 828	42	.404"	53	ORB10404XL		422HSFM104			
828ESB, 928	48	.404"	58	ORB10404XL		482HSFM104			
3000 10cc	59	.404"	69	ORC11404XL				592SMRQ104	
3000 19cc/F2	59	.404"	70	ORC12404XL				592SMRQ104	
5000.	64	.404"	74	ORC12404XL				642SMRQ114	
4000 10cc	59	.404"	69	ORC11404XL				592SMRQ104	
4000 19cc/F2	59	.404"	70	ORC12404XL				592SMRQ104	
5000 ESB, 7000	75	.404"	85	ORC12404XL			752RHFL114	752SMRQ114	
5000 ESB HD 98XL	75	.404"	86	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	
7000, 9000	80	.404"	90	ORC12404XL				802SMRQ104	
7000 98 XL	75	.404"	86	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	
7000 98 XL, 9000 98 XL	82	.404"	93	ORC12404XL	●		822RHFL149	822SMRQ149	
9000 98 XL	90	.404"	101	ORC12404XL	●			902SMRQ149	

	cm/ inch	÷2	#		Jet-Fit™	Solid Harvester	Solid Harvester RSN	SpeedMax™	Stump Spray
5000 Top Saw	48	.404″	60	ORC11404XL		482HSFM104			
7000, 9000 Top Saw	59	.404″	70	ORC12404XL				592SMRQ104	
Log Max 1200	90	.404″	106	ORC15404XL					
	40″	3/4″	60	9T					
	42″	3/4″	67	9T					
Top saw	75	.404″	85	ORC12404XL					
Log Max 9000	90	.404″	101						
5-55	64	.404″	75	ORB11404XL				642SMRQ114	
6-55	64	.404″	75	ORC11404XL				642SMRQ114	
5-55L	75	.404″	86	ORB11404XL			752RHFL114	752SMRQ114	
6-65	75	.404″	86	ORC11404XL			752RHFL114	752SMRQ114	
4M	54	.404″	64	ORC11404XL				542SMRQ104	
5M	59	.404″	69	ORC11404XL				592SMRQ104	
6M	64	.404″	75	ORC11404XL				642SMRQ114	
7L	64	.404″	75	ORC11404XL				642SMRQ114	
7L	75	.404″	86	ORC11404XL			752RHFL114	752SMRQ114	
8L	75	.404″	86	ORC11404XL	●	752HSFL149	752RHFL149	752SMRQ149	
8L	82	.404″	93	ORC11404XL	●		822RHFL149	822SMRQ149	
PONSSE									
H 40, H 50	54	.404″	65					542SMRQ104	
H 50	59	.404″	70	ORB11404XL				592SMRQ104	
H 53, H 60, H 73	64	.404″	76	ORC13404XL			642RHFN104	642SMRR104	
	75	.404″	87	ORC13404XL				752SMRR114	
H60, H73 Whit 16 to 17 Rims	75	.404″	88	ORC16404XL					
	80	.404″	94	ORC16404XL					
30cc whit 16 to 17 Rims	75	.404″	90	ORC16404XL	●	752HSFD149	752RHFD149	752SMRS149	
H73 / 30cc whit 16 to 17 Rims	82	.404″	97	ORC16404XL	●	822HSFD149	822RHFD149	822SMRS149	
H73 / 19cc whit 13 Rims	82	.404″	95	ORC13404XL	●	822HSFB149	822RHFB149	822SMRR149	
H7, H8, New Heds	75	.404″	88	ORC16404XL	●	752HSFD149	752RHFD149	752SMRS149	
	82	.404″	97	ORC16404XL	●	822HSFD149	822RHFD149	822SMRS149	

	cm/ inch	÷2	#	⚙	Jet-Fit™	Solid Harvester	Solid Harvester RSN	SpeedMax™	Stump Spray
ROTTNE									
2000/ 828 PAN	42	.404″	53	ORC11404XL		422HSFM104			
2000/ 828 ESB	48	.404″	58	ORC11404XL		482HSFM104			
770, 780 Snoken, EGS 88	54	.404″	65	ORC11404XL				542SMRQ104	
EGS 400, EGS 405,	59	.404″	71	ORC11404XL				592SMRQ104	
EGS 85	64	.404″	74	ORC11404XL				642SMRQ114	
810/860, RF 81, 600	75	.404″	85	ORC11404XL			752RHFL114	752SMRQ114	
602 B	80	.404″	91	ORC14404XL			802HRFN114	802SMRR114	
EGS 402	58.5	.404″	71	ORB11404XL				592SMRQ104	
EGS 550, EGS 602, EGS 604	75	.404″	87	ORC14404XL				752SMRR114	
	80	.404″	92	ORC14404XL			802HRFN114	802SMRR114	
EGS 590, EGS 700, EGS 706	75	.404″	87	ORC12404XL	●	752HSFL149	752RHFL149	752SMRQ149	
	82	.404″	96	ORC12404XL	●		822RHFL149	822SMRQ149	
	90	.404″	101	ORC12404XL	●			902SMRQ149	
SP MASKIN									
SP 730, SP 21, FX 350	42	.404″	53	ORB10404XL		422HSFM104			
SP 735/45, SP 740, FX 450	54	.404″	64	ORB10404XL				542SMRQ104	
FX 550	64	.404″	74	ORB10404XL				642SMRQ114	
SP 551	64	.404″	75	ORC12404XL				642SMRQ114	
FX 650, FX 750	75	.404″	85	ORB12404XL			752RHFL114	752SMRQ114	
SP 451 LF, SP461 LF	54	.404″	66	ORC12404XL				542SMRQ104	
	59	.404″	70	ORC12404XL				592SMRQ104	
	64	.404″	74	ORC12404XL				642SMRQ114	
SP 551 LF, SP 561 LF	60	.404″	72	ORC12404XL	●	602HSFL163		602SMRQ163	
	67	.404″	79	ORC12404XL	●			672SMRQ163	
	75	.404″	86	ORC12404XL	●		752RHFL149	752SMRQ149	
SP 650	64	.404″	74	ORC12404XL				642SMRQ114	
	75	.404″	85	ORC12404XL		752HSFL149	752RHFL114	752SMRQ114	
	80	.404″	90	ORC12404XL		902HSFL114	902RHFL114	902SMRQ114	
SP591LX, SP401EH,SP421EH	27″	.404″	43				271SNCK225		

OREGON®

75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged. Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product’s performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C008551

PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2023 - AD100-005-EN

OREGON
PowerCut

Discover more of our products at
OregonProducts.com

OREGON®

PERSONAL PROTECTIVE EQUIPMENT

PPE_1.2
EN/EUR

OREGON
OREGON
PowerCut

DESIGNED TO PROTECT

Oregon® understands that the needs of woodcutters – professionals and novices – are as diverse as the terrains and environments in which they work.

We have organized our product into families with key characteristics that different users will value. These product families will ensure that you choose the right Safety Equipments for your every day needs. It will make understanding the differences between our product range effortless.

All our products are classified in 3 categories to help you to identify the products that are right for you.
Three product families, differentiated by Packaging color, to simplify your selection process.

GOOD

OCCASIONAL USERS

Occasional Users products are safe, simple to use, lightweight, and provide added value by saving you money.

BETTER

FREQUENT USERS

Landscapers, homeowners, and other frequent users prize simplicity and reliability. Oregon frequent user products were designed for reliable performance.

Oregon frequent user products are safe, simple to use, lightweight, and provide added value by saving you money.

BEST

PROFESSIONAL USERS

Loggers, arborists, orchardists, millwrights, forestry workers, and other highly skilled woodcutters require products designed for the demands of their tough professions. Oregon makes products that are strong, durable, and reliable, and our state-of-the-art inovations promotes a long lifespan.

You demand top performance from your equipment. Oregon “BEST” safety equipment are designed to the highest safety standards and comfort. Durability, Versatility and Security combined.

PERSONAL PROTECTIVE EQUIPMENT

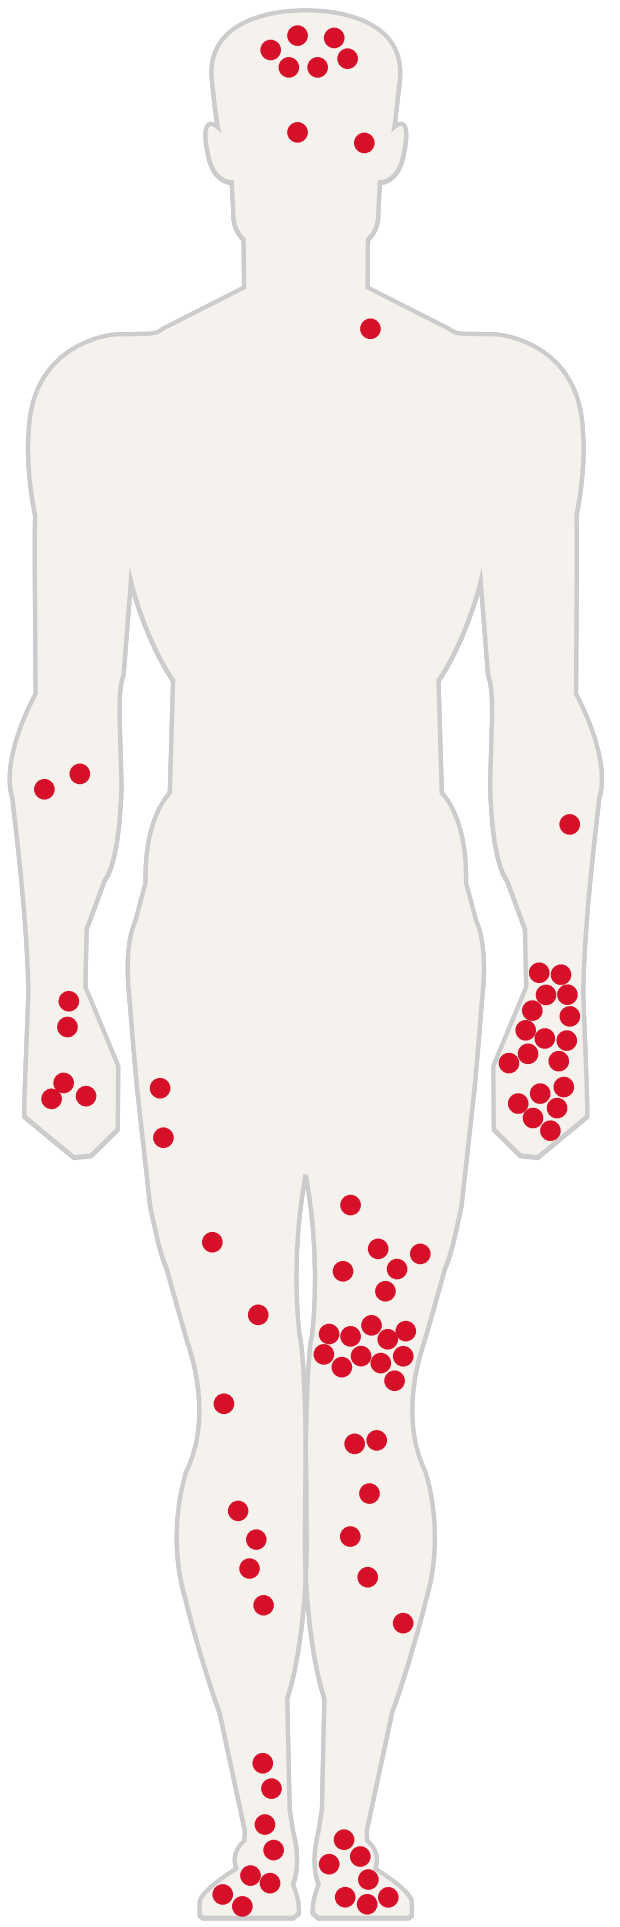

Main areas of chainsaw injuries

DESIGNED TO PROTECT

Every feature of the Oregon® protective equipment range has been designed with your safety in mind, but is also engineered to ensure comfort, versatility and durability. With Oregon personal protective equipment you can do your job in the safest and most efficient manner.

- **Robust** to stand up against, scratches, chemicals…
- So **light** that you can forget about it
- **Ventilated** for optimum working comfort
- Allowing full **freedom of movement** so you can work without restriction.

HIGH PROTECTION

All Oregon protective equipement grant the same level of protection against chainsaw cuts (according to the Class they are certified to). The differences between models are based on features like weight, comfort, durability and number of pockets.

We offer a wide selection of models with various features to cover your different needs and preferences.

Class corresponds to the chain speed 20, 24, 28 m/s at which the cut test has been done.

TYPE A

Recommended for fully trained chainsaw operators.



TYPE C

Recommended for occasional chainsaw users and those engaged in off the ground tree work such as tree surgeons.



Class 1 (20m/s)

Class 2 (24m/s)

Class 3 (28m/s)

	Chaps	Yukon	Yukon+	Waipoua	Fiordland
Class 1 Protection (20 m/s)	●	●	●	●	●
Additional protection		Type C (front/rear)			
Frequency of chainsaw use	●	●●	●●●	●●●●	●●●●●
Total Weight (size M)	1kg	1.05 kg	1.15kg	1.38kg	1.35kg
Stretch Comfort	●	●	●	●	●
Number of pockets (Only on trousers, bib and brace)		3	3	3	5
Extra double tool pocket				●	●
Hi-vis color		●		●	●
Protective pads in friction areas			●	●	●
Zipper ventilation openings				●	●
Free movement system on shoulders					●
Rubberised zipper pockets					●
Reinforced with Armortex®					●

HOW TO FIND THE RIGHT SIZE

Ensure tape measure is tight against skin

A. CHEST
Measure the circumference around the fullest part of your chest and under the arms.

B. WAIST
Measure the circumference around your natural waist (smallest part of the waist).

C. INSIDE LEG
Measure from the inside leg at the crotch to where the trouser hem is to sit on the shoe.

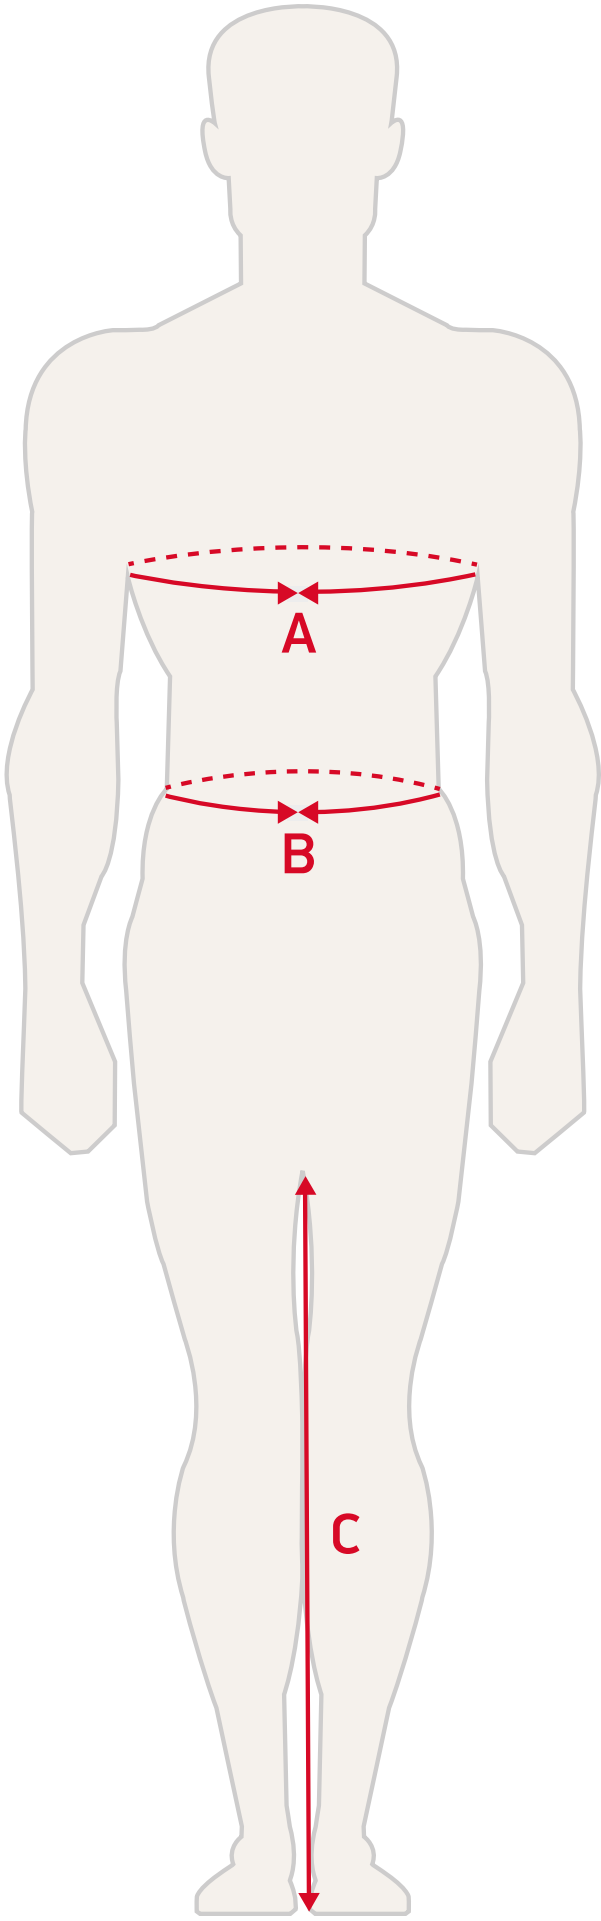

CLOTHING SIZE CHART

Size	Size EU	A Chest	B Waist	C Inseam
S	42 - 44	105 cm	78 - 82 cm	80 cm
M	46 - 48	111 cm	83 - 87 cm	81 cm
L	50 - 52	117 cm	88 - 92 cm	82 cm
XL	54 - 56	123 cm	93 - 97 cm	83 cm
2XL	58 - 60	129 cm	98 - 102 cm	84 cm
3XL	62 - 64	135 cm	103 - 107 cm	84 cm

KWF CERTIFIED

Independent test institute in Germany. Many Oregon PPE products carry the KWF Standard or KWF-Profi label. KWF is an renowned independent entity in Germany that provides advice and support to key players in the Forestry sector. KWF tests and certifies tools and protective equipment and grants the right to print the KWF Standard or FPA logos on products as an indicator of superior quality.

Kuratorium für
Waldarbeit und
Forsttechnik e.V.

NEW

WAIPOUA

DESIGNED TO PROTECT

Taking the forestry user experience one step further, Oregon® introduces the new range of Waipoua protective equipment, with a new, modern design and enhanced features for increased comfort and durability.

BETTER

STANDARD
kwf

EN ISO 11393-2:2019

Class 1 (20m/s)

DURABILITY AND COMFORT ALL DAY LONG

- New Hi-Vis design in two colours
- Breathable: zipper ventilation at back
- Comfortable: 4-way stretch
- Lightweight: 1.38 kg (size M trousers)
- Practical: zipper pockets at front and double tool pocket at back.
- Durable: tear and scratch resistant polyester, protective nylon pads on friction areas.

CUT, ABRASION, HEAT, OIL AND FUEL RESISTANT.

4-WAY
STRETCH
HI-VIS
OREGON

295469

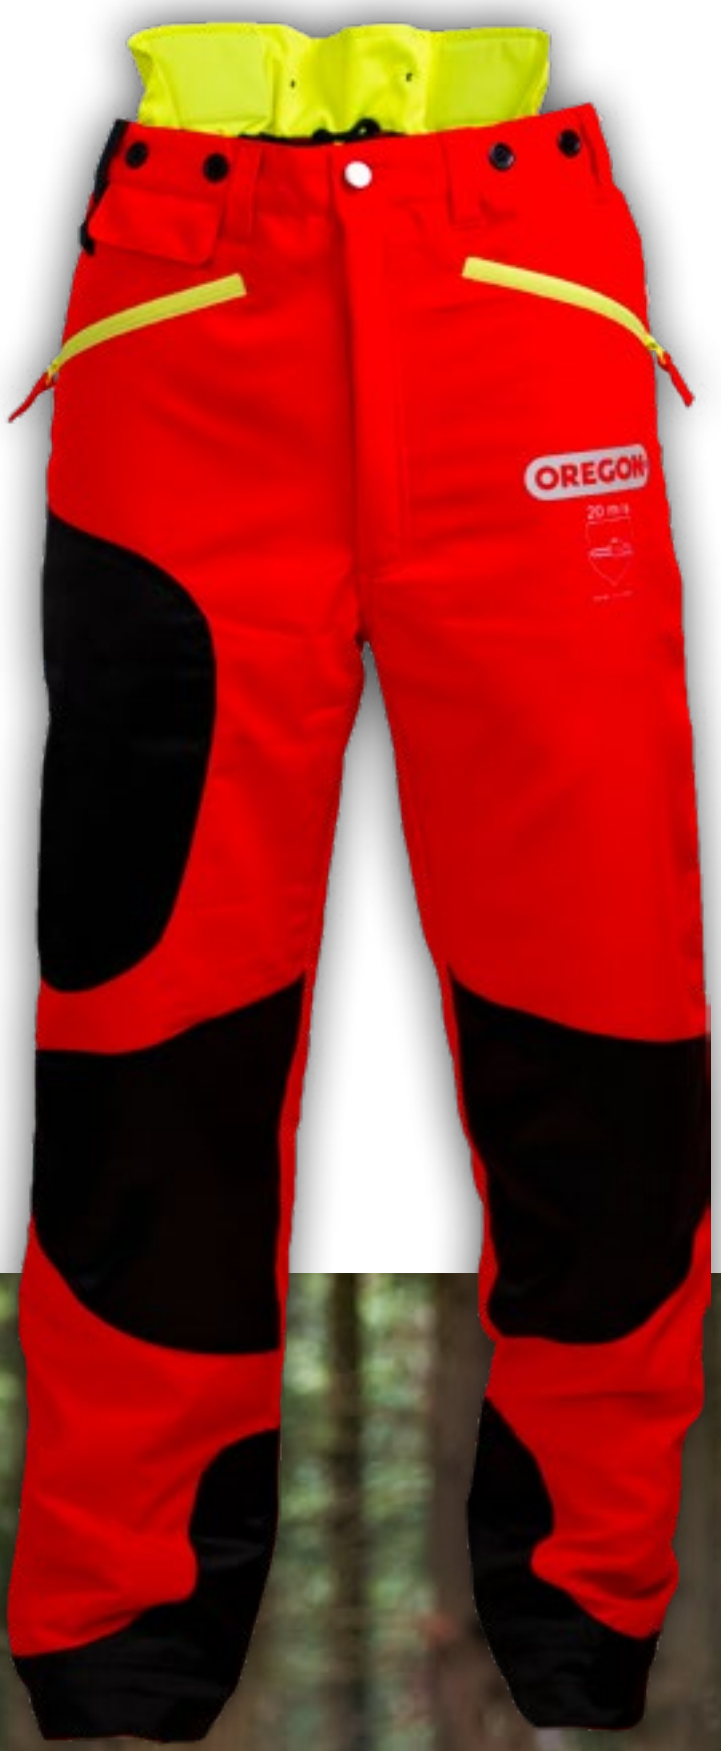
OREGON
20 m/s

295466

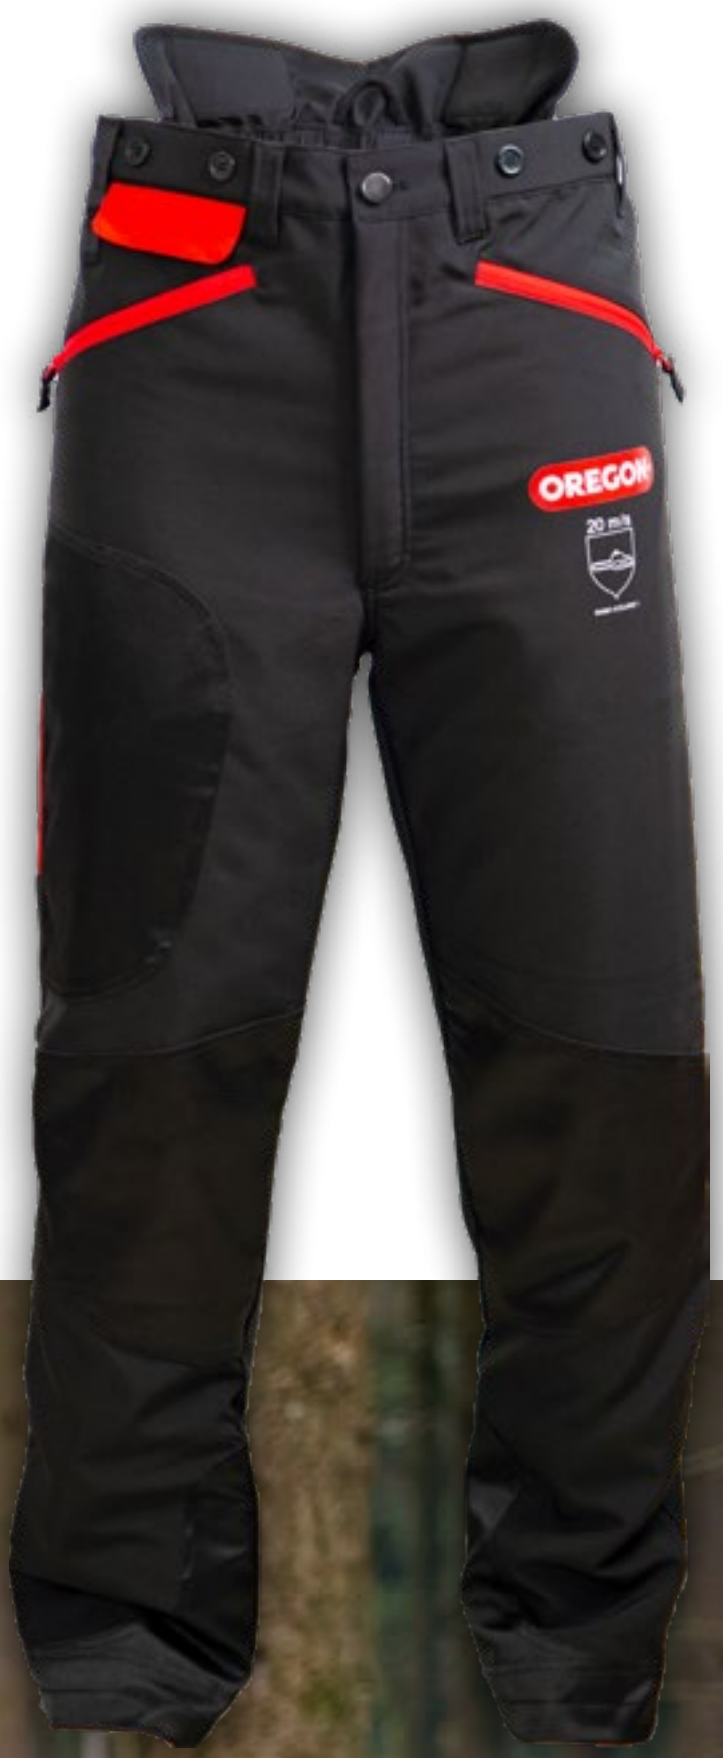
OREGON
20 m/s

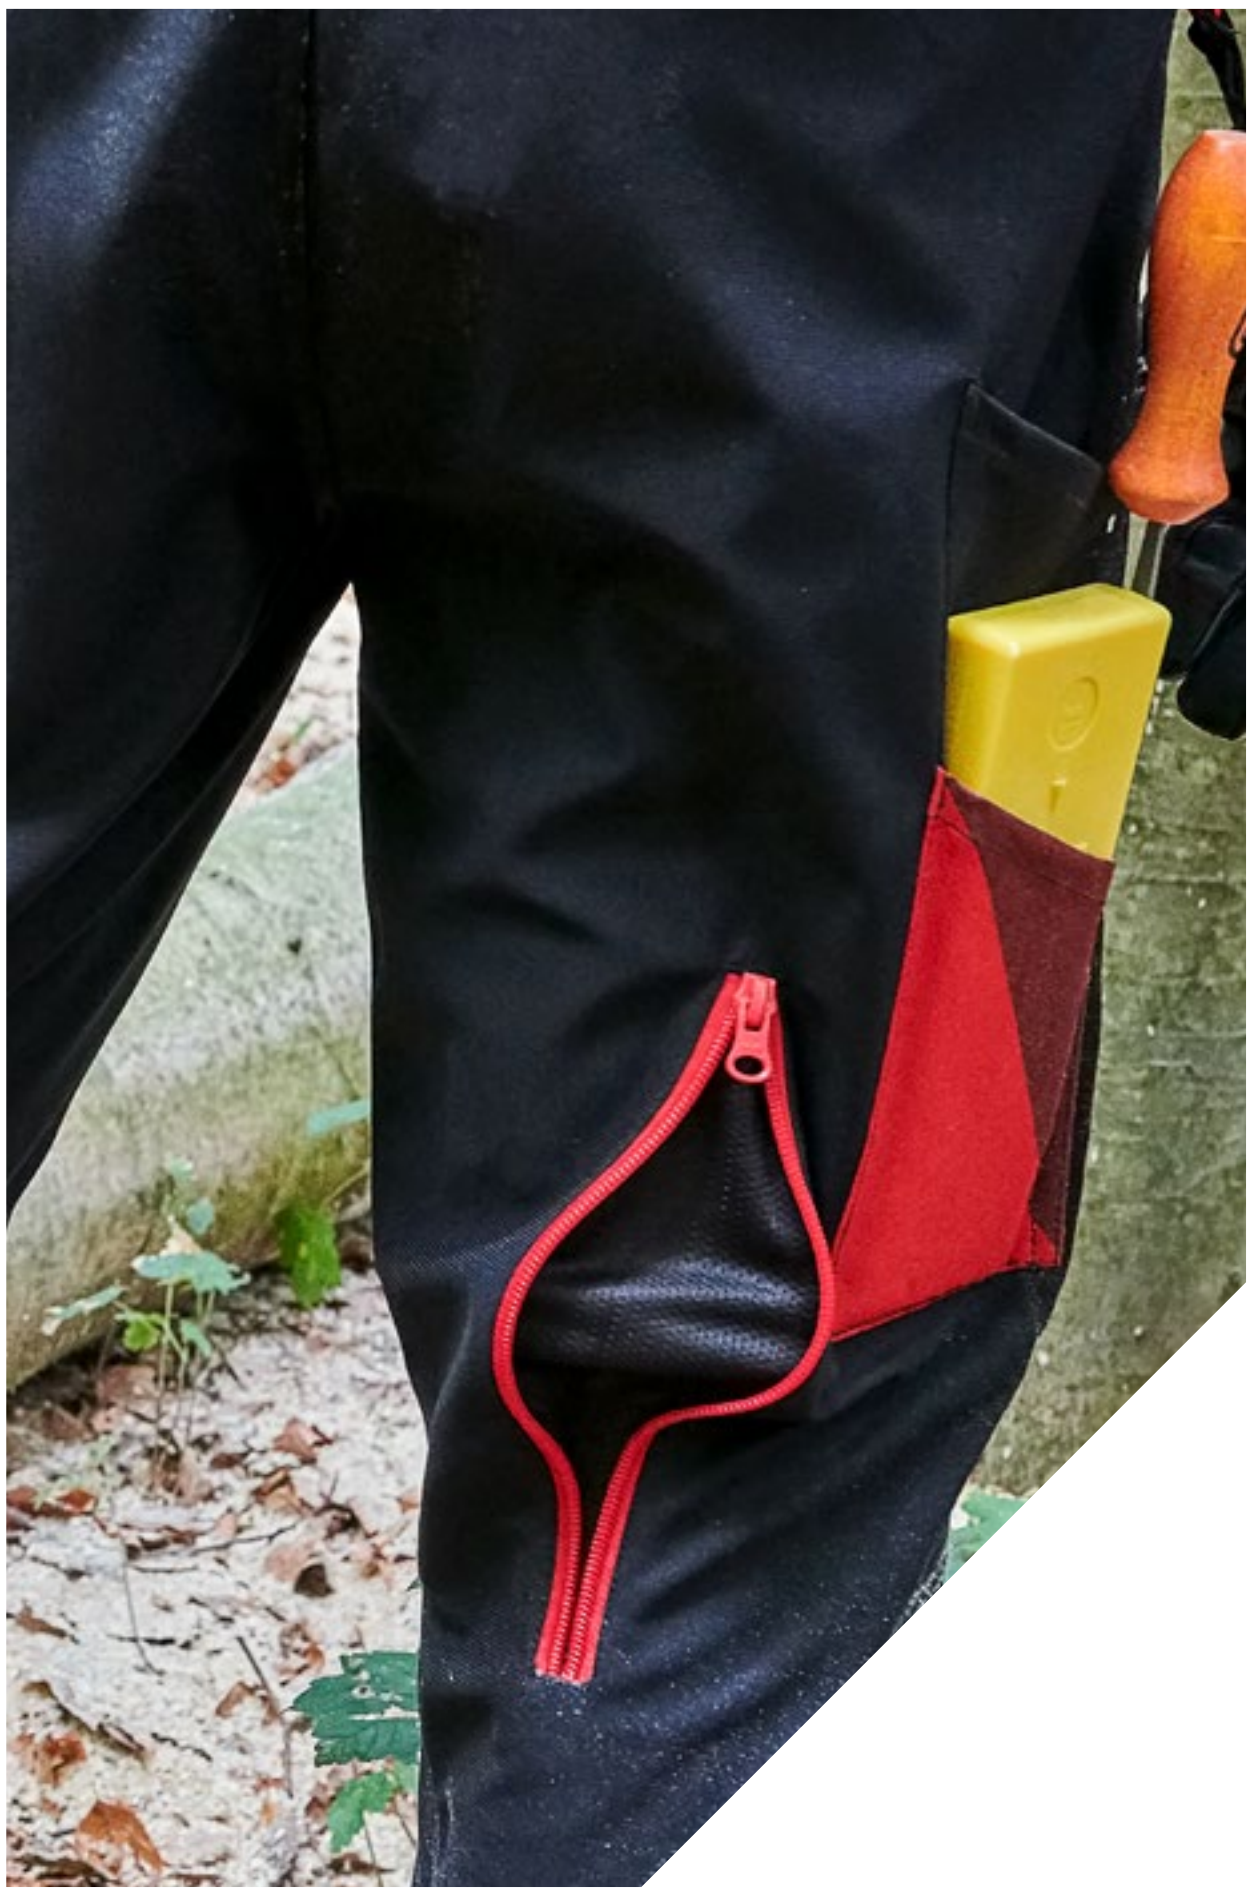

LEATHER CHAINSAW PROTECTIVE BOOTS

The right pair of footwear can be your best ally when working in challenging conditions. Oregon chainsaw protective boots feature a sturdy construction for protection and durability, while ensuring the level of comfort only a leather boot can provide.

- Carefully selected, high-resistant materials
  (leather, insole and outsole, seams, eyelets and hooks, laces)
- Designed to optimize comfort and limit weight
- Cold and heat isolation for extreme working conditions
- Class 1 and 2 chainsaw protection
- Anti-slip sole to ensure stability
- Water repellent and waterproof properties
- Anti-perforation outsole (Fiordland)

STANDARD
kwf





	Model	OREGON	Protection level	Available sizes EUR UK	Weight (size 43) (size 9)	Chainsaw size	Frequency of chainsaw use	Diameter of wood to cut	Durability
GOOD	**YUKON**	295449/ (SIZE)	EN ISO 17249-2013 Class 1 (20m/s)	39 to 48 5.5 to 13	2,3 kg	38-62 cc or Electric, battery	●●	∅ 0-60 cm	●●●
BETTER	**WAIPOUA**	295479/ (SIZE)	EN ISO 17249-2013 Class 1 (20m/s)	38 to 48 5 to 13	2 Kg	38-100 cc	●●●●	∅ 0-90 cm	●●●●
BEST	**FIORDLAND**	295469/ (SIZE)	EN ISO20345-2011 SE2 A E WRU FO SRC Class 2 (24m/s)	38 to 48 5 to 13	2,2 Kg	38-100 cc	●●●●	∅ 0-90 cm	●●●●●

YUKON®

GOOD

EN ISO 11393-2:2019

Class 1 (20m/s)

WAIPOUA®

BETTER

EN ISO 11393-2:2019

Class 1 (20m/s)

FIORDLAND®

BEST

EN ISO 11393-2:2019

Class 2 (24m/s)

CLASS 1
OREGON

Material	Cold & heat isolation	Heat resistant (300°C)	Waterproof membrane (WR)	Water resistant upper (WRU)	Protective material (100% polyester)	Metal toe cap (SB)	Anti-perforation outsole (P)	Anti-slip outsole (SRC)
Cow leather & PU outsole				✓	✓	✓		✓
Cow leather & nitril outsole	✓	✓		✓	✓	✓		✓
Nubuck leather & nitril outsole	✓	✓	✓	✓	✓	✓	✓	✓

PROTECTIVE TROUSERS

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS			
YUKON Type A Protective Trousers GOOD	295435/ S M L XL 2XL 3XL	Type A EN ISO 11393-2:2019 Class 1 (20m/s)	• 5-layer protective material • Abrasion resistant 4-way stretch polyester • 2 large front pockets and one back pocket • Lightweight: 1,05 kg (size M trousers) STRETCH	STANDARD kwf EN ISO 11393-2:2019 Class 1 (20m/s)	S ▶ 3XL	10
YUKON Type C Protective Trousers GOOD	295397/ S M L XL 2XL 3XL	Type C EN ISO 11393-2:2019 Class 1 (20m/s)	• 5-layer protective material • Abrasion resistant 4-way stretch polyester • 2 large front pockets and one back pocket STRETCH	STANDARD kwf EN ISO 11393-2:2019 Class 1 (20m/s)	S ▶ 3XL	10
YUKON Protective Bib and brace GOOD	295445/ S M L XL 2XL 3XL	EN ISO 11393-2:2019 Class 1 (20m/s)	• 5-layer protective material • Abrasion resistant 4-way stretch polyester • 2 large front pockets and one back pocket • Lightweight: 1,05 kg (size M trousers) STRETCH	STANDARD kwf EN ISO 11393-2:2019 Class 1 (20m/s)	S ▶ 3XL	10
YUKON+ Class 1 Protective Trousers GOOD	295453/ S M L XL 2XL 3XL	EN ISO 11393-2:2019 Class 1 (20m/s)	• 6 cutting resistant protective layers • 35% cotton for comfort, breathability and sweat control • 65% polyester for high durability • Oil, fuel and heat resistant • Lightweight: 1.15 kg (size M Class 1) STRETCH REFLECTIVE	STANDARD kwf EN ISO 11393-2:2019 Class 1 (20m/s)	S ▶ 3XL	8

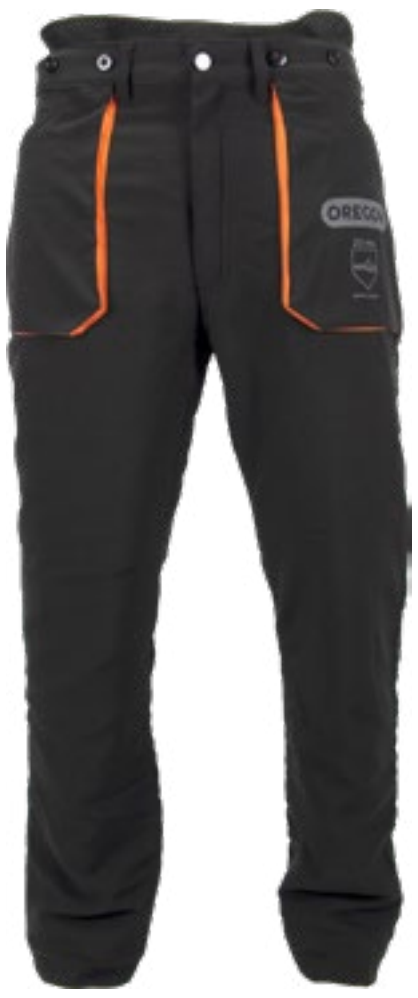

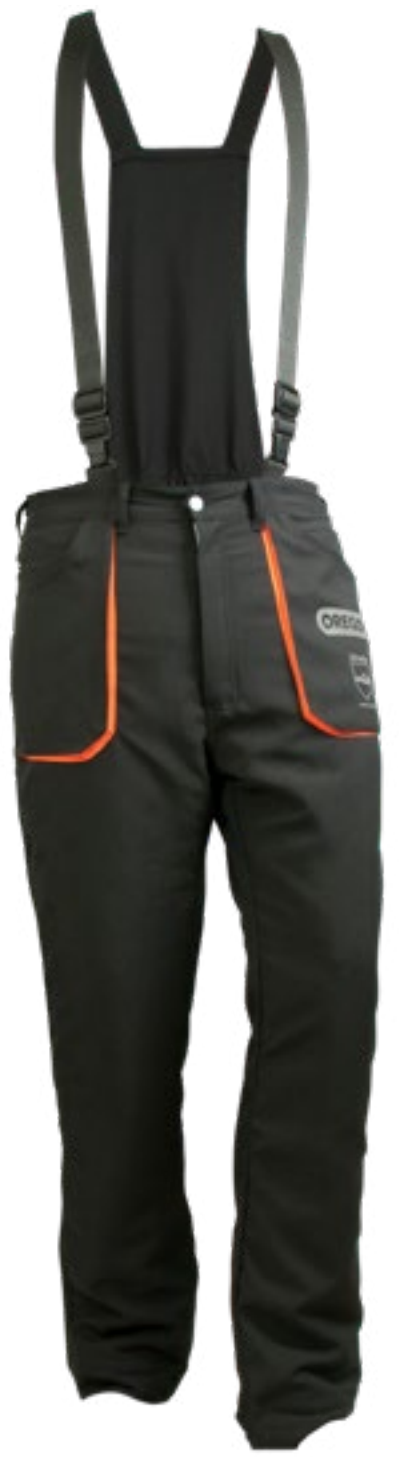

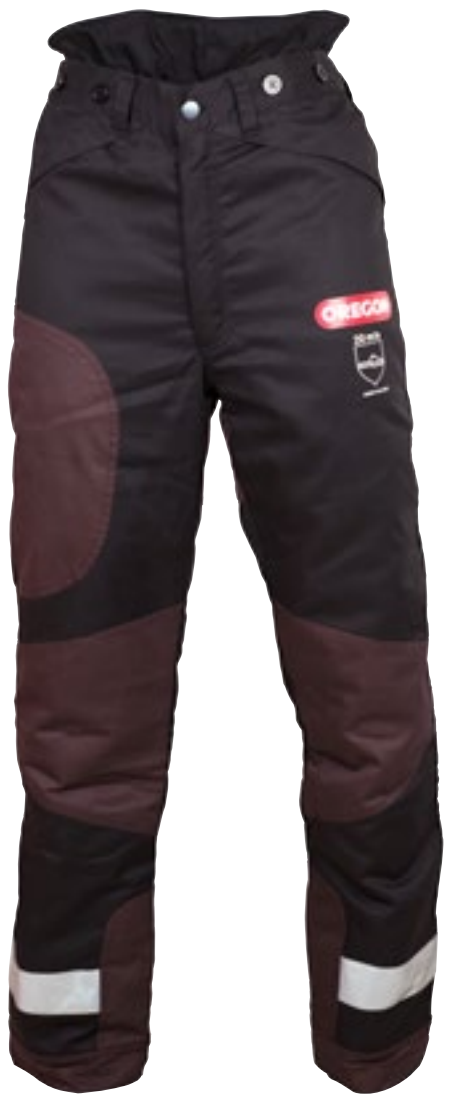

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS		
NEW WAIPOUA® Protective Trousers BETTER	**295466/** **S** **M** **L** **XL** **2XL** **3XL**	EN ISO 11393-2:2019 Class 1 (20m/s)	• Black / Red • 6 Layer protective material • Abrasion resistant 4-way stretch polyester • Lightweight: 1,38kg (size M) • Zipper pockets at front and double tool pocket at back • Zipper ventilations at back of legs	S ▶ 3XL	8
	295469/ **S** **M** **L** **XL** **2XL** **3XL**		• Red / Black / Hi-Vis Yellow		
FIORDLAND Protective Trousers BEST	**295490/** **S** **M** **L** **XL** **2XL** **3XL**	EN ISO 11393-2:2019 Class 1 (20m/s)	• 6 Layer protective material • Long lasting, durable nylon with twill fabric on the front • Armortex® patches in rubbing, wearing and snatching areas • 5 rubberized zipper pockets • Extra long zipper ventilation on both legs • Oil, fuel and heat resistant • Lightweight • Repair kit provided	S ▶ 3XL	8

EN ISO 11393-2:2019
Class 1 (20m/s)

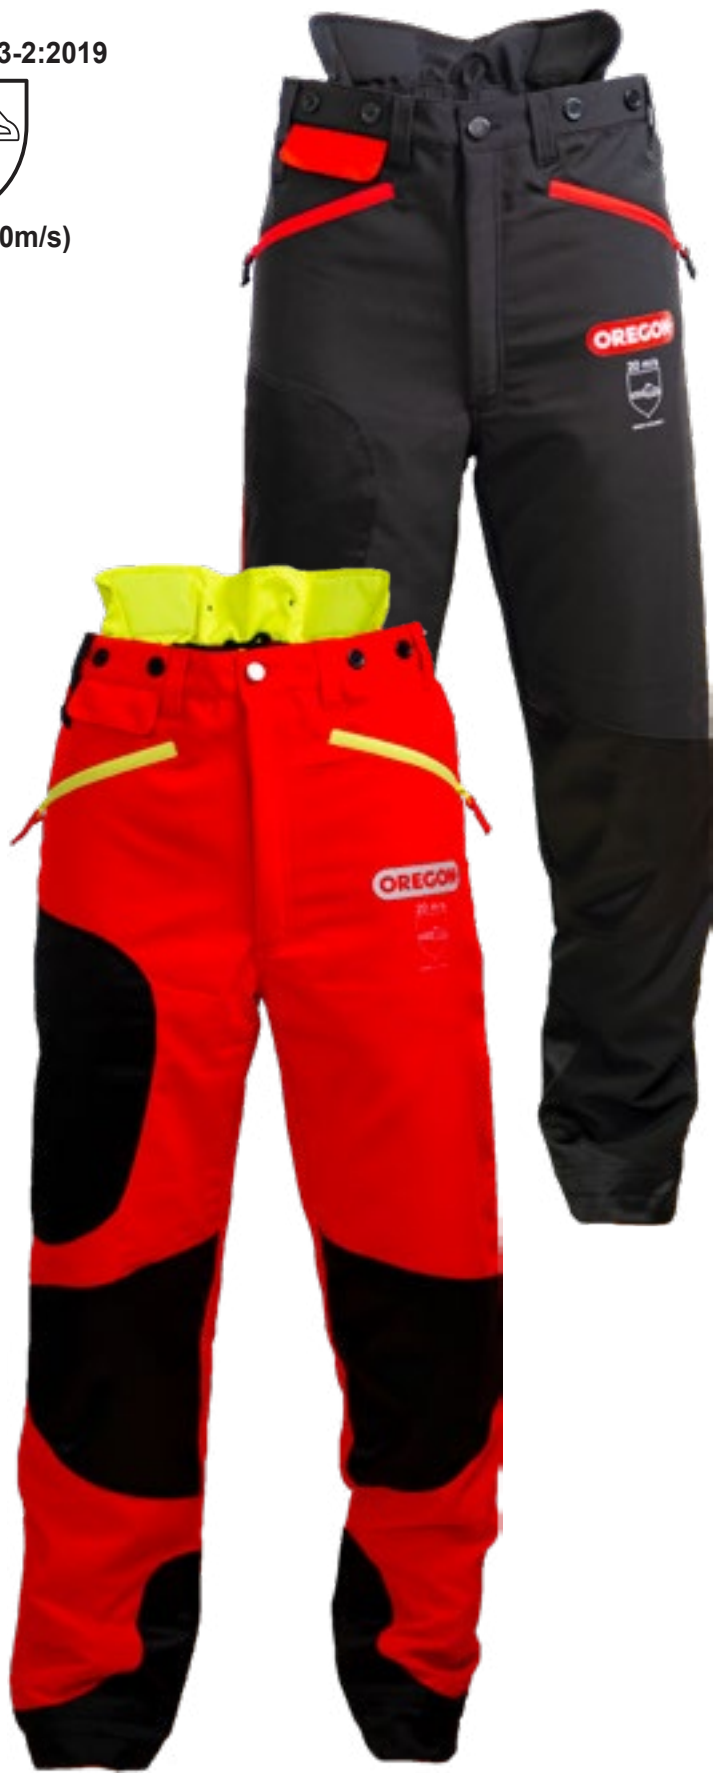

EN ISO 11393-2:2019
Class 1 (20m/s)

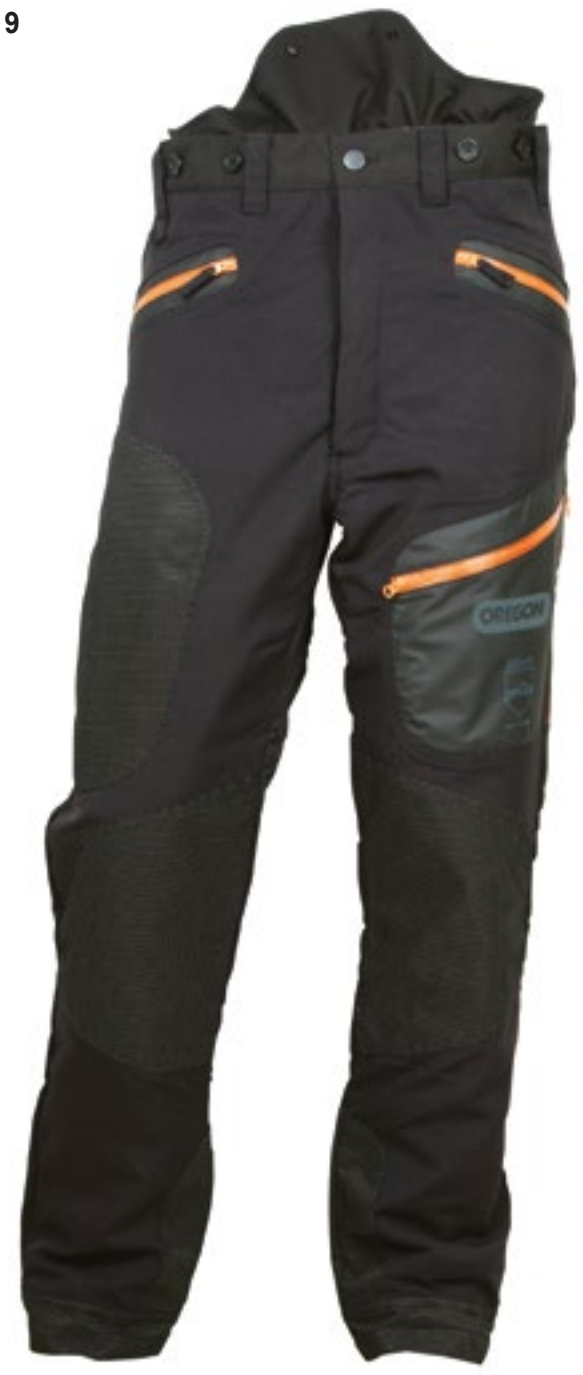

NON PROTECTIVE JACKET

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS			
YUKON Non Protective Jacket GOOD	295472/ S M L XL 2XL 3XL	PROFI kwf	• Abrasion resistant 4-way stretch polyester • 4 pockets (1 chest + 2 sides + 1 First Aid pockets) • Comfortable high collar with Corduroy • Reinforced with Cordura® elbow patches 4-WAY STRETCH · HI-VIS · CORDURA	S ▶ 3XL	18	
NEW High-Vis Jacket GOOD	295478- S M L XL 2XL 3XL	EN ISO 20471:2013 + A1:2016 Class 3	• Class 3 certified jacket, high day and night visibility • Fluorescent color and reflective stripes • Back and underarm ventilation • 2 chest pockets + 2 waist pockets + 1 first aid pocket • Adjustable cuffs with buttons • Extended back HI-VIS · 4-WAY STRETCH · REFLECTIVE	S ▶ 3XL	10	

UNIVERSAL LEGGINGS

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS			
Leggings GOOD	575780	EN ISO 11393-2:2019 Class 1 (20m/s)	• One size fits all • 6-layer protective material • Abrasion resistant 4-way stretch polyester • 4 adjustable straps on each back leg • Lightweight: 1kg 4-WAY STRETCH	EN ISO 11393-2:2019 Class 1 (20m/s)	10	

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS		
CHAINSAW PROTECTIVE CUFFS					
Cuffs GOOD	572332	EN ISO 11393-6: 2019 clause 4.7	• Class 1 (20 m/s) arm protection for forestry and arborist work • One size fits all • Outer fabric: 100% polyester • Lining: 67% polyester + 33% cotton HI-VIS		Class 1 (20m/s)
LOGGER BRACES					
Braces with metal clips	562411		• Fits all oregon trousers		10
Braces for buttons	537804				
SHINGUARDS					
Brushcutter shinguards	559061		• Protects entire lower leg and knee • Soft, cushioned inside molds • Strong adjustable buckle system		25

CHAINSAW PROTECTIVE RUBBER BOOTS

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS		
Yukon rubber boots	**295385/** **38** **39** **40** **41** **42** **43** **44** **45** **46** **47** **48**	EN ISO 17249: 2013 Class 3 (28 m/s) EN ISO 20345: 2011 - SB E SRA	• Hight chainsaw protection - Class 3 • Natural rubber with comfortable cotton lining • Steel toe cap (200J) • Shock absorbent heel • Oil and slip resistant rubber sole (SRA certified)	38 ▶ 5 39 ▶ 5½ 40 ▶ 6½ 41 ▶ 7½ 42 ▶ 8 43 ▶ 9 44 ▶ 9½ 45 ▶ 10½ 46 ▶ 11 47 ▶ 12 48 ▶ 13	5

Class 3 (28m/s)

CHAINSAW PROTECTIVE LEATHER BOOTS

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	EUR ▶ UK	
YUKON leather boots GOOD	295449/ 39 40 41 42 43 44 45 46 47 48	EN ISO 17249: 2013 Class 1 (20m/s) EN ISO 20345: 2011 - S2 A E WRU FO SRC	- Water-repellent upper - Cow leather & PU outsole - Lightweight: 2.3 kg - Anti-slip and hydrocarbon resistant outsole - Premium quality lace hooks Class 1 (20m/s)	39 ▶ 5½ 40 ▶ 6½ 41 ▶ 7 42 ▶ 8 43 ▶ 9 44 ▶ 9½ 45 ▶ 10½ 46 ▶ 11 47 ▶ 12 48 ▶ 12½	6
WAIPOUA® leather boots BETTER	295479/ 38 39 40 41 42 43 44 45 46 47 48	EN ISO 17249:2013 Class 1 (20m/s) EN ISO 20345: 2011 - S2 HRO HI CI SRC	- Water-repellent upper - 1,8mm cow leather & nitril outsole - Lightweight: 2 kg (size 43) - Cold and heat isolation, heat resistant - Anti-slip and hydrocarbon resistant outsole - Ergonomic with collar padding Class 1 (20m/s)	38 ▶ 5 39 ▶ 5½ 40 ▶ 6½ 41 ▶ 7½ 42 ▶ 8 43 ▶ 9 44 ▶ 9½ 45 ▶ 10½ 46 ▶ 11 47 ▶ 12 48 ▶ 13	4
FIORDLAND leather boots BEST	295469/ 38 39 40 41 42 43 44 45 46 47 48	EN ISO 17249:2013 Class 2 (24m/s) EN ISO 20345:2011 - S3 WR SRC FO HI CI HRO	- Waterproof, isolated against cold and resistant to heat up to 300°C - 2mm nubuck leather & nitril outsole - Lightweight: 2.2 kg - Anti-perforation, anti-slip and hydrocarbon resistant outsole - Ergonomic with collar padding Class 2 (24m/s)	38 ▶ 5 39 ▶ 5½ 40 ▶ 6½ 41 ▶ 7½ 42 ▶ 8 43 ▶ 9 44 ▶ 9½ 45 ▶ 10½ 46 ▶ 11 47 ▶ 12 48 ▶ 13	4

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	📦	

YUKON FORESTRY HELMET COMBINATION

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	📦	
Yukon Safety helmet combination GOOD	562412	EN 397: 2012 + A1:2012 EN 352-3: 2002 EN 1731: 2006	• Impact resistant PP helmet • 6 ventilation holes for breathability • 6 points easy to adjust harness with ratchet system • Wide and durable stainless steel mesh visor • Comfortable earmuffs, SNR value 25.9 dB	12	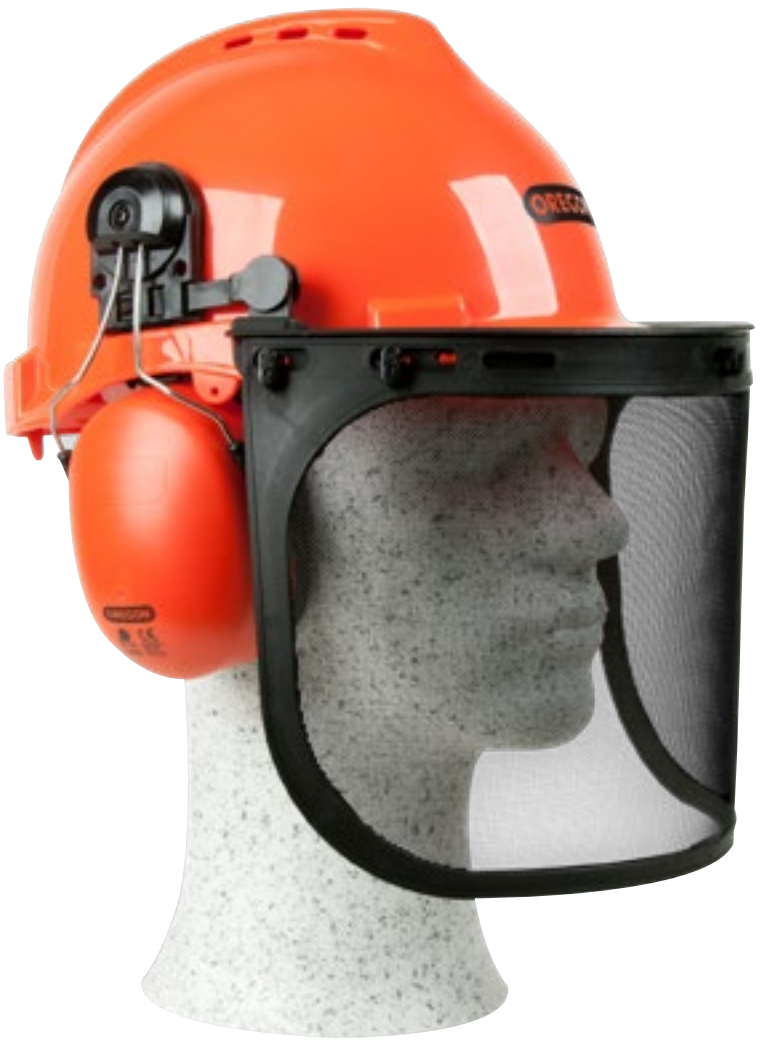
	566092		• Harness replacement	1	
	523600		• Visor holder	1	
	566093		• Replacement visor	1	
	518774		• Hygiene kit	1	
	562665		• Neck cape	1	

WAIPOUA FORESTRY HELMET COMBINATION

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	📦
Waipoua® Safety helmet combination BETTER	562413	EN 397: 2012 + A1:2012 EN 352-3: 2002 EN 1731: 2006	• High impact and resistant ABS material • 20 ventilation holes for breathability • UV-stabilized shell with rain gutter • 4 points easy to adjust harness with push-pull ratchet system • Removable and washable anti-slip sweatband • Durable stainless steel mesh visor with flip up and dow function • Comfortable earmuffs, SNR value 26dB • Removable chin protection included	12
	564570		• Suspension kit	1
	564580		• Sweatband	1
	585673		• Visor holder	1
	564579		• Replacement visor	1
	564649		• Earmuff replacement	1
	605575		• Chin protector	1
	562666		• Neck cape	1

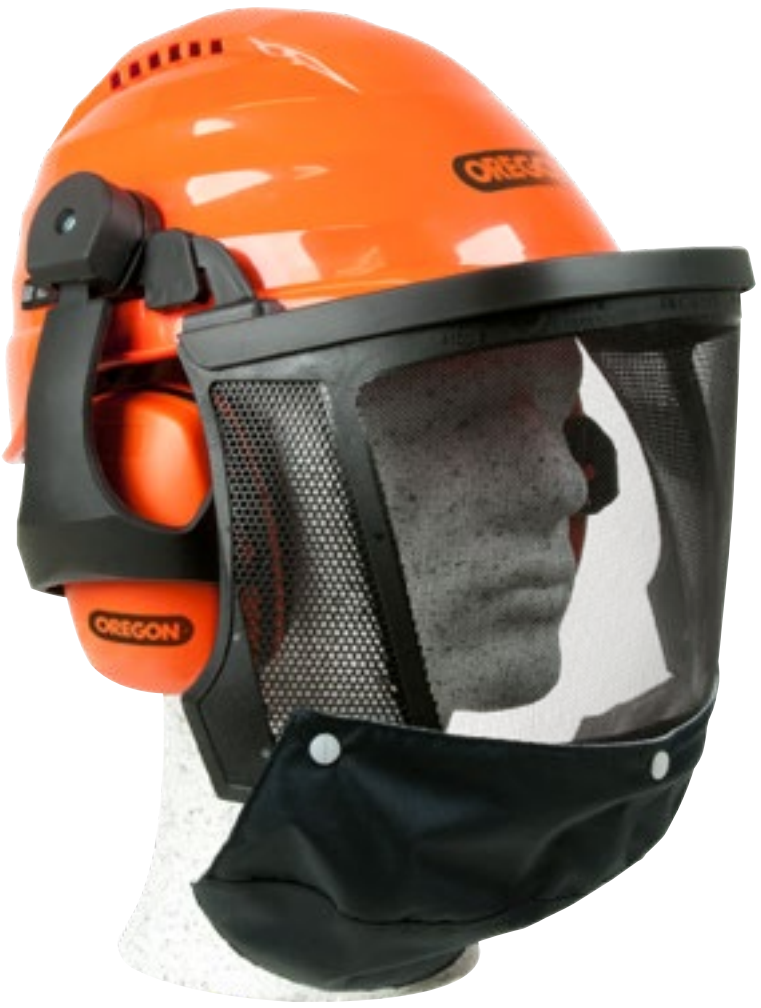

OREGON
OREGON

FACE AND EAR PROTECTION

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	📦	
Mesh visor/muff combination	Q515061	EN 352-1:2002 EN 1731:2006 F	• Steel mesh visor • Headband with single-point adjustment • SNR value 27,6 dB	12	
Browguard and steel mesh visor	Q515064	EN 1731:2006 F	• Steel mesh visor • Headband with single-point adjustment	12	
Steel mesh face screen	Q515065	EN 1731:2006 S	• Steel mesh visor • Elastic headband	60	
Polycarbonate visor/ muff combination	Q515062	EN 352-1:2002 EN 166:2001 3B	• Polycarbonate visor • Headband with single-point adjustment • SNR value 27,6 dB	12	
Browguard and polycarbonate visor	Q515063	EN 166:2001 3B	• Polycarbonate visor • Headband with single-point adjustment	12	
Polycarbonate face screen	Q515066	EN 166:2001 1S	• Polycarbonate visor • Elastic headband	60	
Polycarbonate face screen	518773	EN 166:2001 1S	• Polycarbonate visor • Replacement part		
Headband with ear muffs	Q515060	EN 352-1:2002	• Sliding ear muff cups • Compact and easy to adjust • SNR value: 24,3dB	32	

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	📦	
SAFETY KIT					
	581188	EN352-1 EN1731 EN388 CAT II	• One mesh visor and earmuff combination (EN352-1 and EN1731 certified) • One pair of working gloves (size M) EN388 CAT II certified	12	
	572870	EN352-1 EN 166 EN388 CAT II	• One protective earmuff: 26dB (EN352-1 certified) • One pair of safety glasses: 100% UV protection, EN 166 certified • One pair of working gloves (size M) EN388 CAT II certified	36	

WORKING GLOVES

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS			
Cold weather working gloves GOOD	**295487/** **M** **L** **XL**	EN 388:2016, level 2131X EN 511:2006, level X2X	• Hand protection against blade cut, abrasion and puncture • Protection against cold up to -50° • Comfortable and ergonomic • Strong grip on objects and tools ❄	EN388: 2016 2131 X EN511 X2X M ▶ XL	120	
Leather working gloves GOOD	**539171** **M** **L** **XL**	EN 388:2016, level 3122X	• Leather and 4-way stretch fabric • Protection against blade cut, abrasion and puncture • Excellent operational control • Extra grip • Adjustable strap 4-WAY STRETCH	EN388: 2016 3122 X M ▶ XL	10	
Leather and fabric working gloves GOOD	**542656**	EN 420 CAT I	• Size L (10) • Smooth leather • Close-fit wrist design	EN388: 2016 4121 X L	10	

CHAINSAW PROTECTIVE GLOVES

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS			
Leather gloves BETTER	295399 M L XL	EN ISO 11393-4:2019 Class 0 (16 m/s) EN 388:2016 Level 3142X	• Two hands chainsaw protection • Smooth leather • Excellent chainsaw feel • Durable palm area • Close-fit wrist design HI-VIS	EN388: 2016 3122 X Design A Class 0 16 m/s EN ISO 11393-4:2019 M ▶ XL	10	
	91305 S M L XL	EN ISO 11393-4:2019 Class 0 (16 m/s) EN 388:2016 Level 3142X	• Left hand chainsaw protection • Smooth leather • Excellent chainsaw feel • Durable palm area • Close-fit wrist design HI-VIS	EN388: 2016 3122 X Design A Class 0 16 m/s EN ISO 11393-4:2019 S ▶ XL	10	
FIORDLAND cold weather gloves BEST	295485 M L XL	EN ISO 11393-4:2019 Class 0 (16 m/s) EN 388:2016 Level 3122X	• Left hand chainsaw protection • Durable leather and stretch fabric • Ideal for working in cold weather conditions • Keeps excellent operational control • Reinforcement on palm area and fingers • Adjustable strap for optimum fit around the wrist	EN388: 2016 3122 X Design A Class 0 16 m/s EN ISO 11393-4:2019 M ▶ XL	10	
FIORDLAND leather gloves BEST	295395 M L XL	EN ISO 11393-4:2019 Class 0 (16 m/s) EN 388:2016 Level 3122X	• Left hand chainsaw protection • High quality leather and stretch fabric • Keeps excellent operational control • Reinforcement on palm area and fingers • Adjustable strap for optimum fit around the wrist 4-WAY STRETCH	EN388: 2016 3122 X Design A Class 0 16 m/s EN ISO 11393-4:2019 M ▶ XL	10	

SAFETY GLASSES

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	📦	
Clear	Q515068	EN 166:2001 EN 170:2002	• Protection against impacts • UV filter	160	
Yellow	Q515069	EN 166:2001 EN 170:2002	• Protection against impacts • UV filter	160	
Clear	Q525249	EN 166:2001	• Protection against impacts	160	
Yellow	Q525250	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160	
Black	Q525251	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160	
Black mirror	Q525252	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160	
Clear	Q545830	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160	
Clear silver mirror	Q545831	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160	

PRODUCT NAME	OREGON	STANDARDS	SPECIFICATIONS	📦	
Black	Q545832	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160	
Black silver mirror	Q545833	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160	
Clear	572794	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160	
Clear	572796	EN 166:2001 EN170:2002	• Protection against impacts • UV filter	160	
Black	572797	EN 166:2001 EN170:2002 EN172:1994	• Protection against impacts • UV filter • Solar filter for industrial use	160	

SAFETY GOGGLES

	539169	EN 166:2001 EN170:2002	• Protection against impacts • UV filter • PVC frame with top and bottom ventilation holes • Polycarbonate ocular • Non-misting interior • Scratch resistant	30	

75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged.
Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents.
Engineering is the bedrock of our reputation.

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C008551

PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.
OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-006-EN

OREGON
PowerCut

Discover more of our products at
OregonProducts.com

OUTDOOR POWER EQUIPEMENT

OPE_1.2
EN/EUR

YOUR GARDEN, OUR PASSION

Connecting with customers on a deep level to understand their work and needs, Oregon use specific product optimisation to help professionals and home users to get the job done right.

OUTDOOR POWER EQUIPMENT

OREGON
OREGON

INSTANT START

- No Pull Cords
- No Warm-Up Required
- No Petrol-Oil Mixing

LESS DOWN TIME

- Fewer Repairs Needed (Compared to Petrol Engines)

LOW NOISE

- Significantly Quieter than Petrol-Powered Motors
- Silent Between Cuts/Trimming
- Start Early and Work Late

COMFORT AND CONTROL

- Ergonomic Design
- Light-Weight and Balanced
- Low Vibration

ZERO EMISSIONS

- Environmentally Friendly
- No Petrol Fumes

PowerSharp®

CS1500 Self-Sharpening Corded Chainsaw

CS1400 Corded Chainsaw

PS750 Corded Pole Saw

CS1200 Corded Chainsaw

CS1500

THE ONLY SELF-SHARPENING CHAINSAW ON THE MARKET.

With the built-in PowerSharp Sharpening System, there's no more downtime due to a dull chain. Simply pull the lever for 3-5 seconds and the chain works like new. PowerSharp: sharpens on the saw, on the job, in seconds.

PowerSharp®
Sharpening System

OREGON
OREGON
OREGON

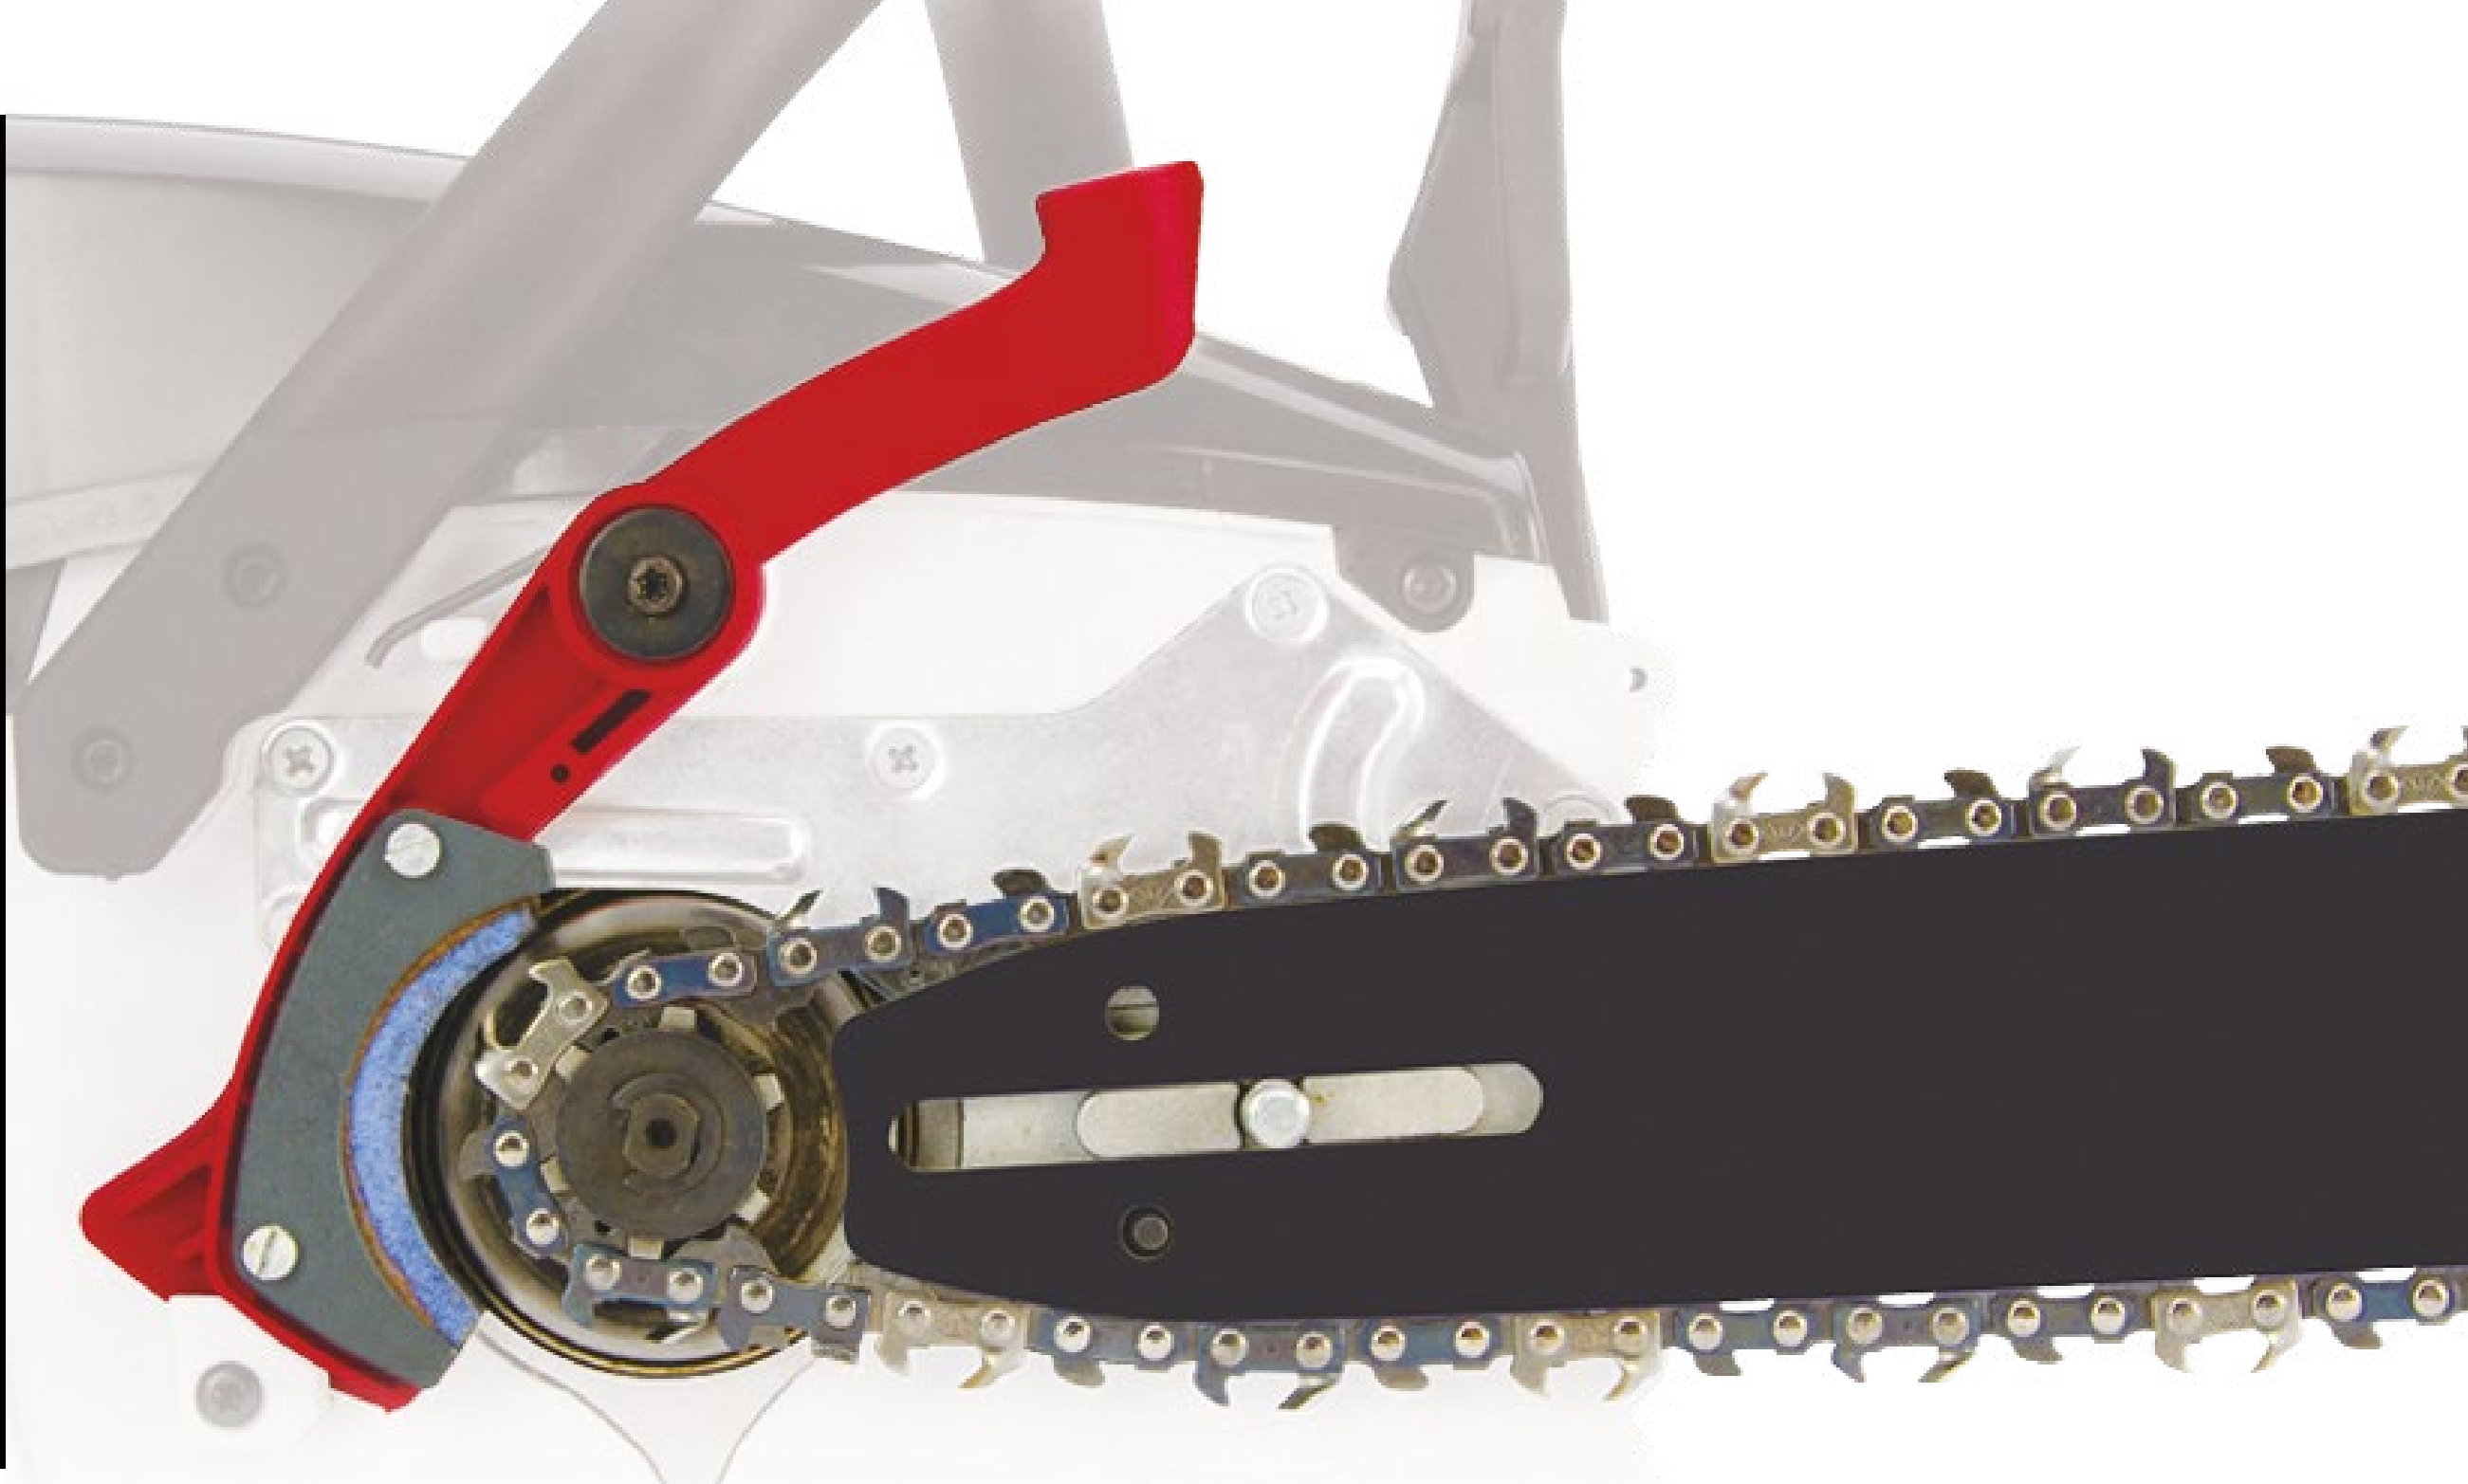

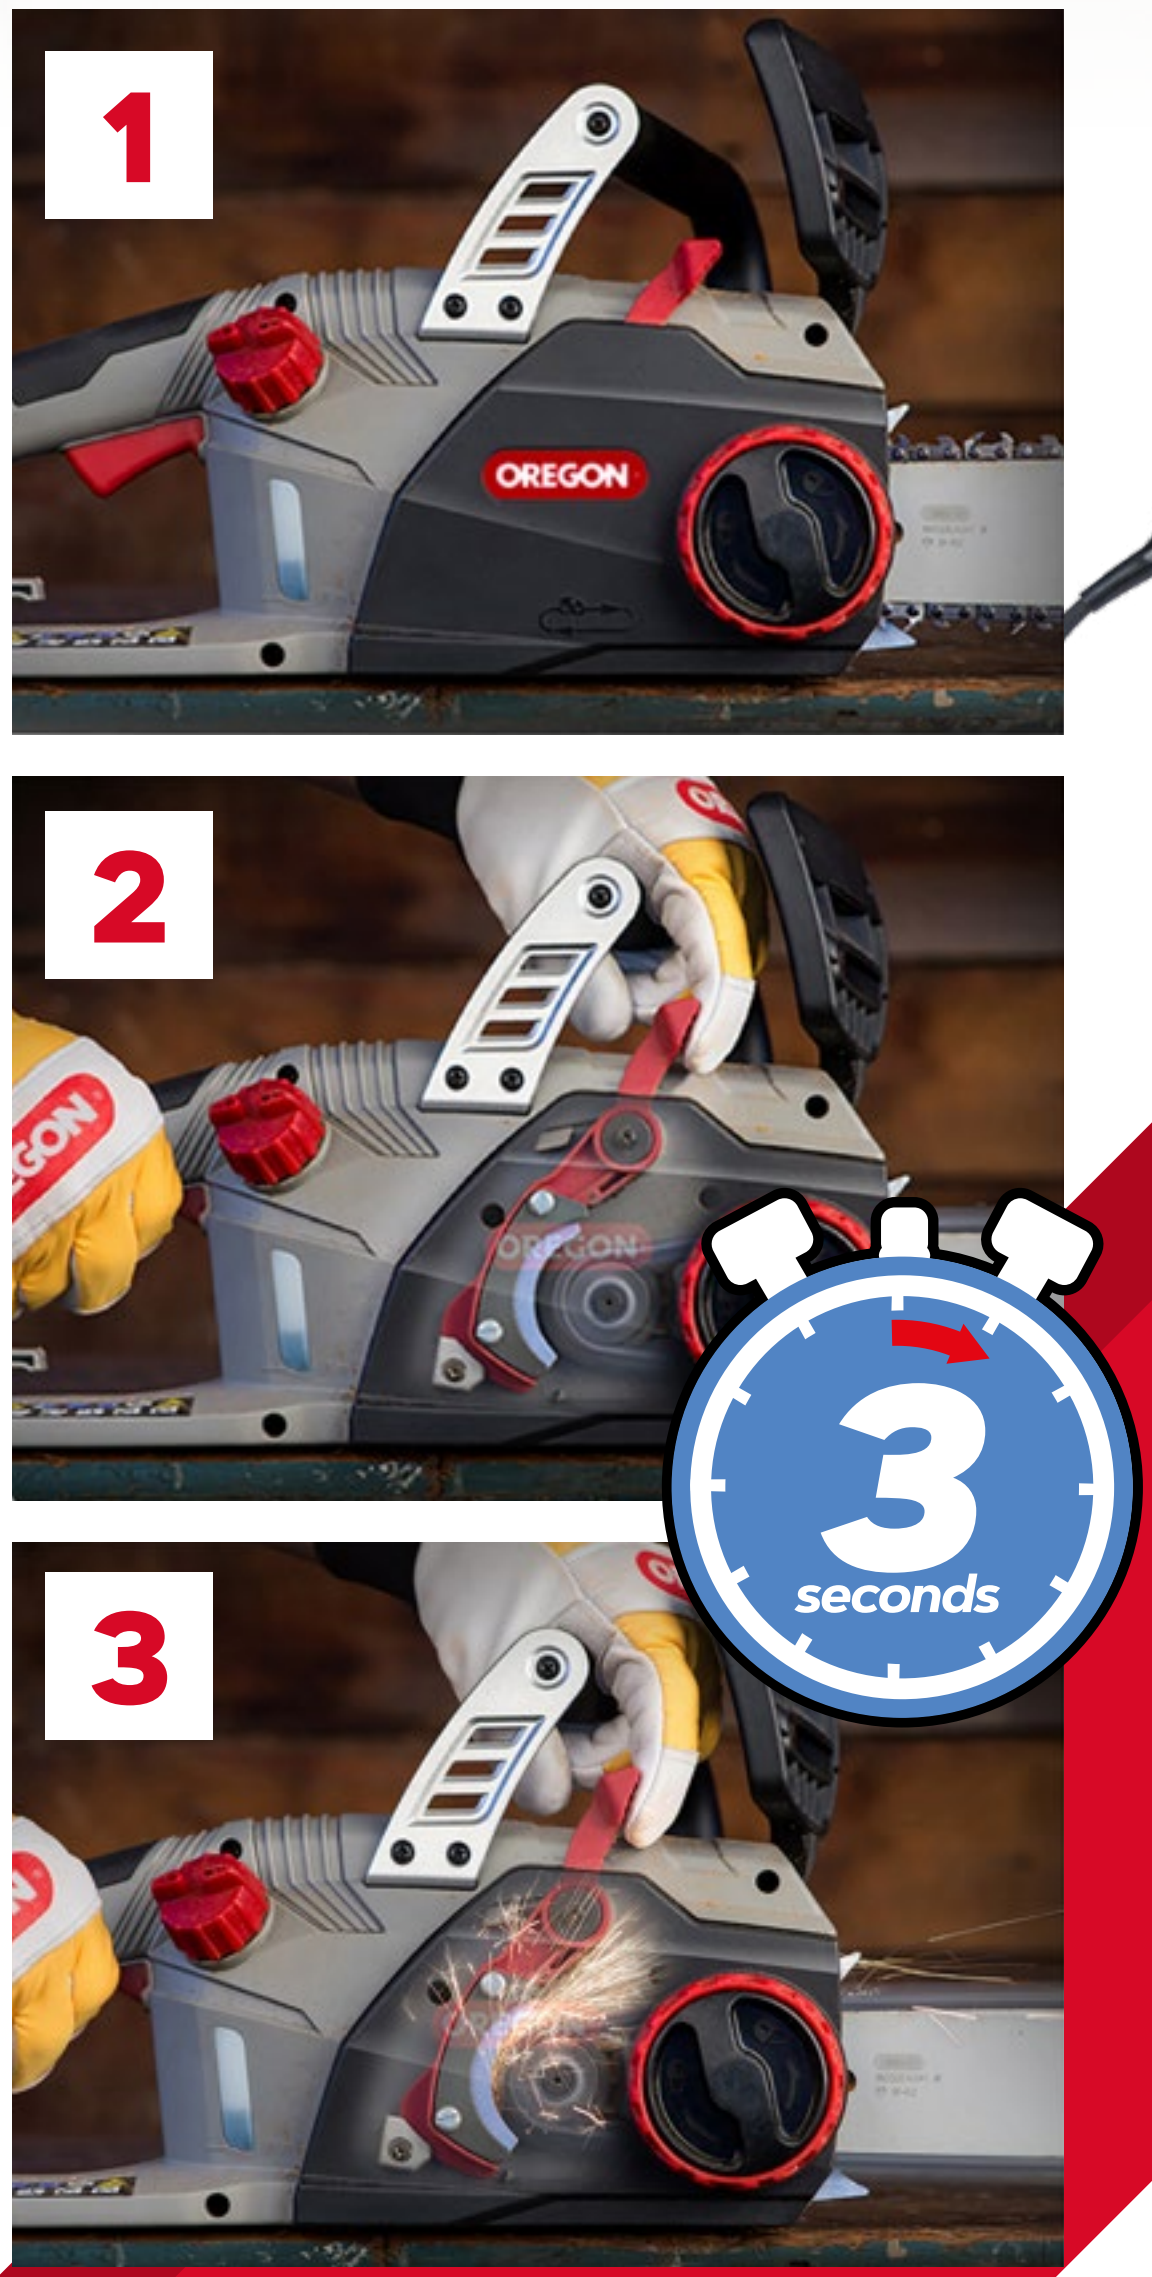

SELF-SHARPENING CORDED CHAINSAW

CS1500

Oregon's high-power, 2400 Watts CS1500 chainsaw is the only corded electric chainsaw on the market with a chain that can sharpen itself. The CS1500 has all the traditional conveniences of an electric chainsaw - instant start with the pull of a trigger, minimal maintenance, low noise and silent between cuts - and takes it one step further by incorporating the built-in PowerSharp® chain sharpening system.

PowerSharp®
Sharpening System

CS1200 - CORDED CHAINSAW 230V

PRODUCT NAME	OREGON	SPECIFICATIONS
CS1200 Corded chainsaw 230v	601681 601682 UK only	• Power : 1800 Watts • Bar Length : 14” (35cm) • Type of chain : AdvanceCut chain • Pitch : 3/8” Low-Profile TM • Gauge : .050” (1.3 mm) • No Load Chain Speed : 14,5 m/s • Variable Speed Trigger • Tool-Less Chain Tensioning System • Automatic Oiler • Weight : Only 4.5 kg with guide bar and saw chain attached
Chain	91PX052E or Q91VG052E	
Guide Bar 14"	140SDEA041	

OREGON
OREGON
OREGON

SPARE PARTS

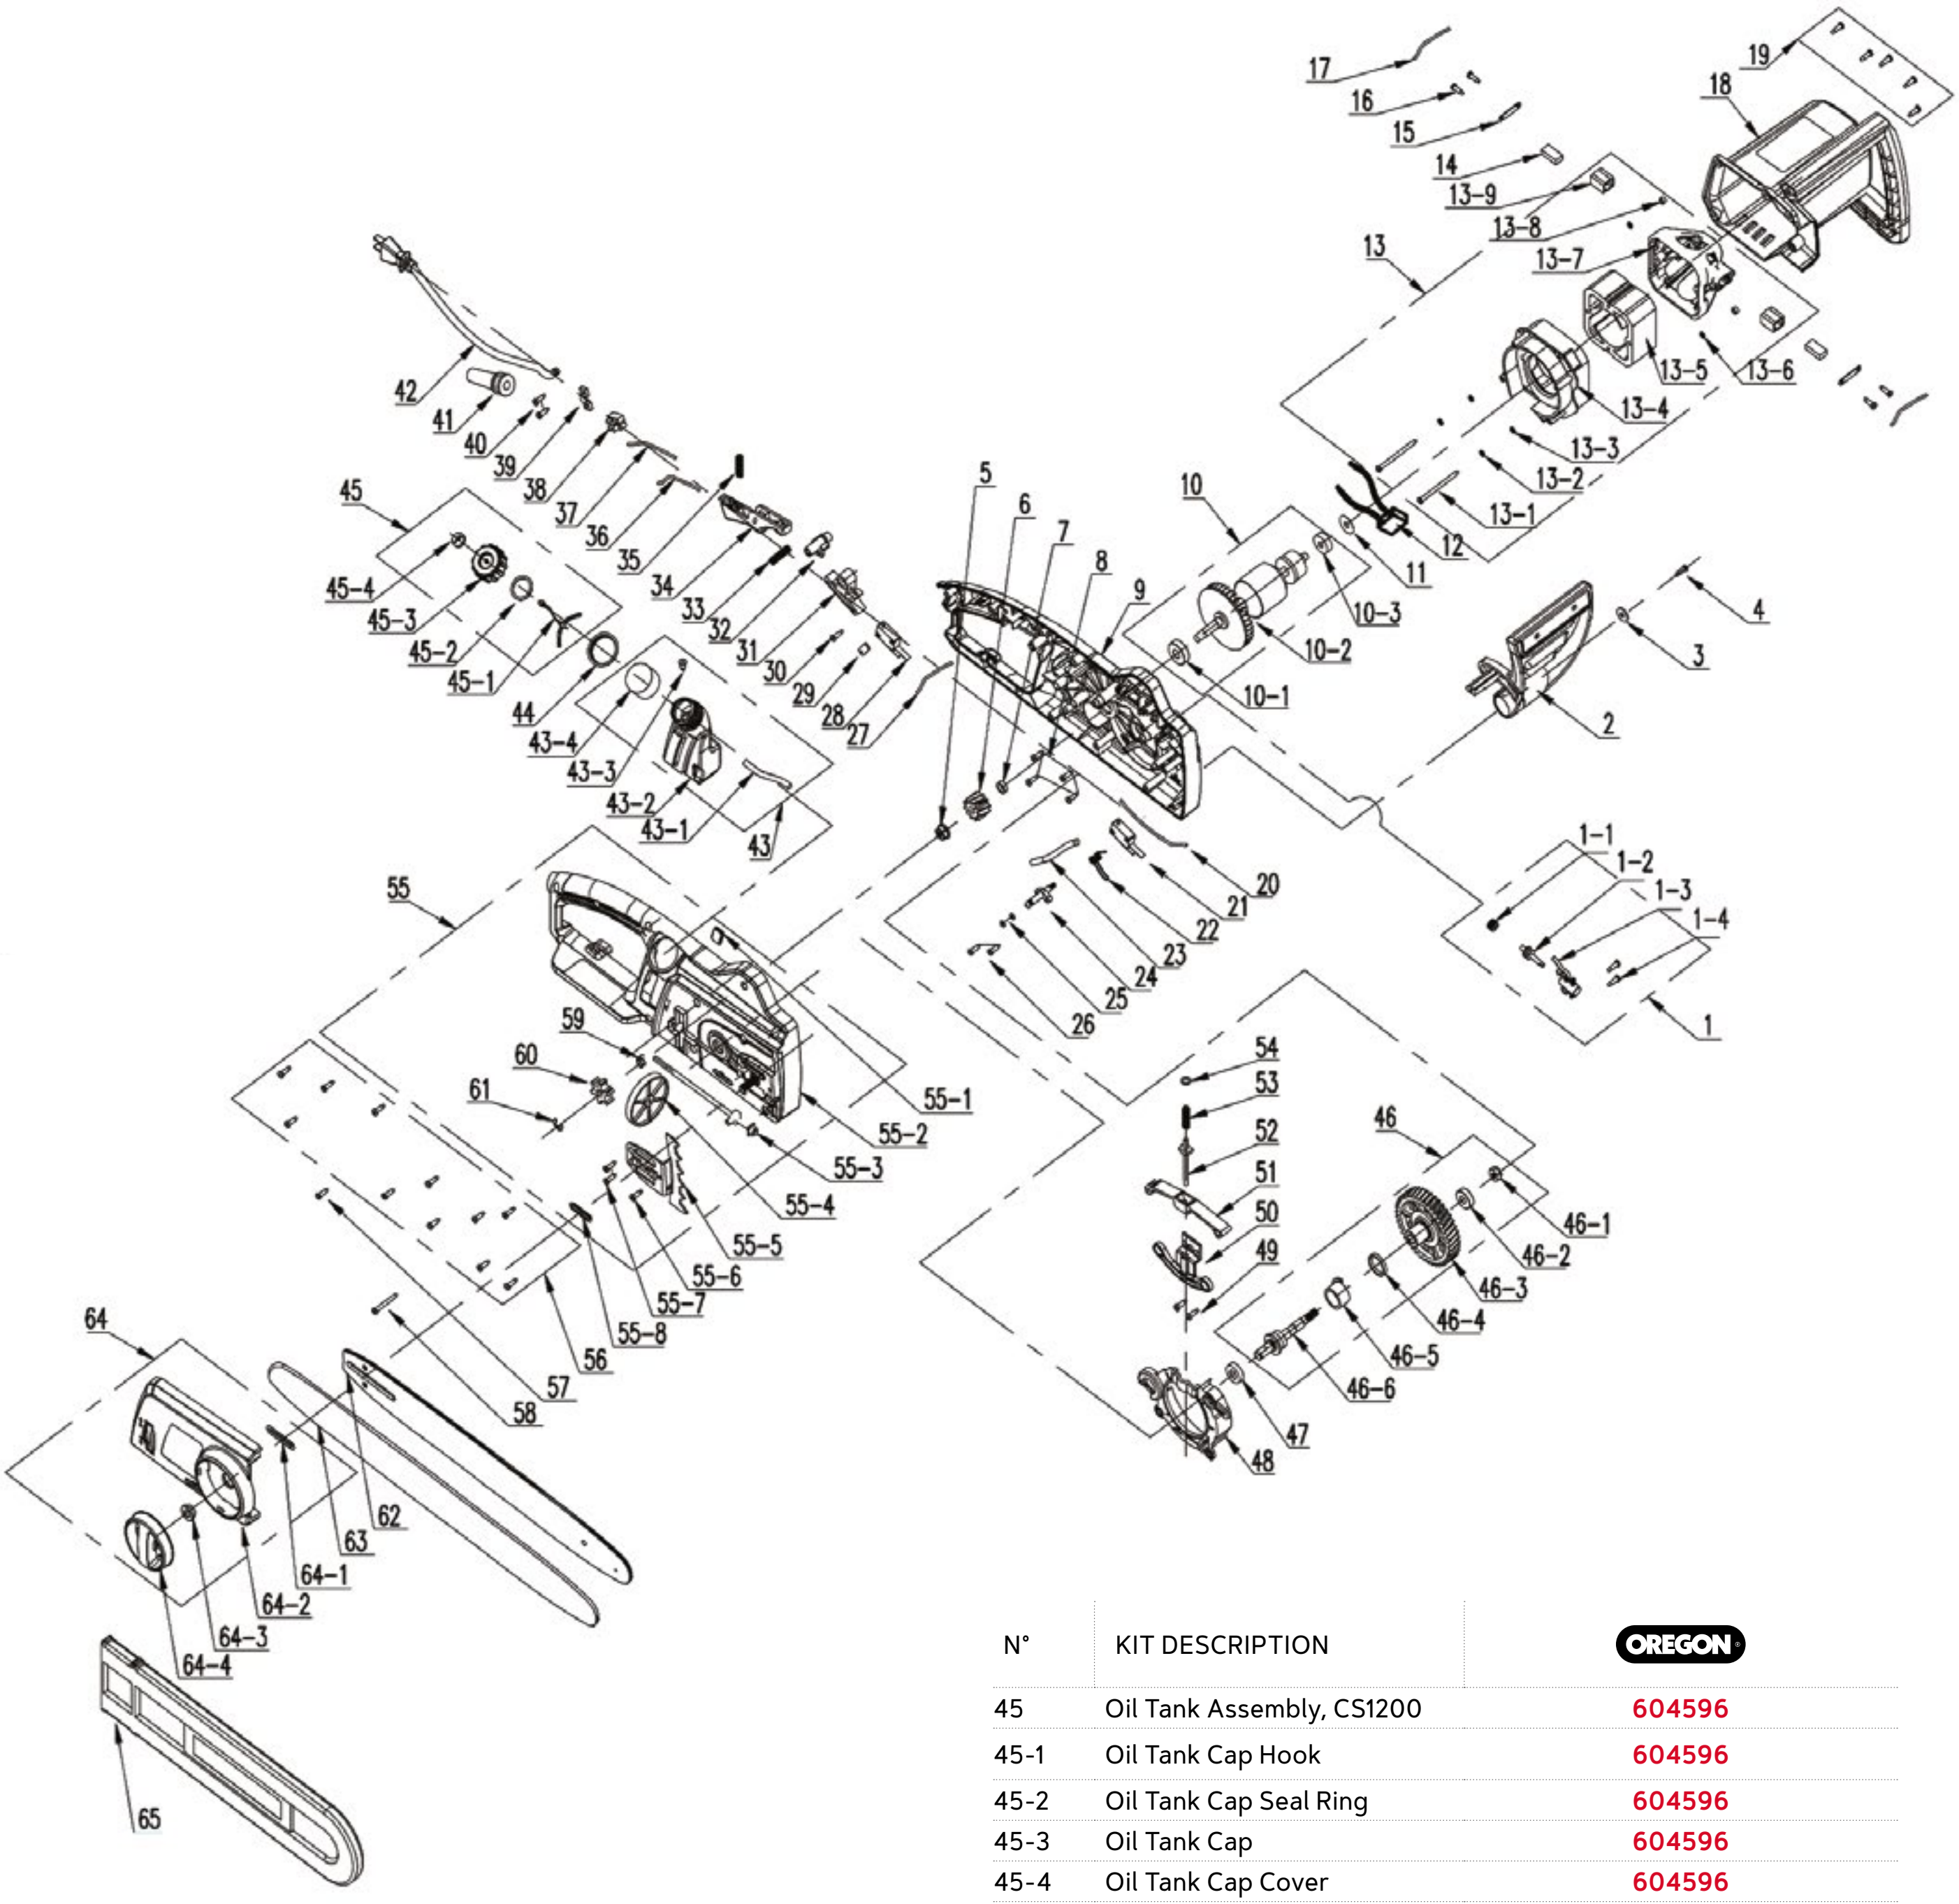
17
16
15
14
13-9
13-8
13-7
13
19
18
13-5
13-6
13-4
13-3
13-2
13-1
12
11
10
10-3
10-2
10-1
4
3
2
5
6
7
8
9
42
41
40
39
38
37
36
35
34
33
32
31
30
29
28
27
45
45-4
45-3
45-2
45-1
44
43-4
43-3
43-2
43-1
43
20
21
22
23
24
25
26
1-1
1-2
1-3
1-4
1
55
59
60
61
55-1
55-2
55-3
55-4
55-5
55-6
55-7
55-8
56
57
58
54
53
52
51
50
49
46
46-1
46-2
46-3
46-4
46-5
46-6
47
48
64
62
63
64-1
64-2
64-3
64-4
65

N°	KIT DESCRIPTION	OREGON
45	Oil Tank Assembly, CS1200	604596
45-1	Oil Tank Cap Hook	604596
45-2	Oil Tank Cap Seal Ring	604596
45-3	Oil Tank Cap	604596
45-4	Oil Tank Cap Cover	604596
55-3	Tensioner Assembly	608241
55-4	Tensioner Knob	608241
55-5	Bar Pad	608239
59	Drive Sprocket, CS1200	604597
60	Sproket	604597
61	E-retaining Ring	604597
62	Guide Bar	140SDEA041 (EU)
63	Saw Chain	Q91VG052E or 91PX052E (EU)
64	Side Cover, CS1200	604595
64-1	End Cap Seal Ring	604595
64-2	Adjust End Cap	604595
64-3	Shaft Sleeve	604595
64-4	Compact Knob	604595

CS1400 - CORDED CHAINSAW 230V

PRODUCT NAME	OREGON	SPECIFICATIONS
CS1400 Corded chainsaw 230v	603349 612000 UK only	• Power : 2400 Watts • Bar Length : 16 ” (40cm) • Type of chain : AdvanceCut chain • Pitch : 3/8” Low-Profile TM • Gauge : .050” (1.3 mm) • No Load Chain Speed : 14,7 m/s • Tool-Less Chain Tensioning System • Automatic Oiler • Weight : Only 5.90Kg with guide bar and saw chain attached
Chain	91PX056E or Q91VG056E	
Guide Bar 16"	160SDEA041	

OREGON
OREGON

SPARE PARTS

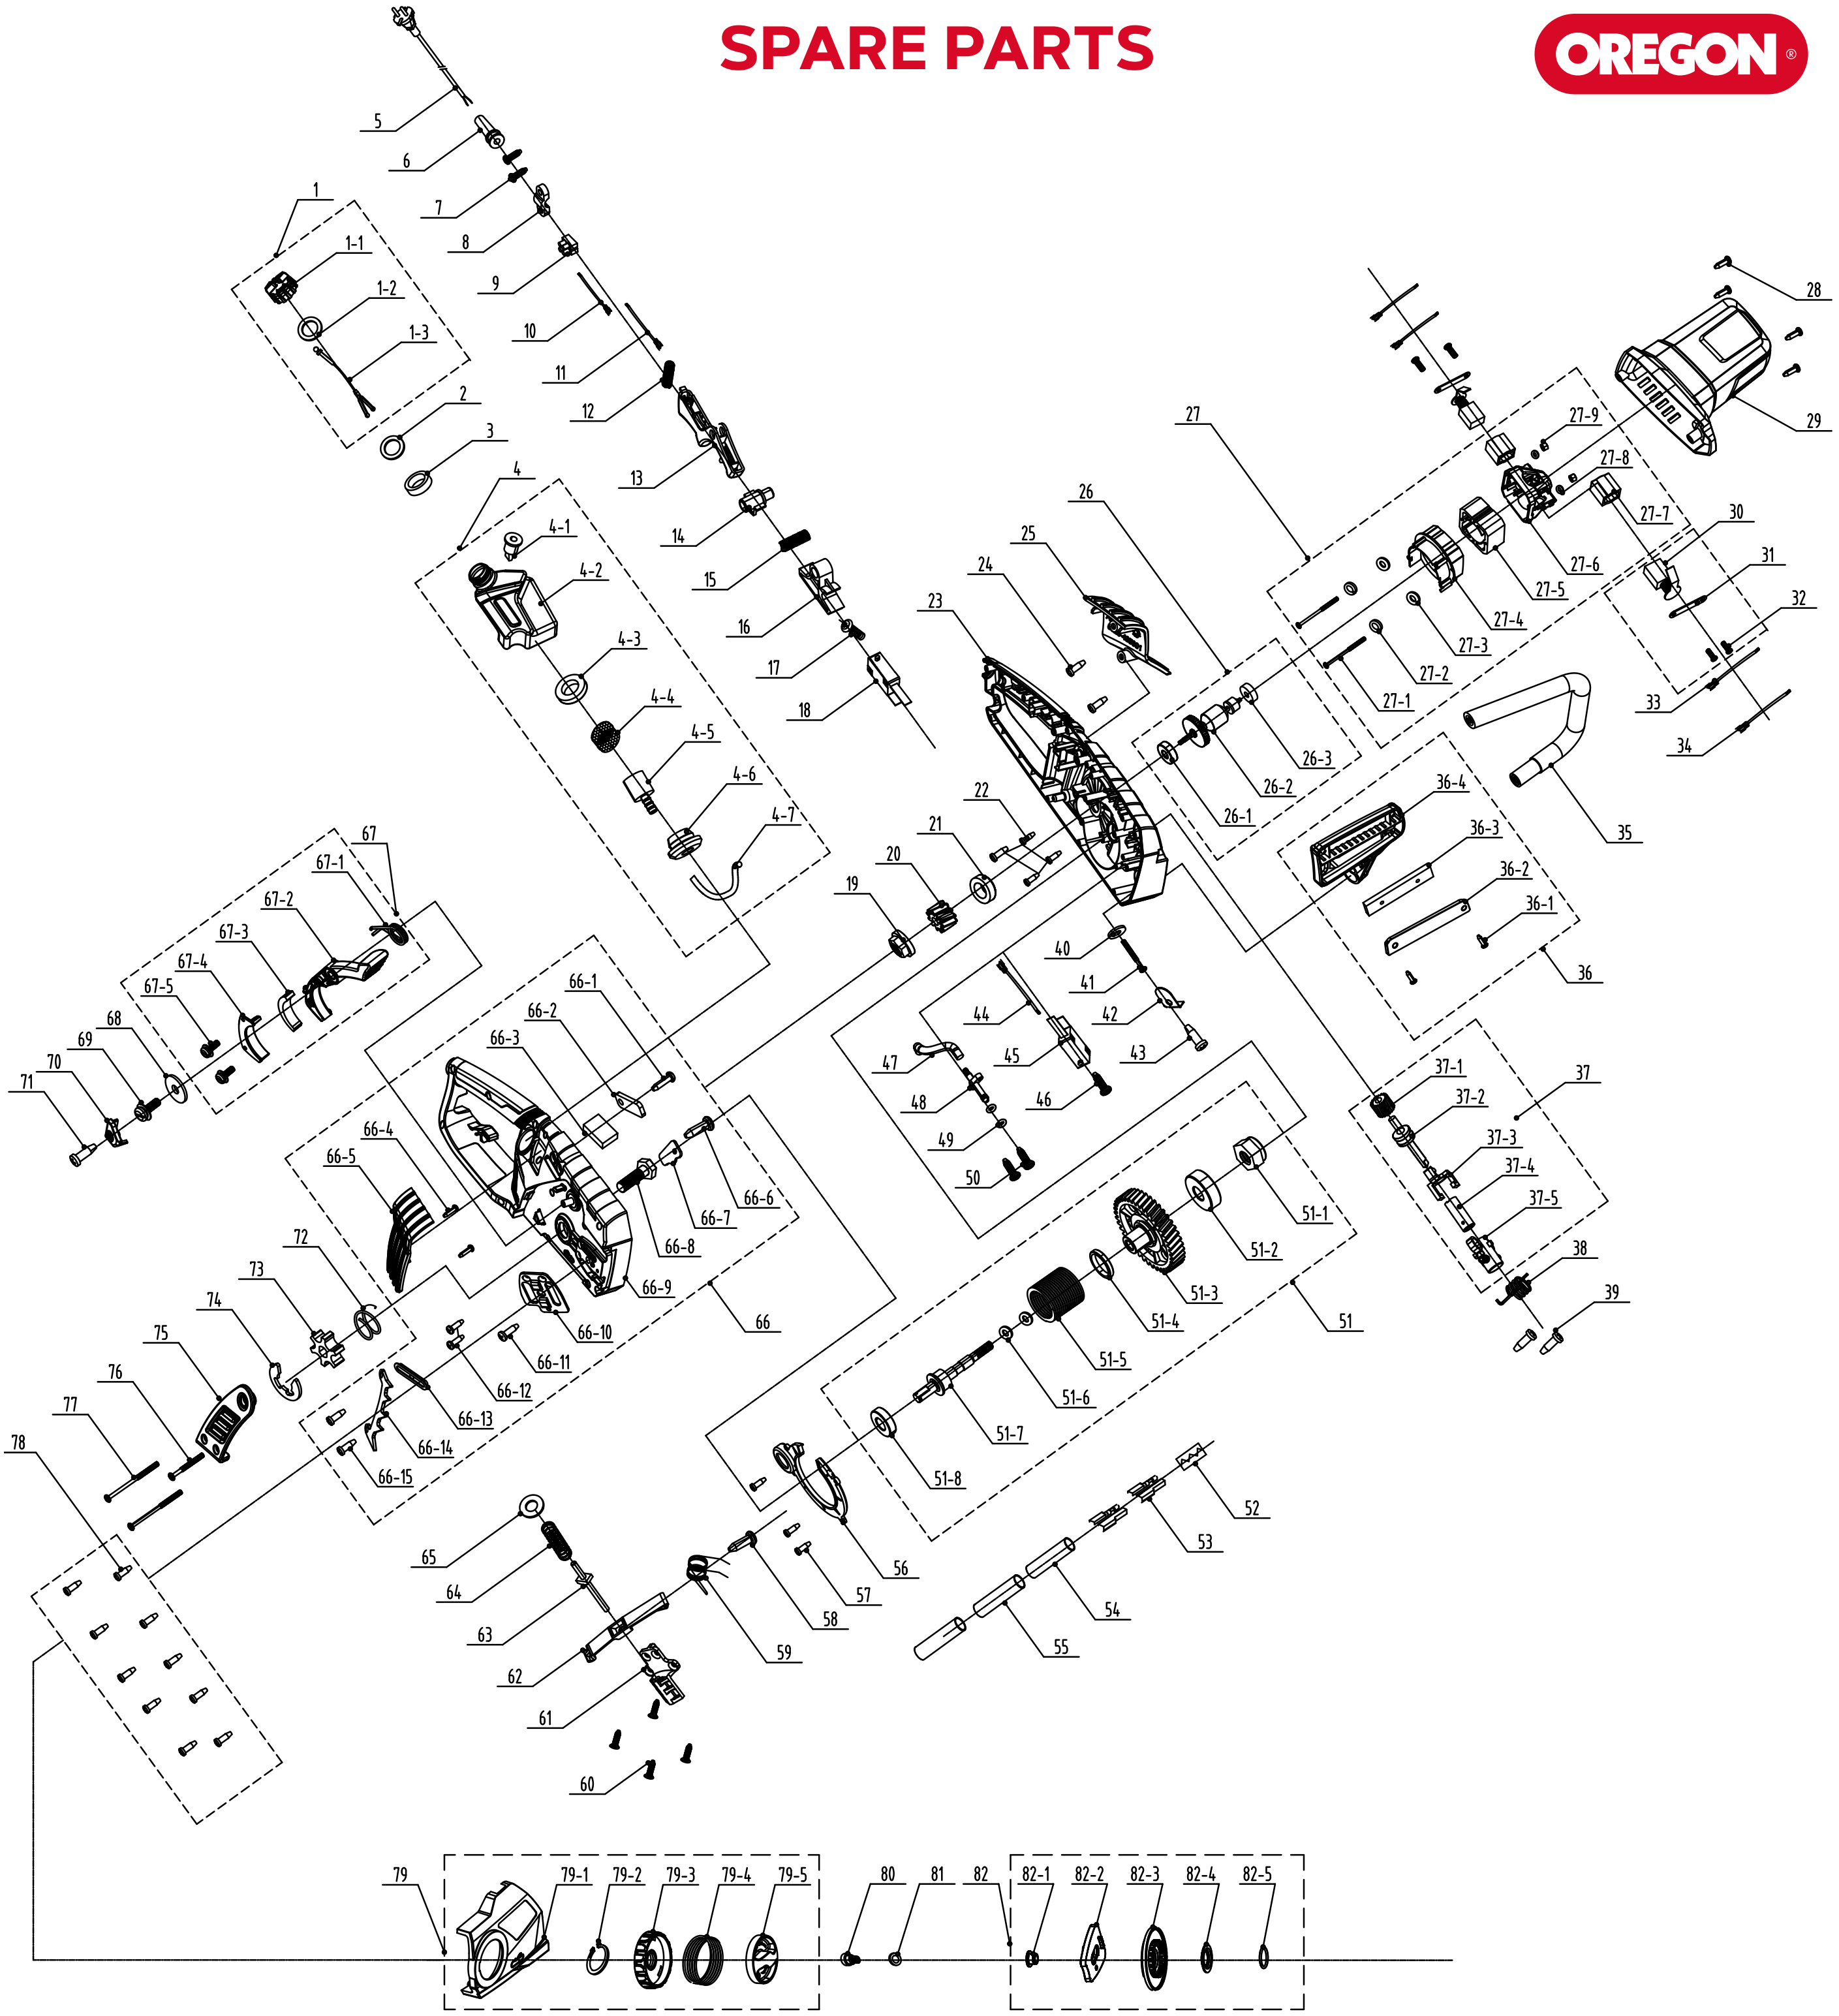
1
1-1
1-2
1-3
2
3
4
4-1
4-2
4-3
4-4
4-5
4-6
4-7
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
26-1
26-2
26-3
27
27-1
27-2
27-3
27-4
27-5
27-6
27-7
27-8
27-9
28
29
30
31
32
33
34
35
36
36-1
36-2
36-3
36-4
37
37-1
37-2
37-3
37-4
37-5
38
39
40
41
42
43
44
45
46
47
48
49
50
51
51-1
51-2
51-3
51-4
51-5
51-6
51-7
51-8
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
66-1
66-2
66-3
66-4
66-5
66-6
66-7
66-8
66-9
66-10
66-11
66-12
66-13
66-14
66-15
67
67-1
67-2
67-3
67-4
67-5
68
69
70
71
72
73
74
75
76
77
78
79
79-1
79-2
79-3
79-4
79-5
80
81
82
82-1
82-2
82-3
82-4
82-5

N°	KIT DESCRIPTION	OREGON
1	Oil Box Cap Assembly	573657
1-1	Oil Box Cap	573657
1-2	Seal Ring	573657
1-3	Hanger	573657
5	Power Cord Leoni	571066
18	Power Switch	572391
30	Brush x2	581885
31	Brush Holder Clamp x2	581885
32	Self Tapping Screw x4	581885
37	Oil Pump Assembly	574975
37-1	Worm Gear Tooth	574975
37-2	Worm Gear	574975
37-3	Plunger Support	574975
37-4	Piston Bush	574975
37-5	Main Part Of Oil Pump	574975
45	Brake Switch	572392
60	Countersunk Head Screw	570965
61	Brake Bar Dead Plate	570965
66-13	Oil-out Seal Ring	600252
70	Clamp	570964
71	Self Tapping Screw	570964
72	Tensioning Spring	570964
73	Sprocket	570964
74	Split Washer	570964
79	Side Cover Assembly	570968
79-1	Side Cover	570968
79-2	Axis With The Spring	570968
79-3	Adjusting Knob	570968
79-4	Spring Compression Knob	570968
79-5	Compression Knob	570968
82	Tensioner Kit Assembly	570963
82-1	Shoulder Washer	570963
82-2	Tensioner Plate	570963
82-3	Tensioner Disc	570963
82-4	Inner Locking Ring	570963
82-5	Outer Locking Ring	570963

PRODUCT NAME	OREGON	SPECIFICATIONS

CS1500 POWERSHARP - CORDED CHAINSAW 230V

CS1500 Corded chainsaw 230v	604419 579641 UK only	• Power : 2400 Watts • Bar Length : 18” (45 cm) • Type of chain : Powersharp chain • Pitch : 3/8” Low-Profile TM • Gauge : .050” (1.3 mm) • Built-in PowerSharp® sharpening system • No Load Chain Speed : 14,7 m/s • Variable Speed Trigger • Tool-Less Chain Tensioning System • Automatic Oiler • Weight : Only 6 Kg with guide bar and saw chain attached
Chain	571039	
Guide Bar 18"	180SDEA041	

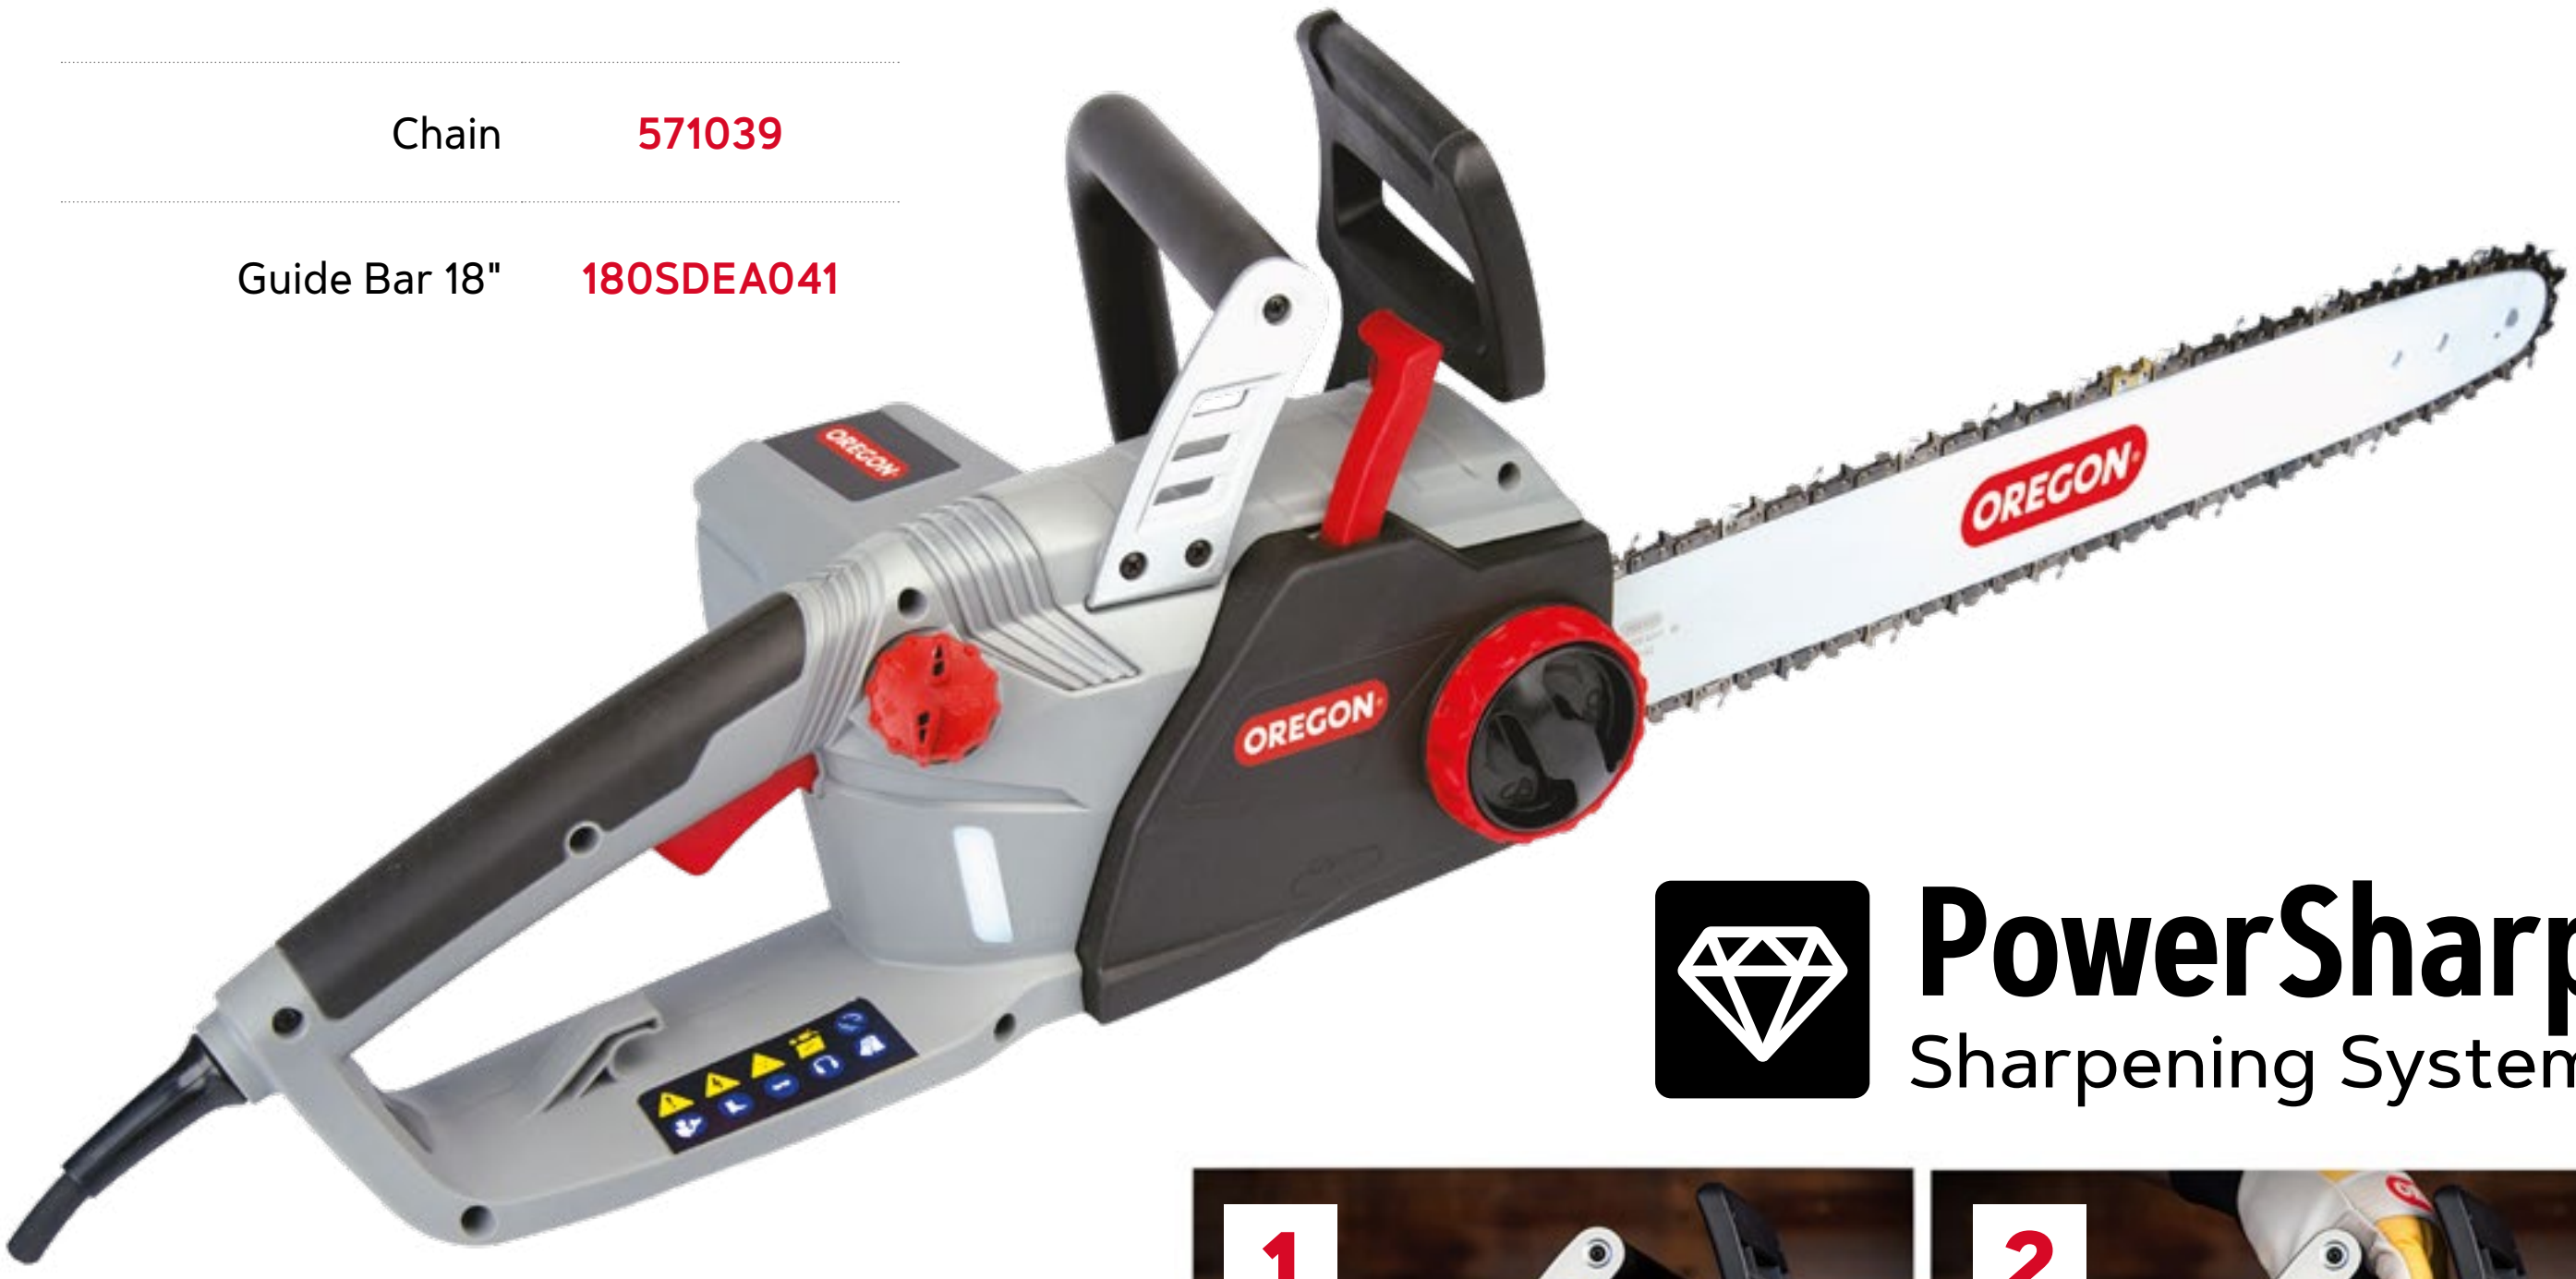

PowerSharp®
Sharpening System

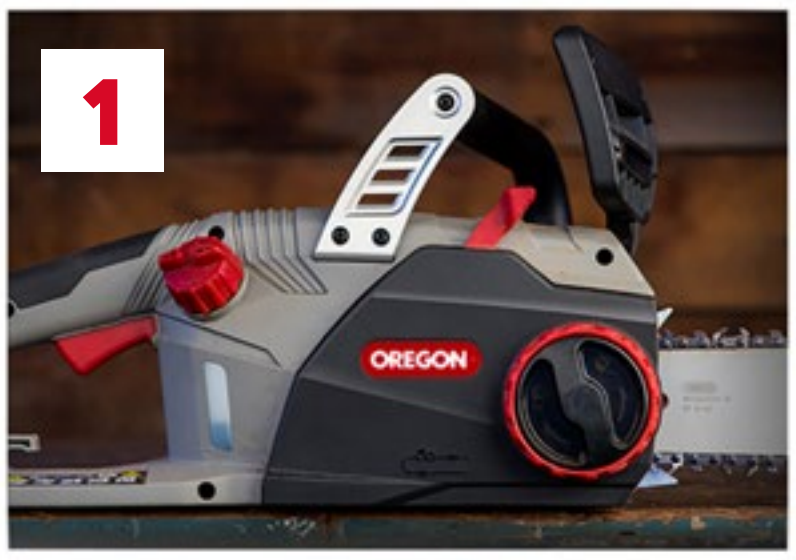

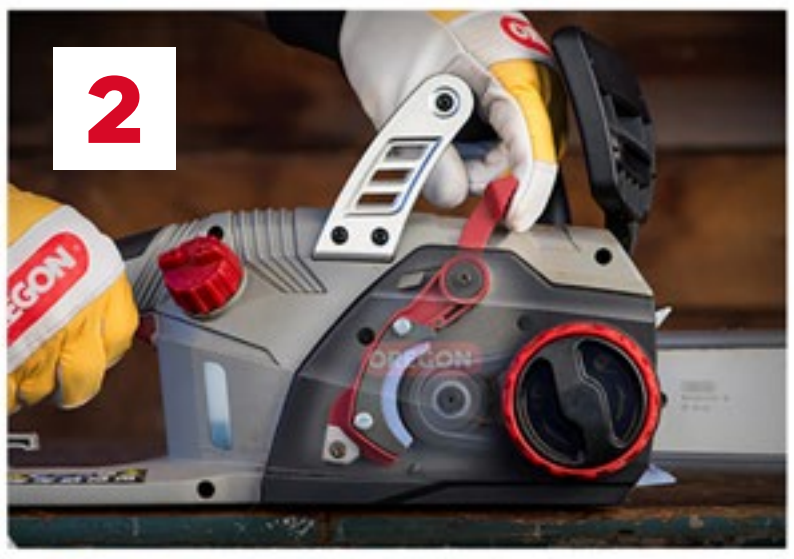

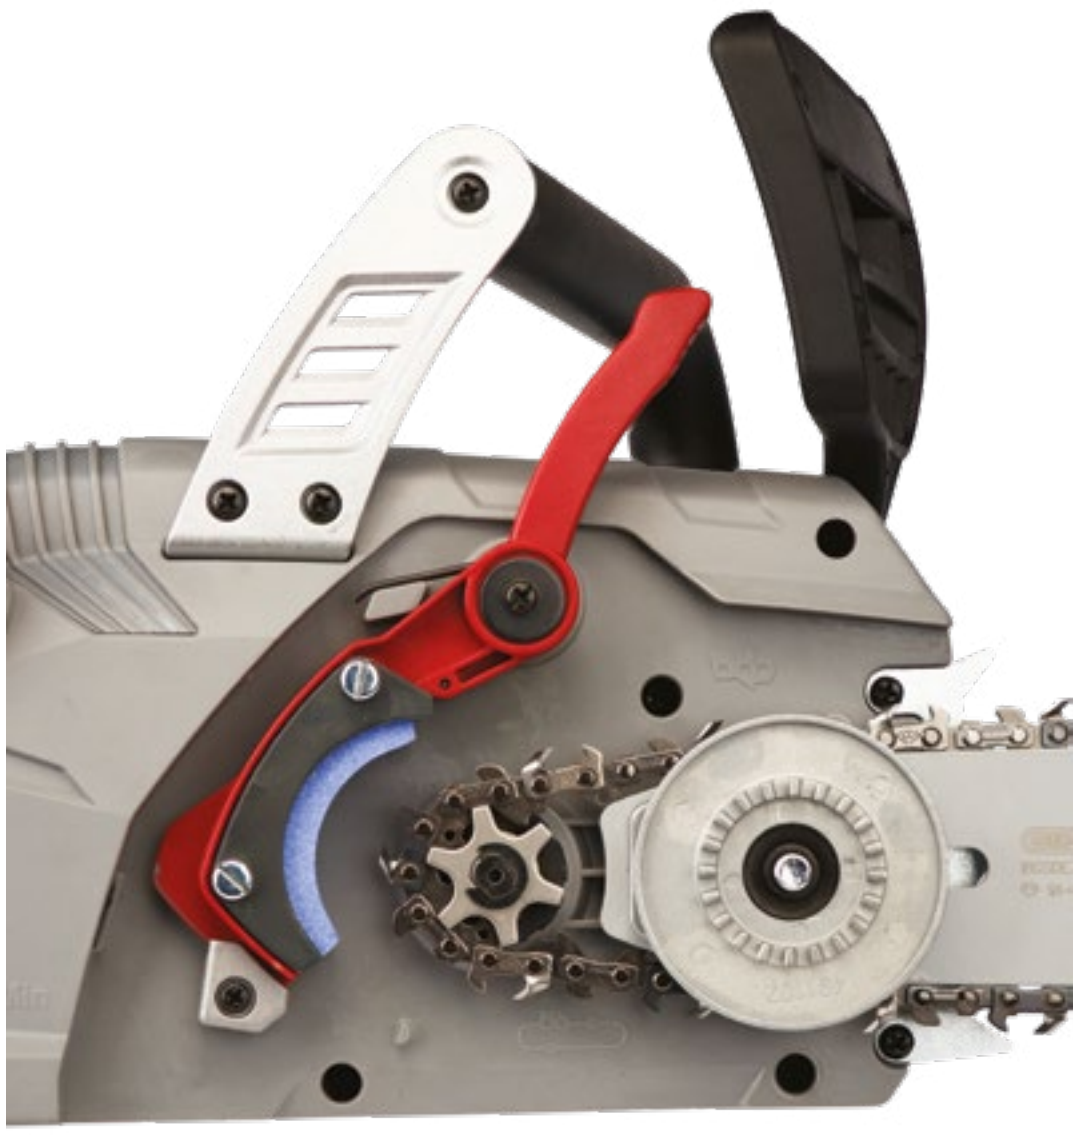

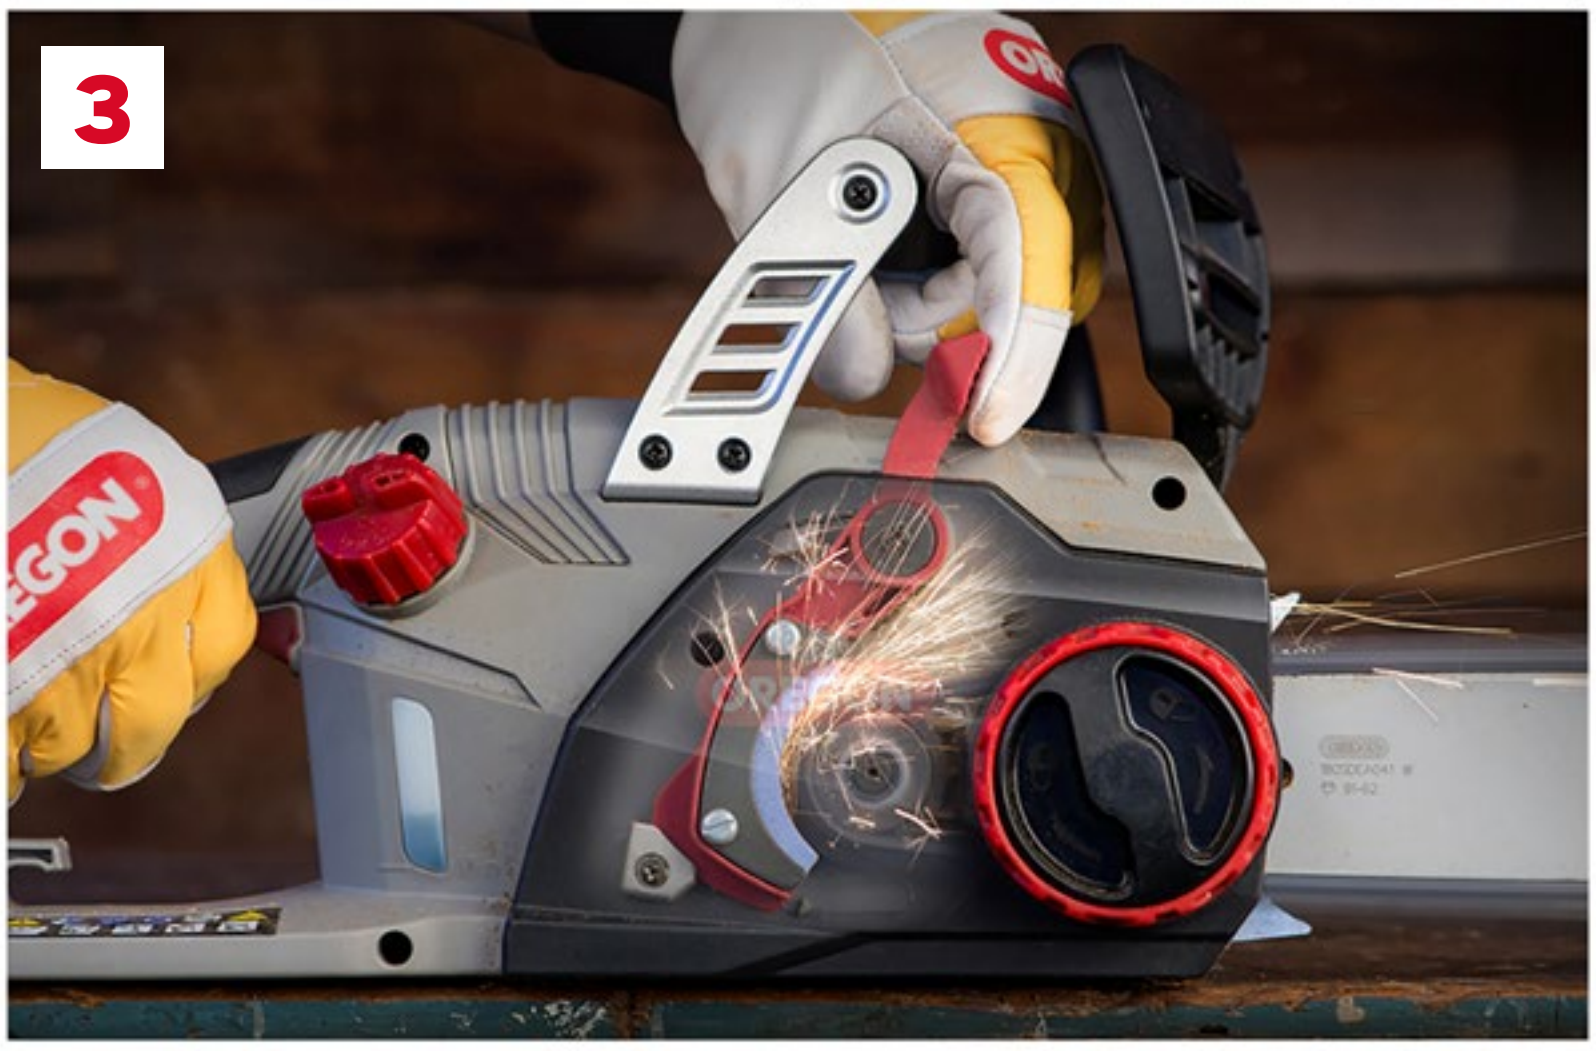

SPARE PARTS

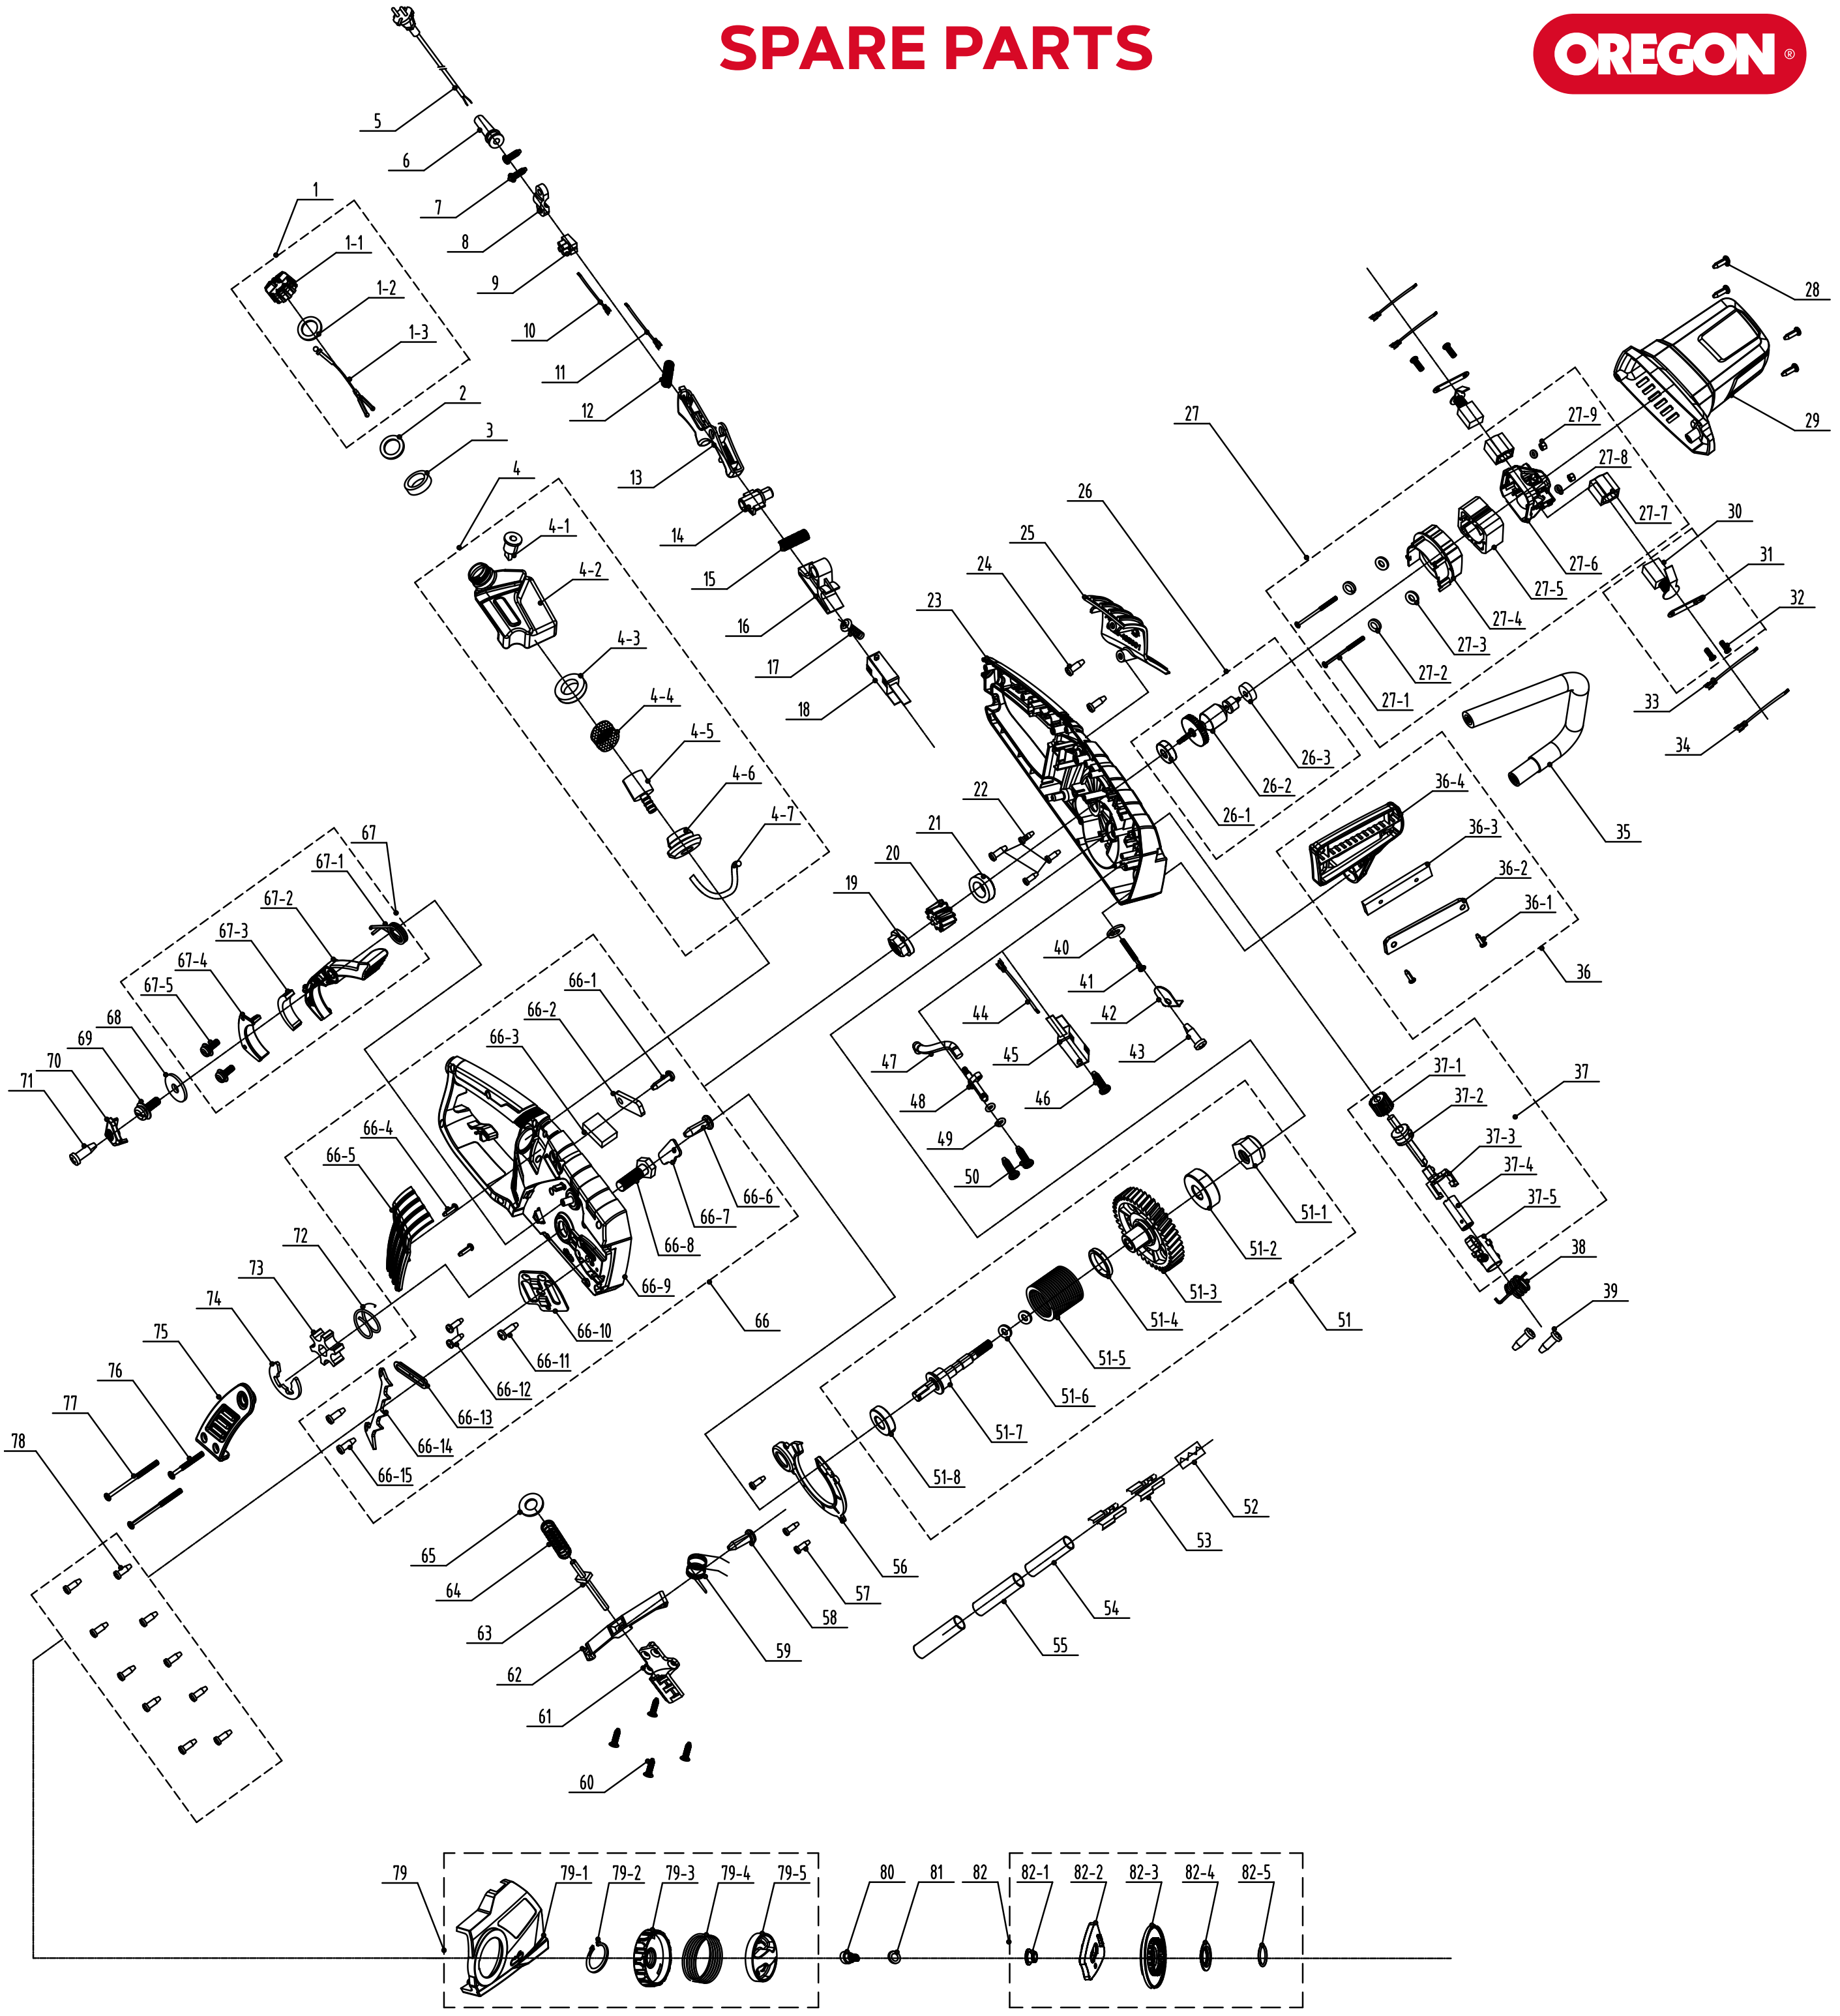
5
6
7
8
9
10
11
12
13
14
15
16
17
18
1
1-1
1-2
1-3
2
3
4
4-1
4-2
4-3
4-4
4-5
4-6
4-7
19
20
21
22
23
24
25
26
26-1
26-2
26-3
27
27-1
27-2
27-3
27-4
27-5
27-6
27-7
27-8
27-9
28
29
30
31
32
33
34
35
36
36-1
36-2
36-3
36-4
37
37-1
37-2
37-3
37-4
37-5
38
39
40
41
42
43
44
45
46
47
48
49
50
51
51-1
51-2
51-3
51-4
51-5
51-6
51-7
51-8
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
66-1
66-2
66-3
66-4
66-5
66-6
66-7
66-8
66-9
66-10
66-11
66-12
66-13
66-14
66-15
67
67-1
67-2
67-3
67-4
67-5
68
69
70
71
72
73
74
75
76
77
78
79
79-1
79-2
79-3
79-4
79-5
80
81
82
82-1
82-2
82-3
82-4
82-5

N°	KIT DESCRIPTION	OREGON
1	Oil Box Cap Assembly	573657
1-1	Oil Box Cap	573657
1-2	Seal Ring	573657
1-3	Hanger	573657
5	Power Cord Leoni	571066
18	Power Switch	572391
30	Brush x2	581885
31	Brush Holder Clamp x2	581885
32	Self Tapping Screw x4	581885
37	Oil Pump Assembly	574975
37-1	Worm Gear Tooth	574975
37-2	Worm Gear	574975
37-3	Plunger Support	574975
37-4	Piston Bush	574975
37-5	Main Part Of Oil Pump	574975
45	Brake Switch	572392
60	Countersunk Head Screw	570965
61	Brake Bar Dead Plate	570965
66-13	Oil-out Seal Ring	600252
67	PowerSharp Lever Assembly	573657
67-1	PowerSharp Lever Spring	573657
67-2	PowerSharp Lever	573657
70	Clamp	570964
71	Self Tapping Screw	570964
72	Tensioning Spring	570964
73	Sprocket	570964
74	Split Washer	570964
79	Side Cover Assembly	570968
79-1	Side Cover	570968
79-2	Axis With The Spring	570968
79-3	Adjusting Knob	570968
79-4	Spring Compression Knob	570968
79-5	Compression Knob	570968
82	Tensioner Kit Assembly	570963
82-1	Shoulder Washer	570963
82-2	Tensioner Plate	570963
82-3	Tensioner Disc	570963
82-4	Inner Locking Ring	570963
82-5	Outer Locking Ring	570963

PRODUCT NAME	OREGON	SPECIFICATIONS

CORDED POLE SAW 230V

PS750 Corded Pole Saw 230v	620371 601688 UK only	• Power : 750 Watts • Bar Length : 8” (20 cm) • Type of chain : AdvanceCut chain • Pitch : 3/8” Low-Profile TM • Gauge : .050” (1.3 mm) • No Load Chain Speed : 11,5 m/s • Tool-Less Chain Tensioning System • Automatic Oiler • Weight : Only 3.5 kg with guide bar and saw chain attached • Tool length fully extended 2.69 m • Up to 4 m overhead reach
Chain	91PX033E or Q91VG033E	
Guide Bar 8"	080SDEA041	

SPARE PARTS

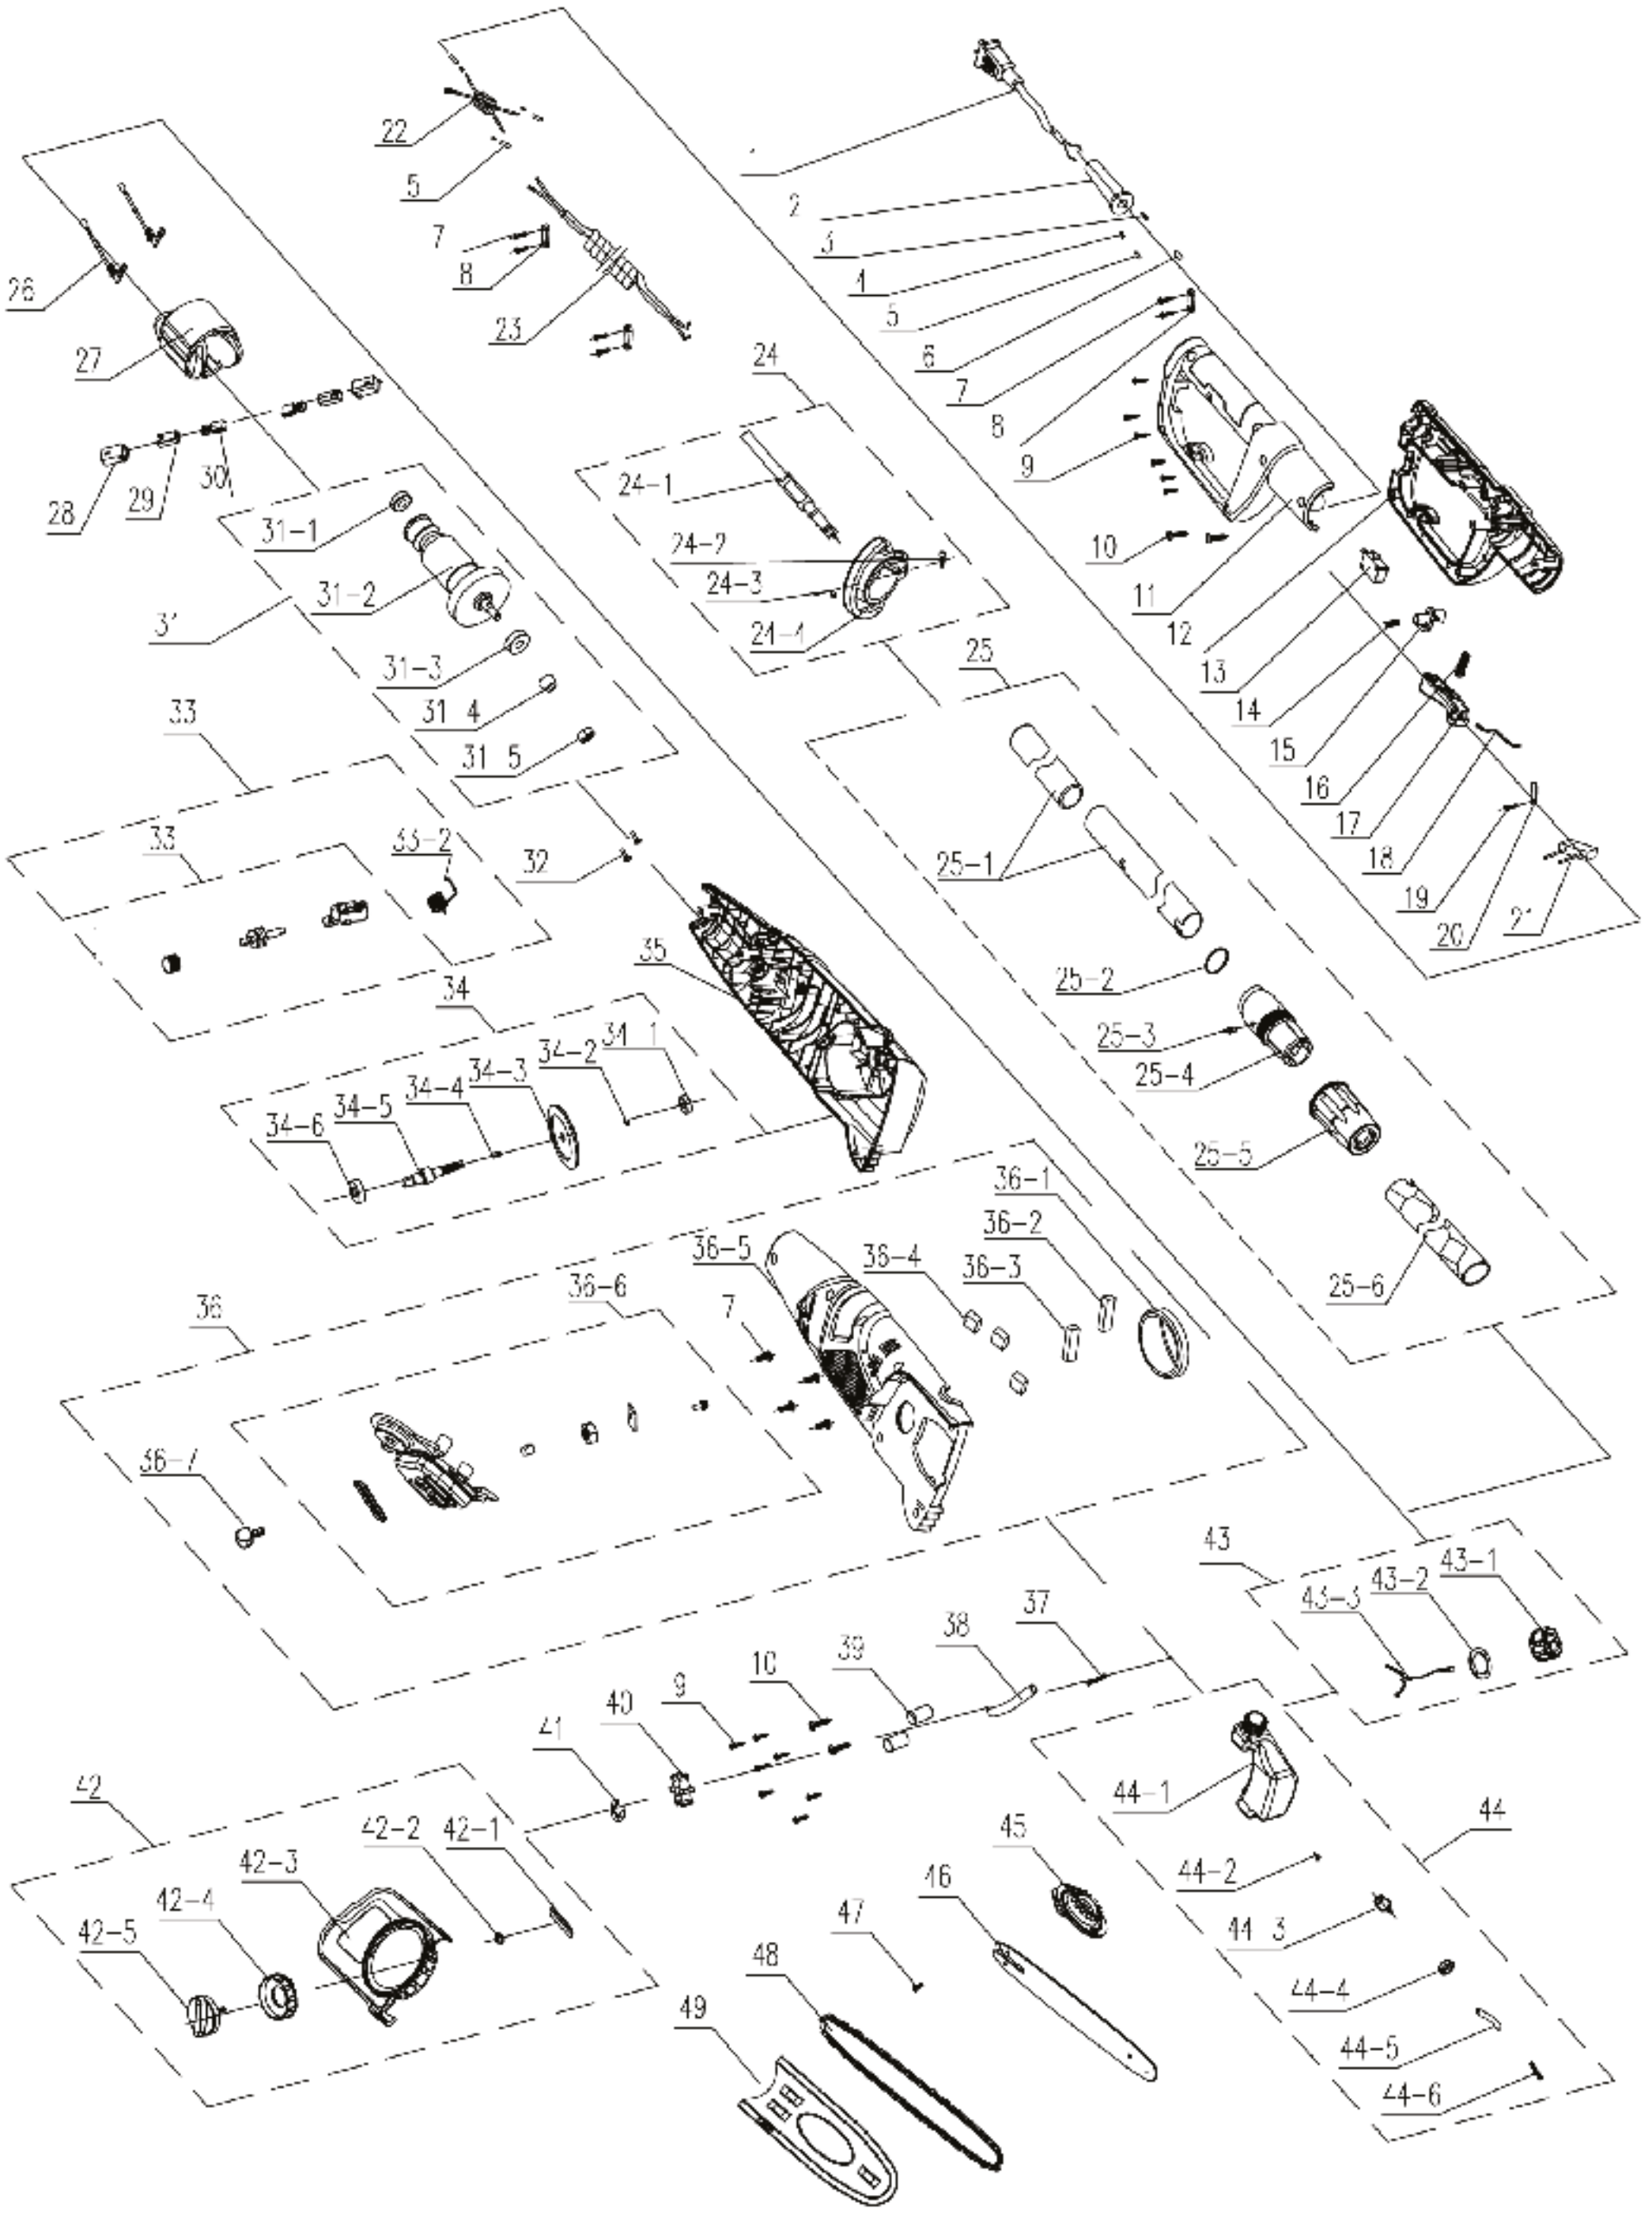
22
5
7
8
23
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
24
24-1
24-2
24-3
24-4
25
25-1
25-2
25-3
25-4
25-5
25-6
26
27
28
29
30
31-1
31-2
31
31-3
31-4
31-5
33
33-1
33-2
32
35
34
34-1
34-2
34-3
34-4
34-5
34-6
36
36-1
36-2
36-3
36-4
36-5
36-6
36-7
7
43
43-1
43-2
43-3
37
38
39
10
9
40
41
42
42-1
42-2
42-3
42-4
42-5
44
44-1
44-2
44-3
44-4
44-5
44-6
45
46
47
48
49

N°	KIT DESCRIPTION	OREGON
40	Drive Sprocket, PS750	604590
41	Split Washer	604590
42	Side Cover, PS750	604588
42-1	Adjusting End Cap	604588
42-2	Locking Knob	604588
42-3	End Cap Seal Ring	604588
42-4	Knob	604588
42-5	Axis With Circlips	604588
44	Oil Tank Assembly, PS750	604589
44-1	Oil Tank	604589

N°	KIT DESCRIPTION	OREGON
44-2	Valve	604589
44-3	Oil Joint Component	604589
44-4	Oil Box Seal Ring	604589
44-5	Transparent Oil Tube	604589
44-6	Tubing Set Spring	604589
45	Tensioner Ring	608240
46	Guide Bar	080SDEA041
47	Tensioner Screw	608240
48	Saw Chain	Q91VG033E or 91PX033E

PRODUCT NAME		OREGON	SPECIFICATIONS
Lithium Ion Battery	B742	**610078**	• Lithium Ion Battery Pack • 36V • 4.0 Ah | 144 Wh
Standard Chargers	C650	**594078** **596303** UK only	• Standard Charger • For 36V Lithium Ion Battery Pack

36V LITHIUM ION BATTERY AND CHARGERS

Those 2 items remain available for sale

This product line has been discontinued but replacement kits for maintenance remain available

ST275
String Trimmer

PS600
Pole Saw

EX600
Extention

ST600
String Trimmer

BC600
Brush Cutter

HT275
Hedge Trimmer

LM300
Lawn Mower

CS300
Self-Sharpening
Chain Saw

PowerSharp®

PH600
Power Head
Multi-Tool

PS250
Pole Saw

LM400
Lawn Mower

BL300
Blower

OREGON

OREGON
OREGON

OREGON®

75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged.
Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents.
Engineering is the bedrock of our reputation.

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C008551

PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-010-EN

OREGON
PowerCut

Discover more of our products at
OregonProducts.com

TRIMMER LINES, HEADS AND BLADES

LHB_1.2
EN/EUR

OREGON®

Oregon® understands that the needs of landscapers – professionals and novices – are as diverse as the terrains and environments in which they work.

We have organized our products into families with key characteristics that different users will value. These product families will ensure that you choose the right product for your everyday needs. It will make understanding the differences between our product range effortless.

All our products are classified in three categories to help you to identify the products that are right for you.
Three product families, differentiated by color, to simplify your selection process.

GOOD

OCCASIONAL USERS

Oregon makes safe, affordable, simple to use, and high quality products for people who only need to occasionally use a brushcutter.

BETTER

FREQUENT USERS

Landscapers and homeowners who regularly tend land and gardens prize simplicity and reliability.

Oregon makes safe, reliable, and simple to use products that also work for a larger range of applications (everything from short grass to tall weeds and more).

BEST

PROFESSIONAL USERS

Professional landscapers require products designed for the demands of their tough professions. Oregon makes products that are strong, durable, and reliable, and our state-of-the-art innovations promote a long lifespan.

You demand top performance from your tools. Oregon trimmer lines, heads and blades are designed to make your work day easier and more efficient - for every environment imaginable.

GRASS CUTTING SYSTEMS

TRIMMER LINES AND HEADS, BRUSHCUTTER BLADES

Every garden and every piece of land is different. That is why Oregon® has created a wide range of trimmer lines, heads and brushcutter blades, offering something to keep everyone happy.

From the small "Tap & Go" head to highly resistant nylon lines for professionals, it covers everything needed to bring out the best in your garden and make it unique.

TRIMMER LINES

The Oregon® trimmer line range can be listed in two categories:

Monofilament trimmer lines easily trim grass and cut through high weeds because they are manufactured from a mixture of copolymers.
Yellow Line, Coloured Line, Nylium®.

Co-extruded trimmer lines cut through a variety of vegetation. These line types offer users multiple options because of the unique composition of the line cores, embedded materials, and outer skins.

As a result, Oregon co-extruded lines have strong wear resistance for higher performance.

Oregon® offers also three different profiles:

● Round, for simple and efficient cutting

★ Star-shaped, for clean and precise cutting

■ Square / Toothed, for power and efficiency in denser vegetation

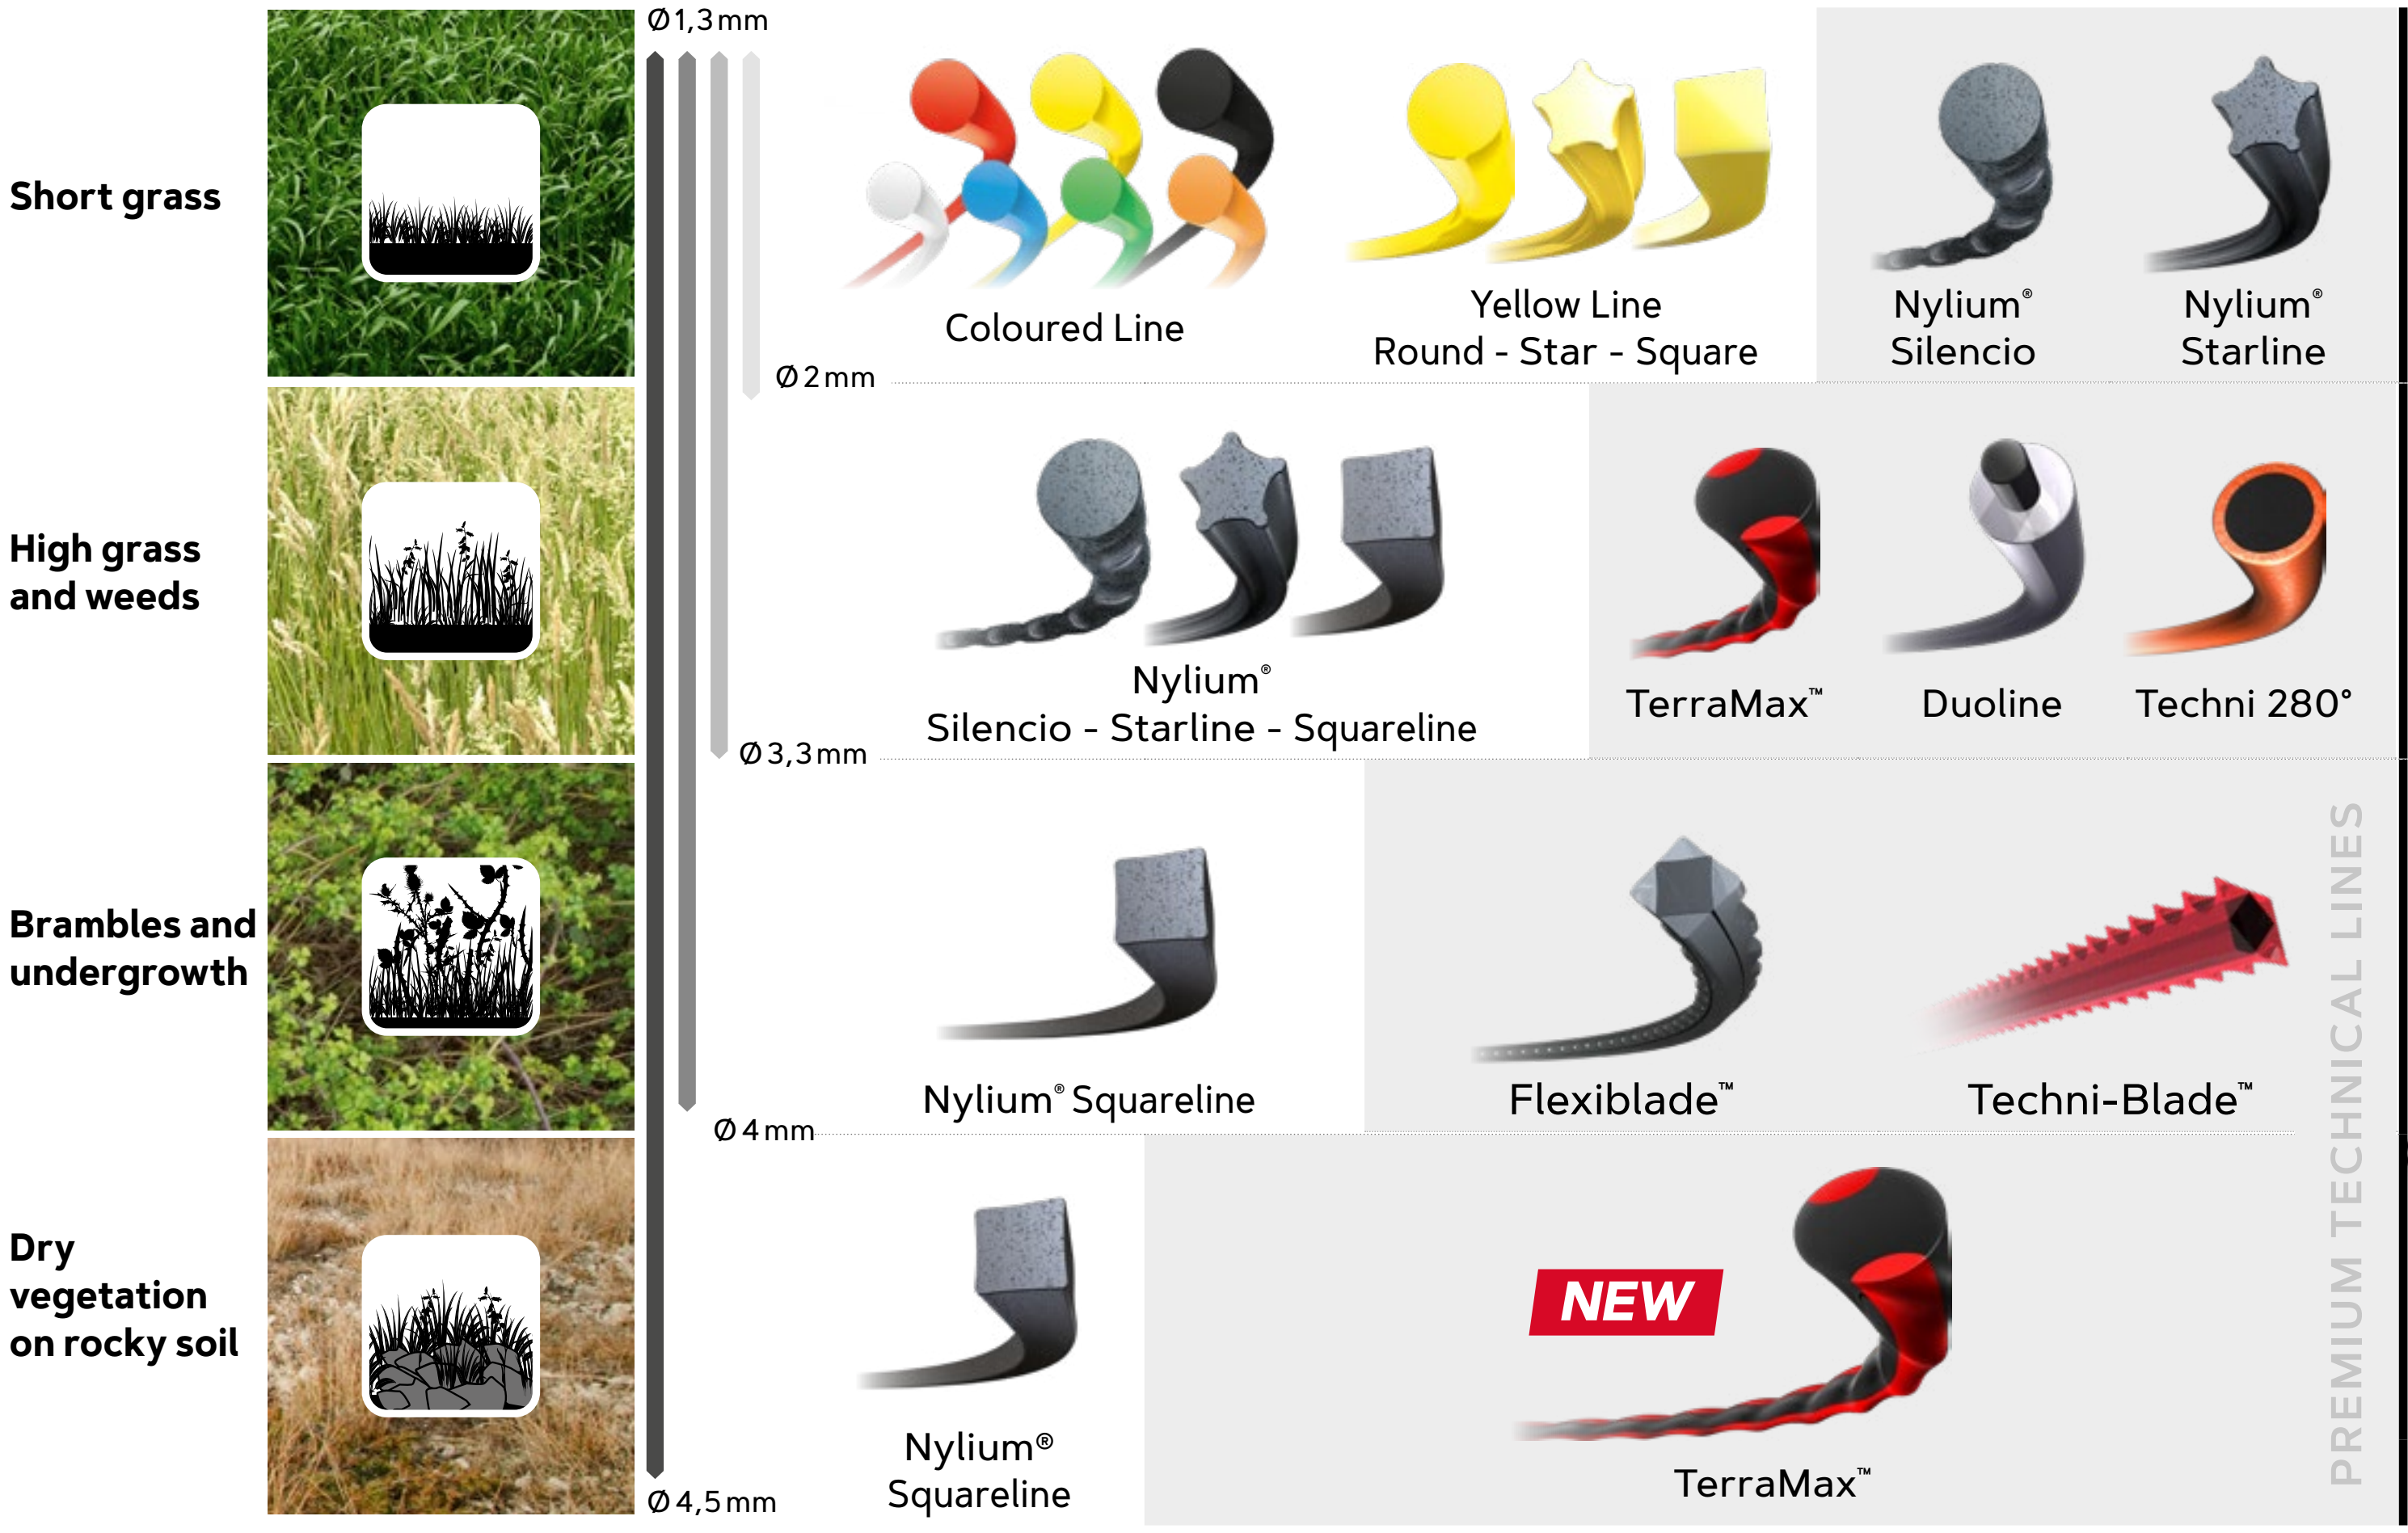
Short grass
High grass and weeds
Brambles and undergrowth
Dry vegetation on rocky soil
Ø1,3mm
Ø2mm
Ø3,3mm
Ø4mm
Ø4,5mm
Coloured Line
Yellow Line
Round - Star - Square
Nylium®
Silencio
Nylium®
Starline
Nylium®
Silencio - Starline - Squareline
TerraMax™
Duoline
Techni 280°
Nylium® Squareline
Flexiblade™
Techni-Blade™
Nylium®
Squareline
NEW
TerraMax™
PREMIUM TECHNICAL LINES

see all Trimmer Line information on pages 15 to 28

STRING TRIMMER - BRUSHCUTTER HEADS

Oregon heads are adaptable for most string trimmers and brushcutters (supplied with washers or adapters).

We offer two categories:

MANUAL

Manual heads come pre-filled with trimmer line. Once you have used up the line, manually reload the head.

TAP&GO

Tap & Go heads automatically reload trimmer line. Gently tapping the head onto the ground at full throttle will activate the automatic line feeding feature.

BRUSHCUTTER BLADES

Oregon universal brushcutter blades deliver convenience, because they fit "all" brushcutters.
These European-made steel blades are available in several cutting styles (from two to eight teeth) for all vegetation and soil conditions.

Our brushcutter blades meet all safety and performance requirements, letting you work comfortably and efficiently.

Standard black blades are also available in our range.

ONE FOR ALL

One For All red blades (supplied with an adapter) are designed for greater vibility in dense vegetation.

Nylium® Ø 3,75 mm

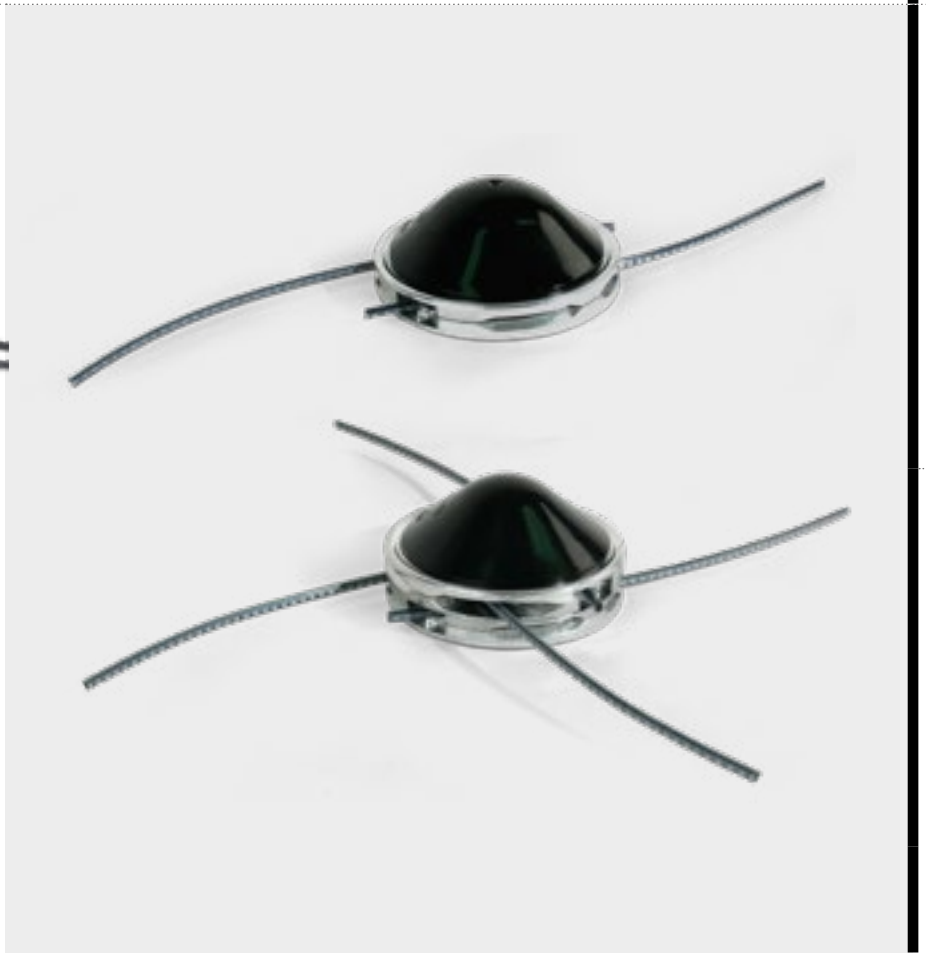

see all Heads information on pages 29 to 38



see all Brush cutter blades information on pages 39 to 43

PACKAGING AND LABELS

Easier than ever to select what you need

Oregon's packaging and labels make it easier for you to select the best nylon lines for your string trimmer / brushcutter.

Our labelling system displays simpler icons for garden and landscaping applications.

All products feature convenient rating levels so you can decide which products meet your specific needs.

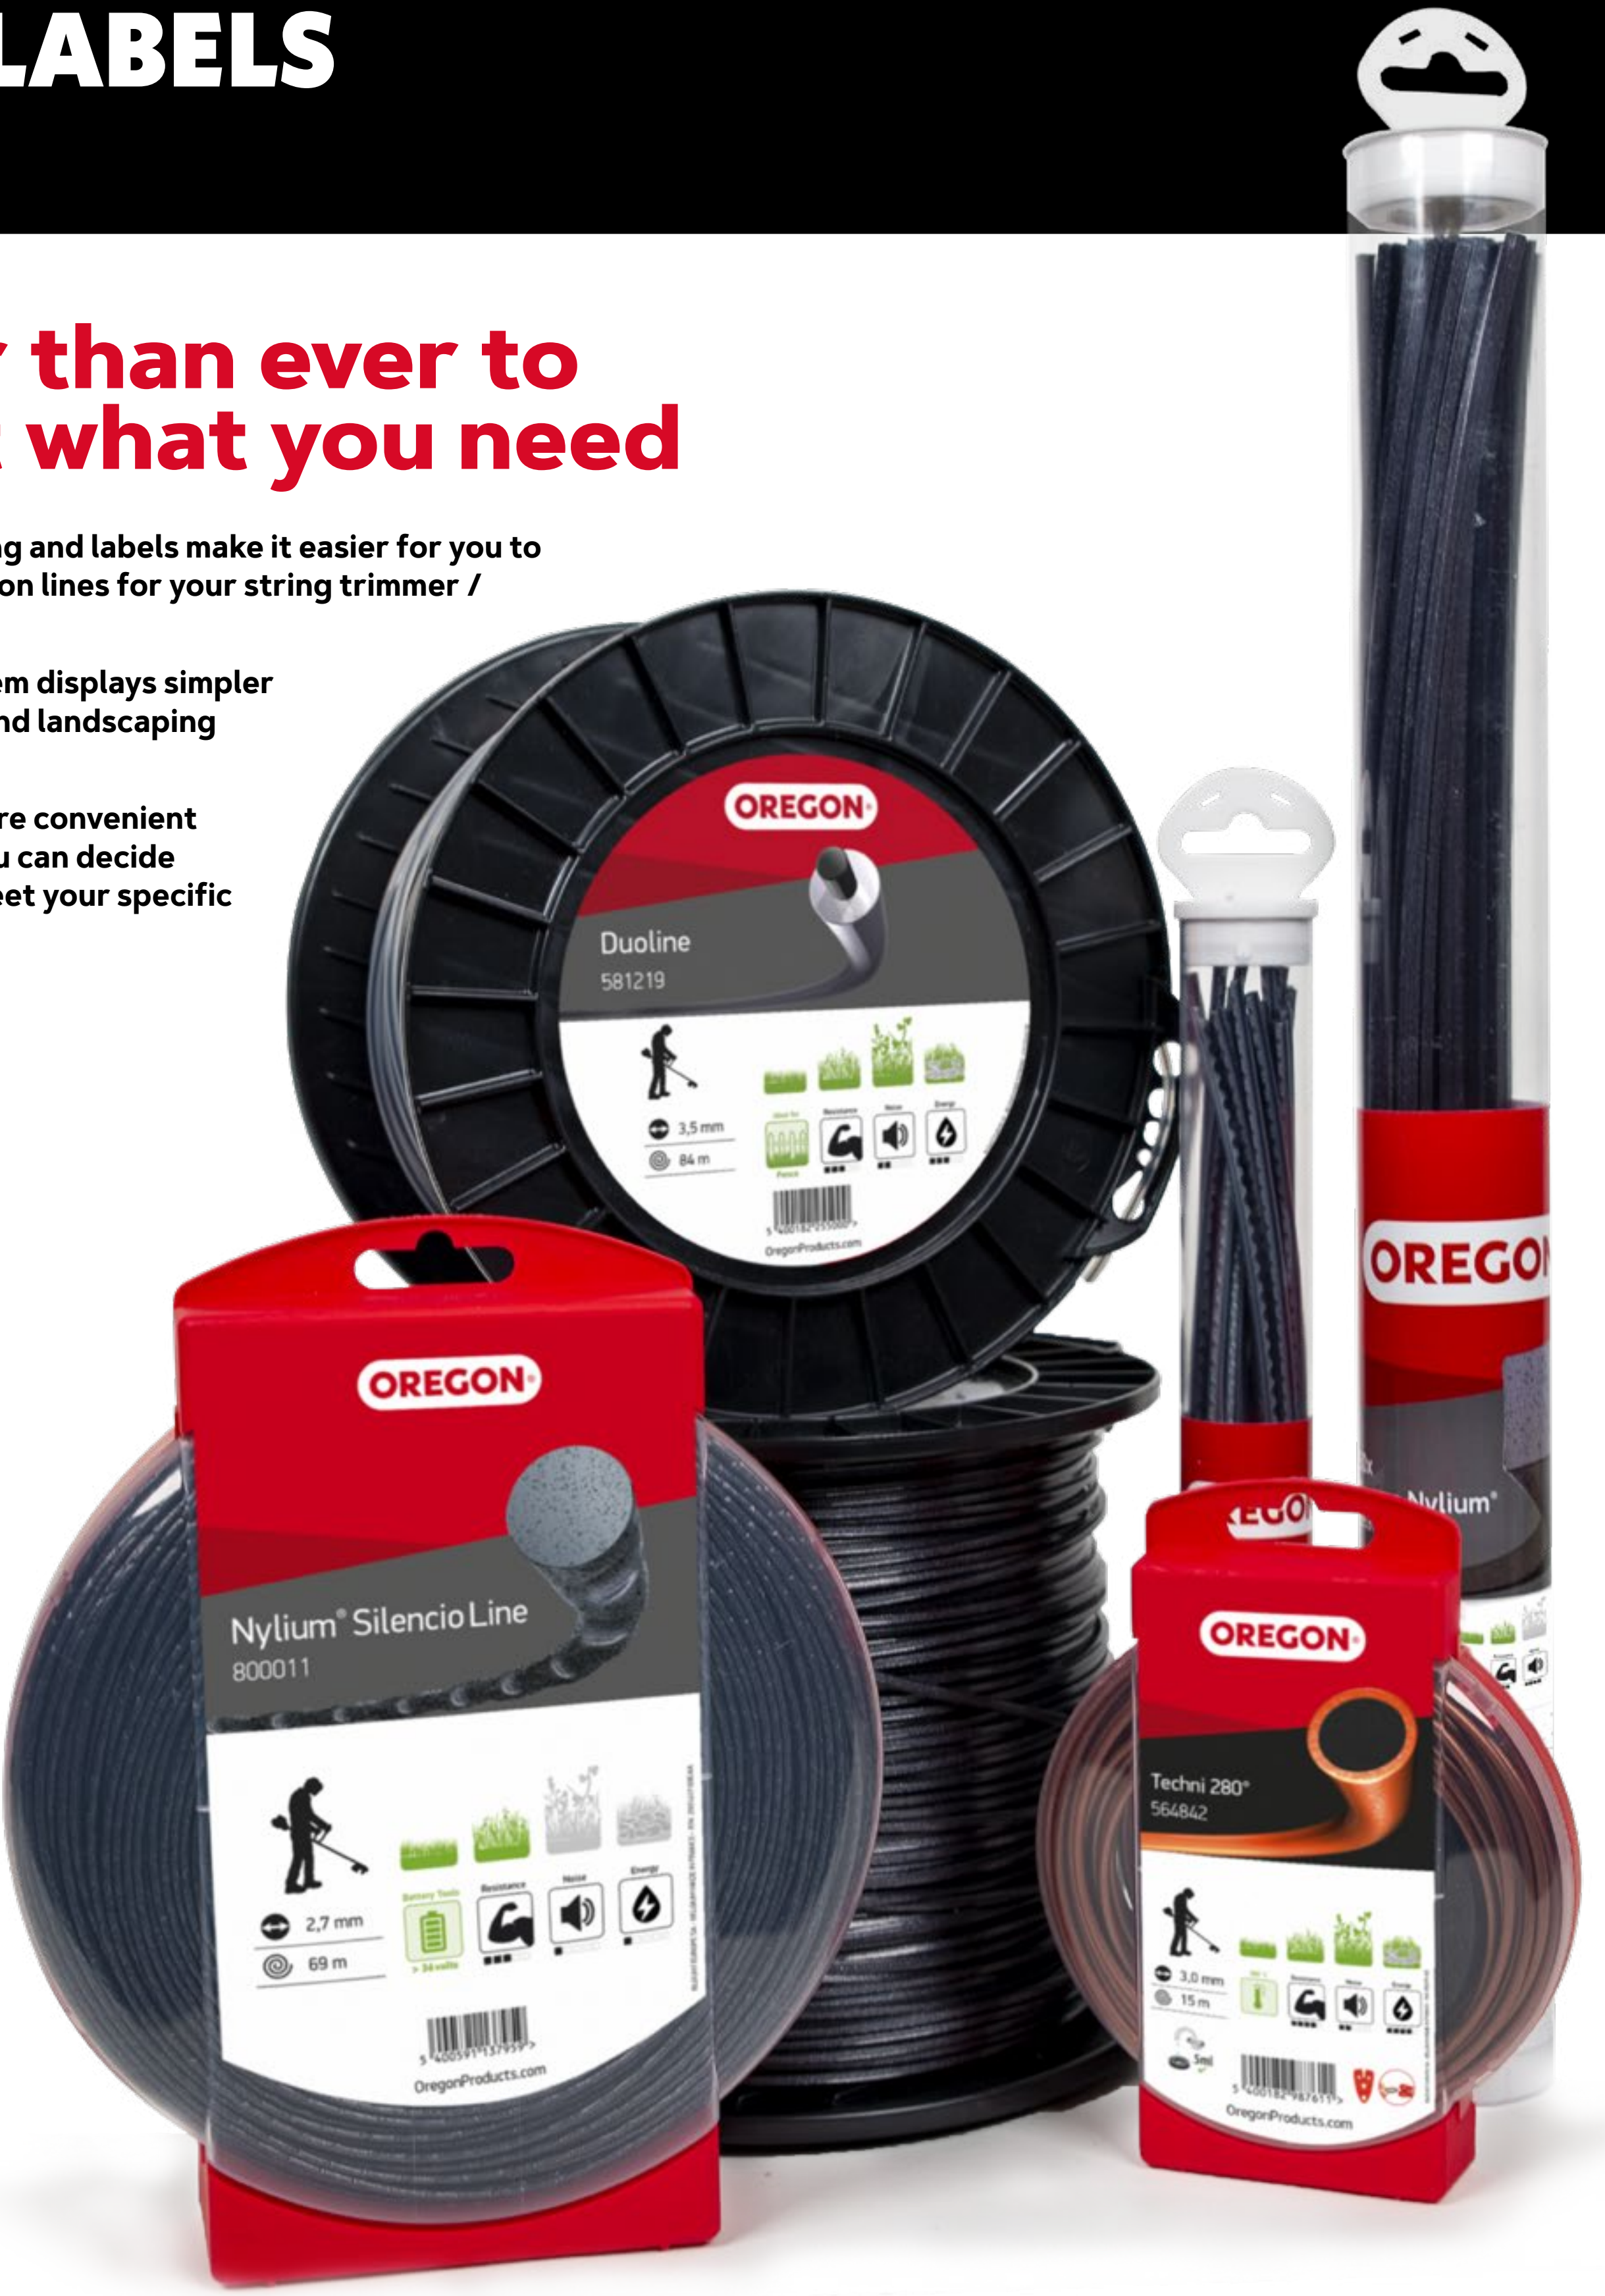
OREGON
Duoline
581219
3,5 mm
84 m
OregonProducts.com
OREGON
Nylium® Silencio Line
800011
2,7 mm
69 m
OregonProducts.com
OREGON
Techni 280°
564842
3,0 mm
15 m
OregonProducts.com
OREGON
Nylium®

APPLICATIONS

The type of vegetation you can cut is clearly marked on each product.

Low grass

High grass & weeds

Brambles

Rocky soil

FEATURES

Each product clearly displays design features.

Neat Cut

Ideal for Fence

Saw effect

Abrasion & Breakage Resistance

Energy Consumption

Noise

Heat resistance

Battery Tools < 36 volts

Battery Tools ≥ 36 volts

RATING

Key features are rated on a 1 to 5 scale (1 is the lowest; 5 is the highest)

■■■■■

1 → 5

NEW

NYLIUM® SILENCIO LINE

The high resistance of Nylium® with less noise

Oregon®'s new and exclusive trimmer line combines the performance of our best selling Nylium® with a profile specifically designed for battery-powered machines. Up to 25% more runtime*!

Nylium Silencio provides better aerodynamic performance, less vibration, and less noise because of a unique new profile. You'll also enjoy high resistance and an excellent cutting performance because of embedded aluminum particles.

Work more efficiently with up to 25% more runtime because Nylium Silencio improves battery runtime and consumes less fuel.
Nylium Silencio is the best choice for users of battery-powered tools.

Cut quietly, with improved battery run-time!

Low grass

High grass & weeds

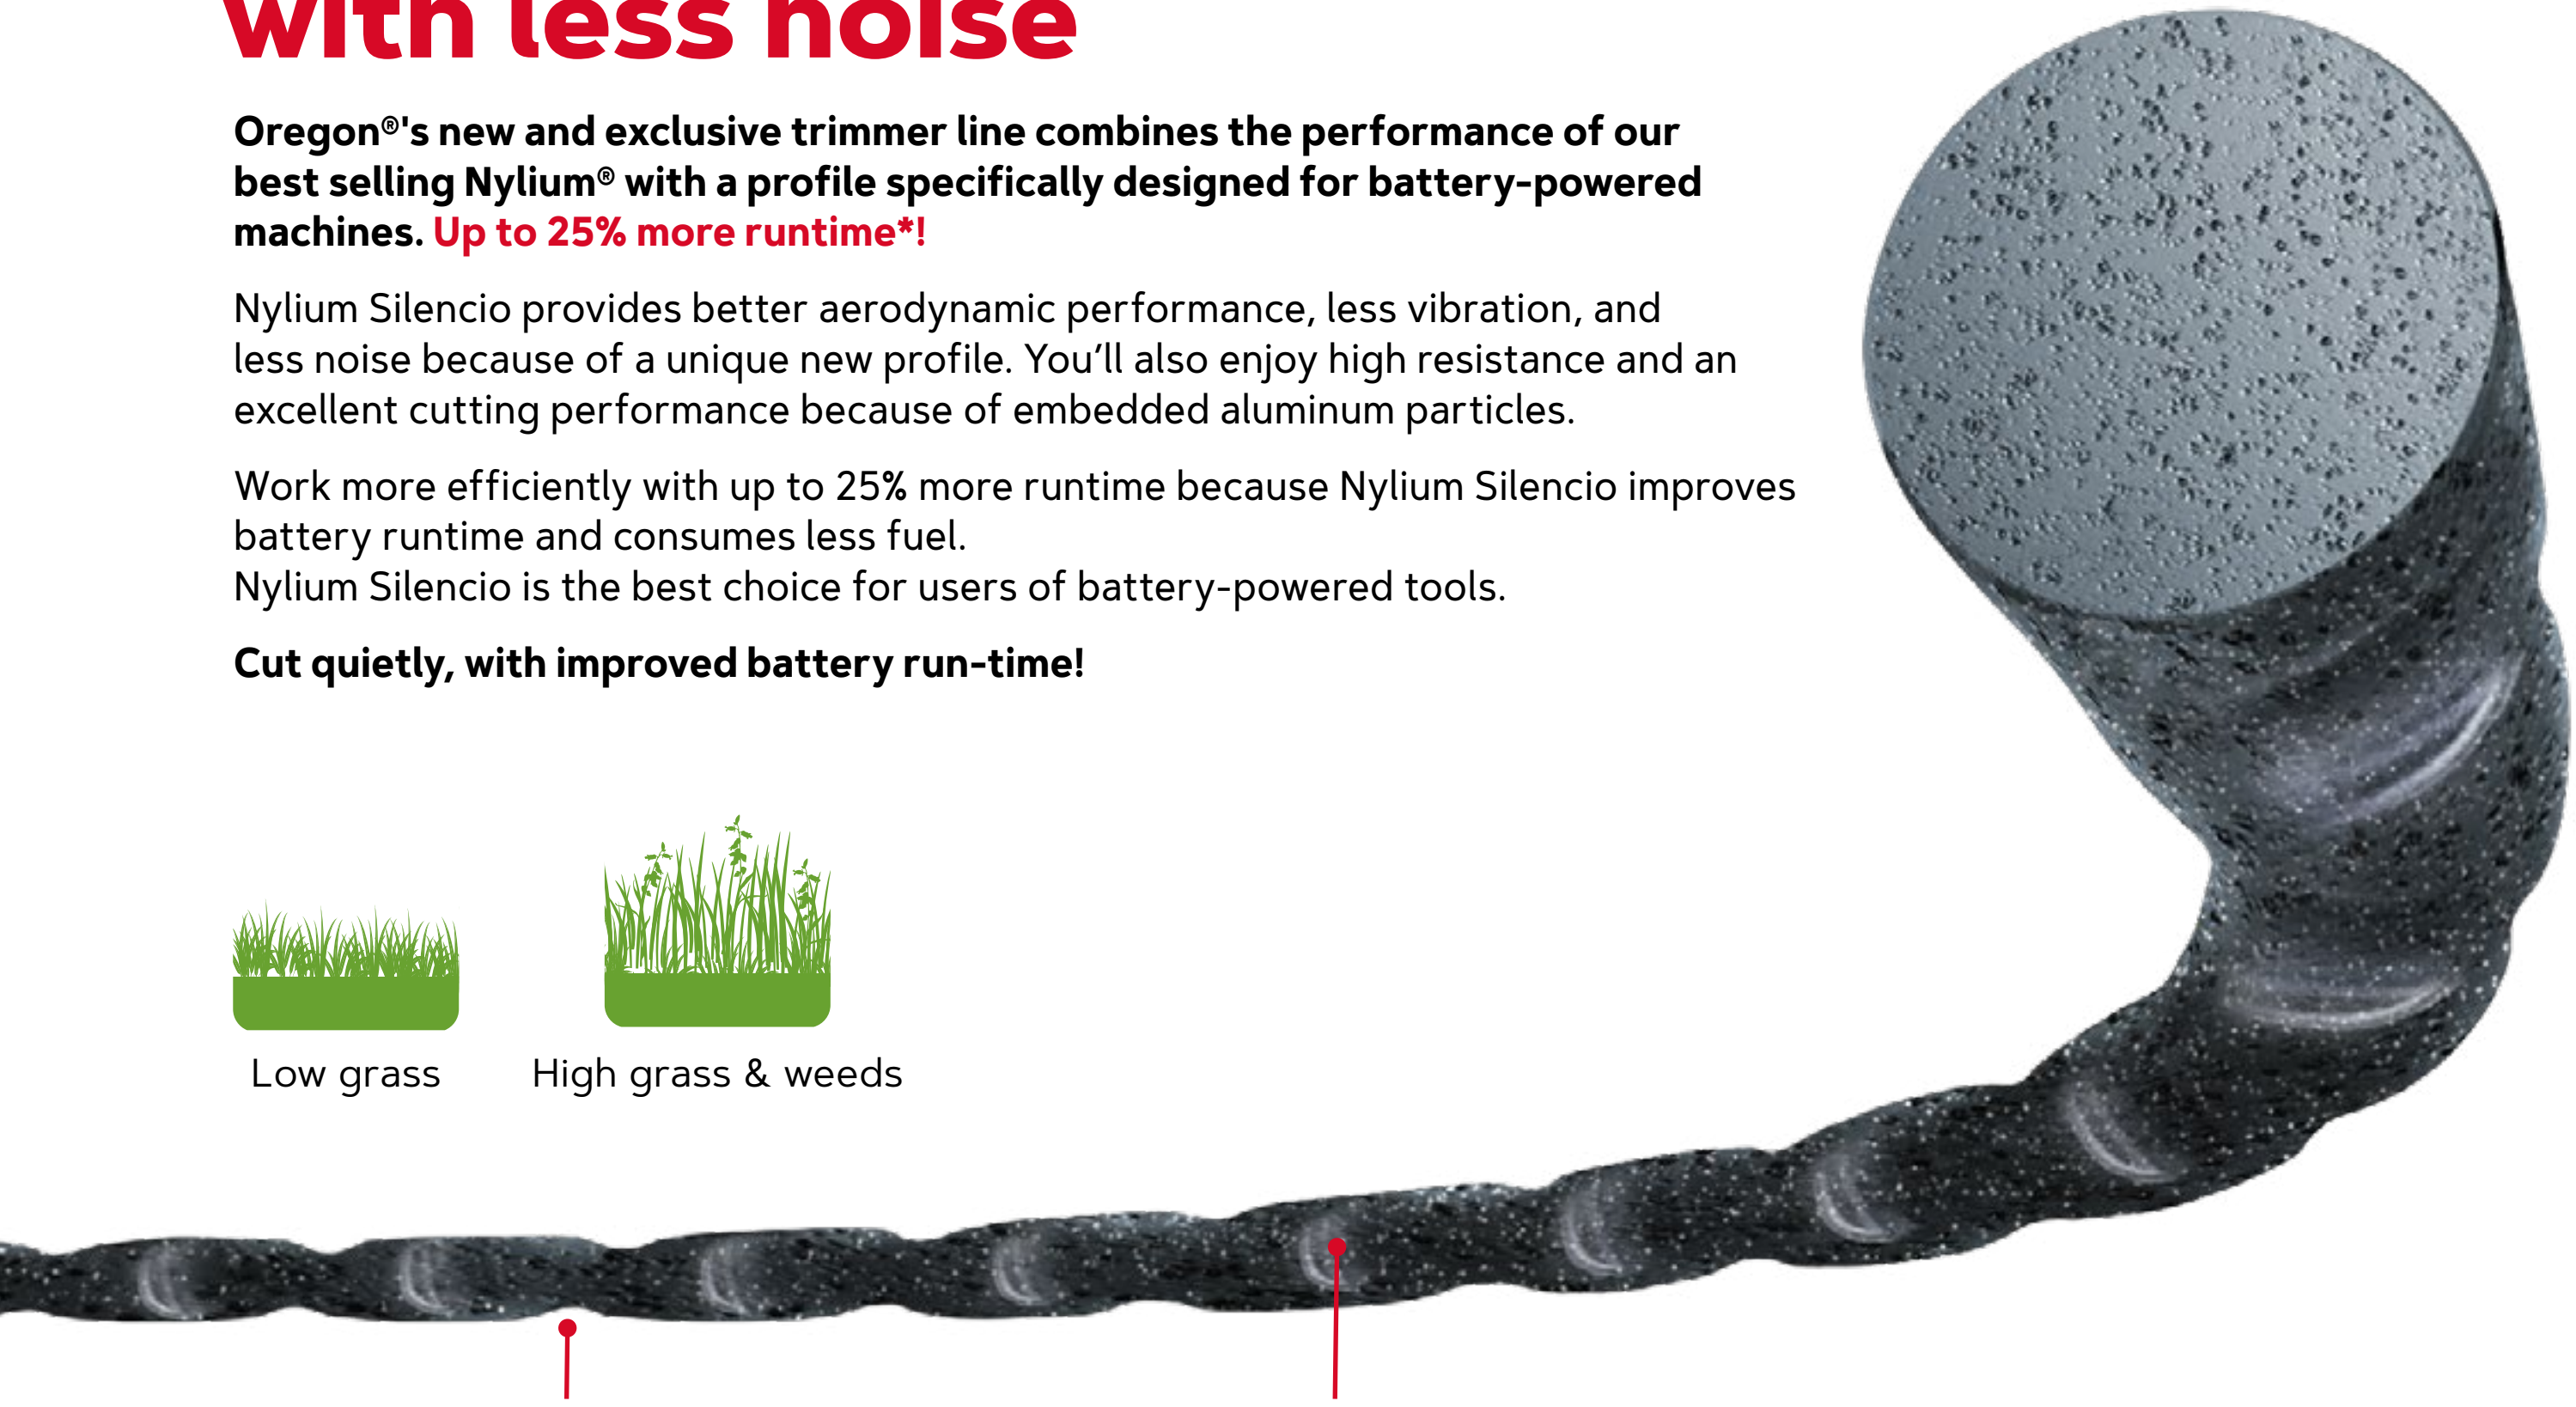

Excellent aerodynamic properties

High resistance and excellent performance from aluminum particles

Specifically designed for battery tools

■■■□□ High resistance to abrasion: stronger & longer lifespan

■□□□□ Low-noise for a comfortable and healthy cut: up to 10% less noise than traditional round and square profiles

■□□□□ Less energy consumption: Improves battery run time. Up to 25% more runtime*
Less fuel consumption for petrol brushcutters

---

* according to Oregon Tool test results.

APPLICATIONS

This line has been designed to meet battery-powered tool users' needs, but is also suited to petrol trimmers and brushcutters with the advantage of a lower fuel consumption

- **For battery-powered string trimmers, Oregon recommends diameters from 1.6mm to 2.4mm (for low and high grass).**
- **For petrol trimmers / brushcutters, Oregon recommends diameters from 2.4mm to 3.5mm (for heavy/thick grass and weeds).**

OREGON
Nylium® Silencio Line
800016
2,7 mm
140 m
OREGON
Nylium® Silencio Line
800005
3,0 mm
15 m
OregonProducts.com
OREGON
Nylium® Silencio Line
800010
2,4 mm
87 m
Battery Tools
Resistance
Noise
Energy
OregonProducts.com

	↔	◎	OREGON	
< 36 volts	1.6mm	15 m	800001	Small Donut
	2.0mm	15 m	800002	Small Donut
	2.0mm	126 m	800009	Donut
	2.4mm	15 m	800003	Small Donut
	2.4mm	87 m	800010	Donut
	2.4mm	240 m	800014	Spool
≥ 36 volts and petrol	2.7mm	15 m	800004	Small Donut
	2.7mm	69 m	800011	Donut
	2.7mm	140 m	800016	Spool
	2.7mm	280 m	800018	Spool
	3.0mm	15 m	800005	Small Donut
	3.0mm	56 m	800012	Donut
	3.0mm	120 m	800017	Spool
	3.0mm	224 m	800019	Spool
	3.5mm	40 m	800013	Donut

See all lenghts available p22

NEW

YELLOW LINE

High-quality nylon for a long lifespan

Professional grade trimmer line: high-quality nylon for a long lifespan

Suitable for all trimmer heads

Round, star and square-shaped profiles

Available in diameters from 1.3mm to 4.5mm, and in different lengths and packaging configurations

Low grass

OREGON
Yellow Roundline
4.5 mm
75 m
OREGON
1.7 mm
15 m
Yellow Roundline
OREGON
Yellow Roundline
4.5 mm
25 m

Yellow Roundline

↔	◎	OREGON
1.7mm	15m	69-350-Y
2.0mm	15m	69-356-Y
	127m	69-358-Y
2.4mm	15m	69-362-Y
	88m	69-364-Y
	264m	69-365-Y
2.7mm	15m	69-380-Y
	70m	69-382-Y
	209m	69-383-Y
3.0mm	15m	69-368-Y
	56m	69-370-Y
	169m	69-371-Y
	240m	69-373-Y
3.5mm	41m	69-376-Y
	124m	69-377-Y
4.0mm	**32m**	69-387-Y **NEW**
	95m	69-388-Y

Yellow Starline

↔	◎	OREGON
1.7mm	15m	69-440-Y
2.0mm	15m	69-446-Y
	155m	69-448-Y
2.4mm	15m	69-452-Y
	111m	69-454-Y
	332m	69-455-Y
2.7mm	15m	69-430-Y
	92m	69-432-Y
3.0mm	15m	69-458-Y
	71m	69-460-Y
	212m	69-461-Y

Yellow Square Line

↔	◎	OREGON
2.0	15m	69-406-Y
2.4	15m	69-412-Y
	75m	69-414-Y
	225m	69-415-Y
3.0	48m	69-420-Y
	144m	69-421-Y
4.0	32m	69-478-Y
	95m	69-479-Y

See all lenghts available p17-19

NEW

TERRAMAX™

TRIMMER LINE

EASILY CUT DENSE VEGETATION IN HARSH, DRY, AND ROCKY TERRAIN.

The all-new Oregon® TerraMax™ trimmer Line is the ideal trimmer line for professionals working in harsh, dry, and rocky terrain. Made with a high-grade copolymer blend for added strength and stiffness, this line is designed and engineered to help you get the job done in harsh conditions.

- Easily cuts through dense and robust vegetation in harsh, dry, and rocky terrain — ideal for Mediterranean climates
- Made of high-grade copolymers for strength and durability — resists abrasion and fray, absorbs shocks, and reduces breakage
- Outstanding resistance to welding and gluing in head spools
- Engineered extended-pitch design delivers outstanding stability for maximum efficiency and faster cutting
- Tap-and-Go head users will experience easy line feeding and optimum efficiency

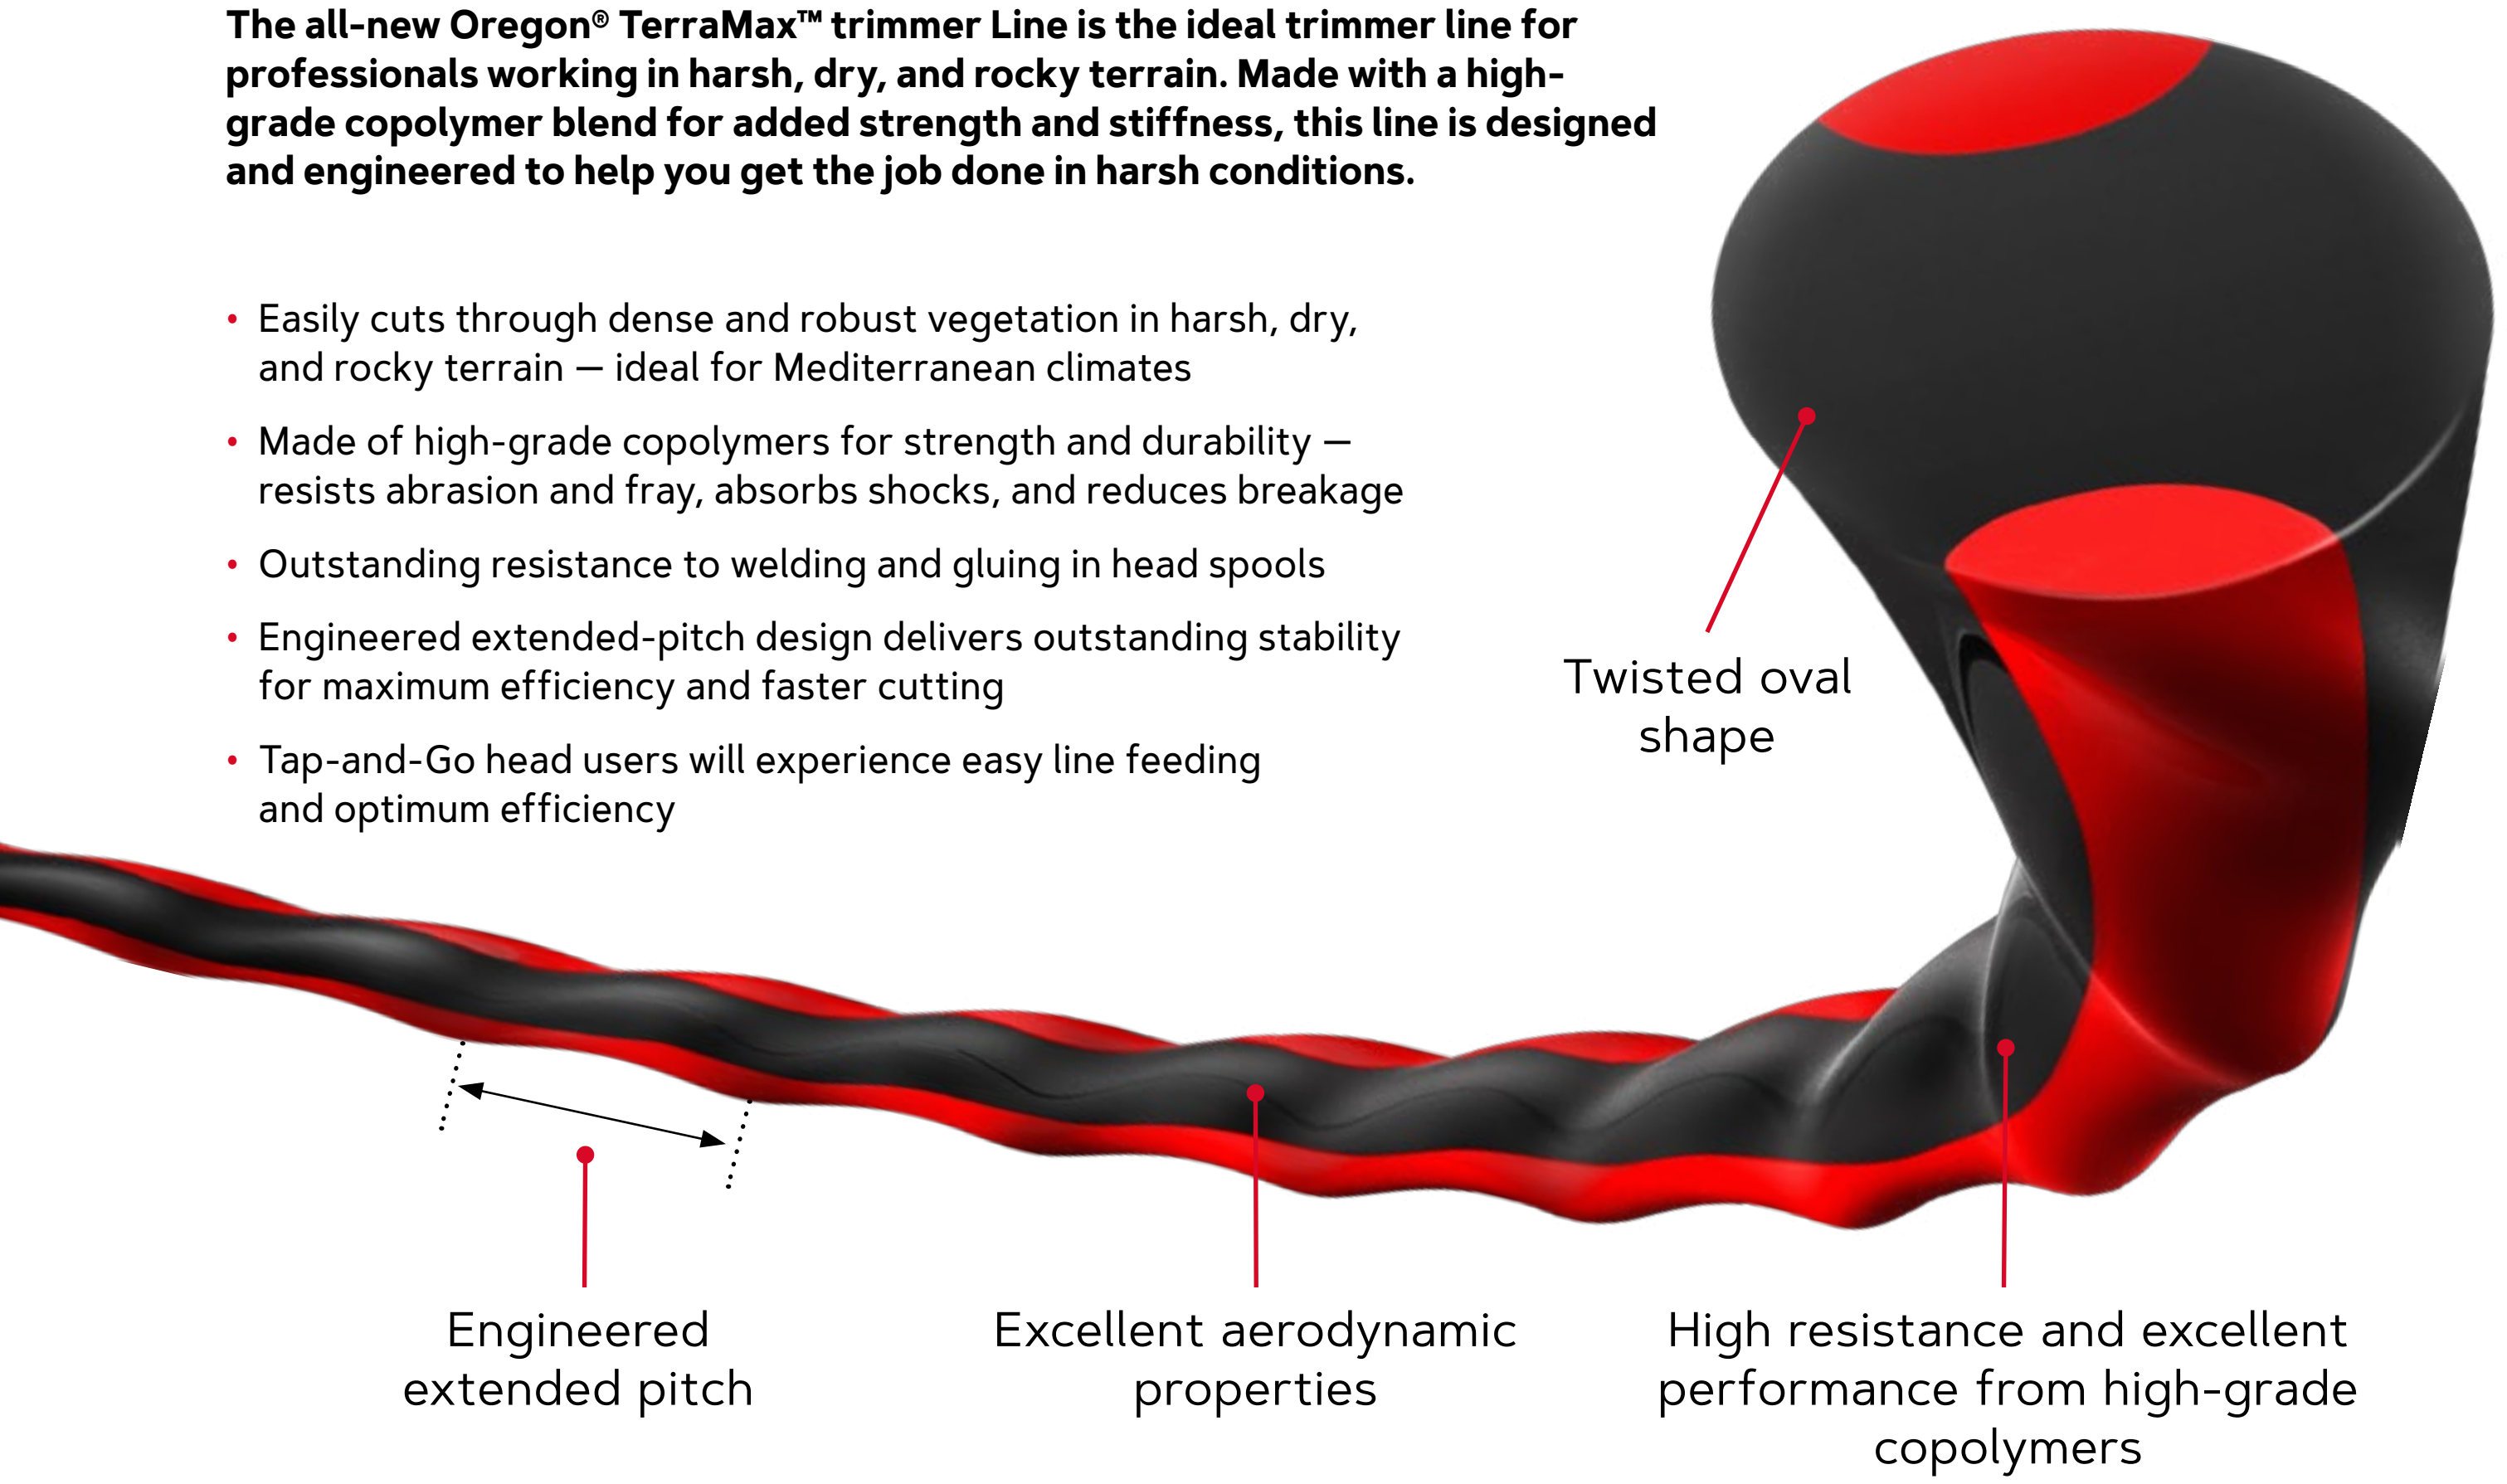
Twisted oval shape
Engineered extended pitch
Excellent aerodynamic properties
High resistance and excellent performance from high-grade copolymers

DRY CONDITIONS

ROCKY TERRAIN

LOW VEGETATION

HIGH VEGETATION

HARSH VEGETATION

RECOMMENDATION FOR USE:

2,7 mm and 3,0 mm fitted on tap-and-go heads and ≥33 cc brushcutters

3,5 mm, 4,0 mm and 4,5 mm fitted on fixed line heads and ≥40 cc brushcutters for heavier-duty application

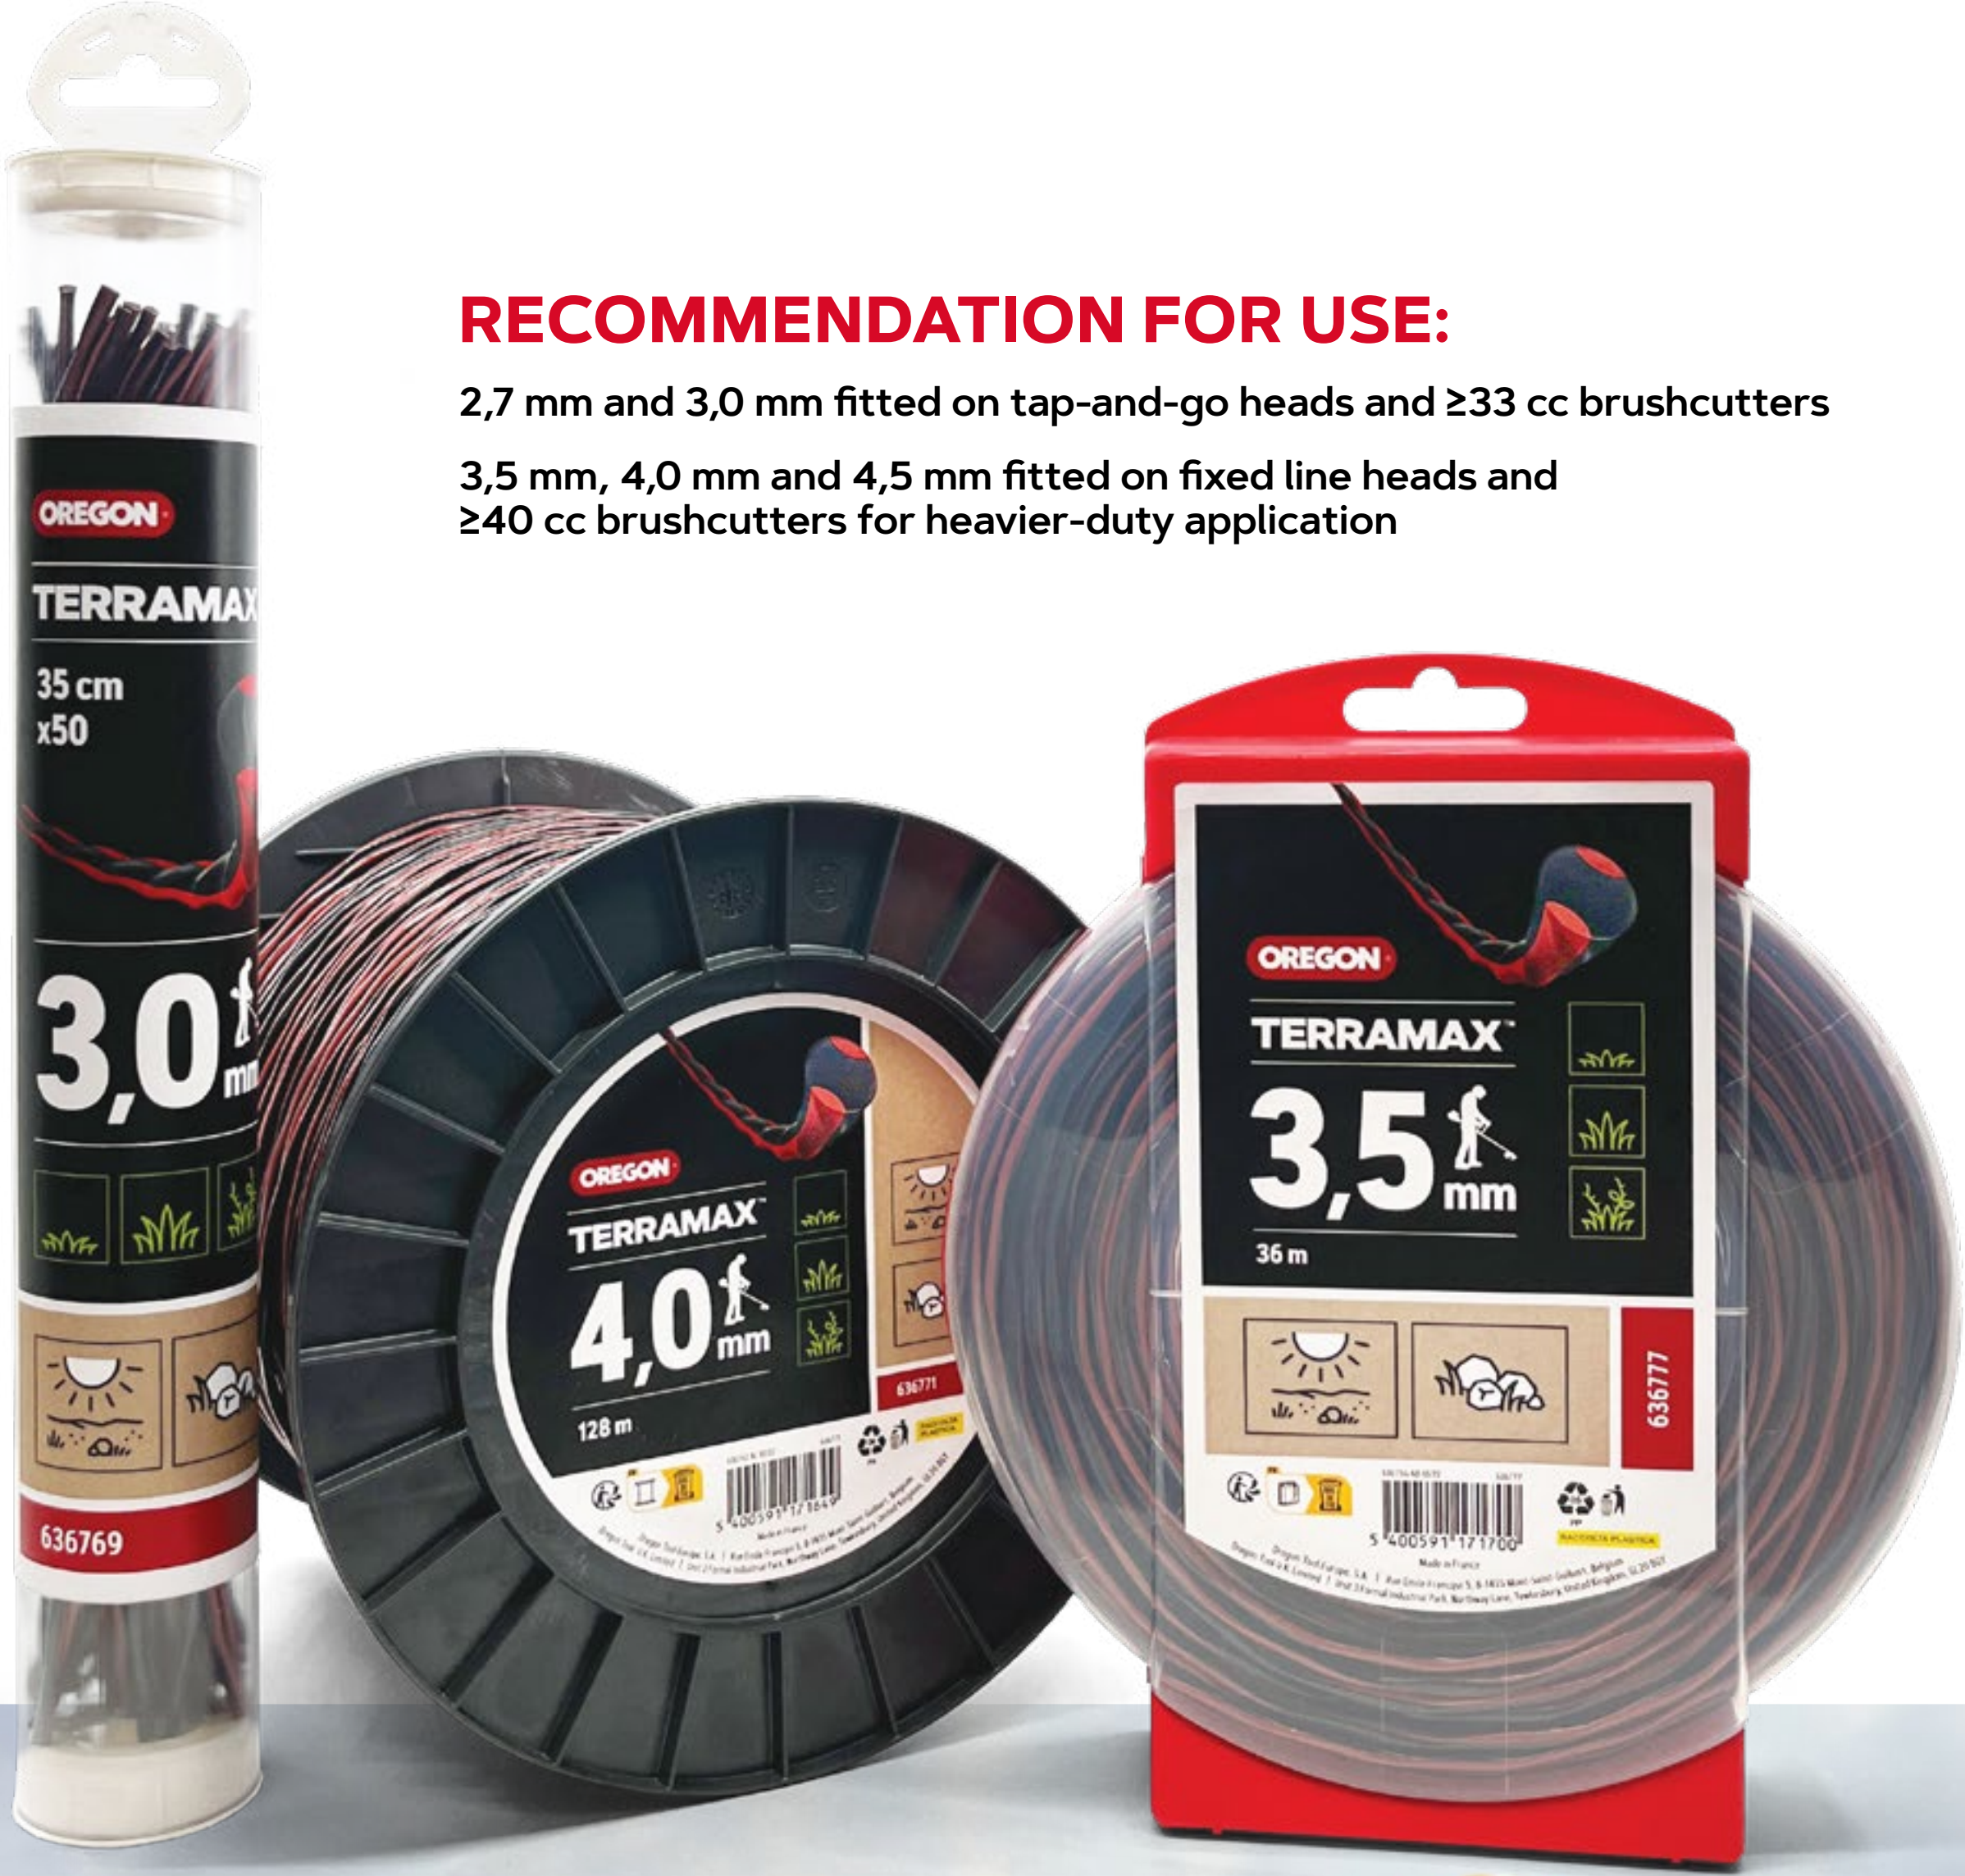
OREGON
TERRAMAX
35 cm
x50
3,0 mm
636769
OREGON
TERRAMAX
4,0 mm
128 m
636771
OREGON
TERRAMAX
3,5 mm
36 m
636777

↔	◎	OREGON	
2,7 mm	56 m	636779	Donut
2,7 mm	280 m	636774	Spool
3,0 mm	44 m	636778	Donut
3,0 mm	220 m	636773	Spool
3,0 mm	24 cm x 50 pcs	636769	Tube
3,0 mm	35 cm x 50 pcs	636768	Tube
3,5 mm	36 m	636777	Donut
3,5 mm	183 m	636772	Spool
4,0 mm	26 m	636776	Donut
4,0 mm	128 m	636771	Spool
4,5 mm	17 m	636775	Donut
4,5 mm	111 m	636770	Spool

See all lenghts available p25

OREGON®

TRIMMER LINES

Colored line - Pro-Grade

- Professional quality cutting line: high-quality nylon for a long service life
- Suitable for all trimmer heads
- One colour per diameter, for quick and easy selection from 1.3mm to 3.0mm
- Universal round profile: power, clean cut and durability
- Available in 15m (blister), between 56m and 88m (donuts)

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
●	1.3mm	15m	69-482-CL	✓				2	2	1	Blister	144
●	1.7mm	15m	69-350-BL	✓				2	2	1	Blister	144
●	2.0mm	15m	69-356-GR	✓				2	2	2	Blister	144
●	2.4mm	15m	69-362-OR	✓	✓			2	2	2	Blister	72
●	2.4mm	88m	69-364-OR	✓	✓			2	2	2	Donut	32
●	2.7mm	15m	69-380-RD	✓	✓			2	2	3	Blister	72
●	2.7mm	70m	69-382-RD	✓	✓			2	2	3	Donut	32
●	3.0mm	15m	69-368-YE	✓	✓	✓		2	2	2	Blister	72
●	3.0mm	56m	69-370-YE	✓	✓	✓		2	2	2	Donut	32
●	3.5mm	15m	69-390-BK	✓	✓	✓		2	2	3	Blister	72

OREGON
TRIM LIKE A PRO
1.3 mm
15 m
1.7 mm
15 m
2.0 mm
15 m
2.4 mm
15 m
2.7 mm
15 m
3.0 mm
15 m
3.5 mm
15 m

OREGON
TRIM LIKE A PRO
2.0 mm
127 m
2.4 mm
88 m
2.7 mm
70 m
3.0 mm
56 m

OREGON
1.7 mm
15 m
Yellow Starline

OREGON
2.7 mm
92 m
Yellow Starline

OREGON
2.0 mm
466 m
Yellow Starline

Yellow line - Pro-Grade - Star

- Professional quality cutting line: high-quality nylon for a long service life
- Suitable for all trimmer heads
- Star-shaped profile
- Available in diameters from 1.7mm to 3.0mm, in different lengths and packaging configurations

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	📦
★	1.7mm	15m	69-440-Y	✓				2	3	2	Hanger	216
★	2.0mm	15m	69-446-Y	✓				2	3	2	Hanger	180
★	2.0mm	1LB/155m	69-448-Y	✓				2	3	2	Donut	32
★	2.4mm	15m	69-452-Y	✓				2	3	2	Hanger	180
★	2.4mm	1LB/111m	69-454-Y	✓				2	3	2	Donut	32
★	2.4mm	3LB/332m	69-455-Y	✓				2	3	2	Spool	12
★	2.7mm	15m	69-430-Y	✓	✓			2	3	2	Hanger	135
★	2.7mm	1LB/92m	69-432-Y	✓	✓			2	3	2	Donut	32
★	3.0mm	15m	69-458-Y	✓	✓			2	3	3	Hanger	135
★	3.0mm	1LB/71m	69-460-Y	✓	✓			2	3	3	Donut	32
★	3.0mm	3LB/212m	69-461-Y	✓	✓			2	3	3	Spool	12

Yellow line - Pro-Grade - Round

- Professional quality cutting line: high-quality nylon for a long service life
- Suitable for all trimmer heads
- Round-shaped profiles
- Available in diameters from 1.7mm to 4.0mm, in different lengths and packaging configurations

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	📦
●	1.7mm	15m	69-350-Y	✓				2	2	1	Hanger	216
●	2.0mm	15m	69-356-Y	✓				2	2	2	Hanger	180
●	2.0mm	1LB/127m	69-358-Y	✓				2	2	2	Donut	32
●	2.4mm	15m	69-362-Y	✓	✓			2	2	2	Hanger	180
●	2.4mm	1LB/88m	69-364-Y	✓	✓			2	2	2	Donut	32
●	2.4mm	3LB/264m	69-365-Y	✓	✓			2	2	2	Spool	12
●	2.7mm	15m	69-380-Y	✓	✓			2	2	2	Hanger	135
●	2.7mm	1LB/70m	69-382-Y	✓	✓			2	2	2	Donut	32
●	2.7mm	3LB/209m	69-383-Y	✓	✓			2	2	2	Spool	12
●	3.0mm	15m	69-368-Y	✓	✓	✓		2	2	3	Hanger	135
●	3.0mm	1LB/56m	69-370-Y	✓	✓	✓		2	2	3	Donut	32
●	3.0mm	3LB/169m	69-371-Y	✓	✓	✓		2	2	3	Spool	12
●	3.5mm	1LB/41m	69-376-Y	✓	✓	✓		2	2	3	Donut	32
●	3.5mm	3LB/124m	69-377-Y	✓	✓	✓		2	2	3	Spool	12
●	4.0mm	1LB/32m	69-387-Y	✓	✓	✓		2	2	4	Donut	32
●	4.0mm	3LB/95m	69-388-Y	✓	✓	✓		2	2	4	Spool	12

Yellow line - Pro-Grade - Square

- Professional quality cutting line: high-quality nylon for a long service life
- Suitable for all trimmer heads
- Square-shaped profiles
- Available in diameters from 2.0mm to 4.0mm, in different lengths and packaging configurations

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	📦
🟨	2.0mm	15m	69-406-Y	✓	✓			2	4	3	Hanger	135
🟨	2.4mm	15m	69-412-Y	✓	✓			2	4	3	Hanger	135
🟨	2.4mm	1LB/75m	69-414-Y	✓	✓			2	4	3	Donut	32
🟨	2.4mm	3LB/225m	69-415-Y	✓	✓			2	4	3	Spool	12
🟨	3.0mm	1LB/48m	69-420-Y	✓	✓	✓		2	4	3	Donut	32
🟨	3.0mm	3LB/144m	69-421-Y	✓	✓	✓		2	4	3	Spool	12
🟨	4.0mm	1LB/32m	69-478-Y	✓	✓	✓		2	4	4	Donut	32
🟨	4.0mm	3LB/95m	69-479-Y	✓	✓	✓		2	4	4	Spool	12

Nylium® Starline® - for precise cuts

- Nylium embedded aluminium particles increase the line conductivity and cool down properties
- Outstanding resistance to breakage at the head eyelets
- High resistance to line welding inside heads
- Available in diameters from 1.3mm to 3.3mm, and in different lengths and packaging configurations
- The star shape cuts grass neatly for a splendid green lawn
- The star shape reduces engine drag compared with standard round shape line

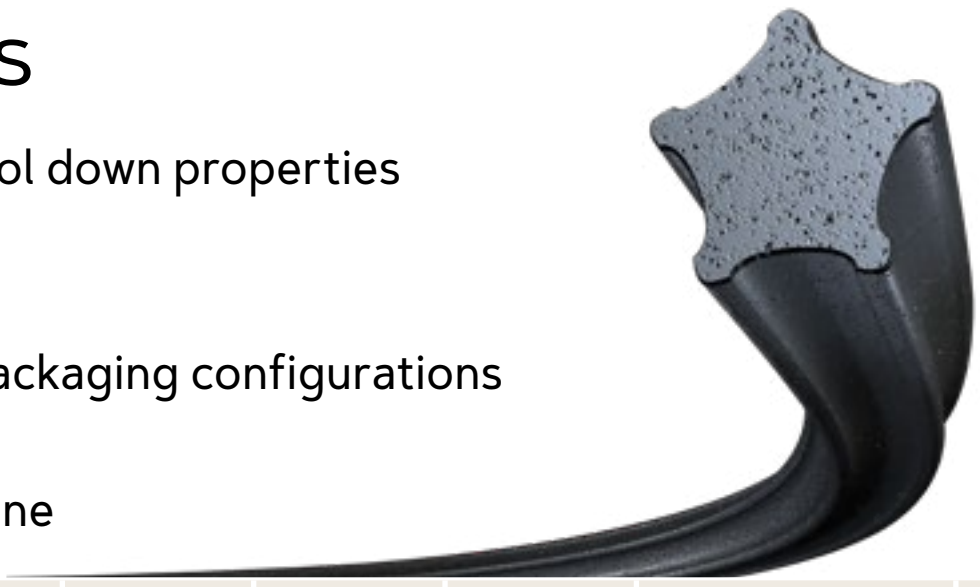

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	📦
★	1.3mm	15m	533744	✓				3	3	2	Donut	42
★	1.6mm	15m	533745	✓				3	3	2	Donut	42
★	2.0mm	15m	581222	✓				3	3	2	Donut	42
★	2.4mm	15m	110985E	✓	✓			3	3	3	Donut	42
★	2.4mm	90m	104883E	✓	✓			3	3	3	Donut	8
★	2.4mm	360m	104885E	✓	✓			3	3	3	Spool	8
★	2.7mm	15m	559054	✓	✓			3	3	3	Donut	30
★	2.7mm	70m	110987E	✓	✓			3	3	3	Donut	8
★	2.7mm	280m	559055	✓	✓			3	3	3	Spool	8
★	3.0mm	15m	110986E	✓	✓	✓		3	3	3	Donut	30
★	3.0mm	60m	104884E	✓	✓	✓		3	3	3	Donut	8
★	3.0mm	240m	104886E	✓	✓	✓		3	3	3	Spool	8
★	3.3mm	200m	106361E	✓	✓	✓		3	3	3	Spool	8

OREGON
Nylium® Starline®
559054

OREGON
Nylium® Starline®
104884E

OREGON
Nylium® Starline®

Nylium® Square Line - for Performance cuts

- Better conductivity thanks to aluminium particles
- High resistance to breakage at the head eyelet
- Rugged square profile for use on dry vegetation on rocky ground
- Up to 27% greater efficiency than its round equivalent
- Available in diameters from 2.4mm to 4.0mm, and in different lengths and packaging configurations

OREGON
Nylium Square Line
109524E



+27%

Rugged square shape offers 27% more working nylon material versus the round equivalent (27% more weight per meter)

OREGON
Nylium® Square Line
109521E

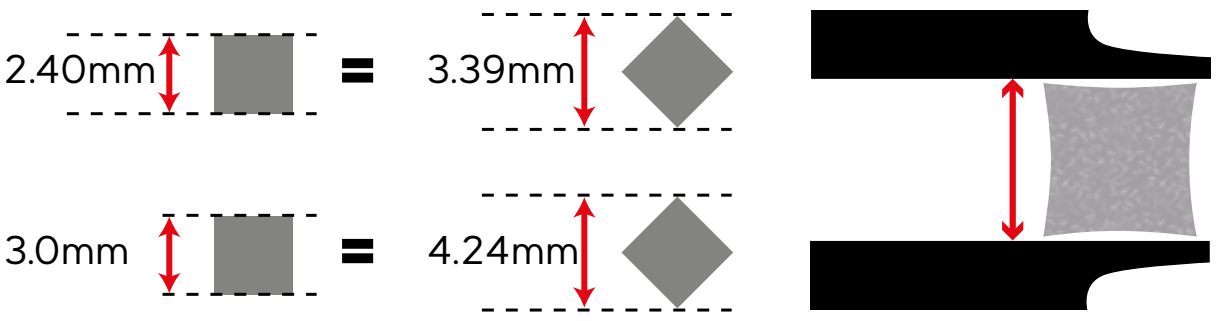

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	📦
■	2.4mm	60m	109521E	✓	✓			4	4	3	Donut	8
■	2.4mm	245m	109523E	✓	✓			4	4	3	Spool	8
■	2.55mm	42cm	295371E	✓	✓			4	4	3	Precut x100	35
■	3.0mm	40m	109522E	✓	✓	✓		4	4	3	Donut	8
■	3.0mm	150m	109524E	✓	✓	✓		4	4	3	Spool	8
■	3.5mm	30m	539165	✓	✓	✓	✓	4	4	4	Donut	8
■	3.75mm	42cm	295372E	✓	✓	✓	✓	4	4	4	Precut x50	35
■	3.75mm	42cm	514820	✓	✓	✓	✓	4	4	4	Precut x220	8
■	3.75mm	100m	295314E	✓	✓	✓	✓	4	4	4	Spool	8
■	4.0mm	22m	539166	✓	✓	✓	✓	4	4	4	Donut	8
■	4.0mm	81m	581221	✓	✓	✓	✓	4	4	4	Spool	8

Nylium® Silencio Line - for Extended battery Usage

- Low-noise for a comfortable and healthy cut
- High resistance to abrasion: stronger, longer lifespan, less investment.
- Embedded aluminum particles improve the line's conductivity, reducing line breakage and line welding in the head.
- Battery energy saving: the battery lasts longer.
- Less fuel consumption for petrol brush cutters.
- For battery-powered string trimmers, Oregon recommends diameters from 1.6 mm to 2.4 mm (for low and high grass).
- For petrol trimmers / brushcutters, Oregon recommends diameters from 2.4mm to 3.5mm (for heavy/thick grass and weeds).

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	📦	BATTERY / PETROL
●	1.6mm	15m	800001	✓				3	1	1	Donut	42	≤36V
●	2.0mm	15m	800002	✓				3	1	1	Donut	42	≤36V
●	2.0mm	126m	800009	✓				3	1	1	Donut	8	≤36V
●	2.4mm	15m	800003	✓	✓			3	1	1	Donut	42	≤36V
●	2.4mm	87m	800010	✓	✓			3	1	1	Donut	8	≤36V
●	2.4mm	240m	800014	✓	✓			3	1	1	Spool	8	≤36V
●	2.7mm	15m	800004	✓	✓			3	1	1	Donut	30	>36V
●	2.7mm	69m	800011	✓	✓			3	1	1	Donut	8	>36V
●	2.7mm	140m	800016	✓	✓			3	1	1	Spool	8	>36V
●	2.7mm	280m	800018	✓	✓			3	1	1	Spool	8	>36V
●	3.0mm	15m	800005	✓	✓	✓		3	1	1	Donut	30	Petrol
●	3.0mm	56m	800012	✓	✓	✓		3	1	1	Donut	8	Petrol
●	3.0mm	120m	800017	✓	✓	✓		3	1	1	Spool	8	Petrol
●	3.0mm	224m	800019	✓	✓	✓		3	1	1	Spool	8	Petrol
●	3.5mm	40m	800013	✓	✓	✓		3	1	1	Donut	8	Petrol

OREGON
Nylium Silencio Line
800003

OREGON
Nylium Silencio Line
800011

OREGON
Nylium Silencio Line

Duoline - Strength and Flexibility

- Its composition - 30% rigid carbon core, and 70% more flexible outer skin - enables it to more easily absorb shocks, and reduce the risk of breakages at the eyelet.
- Available in diameters from 2.0mm to 4.0mm, and in different lengths and packaging configurations.

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	📦
●	2.0mm	15m	591609	✓				3	2	2	Donut	42
●	2.4mm	15m	295367E	✓	✓			3	2	2	Donut	42
●	2.4mm	90m	106501E	✓	✓			3	2	2	Donut	8
●	2.4mm	180m	106503E	✓	✓			3	2	2	Spool	8
●	2.7mm	70m	545828	✓	✓			3	2	2	Donut	8
●	2.7mm	140m	545829	✓	✓			3	2	2	Spool	8
●	3.0mm	15m	295368E	✓	✓	✓		3	2	3	Donut	30
●	3.0mm	60m	106502E	✓	✓	✓		3	2	3	Donut	8
●	3.0mm	120m	106504E	✓	✓	✓		3	2	3	Spool	8
●	3.5mm	40m	533742	✓	✓	✓	✓	3	2	3	Donut	8
●	3.5mm	84m	581219	✓	✓	✓	✓	3	2	3	Spool	8
●	4.0mm	64m	581220	✓	✓	✓	✓	3	2	4	Spool	8

Techni 280° - Performance and Heat Resistance

- Up to 30 % more robust than the standard round line.
- Extremely resistant to notching and wear
- High melting point >280°: Lower breakage risk, and prevents the line from sticking inside the head
- Available in diameters from 2.5mm to 3.0mm, and in different lengths and packaging configurations

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
●	2.5mm	15m	564844	✓	✓	✓		4	2	3	Donut	42
●	2.5mm	81m	545819	✓	✓	✓		4	2	3	Donut	8
●	2.5mm	324m	545822	✓	✓	✓		4	2	3	Spool	8
●	2.7mm	15m	564843	✓	✓	✓	✓	4	2	3	Donut	30
●	2.7mm	70m	545820	✓	✓	✓	✓	4	2	3	Donut	8
●	2.7mm	280m	545823	✓	✓	✓	✓	4	2	3	Spool	8
●	3.0mm	15m	564842	✓	✓	✓	✓	4	2	4	Donut	30
●	3.0mm	56m	545821	✓	✓	✓	✓	4	2	4	Donut	8
●	3.0mm	224m	545824	✓	✓	✓	✓	4	2	4	Spool	8

OREGON
TERRAMAX
35 cm
x50
3,0 mm
TERRAMAX
24 cm
x50
3,0 mm

OREGON
TERRAMAX
3,5 mm
36 m
636777

TERRAMAX
4,0 mm
128 m

TerraMax - Harsh Vegetation, Rocky terrain

- Easily cuts through dense and robust vegetation in harsh, dry, and rocky terrain ideal for Mediterranean climates
- High-grade copolymers : resists abrasion, absorbs shocks, and reduces breakage
- Outstanding resistance to welding and gluing in head spools
- Extended-pitch design delivers outstanding stability for maximum efficiency and faster cutting
- Tap-and-Go head users will experience easy line feeding and optimum efficiency

SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	HARSH VEGETATION	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	
●	2,7 mm	56m	636779	✓	✓	✓	✓	4	3	3	Donut	
●	2,7 mm	280m	636774	✓	✓	✓	✓	4	3	3	Spool	
●	3,0 mm	44m	636778	✓	✓	✓	✓	4	3	3	Donut	
●	3,0 mm	220m	636773	✓	✓	✓	✓	4	3	3	Spool	
●	3,0 mm	24cm	636769	✓	✓	✓	✓	4	3	3	Precut x50	
●	3,0 mm	35cm	636768	✓	✓	✓	✓	4	3	3	Precut x50	
●	3,5 mm	36m	636777	✓	✓	✓	✓	4	3	4	Donut	
●	3,5 mm	183m	636772	✓	✓	✓	✓	4	3	4	Spool	
●	4,0 mm	26m	636776	✓	✓	✓	✓	4	3	4	Donut	
●	4,0 mm	128m	636771	✓	✓	✓	✓	4	3	4	Spool	
●	4,5 mm	17m	636775	✓	✓	✓	✓	4	3	4	Donut	
●	4,5 mm	111 m	636770	✓	✓	✓	✓	4	3	4	Spool	

Flexi-Blade™ - For Highly Demanding Applications

- Composition - 50% flexible core and 50% reinforced outer skin, this co-extruded line offers outstanding performance and durability.
- Silent and aerodynamic profile (low fuel consumption)
- Designed for Jet-Fit™ aluminium heads
- High melting point 255°c
- Up to 27% greater efficiency than its round equivalent
- Reinforced surface and aggressive teeth for exceptional performance
- Available in diameters from 2.5mm to 4.0mm, and in different lengths and packaging configurations

OREGON
Flexiblade™
111081E
OREGON
Flexiblade™
OREGON



+27%

Rugged square shape offers 27% more working nylon material versus the round equivalent (27% more weight per meter)



SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	📦
■	2.5mm	26cm	111112E	✓	✓			5	4	3	Precut x50pc	40
■	2.5mm	53m	111080E	✓	✓			5	4	3	Donut	8
■	2.5mm	281m	111086E	✓	✓			5	4	3	Spool	8
■	2.7mm	47m	111081E	✓	✓			5	4	3	Donut	8
■	2.7mm	250m	111087E	✓	✓			5	4	3	Spool	8
■	3.0mm	26cm	111114E	✓	✓		✓	5	4	4	Precut x35pc	40
■	3.0mm	37m	111082E	✓	✓		✓	5	4	4	Donut	8
■	3.0mm	195m	111088E	✓	✓		✓	5	4	4	Spool	8
■	3.5mm	26cm	111115E	✓	✓		✓	5	4	4	Precut x25pc	40
■	3.5mm	27m	111084E	✓	✓		✓	5	4	4	Donut	8
■	3.5mm	143m	111090E	✓	✓		✓	5	4	4	Spool	8
■	4.0mm	26cm	111116E	✓	✓		✓	5	4	4	Precut x20pc	40
■	4.0mm	21m	111085E	✓	✓		✓	5	4	4	Donut	8
■	4.0mm	110m	111091E	✓	✓		✓	5	4	4	Spool	8

Techni-Blade™ - Precision, Durability and Speed

- Designed for Jet-Fit™ aluminium heads 111110 and 111111
- Composition - 50% flexible core and 50% reinforced outer skin, this co-extruded line offers outstanding performance and durability.
- Silent and aerodynamic profile (low fuel consumption)
- High melting point >255°
- As sharp as a blade, pinch-hardened teeth for outstanding efficiency
- Available in precut 26cm pieces and 5.0mm, 6.0mm and 7.0mm sizes



+27%

Rugged square shape offers
27% more working nylon material
versus the round equivalent
(27% more weight per meter)





SHAPE	DIAMETER	LENGTH	OREGON	LOW GRASS	HIGH GRASS	ROCKY SOILS	BRAMBLES	WEAR RESISTANCE	NOISE LEVEL	ENERGY CONSUMPTION	PACKAGING	📦
🟩	5.0mm	26cm	539176	✓	✓		✓	5	4	4	Precut x70pc	66
🟨	6.0mm	26cm	539175	✓	✓		✓	5	4	4	Precut x50pc	66
🟨	6.0mm	26cm	525243	✓	✓		✓	5	4	4	Precut x205pc	12
🟥	7.0mm	26cm	539174	✓	✓		✓	5	4	4	Precut x40pc	66
🟥	7.0mm	26cm	525244	✓	✓		✓	5	4	4	Precut x155pc	12
🟨🟥	6.0mm + 7.0mm	26cm	525242 JET-FIT™ HEAD (111111) + TECHNI BLADE™ KIT	✓	✓		✓	5	4	4	Precut 155pc + 205pc	6

TECH TIP

Keep Techni-Blade™ in its original package and make sure the sponge is always wet and the tube closed.

Do not store in over-heated, dry places.





TRIMMER HEADS

GOOD

≤30cc

Low grass

TAP&GO

● ★

Mini tap and go heads

- Two-line Tap and Go heads to fit most popular bent shaft trimmers : STIHL®, MC CULLOCH®, RYOBI® and HOMELITE®
- Model Q111140 fits STIHL® FS38, 40, 45, 50 and FSE60, 81
- Fitted with OREGON® 2.0mm trimmer line

PRODUCT NAME	OREGON	SPECIFICATIONS				
Mini tap & go head	Q111140	for Stihl® FS 38, FS 40, FS 45, FS 50, FSE 60, FSE 81	✗	● ★ ≤2.4mm	40	
	Q111139	for Mcculloch®				
	Q111138	for Ryobi®				
	Q111137	for Homelite®				
	295294	replacement knob for Q111137 & Q111138				

OREGON® is a registered trademark of Oregon Tool Inc.
All other marks are the property of their respective owners.

108461A
110982A

GOOD

≤40cc

Low grass

High grass & weeds

MANUAL

● ★

Standard manual heads

- Extended eyelets to prevent premature line breakage
- To be mounted with bolts
- Fitted with Nylium Starline 2.4mm

PRODUCT NAME	OREGON	SPECIFICATIONS			
Standard Manual Heads	**108461A**	• 2-Line standard manual head • Requires a bolt to be mounted on trimmer or brushcutter • (Bolt not included - refer to bolt list below) • 110982A with protruding studs	✓	● ★ ≤3.0mm	8
	110982A				

OREGON	♀	
90177T	Bolt 8 X 125 Left Hand	50
91323T	Bolt 10 X 100 Left Hand (Stihl)	50
90178T	Bolt 10 X 125 Left Hand	50
90179T	Bolt 12 X 150 Left Hand	50
90180T	Bolt 12 X 175 Left Hand	50
90171T	Bolt 8 X125 Left Hand	50

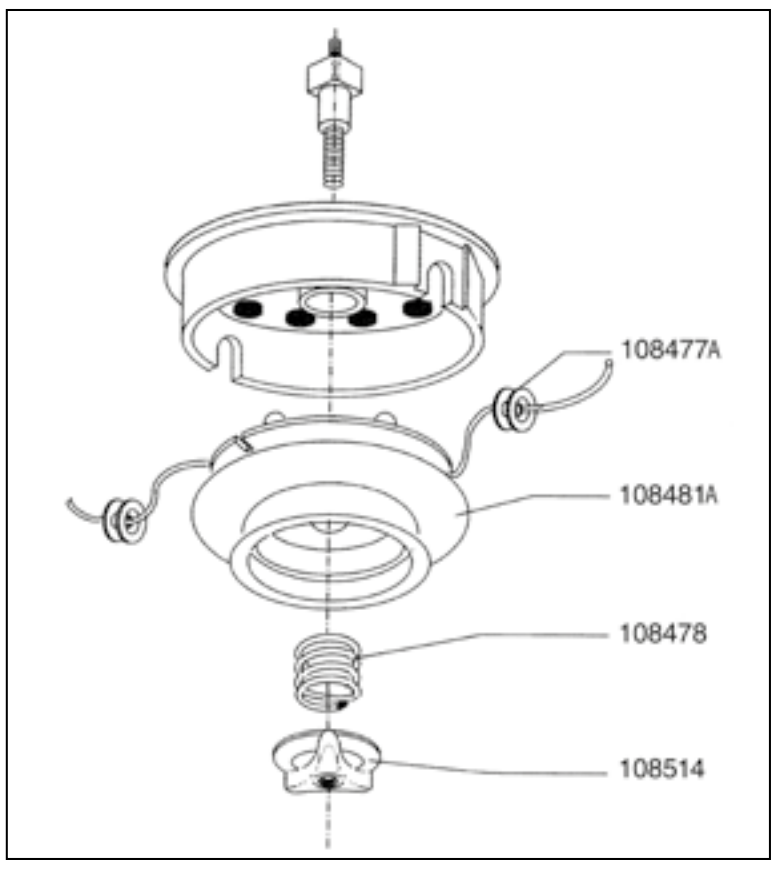
108477A
108481A
108478
108514

108461A

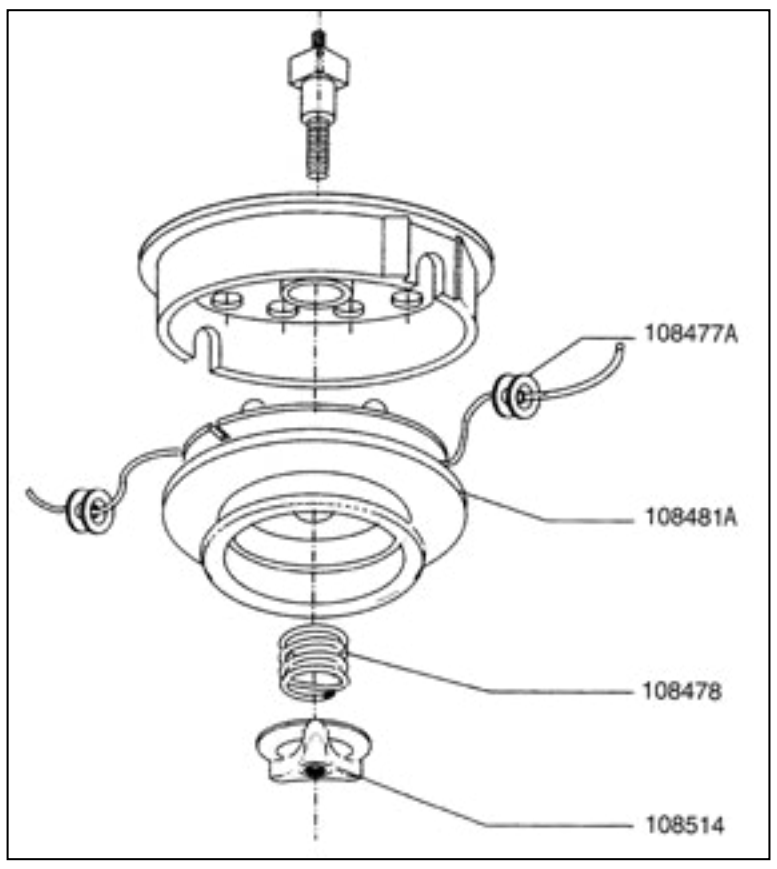
108477A
108481A
108478
108514

110982A

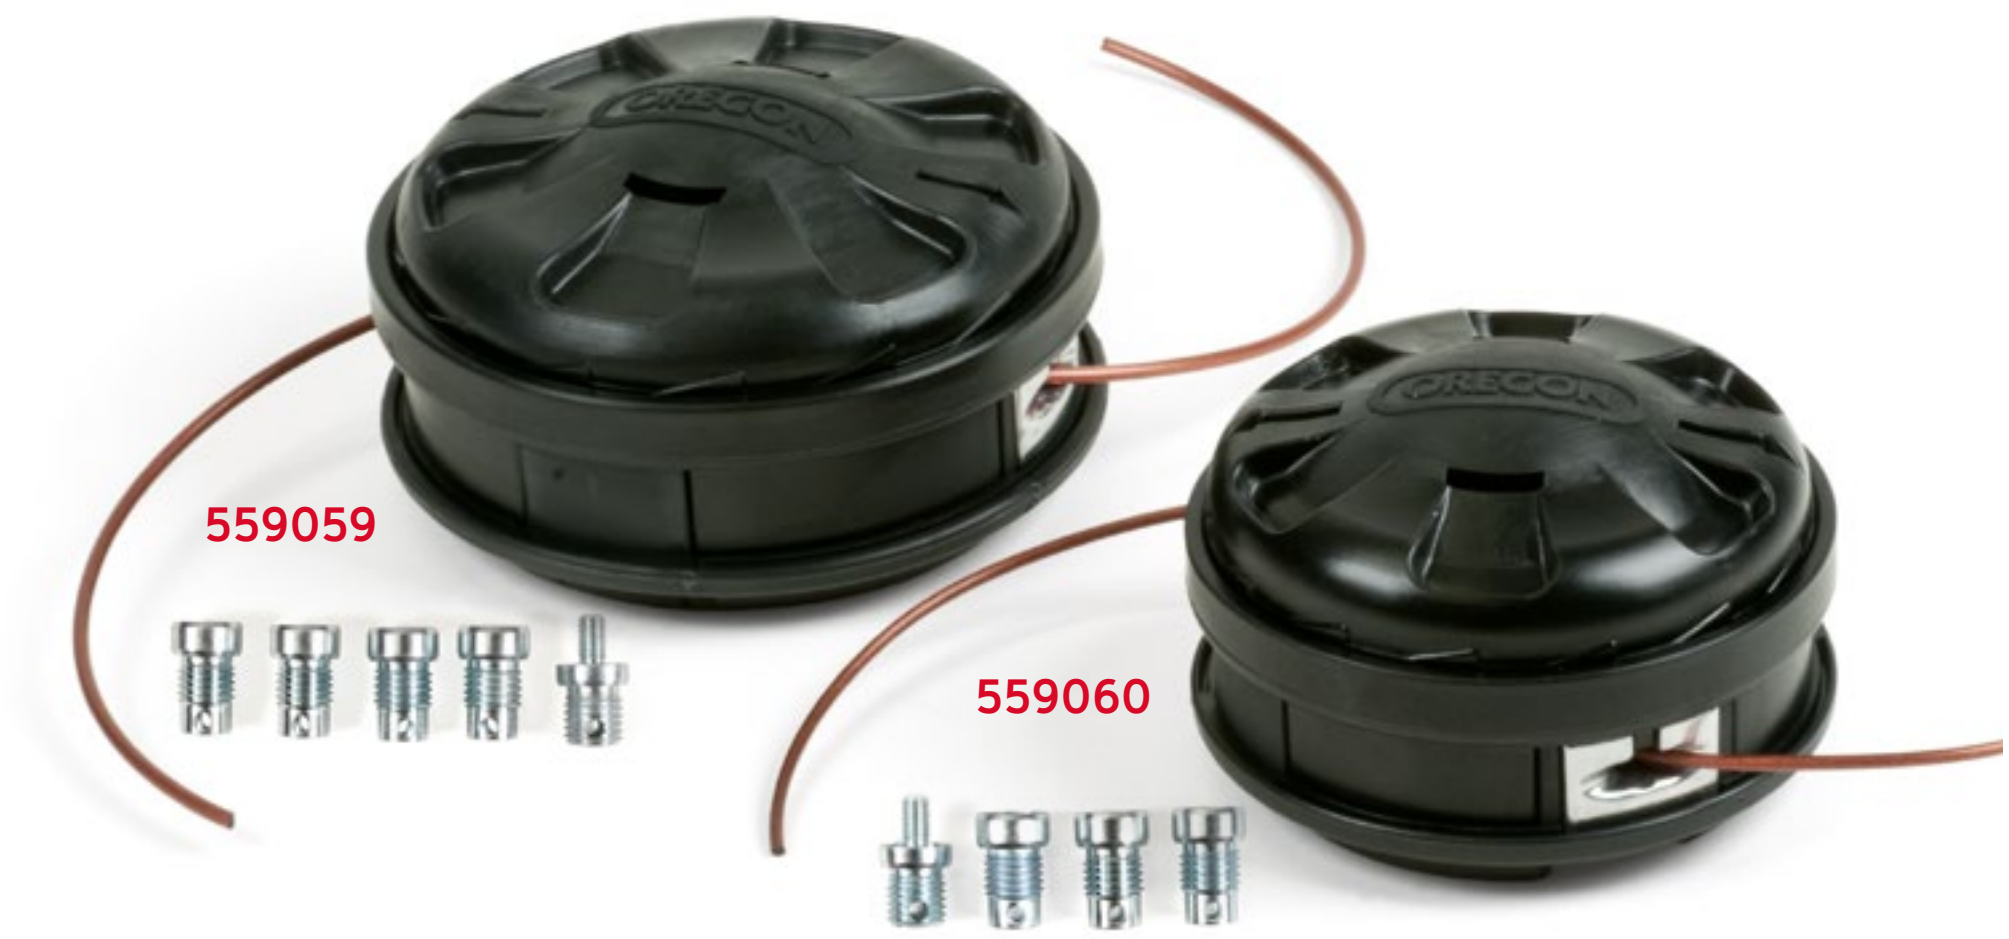
559059
559060

BETTER

≥25cc

Low grass

High grass & weeds

30" Easy Load

TAP&GO

Easy Fit ● ★ ■

Lightning Load™ heads

- Fits 90% of brushcutters
- Heavy duty heads for intensive use
- High loading capacity
- Easy fit; no need to disassemble head for mounting
- Adaptor fitting significantly reduces vibrations
- Delivered with Techni 280°
- OREGON® exclusive


❶
❷
❸
❹
130 mm
130 mm

PRODUCT NAME	OREGON	SPECIFICATIONS			
Lightning Load™ heads	559060	• Diameter 109mm • Fit most **≤33cc** brushcutters • Delivered with 4 adaptors	✓ M8 x 1.25 LHM M8 x 1.25 LHF M10 x 1.25 LHF M10 x1 LHF	● ★ ≤3mm ■ <3mm	12
	559059	• Diameter 130mm • Fit most **>33cc** brushcutters • Delivered with 4 adaptors	✓ M8 x 1.25 LHM M10 x 1 LHF M10 x 1.25 LHF M12 x 1.5 LHF M12 x 1.75 LHF	● ★ ≤4mm ■ <3.5mm	12

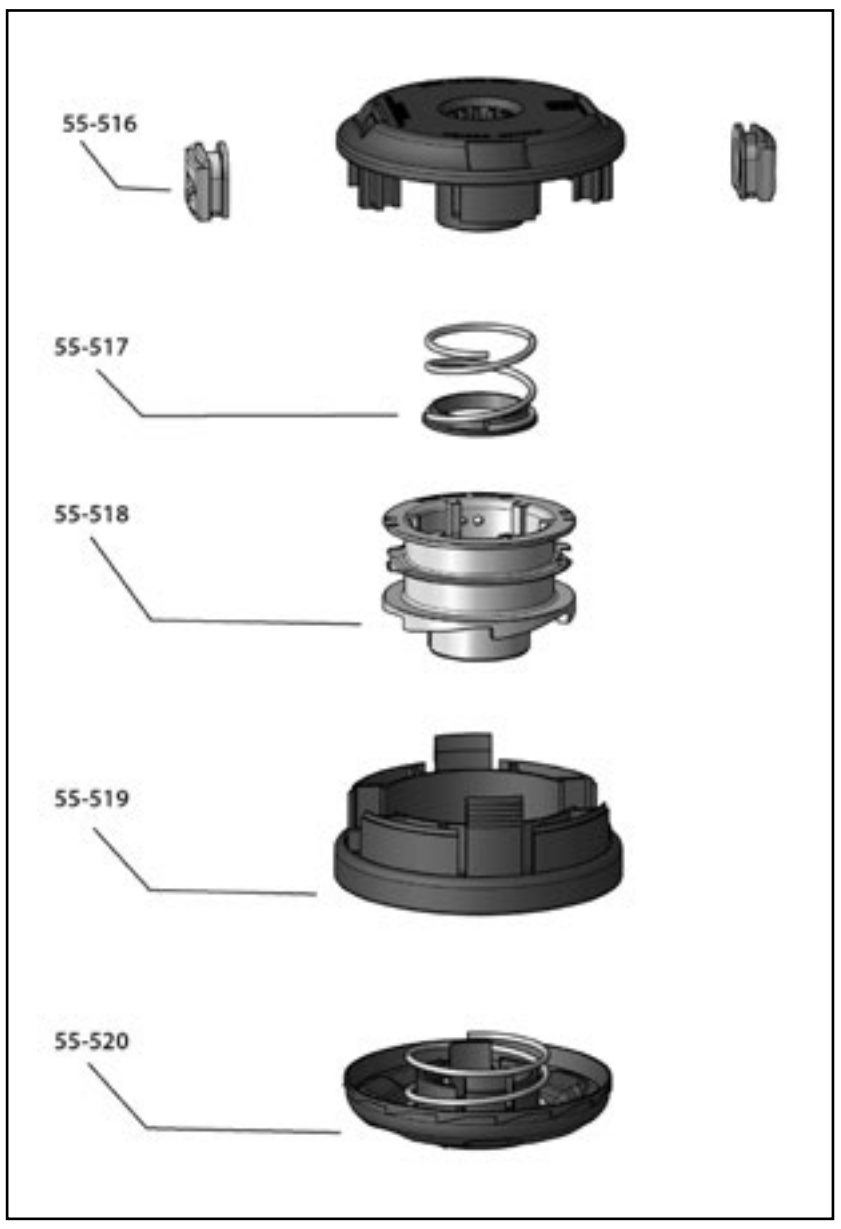
55-516
55-517
55-518
55-519
55-520

559060

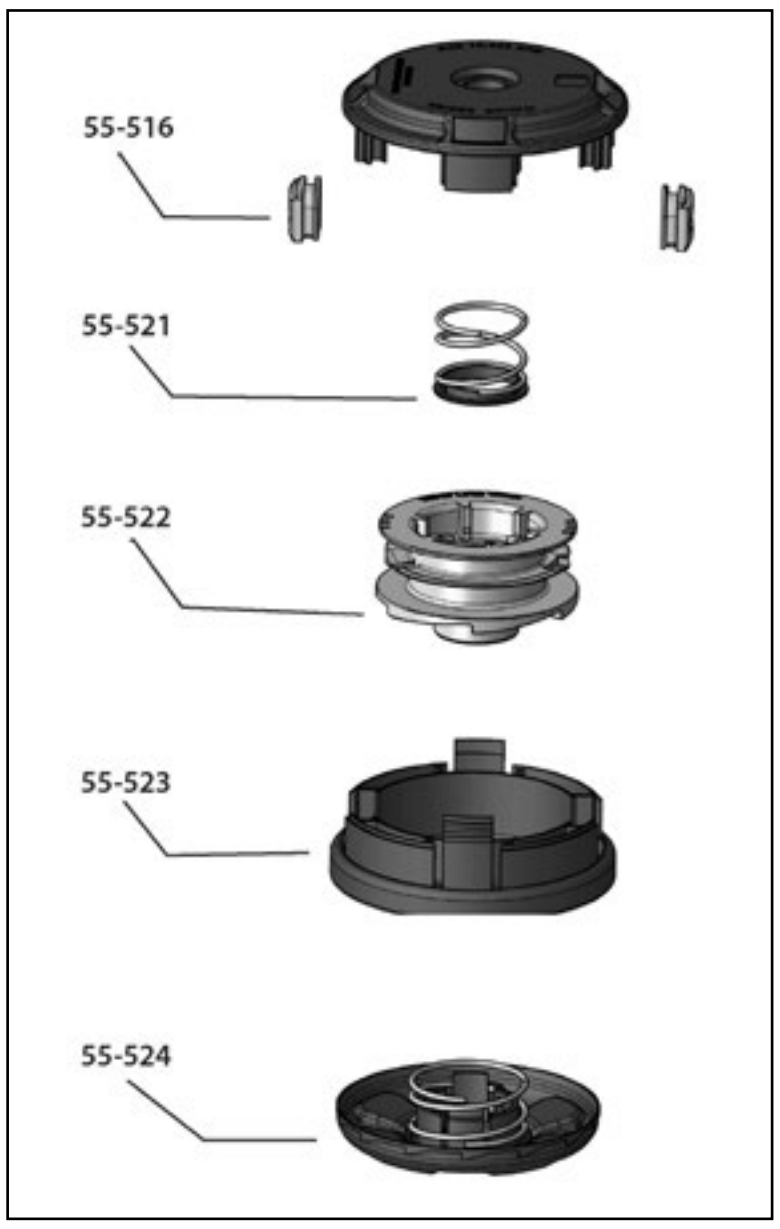
55-516
55-521
55-522
55-523
55-524

559059

Mounting

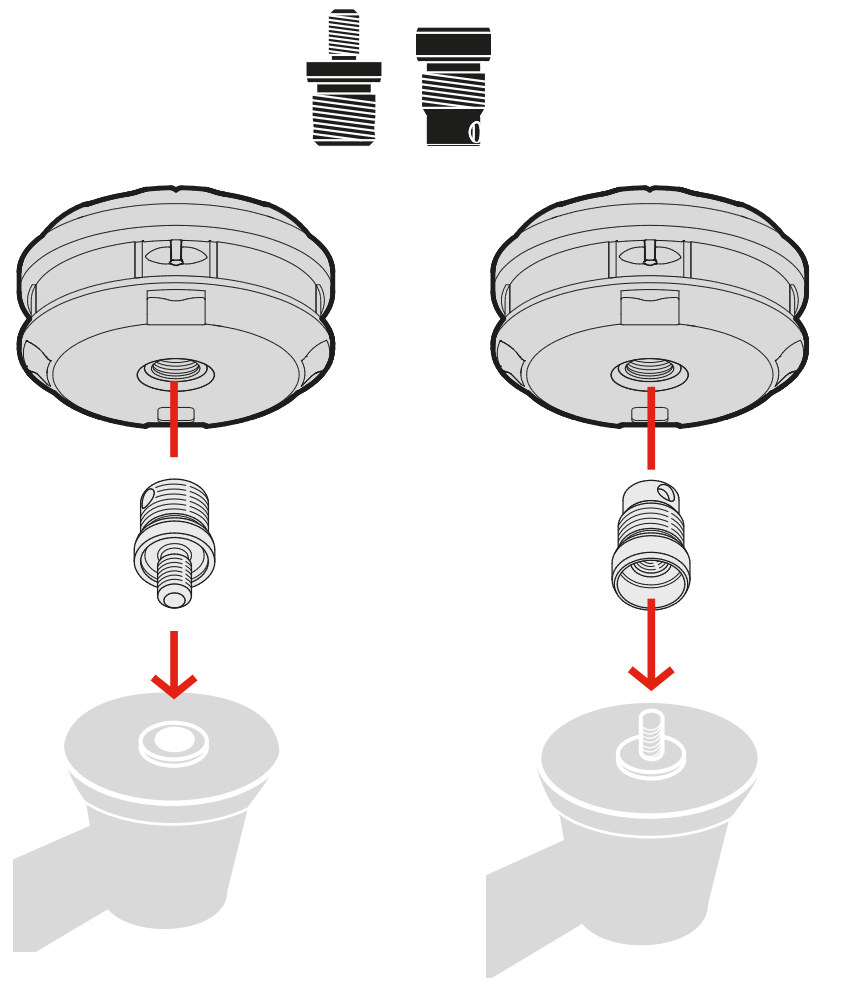

OREGON® is a registered trademark of Oregon Tool Inc.
All other marks are the property of their respective owners.

539137
539138

BETTER

≥25cc

Low grass

High grass & weeds

30"

Easy Load

TAP&GO

Easy Fit ● ★ ■

Boltless Universal heads

- Fits most brushcutters
- Heavy duty heads for intensive use
- Durable aluminium knob (539137 only)
- Wear resistant brass eyelet
- OREGON® exclusive



PRODUCT NAME	OREGON	SPECIFICATIONS			
Boltless Universal Head	539138	• Diameter 109mm • Fit most **≤33cc** brushcutters (washers included)	✗	● ★ ≤2.4mm	12
	539137	• Diameter 130mm • Fit most **>33cc** brushcutters. Mounts like a blade with no washers Durable aluminium knob	✗	● ★ ≤3.0mm	12

Mounts like a blade, no bolts

539137

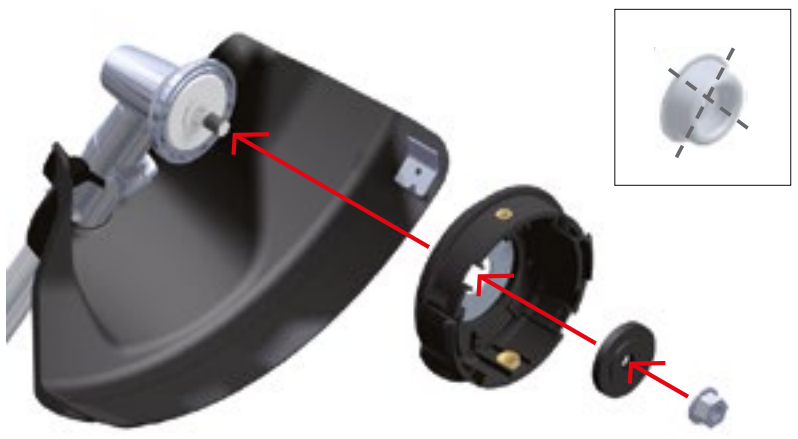

539138

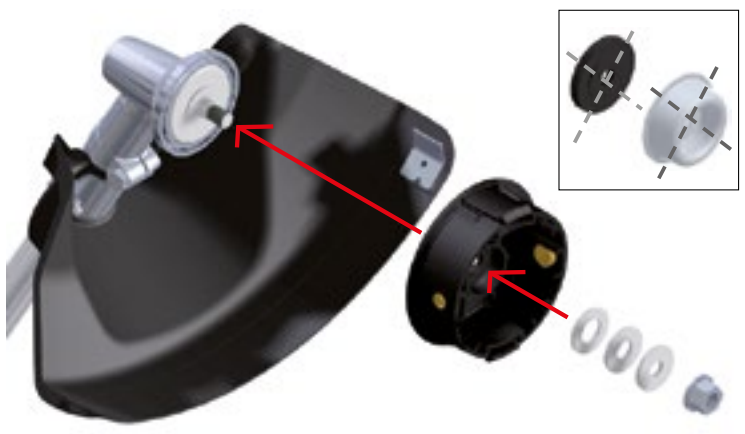

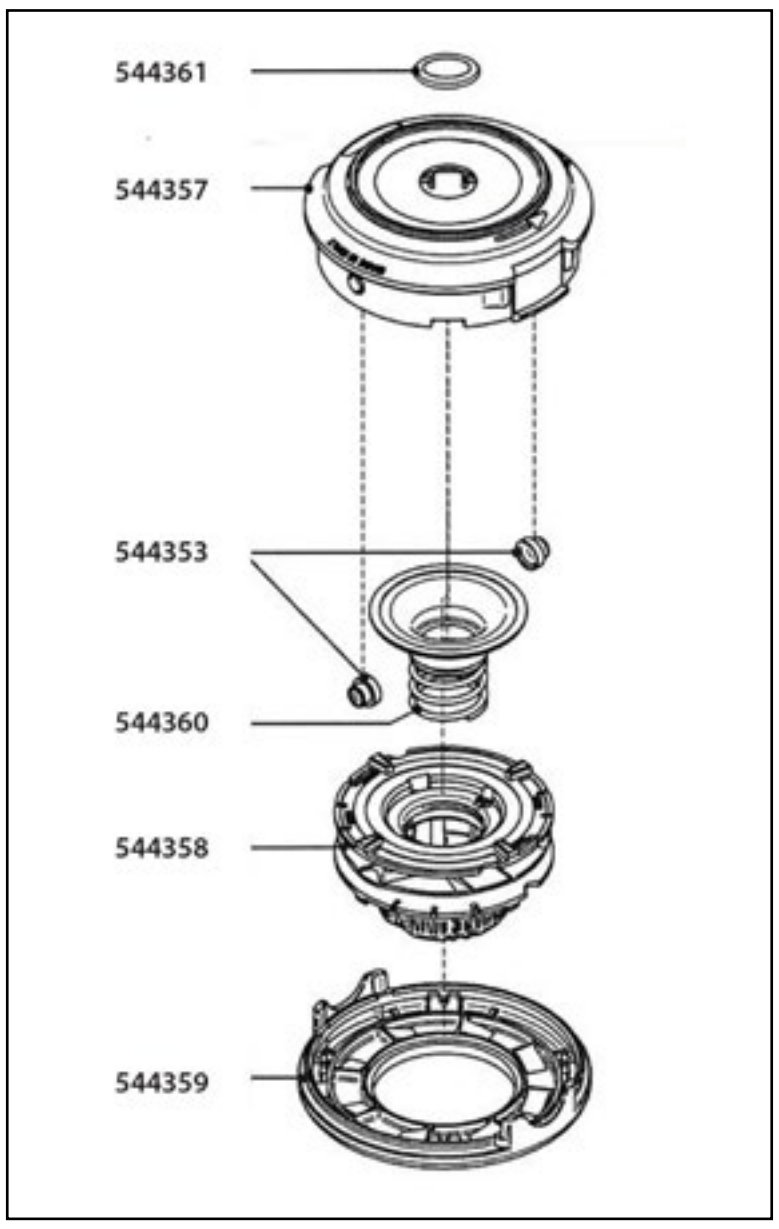
544361
544357
544353
544360
544358
544359

539137

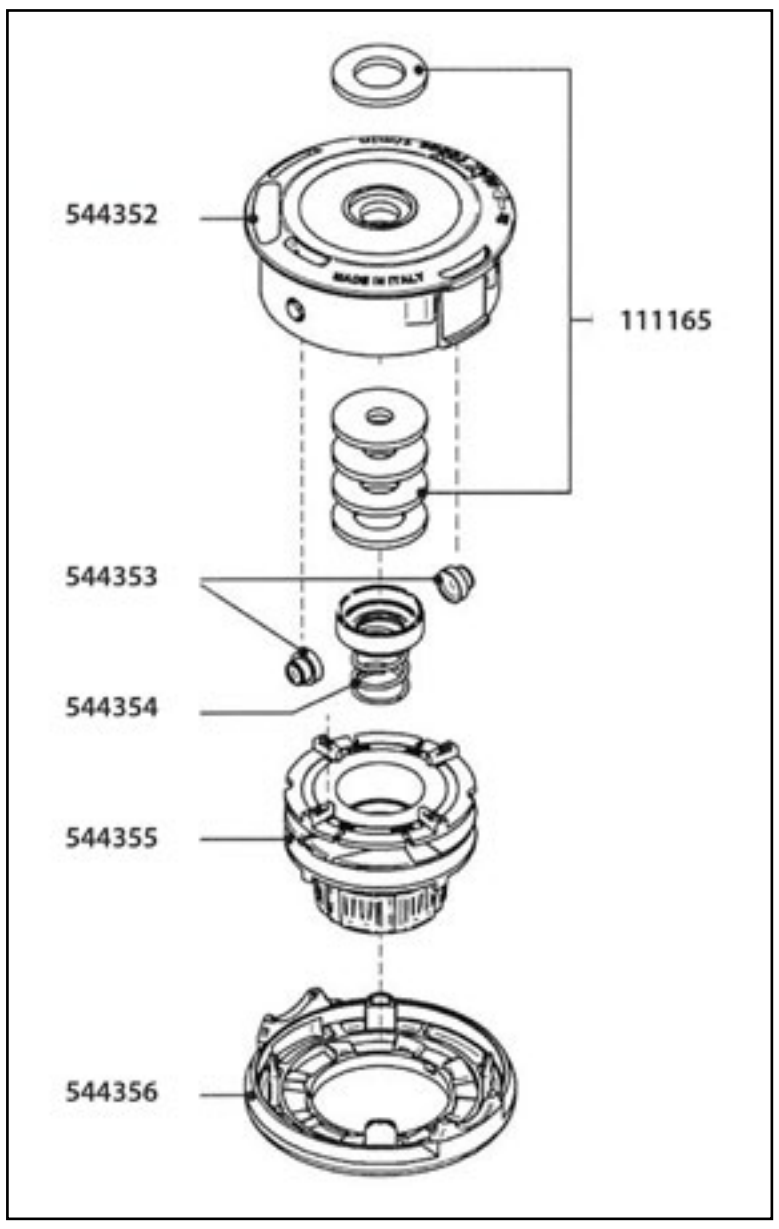
544352
111165
544353
544354
544355
544356

539138

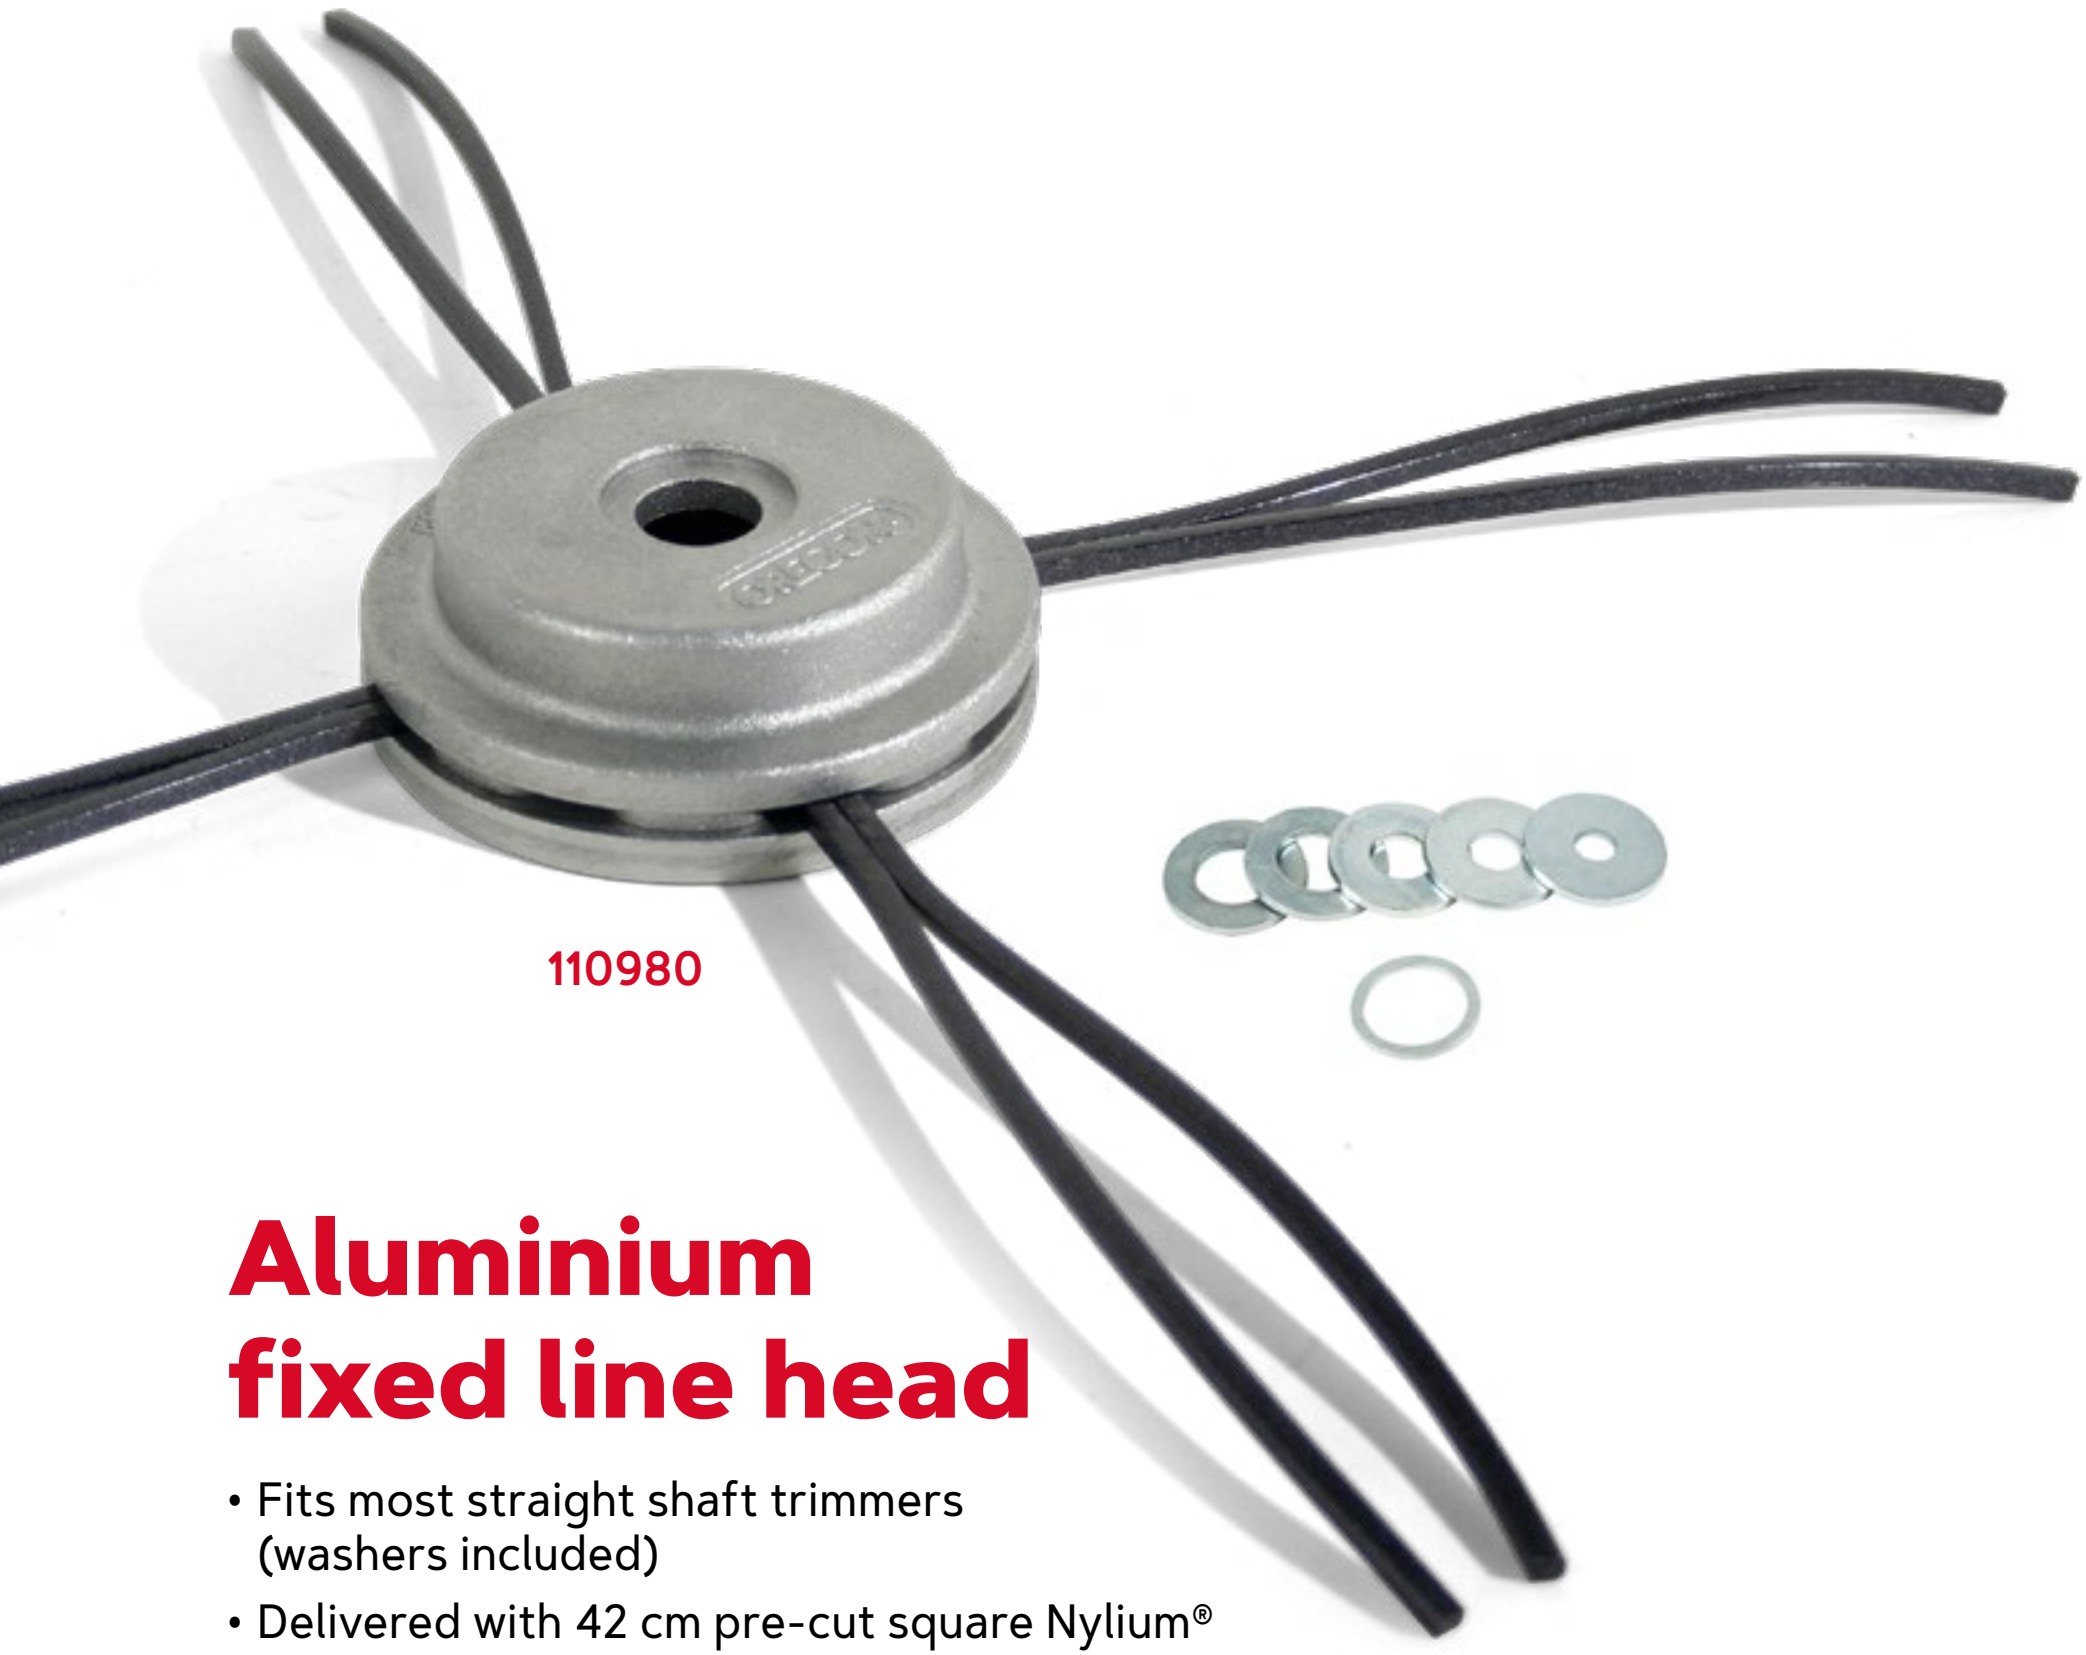

BETTER

≥25cc

High grass
& weeds

Rocky soil

MANUAL

■

Aluminium fixed line head

- Fits most straight shaft trimmers (washers included)
- Delivered with 42 cm pre-cut square Nylium® (2.55mm and 3.75mm)
- Designed to carry two or four double pieces of preformed square Nylium® line

PRODUCT NAME	OREGON			
Aluminium Fixed line head	110980	✗	■ 2.55mm or 3.75mm only	40

RECOMMENDED USE

	2,55mm		3,75mm	
≤ 35cc	✓			
36cc - 40cc	✓	✓		
41cc - 45cc	✓	✓	✓	
≥ 46cc	✓	✓	✓	✓

Nylium® Square Line

High performing trimmer line, recommended for head 110980
See page 17 for more informations.

SHAPE		LENGTH	OREGON		
■	2.55mm	42cm	295371E	Precut x100	35
■	3.75mm	42cm	295372E	Precut x50	35
■	3.75mm	42cm	514820	Precut x220	8

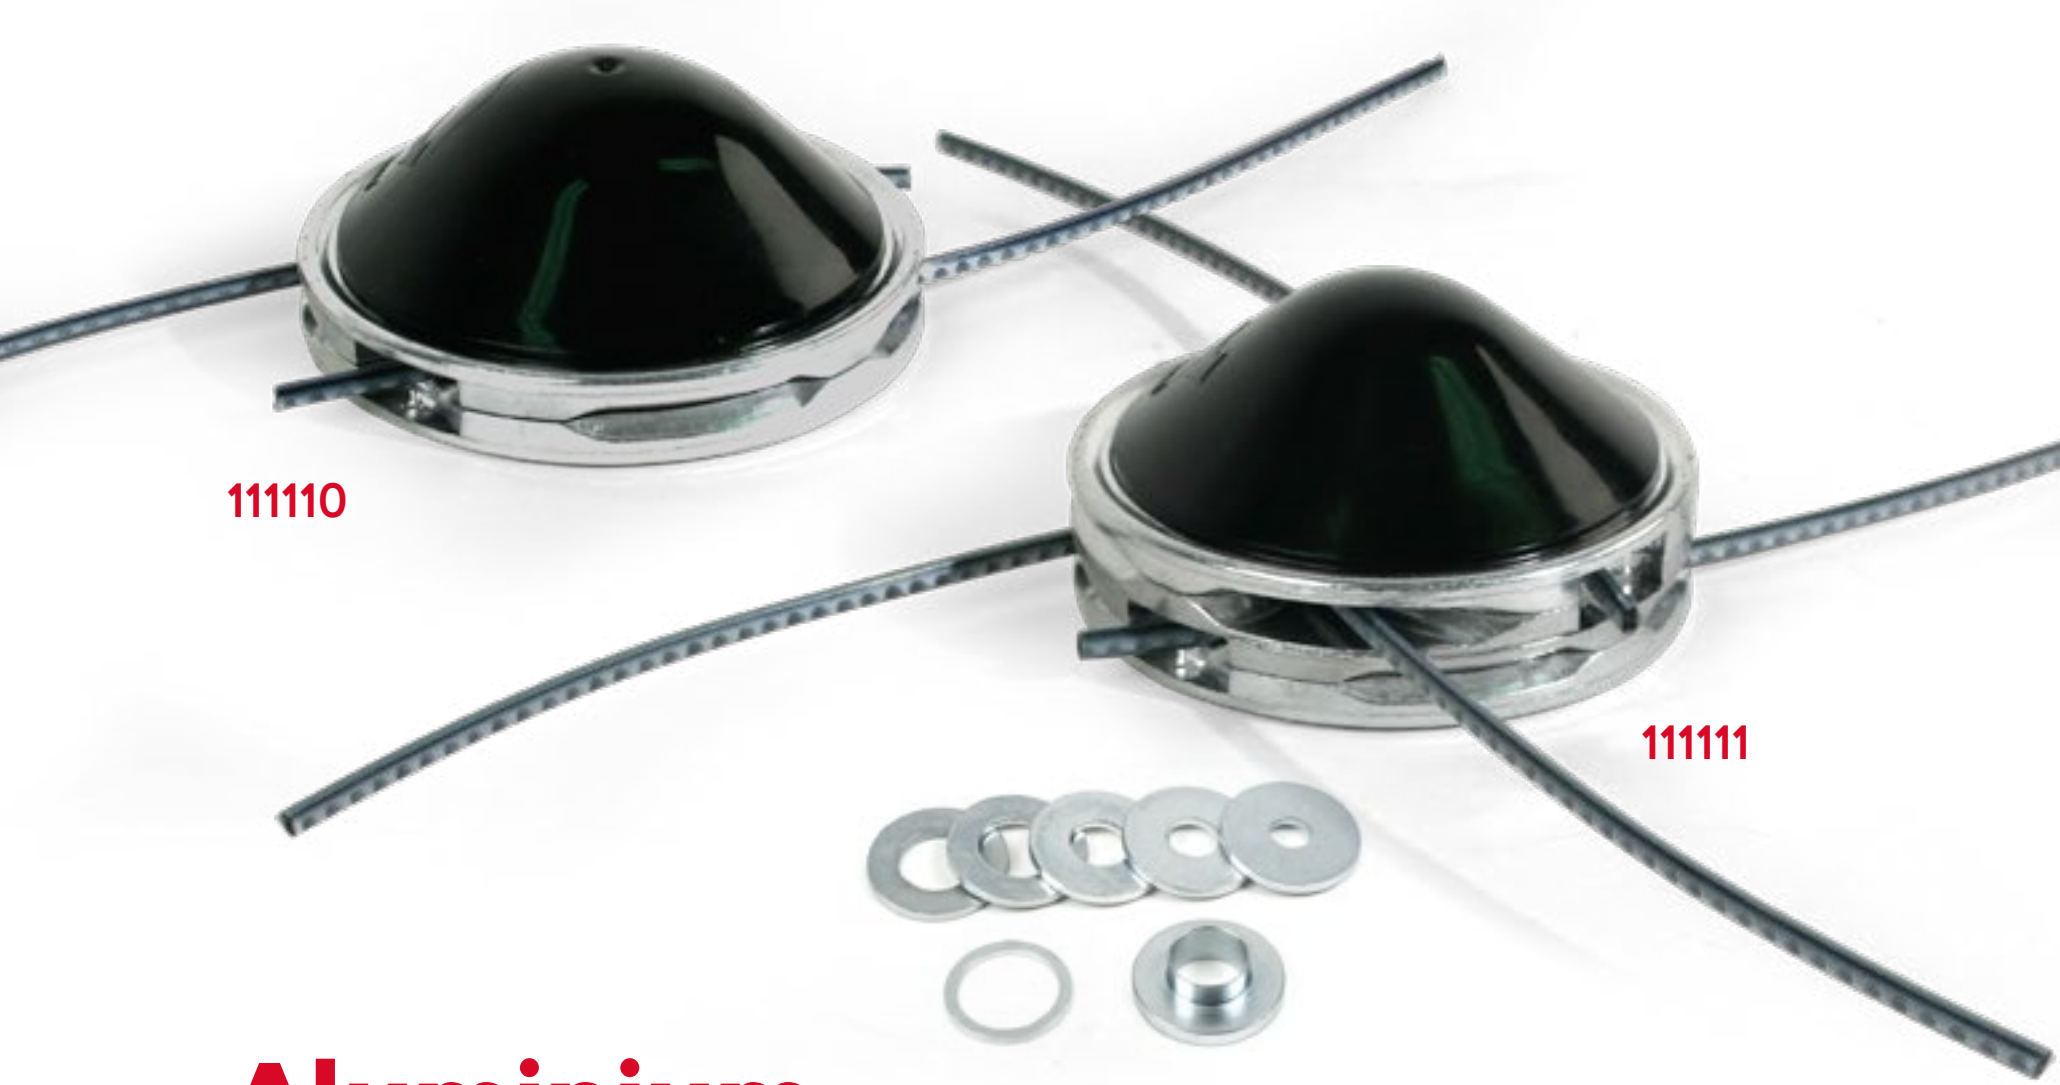
111110
111111

BEST

≥25cc

Low grass

High grass & weeds

Brambles

Rocky soil

Aluminium Jet-Fit™ heads

- Fits most straight shaft trimmers ≥ 25cc (washers included)
- Two models: two lines and four line heads
- Easy load precut lines
- Designed for intensive use
- Supplied with Flexiblade™ precut lines (3.0mm and 4mm)

MANUAL

PRODUCT NAME	OREGON	SPECIFICATIONS			
Aluminium Jet-Fit™ heads	111110	• **Two-line** Aluminium head • Fit most **≥25cc** brushcutters	✗	≤4mm	30
	111111	• **Four-line** Aluminium head • Fit most **≥40cc** brushcutters			
Aluminium Jet-Fit™ heads Contractor pack	539167	• 7x Contractor pack (2-line head) • Fit most **≥25cc** brushcutters	✗	≤4mm	6
	539168	• 5x Contractor pack (4-line head) • Fit most **≥40cc** brushcutters			
	111151	Metal Reinforced bumper available as replacement only			

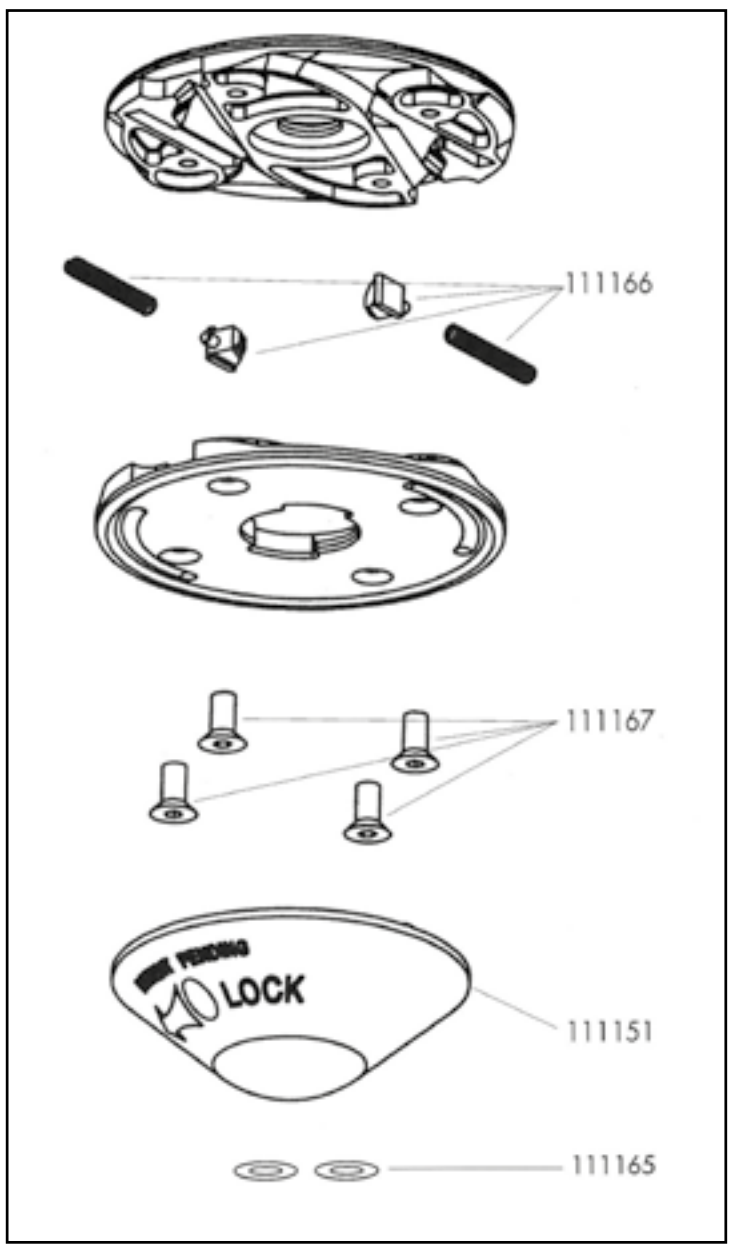
111166
111167
LOCK
111151
111165

111110

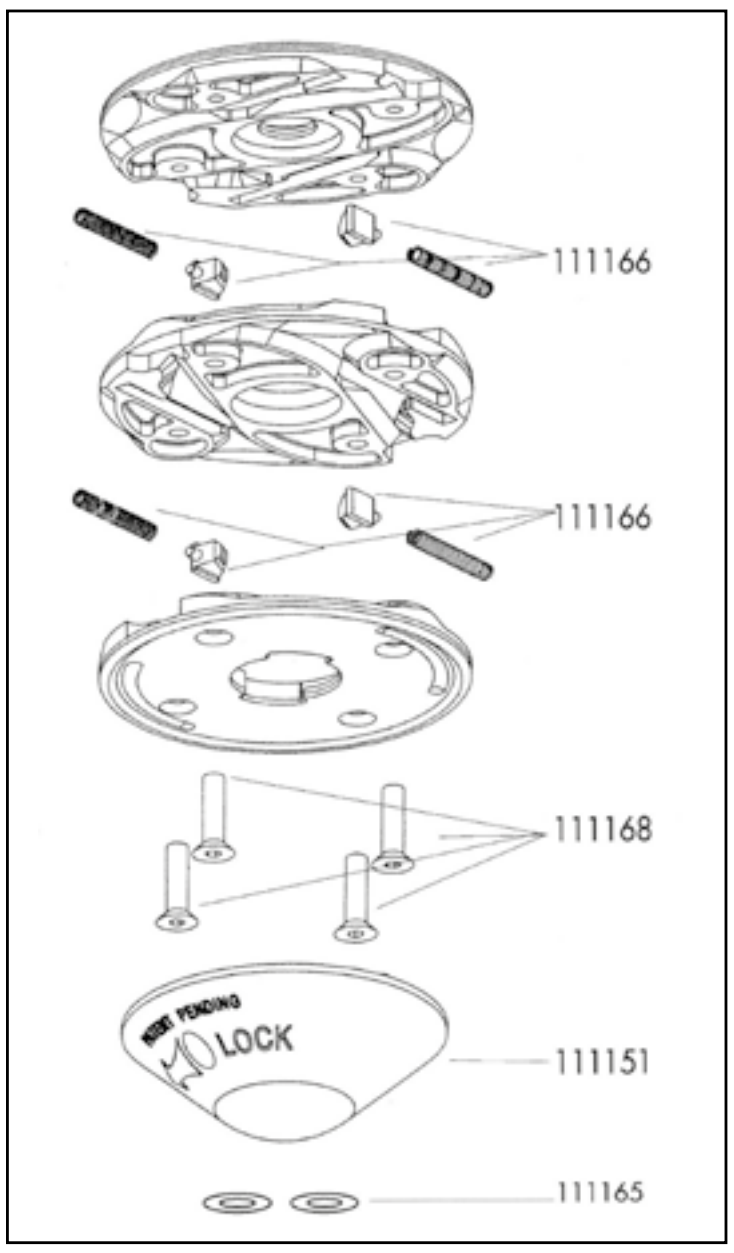
111166
111166
111168
LOCK
111151
111165

111111

Mounting

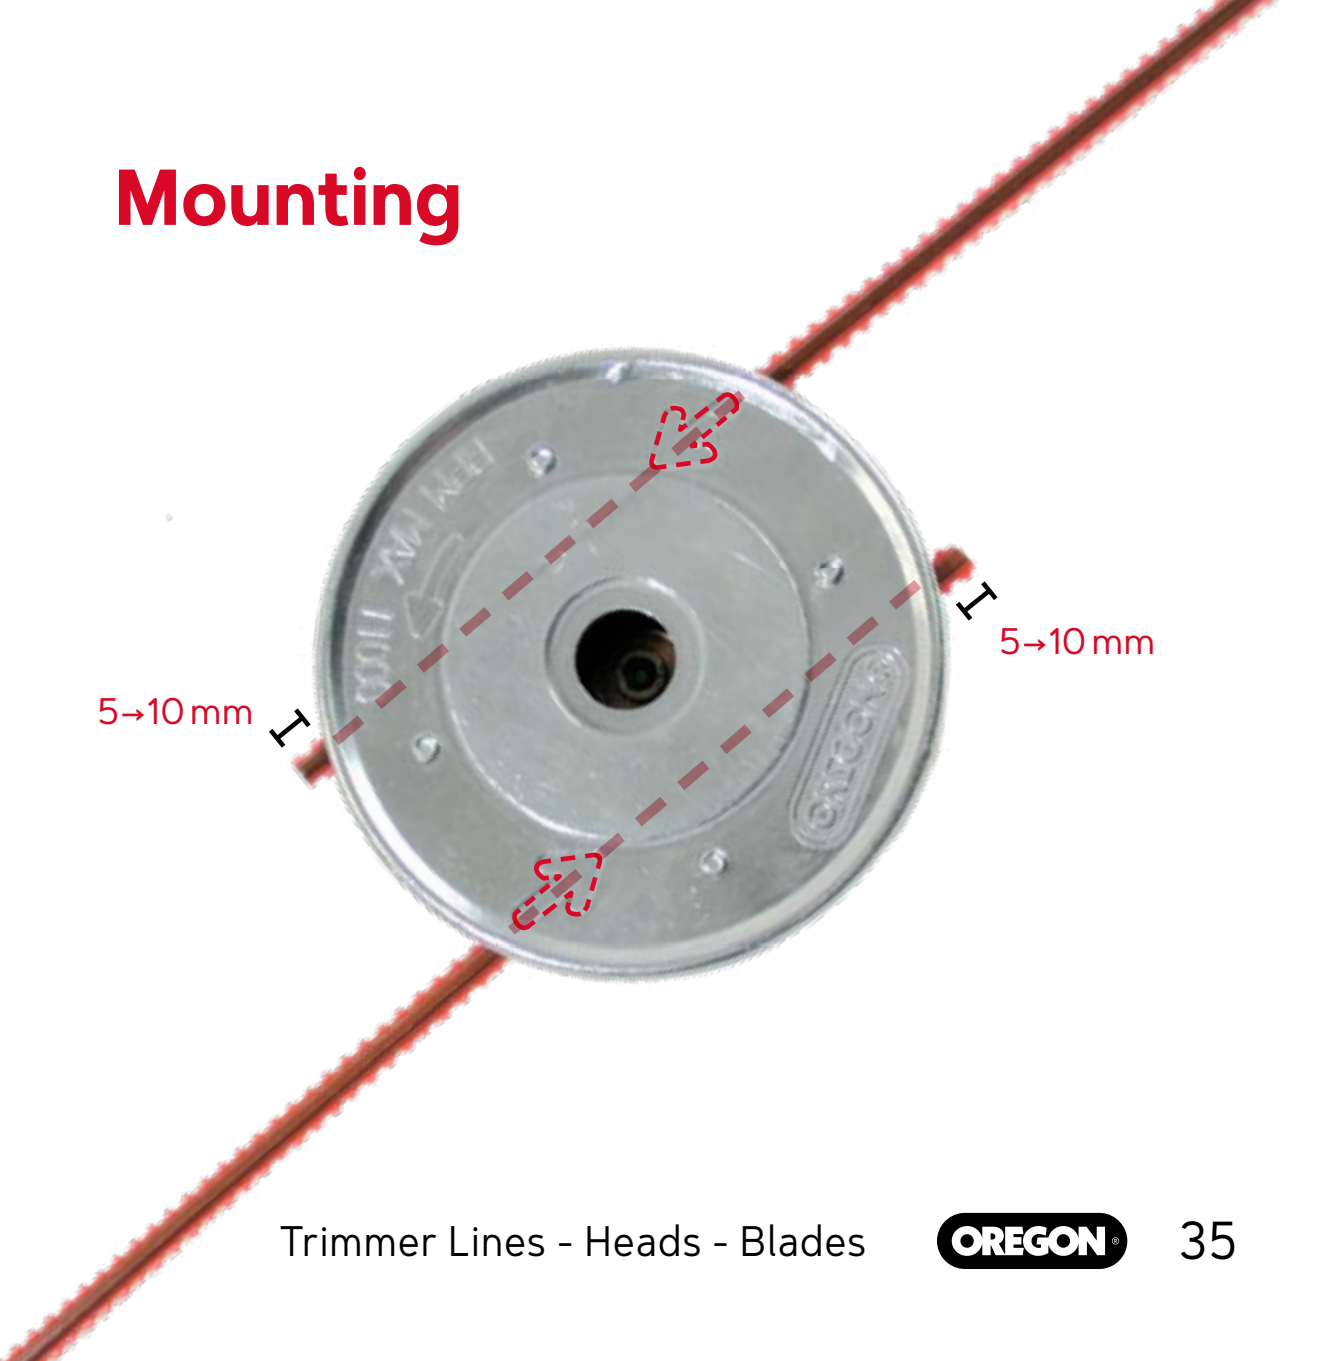
5→10 mm
5→10 mm

552636

552635

Universal trimmer guard

- Universal guards for nylon heads and steel blades
- Easy and fast assembly
- Excellent protection against flying debris and stones
- Delivered complete with metal mounting clamps
- Mounting kit to fit ø 24 – 26 – 28mm shafts included
- Removable lower guard for nylon head with nylon cutting knife

PRODUCT NAME	OREGON	SPECIFICATIONS	📦
Universal trimmer guard	552635	• Diameter 380mm • Fit most **≤33cc** brushcutters	40
	552636	• Diameter 420.0mm • Fit most **>33cc** brushcutters	

OREGON®

BRUSHCUTTER BLADES

Brushcutter Blades

- Universal brushcutter blade
- Reduce range by half - easy selection on application
- Delivered complete with reducer ring to fit ALL brushcutters
- High quality hardened steel - 42-48 HRC
- Compliant with European directive 2006/42/EC and ISO 7113
- Red color provides better visibility in dense vegetation
- European made


Low grass

High grass & weeds

Brambles

FITS ALL BRUSHCUTTERS

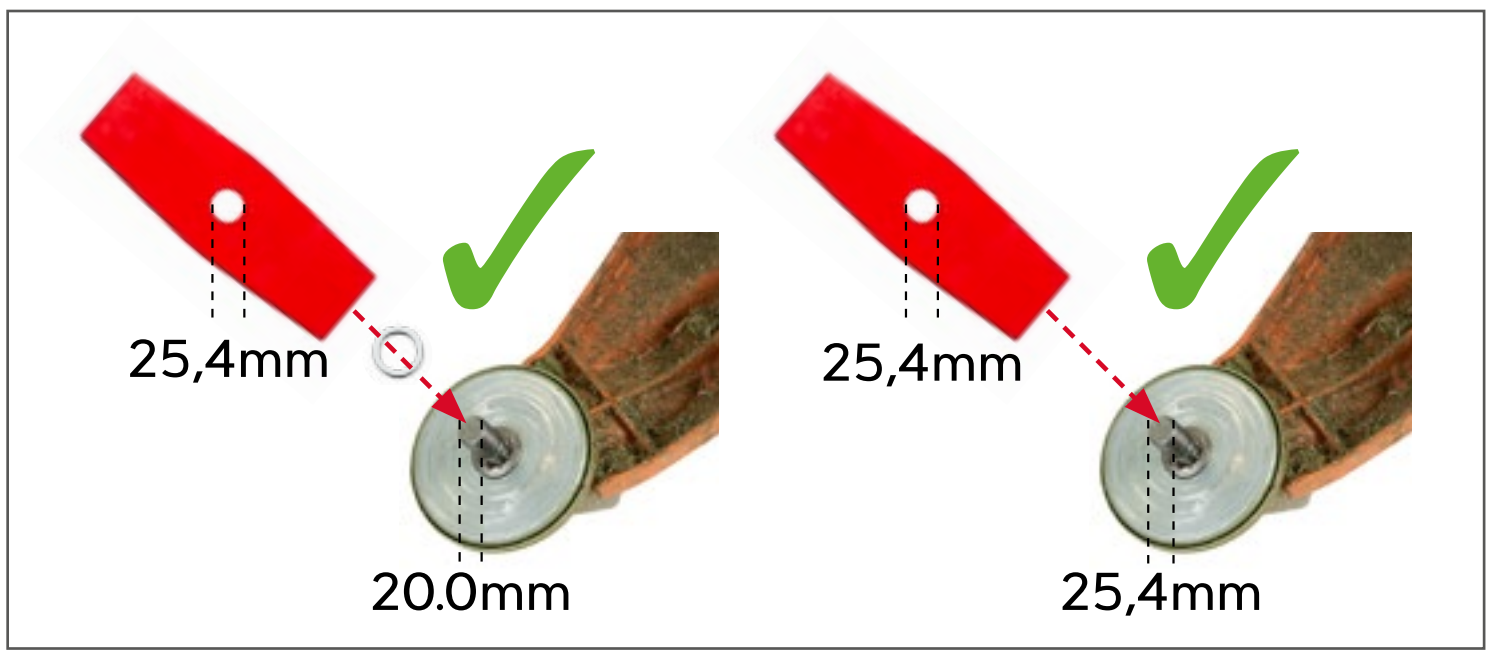

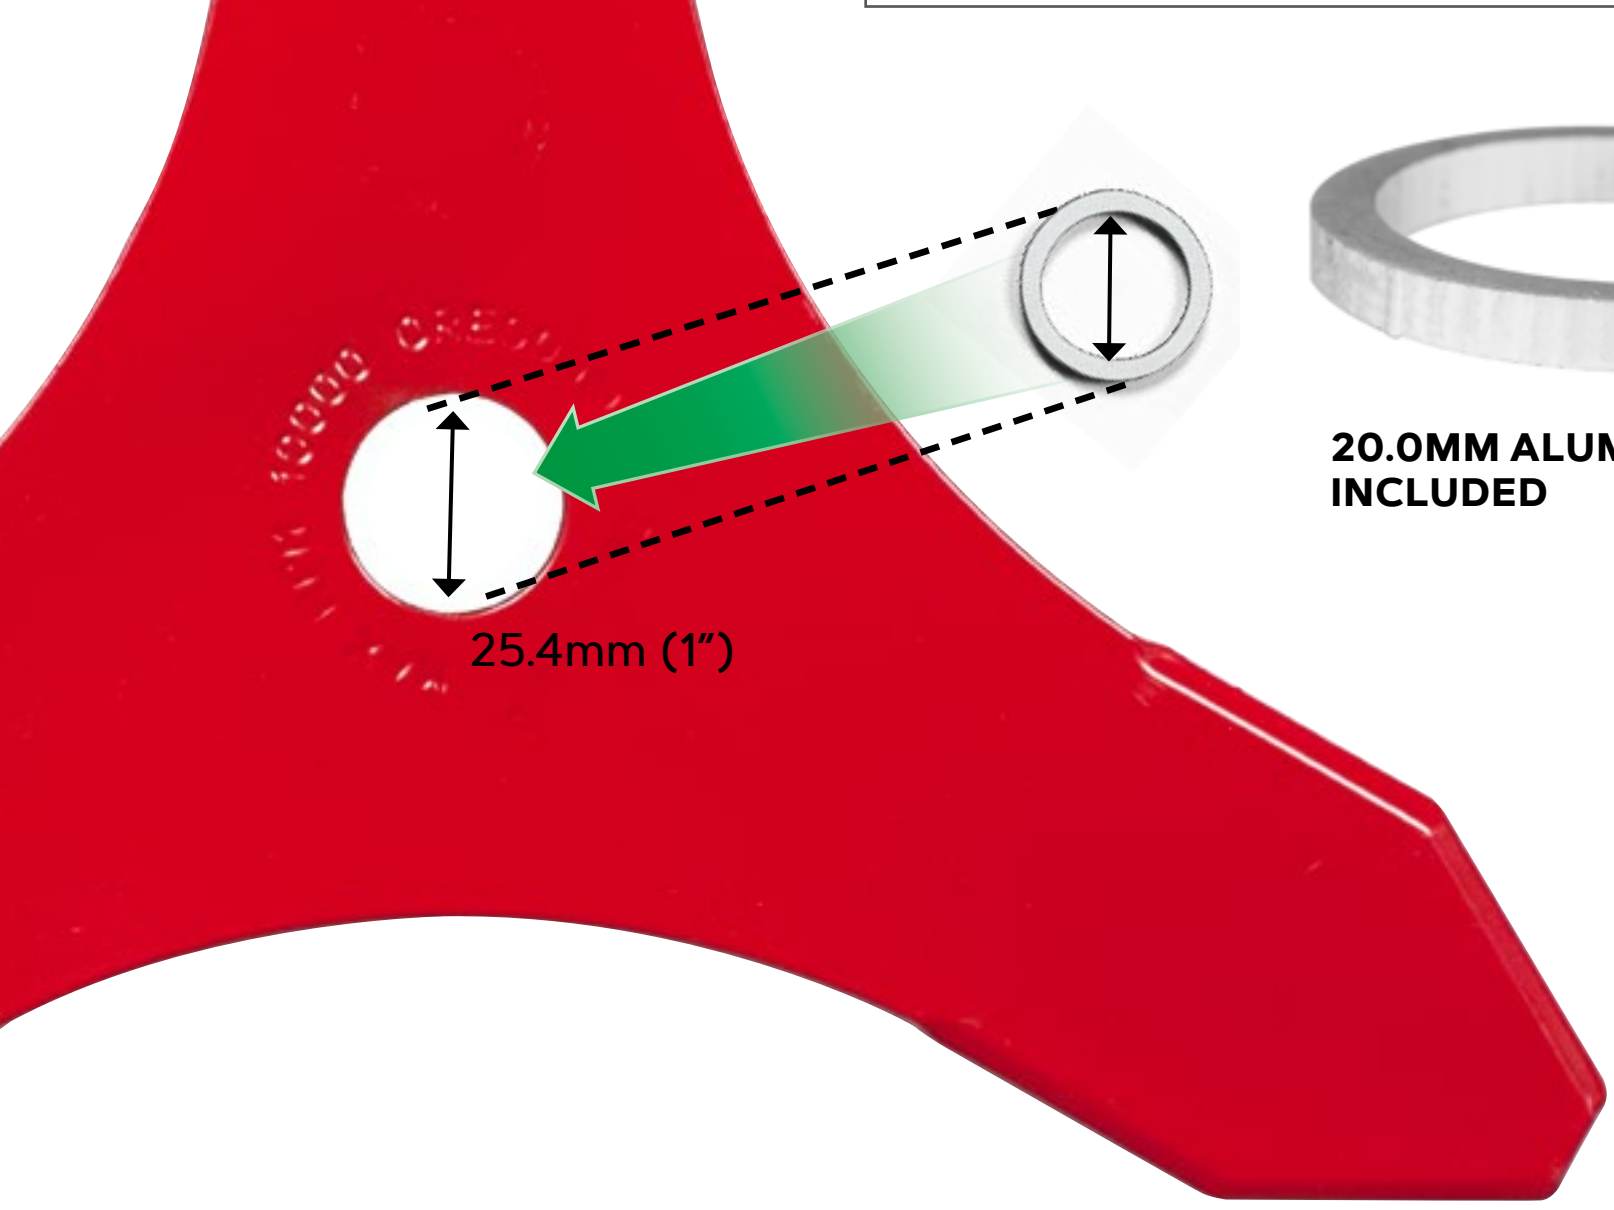

20.0MM ALUMINIUM ADAPTOR INCLUDED

AD301-832EN

BLADE SELECTION SIDE PANEL :
(available in local language upon request)

ONE FOR ALL
Brushcutter blades
FITS ALL BRUSHCUTTERS

Grass
Small areas
OREGON® recommends

Soft growth
Large area
OREGON® recommends

Tougher growth
Nettles, coarse grass, reeds...
OREGON® recommends

Brushwood
Low & dense vegetation
OREGON® recommends

Brushwood
High & dense vegetation
OREGON® recommends

FITS ALL BRUSHCUTTERS

OREGON
www.oregonproducts.com

GRASS CUTTING BLADES - SMALL AREAS

				OREGON	
255mm	20.0mm / 25,4mm	2	1,4mm	295491-0	10



MOWING BLADES - LARGE AREAS OF SOFT GROWTH

				OREGON	
255mm	20.0mm / 25,4mm	3	1,8mm	295493-0	10
255mm	20.0mm / 25,4mm	3	1,4mm	295494-0	10
230mm	20.0mm / 25,4mm	4	1,4mm	295500-0	10
255mm	20.0mm / 25,4mm	4	1,4mm	295501-0	10





MOWING BLADES FOR TOUGHER GROWTH - NETTLES, COARSE GRASS, REEDS, AND MORE

				OREGON	
230mm	20.0mm / 25,4mm	8	1,4mm	295502-0	10
255mm	20.0mm / 25,4mm	8	1,4mm	295503-0	10



BRUSHWOOD BLADES : LOW AND DENSE VEGETATION

				OREGON	
255mm	20.0mm / 25,4mm	3	3.0mm	295496-0	10
300mm	20.0mm / 25,4mm	3	3.0mm	295497-0	10
350mm	20.0mm / 25,4mm	3	4mm	295498-0	10
300mm	20.0mm / 25,4mm	3	4mm	295499-0	10



SHREDDER BLADES : HIGH AND DENSE VEGETATION

				OREGON	
300mm	20.0mm / 25,4mm	2	3.0mm	295504-0	10
300mm	20.0mm / 25,4mm	2	4mm	295505-0	10
300mm	20.0mm / 25,4mm	3	3.0mm	295507-0	10
300mm	20.0mm / 25,4mm	3	4mm	295508-0	10





Brushcutter Blades

- The range includes the most popular shapes or a wide range of applications
- European made
- Unbranded and delivered in bulk
- Competitive price, ideal for:
- Replacement in the workshop
- Professionals who go through several blades every season


Low grass

High grass
& weeds

Brambles

GRASS CUTTING BLADES - SMALL AREAS

				OREGON
255mm	25,4mm	2	1,4mm	559019
300mm	25,4mm	2	1,6mm	559020
300mm	25,4mm	2	2,5mm	P6129300001
350mm	25,4mm	2	1,8mm	P6102350001



MOWING BLADES FOR TOUGHER GROWTH - NETTLES, COARSE GRASS, REEDS, AND MORE

				OREGON
255mm	25,4mm	8	1,8mm	P618825500101



BRUSHWOOD BLADES : LOW AND DENSE VEGETATION

				OREGON
250mm	25,4mm	3	1,8mm	P6191251001
255mm	20.0mm	3	3.0mm	559023
255mm	25,4mm	3	3.0mm	559024
300mm	20.0mm	3	3.0mm	559025
300mm	25,4mm	3	3.0mm	559026
350mm	20.0mm	3	4.0mm	559027
350mm	25,4mm	3	4.0mm	559028
300mm	20.0mm	3	4.0mm	559029
300mm	25,4mm	3	4.0mm	559030



SHREDDER BLADES : HIGH AND DENSE VEGETATION

				OREGON
270mm	20.0mm	2	4.0mm	P6124270002
270mm	25,4mm	2	4.0mm	P6124270001
315mm	20.0mm	2	4.0mm	P6132315002
315mm	25,4mm	2	4.0mm	P6132315001
205mm	25,4mm	2	2,5mm	P6129205001
250mm	25,4mm	2	2,5mm	P6129250003



OREGON® is a registered trademark of Oregon Tool Inc.
All other marks are the property of their respective owners.

Clearing Saw blades

- For use with brushcutters / clearing saws.
- Ideal for thickets and stems up to 20 cm in diameter
- Easy to sharpen with a 7/32" (5,5mm) round file.

				OREGON	SPECIFICATIONS	
200mm	20.0mm	22	1,5mm	**110976**	• Recommended for **30cc** and larger clearing saws • EIA Type	10
	25,4mm	22	1,5mm	**110975**		
225mm	20.0mm	24	1,8mm	**110978**		
	25,4mm	24	1,8mm	**110977**		
200mm	20.0mm	22	1,5mm	**110972**	• Recommended for **45cc** and larger clearing saws • Maxi Type	10
	25,4mm	22	1,5mm	**110971**		
225mm	20.0mm	24	1,8mm	**110974**		
	25,4mm	24	1,8mm	**110973**		

75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged.
Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents.
Engineering is the bedrock of our reputation.

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C008551

PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2024 - AD100-011-EN

OREGON
PowerCut

Discover more of our products at
OregonProducts.com

OREGON®

LAWNMOWER BLADES

LB_1.1
EN/EUR

WHEN OUTSTANDING QUALITY AND INNOVATION COME TOGETHER

Oregon blades are produced in several factories, including the one in Civray, France, under strict quality requirements to ensure market-leading quality, performance, and durability.

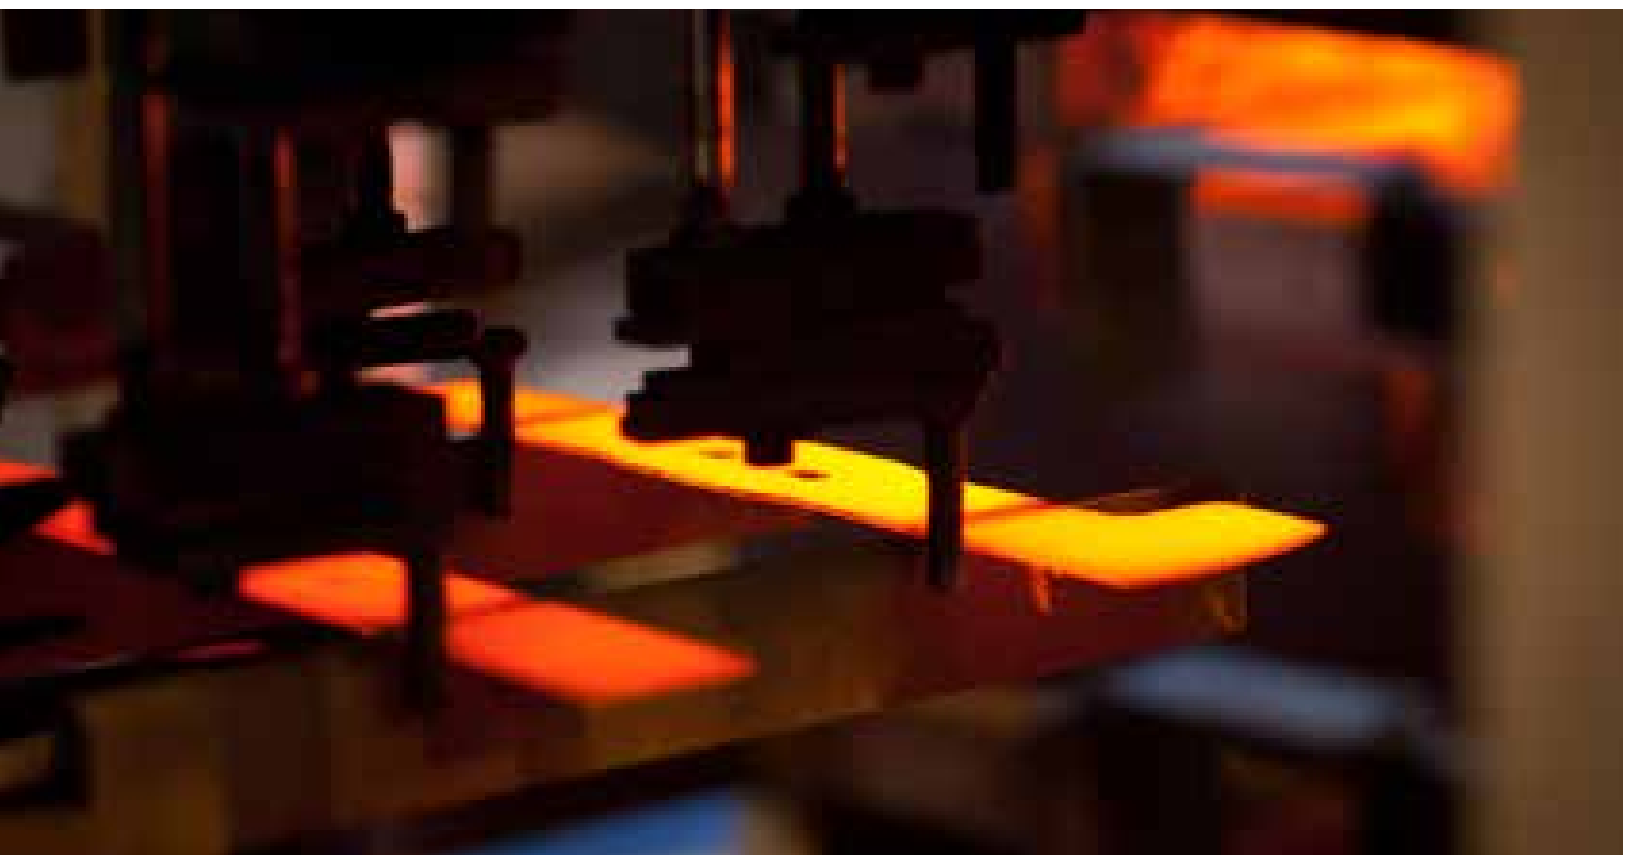

Throughout the blade manufacturing process, 26 key characteristics are checked to ensure our blades deliver the quality you expect from an Oregon blade.

- Balance – We ensure all blades are optimally balanced to ensure superior performance.
- Material Integrity – We consistently check our blades to ensure their material delivers tough, durable and long-lasting performance.
- Sharpness – Each blade meets our rigid standards for sharpness and quality.
- Performance – Extensive product testing ensures every blade performs to the highest level.
- Center-Mounting Hole – Our blades fit with exact OE requirements.
- Traceability – Each and every blade produced by our factory has full traceability back to the mill where the steel was produced.

Oregon Blade
Production plant,
Civray, France.

LAWNMOWER BLADE RANGES

One For All lawnmower blades

- Premium quality blade
- Universal fit: reduced inventory
- 1 blade fits many lawnmowers
- Heavy and medium duty applications
- Mulching, bagging and side discharge

G-SERIES BLADES

Premium Gator® lawnmower blades

- Premium quality blade
- Heavy duty applications
- Superior mulching, bagging and side discharge
- Less sharpening
- Longer lifetime

OEM replacement lawnmower blades

- High quality blade
- Exact OEM replacement
- Extensive range

GATOR® BLADE THE UNMATCHED STANDARD.

Our innovation leads the industry — the standard all other mulchers are measured against. Often imitated, but never matched. Gator® blades lift and circulate clippings for a finer mulch and a cleaner cut. Period.
With relentless quality control, we guarantee this original lives up to its name, time after time.

Radius-Cut End
All Gator blades feature progressive geometry to maintain maximum cutting length throughout the life of the blade.



High-Lift
The aggressive blade angle increases air flow to push debris up-and-out for superior mulching, bagging or side discharge.



Gator® Mulcher
Blades lift and circulate cuttings for a finer mulch and a cleaner, more efficient cut.



Extended Cutting Length
Up to twice the cutting length optimizes the cutting efficiency with each revolution.



Thicker & Wider Steel Stock
Greater width and thickness extends blade life and allows the high-lift arch to improve bagging and mulching.

G3

Engineered with the core Gator mulching features that make them a great choice for normal and abrasive conditions.

- **High-Lift**
- **Gator® Mulcher**

G5

An optimum combination for a wide range of mower units. Features a high-lift contour as well as two additional, premium features to improve performance and retain blade sharpness.

- **High-Lift**
- **Gator® Mulcher**
- **Extended Cutting Length**
- **Fusion® Technology**

G6

Heavy-duty blades designed for commercial applications and to withstand punishing conditions, while offering the full-range of features that make Gator series blades unique.

- **High-Lift**
- **Gator® Mulcher**
- **Extended Cutting Length**
- **Fusion® Technology**
- **Thicker & Wider Steel Stock**

STAY SHARP LONGER

Fusion® Technology

Tungsten carbide is fused into our G5 and G6 blades during the manufacturing process – creating an ultra-hard layer at the cutting edge and increasing the time between sharpenings.

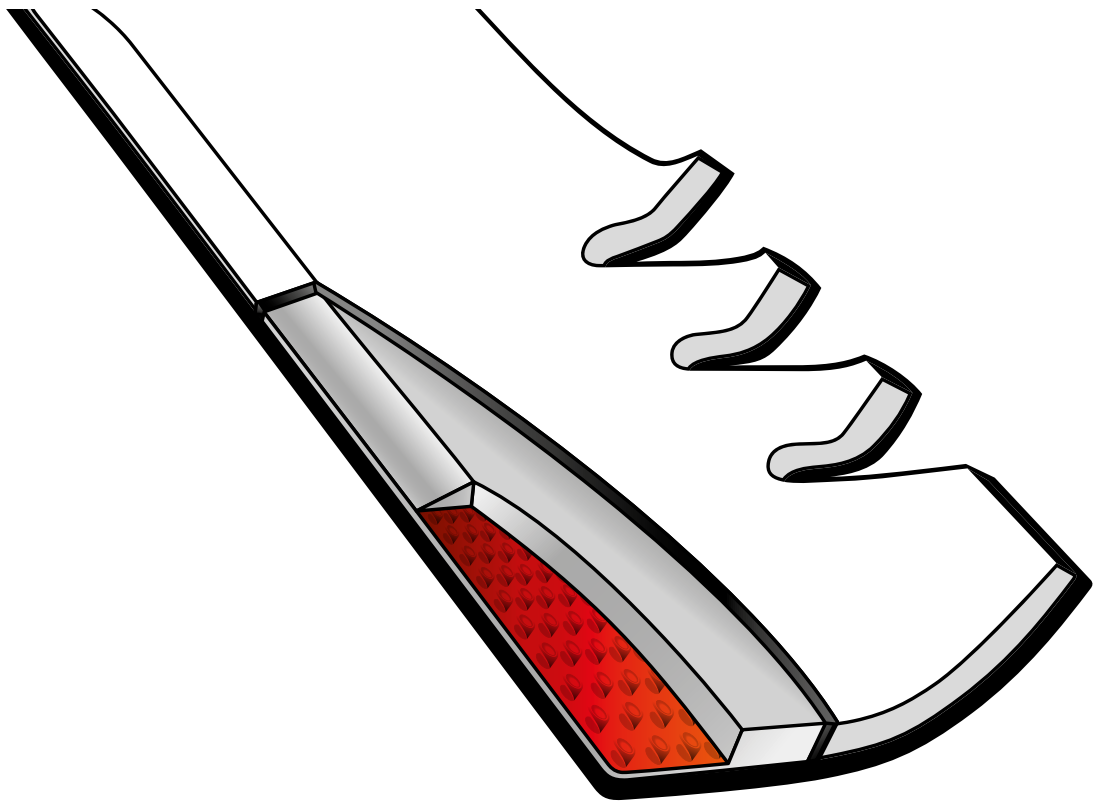

ONE BLADE FITS ALL

ONE FOR ALL

- Premium quality blade
- Universal fit: reduced inventory
- 1 blade fits many lawnmowers
- Heavy and medium duty applications
- Mulching, bagging and side discharge

ONE-FOR-ALL UNIVERSAL LAWN MOWER BLADES RETAIL PACK	INCHES	CM	OREGON	
GATOR® MULCHER STRAIGHT BLADES			ONE FOR ALL	
	16"	40cm	69-239-0	6
	17"	42.5cm	69-241-0	6
	18"	45.1cm	69-242-0	6
	19"	47.6cm	69-243-0	6
	20"	50.2cm	69-244-0	6
	21"	52.7cm	69-245-0	6
	22"	55.2cm	69-246-0	6
GATOR® MULCHER FORMED BLADES			ONE FOR ALL	
	18"	45.1cm	69-263-0	6
	19"	47.6cm	69-264-0	6
	20"	50.2cm	69-265-0	6
	21"	52.7cm	69-266-0	6
	22"	55.2cm	69-267-0	6

ONE-FOR-ALL UNIVERSAL LAWN MOWER BLADES RETAIL PACK

	INCHES	CM	OREGON	
STRAIGHT BLADES			ONE FOR ALL	
	15″	37.5cm	69-247-0	6
	16″	40cm	69-248-0	6
	17″	42.5cm	69-249-0	6
	18″	45.1cm	69-258-0	6
	19″	47.6cm	69-259-0	6
	20″	50.2cm	69-260-0	6
	21″	52.7cm	69-261-0	6
	22″	55.2cm	69-262-0	6
FORMED BLADES			ONE FOR ALL	
	15″	37.5cm	69-250-0	6
	16″	40cm	69-251-0	6
	17″	42.5cm	69-252-0	6
	18″	45.1cm	69-253-0	6
	19″	47.6cm	69-254-0	6
	20″	50.2cm	69-255-0	6
	21″	52.7cm	69-256-0	6
	22″	55.2cm	69-257-0	6
DETHATCHER BLADES			ONE FOR ALL	
	16″	40cm	690-617-0	3
	18″	45.1cm	690-618-0	3
	20″	50.2cm	690-521-0	3
HI-LIFT BLADES			ONE FOR ALL	
	16″	40cm	69-269-0	6
	17″	42.5cm	69-270-0	6
	18″	45.1cm	69-271-0	6
	19″	47.6cm	69-272-0	6
	20″	50.2cm	69-273-0	6
	21″	52.7cm	69-274-0	6
	22″	55.2cm	69-275-0	6
ADAPTORS SET OF 7			ONE FOR ALL	
10mm, ½″ (12.7mm), 14mm, 16mm, 18mm, 19.5mm, 21mm			02-035	1
DETHATCHER SPRINGS 10-PACK			ONE FOR ALL	
10mm, ½″ (12.7mm), 14mm, 16mm, 18mm, 19.5mm, 21mm			89-801	1

ONE-FOR-ALL OEM CROSS REFERENCES

							ONE FOR ALL	
	OEM					X	GATOR®	STD
ALKO								
Classic 40E, 40B, Comfort 40E	513519	38,5	19,7	9	65	1	-	69-247-0
Classic 42 plus	531486	39,5	19,0	9,0	65	1	-	69-247-0
Comfort 420 BIO-COMBI	460983	40	19	8x12	65	1	-	69-239-0
Sigma 460, Goldenline 460, Orion 460, 47 Classic 46E, 46B, BR, BRE	343120	46	19,5	9	65	1	69-242-0	69-258-0
Sigma 460, Goldenline 460, Orion 460, 47 Classic 46E, 46B, BR, BRE	513520	46	19,5	9	65	1	69-242-0	69-258-0
Sigma 460, Goldenline 460, Orion 460, 47 Classic 46E, 46B, BR, BRE	513621	46	19,5	9	65	1	69-242-0	69-258-0
Sigma 460, Goldenline 460, Orion 460, 47 Classic 46E, 46B, BR, BRE	530979	46	19,5	9	65	1	69-242-0	69-258-0
Premium 6000	531736	46	19,5	-	-	1	69-263-0	69-253-0
	405499	46,5	19	8	65	1	69-242-0	69-258-0
	313931	47,5	19	12,7x20	70	1	69-243-0	69-259-0
Aero Kreil 48CM	328531	47,8	19,7	12,7x20	70	1	69-243-0	69-259-0
30/485/48B5/4800B5	300130	48,5	10	-	-	1	69-264-0	69-254-0
ANTONIO CARRARO								
Rondo 1500 (60", 155CM)	59006200	51,4	19	-	-	3	69-265-0	69-255-0
ARIENS								
GT Tractor (38", 96CM)	31237	42	19	-	-	2	-	69-252-0
GT Tractor (48", 122CM)	30278	42,1	19	-	-	3	-	69-252-0
ZTR (50", 127CM)	8779200	43	19	-	-	3	-	69-252-0
AS-MOTOR								
Mulchmeister 102	6415	44,1	20,3	6,8	47	1	69-241-0	69-249-0
Mulchmeister 84	5757	54,2	20,3	-	-	1	69-246-0	69-262-0
BERNARD								
BM102, BM104	12800	42	8,5	-	-	1	69-239-0	69-248-0
BOBCAT								
82CM, 122CM	WM132061	41,2	15,8	-	-	2-3	69-239-0	-
92CM, 137CM	32022HD	45,7	15,8	6,3	41,2	2-3	69-242-0	69-258-0
36", 92CM	BAN2111PB	45,7	15,8	-	-	3	69-263-0	69-253-0
XM series (92CM, 137CM)	32022A	45,7	15,8	-	-	2-3	69-242-0	69-258-0
BOLENS								
30048S, 30048E, 18336, 19211 (48", 122CM)	173-0412	43,1	9,5	9,5	69,8	3	69-241-0	69-249-0
30048S, 30048E, 18336, 19211 (48", 122CM)	173-2145	43,1	9,5	9,5	69,8	3	69-241-0	69-249-0
30048S, 30048E, 18336, 19211 (48", 122CM)	173-8571	43,1	9,5	9,5	69,8	3	69-241-0	69-249-0
300365, 310365 (36", 92CM)	174-7640	47	17,7	-	-	2	69-242-0	69-258-0
300365, 310365 (36", 92CM)	177-2335	47	17,7	-	-	2	69-242-0	69-258-0
21", 53CM	176-4381	53	12,7	9,5	63,5	1	69-266-0	-
21", 53CM	310-1220	53	12,7	9,5	63,5	1	69-266-0	-
22", 56CM	189-3850	55,2	12,7	9,9	63,50	1	69-267-0	69-257-0

							ONE FOR ALL	
	OEM					X	GATOR®	STD
BUNTON								
81CM, 122CM	PC1255	40,6	15,8	-	-	2-3	69-239-0	69-248-0
81CM, 122CM	A48110	41,9	15,8	-	-	2-3	69-241-0	69-249-0
81CM, 122CM	PL4205	41,9	15,9	-	-	2-3	69-241-0	-
Model 38, 39 & 41 (82CM, 122CM)	PL4855	41,9	15,9	-	-	2-3	69-241-0	-
Model 38, 39 & 41 (82CM, 122CM)	PL4055	41,9	15,9	-	-	2-3	-	69-252-0
92CM, 132CM	PL4206	45,7	15,9	-	-	2-3	69-242-0	69-258-0
61", 152CM	PC005	53,1	15,9	-	-	3	69-245-0	69-261-0
61", 152CM	A48111	53,3	15,8	-	-	3	69-245-0	-
60", 152CM	PC005	53,3	15,8	-	-	3	69-245-0	-
CARONI								
TC590N (60", 155CM)	59006200	51,4	19	-	-	1	69-265-0	69-255-0
CASTELGARDEN								
New Garda 410, 414	81004233/0	39	18	8,5	65	1	-	69-248-0
New Garda 410, 414	81004233/2	39	18	8,5	65	1	-	69-248-0
New Garda 410, 414	81004360/1	39	18	8,5	65	1	-	69-248-0
New Garda 410, 414	81004360/2	39	18	8,5	65	1	-	69-248-0
New Garda 410, 414	81004360/3	39	18	8,5	65	1	-	69-248-0
430, 480	81004396	40,8	18	8,8	65	1	69-239-0	69-248-0
RASER 43. 430 + 480 models with 40CM cut	81004341/0	41	18	8,8	65	1	69-239-0	69-248-0
RASER 43. 430 + 480 models with 40CM cut	81004396/0	41	18	8,8	65	1	69-239-0	69-248-0
	81004365/3	43,5	18	8,8	65	1	-	69-252-0
460 MULCHING	81004365	43,5	18	8,8	65	1	69-241-0	-
460 series	81004232/1	44,0	18	8,8	65	1	69-241-0	69-249-0
S474L, G45	81004385	44,9	18	8,8	65	1	69-242-0	69-258-0
430, 480 series	81004346/2	45,7	18	8,8	65	1	69-263-0	69-253-0
430, 480 series	81004397/0	45,7	18	8,8	65	1	69-263-0	69-253-0
T430,T434,T480,T484, MULCHING TC92	81004346	46	18	8,8	65	1	69-263-0	69-253-0
T430,T434,T480,T484, MULCHING TC92	81004346/0	46	18	8,8	65	1	69-263-0	69-253-0
T430,T434,T480,T484, MULCHING TC92	81004346/1	46	18	8,8	65	1	69-263-0	69-253-0
T430,T434,T480,T484, MULCHING TC92	81004346/2	46	18	8,8	65	1	69-263-0	69-253-0
500 series	81004366/0	48	18	8,8	65	1	69-264-0	69-254-0
500 series	81004370/0	48	18	8,8	65	1	69-264-0	69-254-0
500 series	81004395/0	48	18	8,8	65	1	69-264-0	69-254-0
500 series	81004395/1	48	18	8,8	65	1	69-264-0	69-254-0
474TT,N504	81004366	48	18	8,8	65	1	69-243-0	69-254-0
474TT, NG504, NG504TR, TRE	81004366/2	48	18	8,8	65	1	69-243-0	69-254-0
	81004126/0	50	18	8,8	65	1	69-243-0	69-259-0
530	81004381	50,6	18	8,5	65	1	69-244-0	69-260-0
530, Variolux 53BCAH	81004381/0	50,6	18	8,5	65	1	69-244-0	69-260-0
RL534	81004398	51	18	8,7	65	1	69-265-0	69-255-0

	OEM					X	ONE FOR ALL	
							GATOR®	STD
CUB CADET								
44" (117CM)	742-3002	38,4	19	-	-	3	-	69-250-0
48" (122CM)	742-3019	41,9	19	7,9	63,50	3	69-241-0	69-249-0
50" (127CM)	742-3003	43,6	19	-	-	3	-	69-252-0
3160-A	117453-C1	52,4	19	-	-	1	69-266-0	69-256-0
42", 107CM	742-3018	53,5	19	7,9	63,50	2	69-245-0	69-261-0
DIXON								
50", 127CM	9433	43,1	17,4	-	-	3	69-241-0	-
50", 127CM	9444	43,1	17,7	-	-	3	69-241-0	69-249-0
42", 107CM	13920	43,1	17,7	-	-	3	-	69-247-0
Model 502 & 503 (127CM)	9258	43,2	15,8	-	-	3	69-241-0	69-249-0
Model 502 & 503 (127CM)	9265	43,2	15,8	-	-	3	69-241-0	69-249-0
92CM	1893	47	17,7	-	-	2	69-242-0	69-258-0
92CM	1324	47	17,7	-	-	2	69-242-0	69-258-0
92CM	6895	47	17,7	-	-	2	69-242-0	-
152CM	6898	52	17,7	-	-	3	69-245-0	-
8025 (152CM)	12441	52,1	15,8	-	-	3	69-245-0	69-261-0
8025 (152CM)	18931	52,1	15,8	-	-	3	69-245-0	69-261-0
60", 152CM	18931	52,1	15,8	-	-	3	69-245-0	-
DOLMAR								
PM48, PM48S, EM4816	664531048	45,7	18	8,8	65	1	69-263-0	69-253-0
EFCO								
LR43PB	66010038	39	10	8	65	1	-	69-247-0
LR43PE	66010047	39	21	10,5	52	1	-	69-247-0
LR44PB	-	40,5	10	8	65	1	69-239-0	69-248-0
LR47PE	66010017	45,5	21	10,5	52	1	69-242-0	69-258-0
LR47PB	66030201	45,5	10	7,9	65	1	69-242-0	69-258-0
G53TX	66070034	51	10	8	65	1	69-244-0	69-260-0
E-FLOR								
	531-0050-09	43,7	10	-	-	1	69-241-0	-
460 series	81004232/1	44	18	8,8	65	1	69-239-0	-
MULTICLIP 46S/PRO 46	1111-1530-01	46	10	8	55	1	69-242-0	-
MULTICLIP 46S/PRO 46	1111-1603-01	46	10	8	55	1	69-242-0	-
MULTICLIP 46S/PRO 46	1111-9077-01	46	10	8	55	1	69-242-0	-
MULTICLIP 46S/PRO 46	1111-9078-01	46	10	8	55	1	69-242-0	-
36", 92CM	4943	46	10	8	50	2	69-242-0	69-258-0
TMG18 (54", 137CM)	8657306-001-00	47,5	14,0	-	-	3	69-264-0	69-254-0
EXCEL/HULSTER								
Model 2500 (60", 152CM)	76752	53,2	12,7	-	-	3	69-266-0	69-256-0
EXMARK								

							ONE FOR ALL	
	OEM					X	GATOR®	STD
44",112CM	653102	38,7	16	-	-	3	69-250-0	69-247-0
48", 122CM	403059	41,2	15,8	-	-	3	69-239-0	69-248-0
52", 132CM	603873	45,7	12,7	-	-	3	69-242-0	-
92CM, 132CM	303283	45,7	15,8	-	-	2-3	69-242-0	69-258-0
92CM, 132CM	303495	45,7	15,8	-	-	2-3	69-263-0	-
60", 152CM	603874	52	12,7	-	-	3	69-265-0	-
Turf Tracer (60", 152CM)	603283	52	12,7	-	-	3	-	69-255-0
60", 152CM	633483	52,1	15,8	-	-	3	69-245-0	-
FLANDRIA								
Rekord	490005	43,5	10	10,5	52	1	69-241-0	69-249-0
GRANJA								
GT14CP	M2868	37,9	16	6,5	70	1	-	69-250-0
Laser, Mascot, Mercury 16", Omega, Delta, Optima, Mascot 42, Mascot 420P	B021300/0	41,9	16	7,9	65	1	-	69-251-0
GT346/ 347/352/353	1206	45,8	10	-	-	1	69-263-0	69-253-0
	M1336	46	16	7	70	1	69-263-0	69-253-0
	M4358	46	16	7	70	1	69-263-0	69-253-0
	041300/0	46	16	8	65	1	69-263-0	69-253-0
MS748	90892048	48	10	-	-	1	69-264-0	69-254-0
5160BR, 51606BRT, 5160BRM	90895105	51,2	10	8,3	65	1	69-265-0	-
MS753	90892047	52,0	10	7,9	65	1	69-261-0	69-245-0
GRASSHOPPER								
52", 132CM	320236	45,7	12,7	-	-	3	69-263-0	69-253-0
61", 155CM	320242	53,3	12,7	-	-	3	69-266-0	69-256-0
GRAVELY								
PRO 50 (127CM)	11234P1	43,1	15,8	-	-	3	69-241-0	69-249-0
Model 502 & 503 (127CM)	46998	43,2	15,8	-	-	3	69-241-0	-
Pro Master 100ZTR (127CM)	46998	43,2	15,8	-	-	1	69-241-0	69-249-0
36", 92CM	38883	44,9	15,8	-	-	2	69-242-0	-
36", 92CM	42124	44,9	15,8	-	-	2	69-242-0	-
102CM, 152CM	25124	52	15,8	-	-	2-3	-	69-261-0
60", 155CM	48864	52	15,8	-	-	3	69-245-0	69-255-0
60", 152CM	46999	52,1	15,8	-	-	3	69-245-0	69-255-0
GUTBROD								
Golf 248 S4	-	45	15,8	7,9	65	1	69-242-0	69-258-0
HARRY								
16", 41CM	302-40-803	47,5	15,8	10	70	1	69-263-0	-
22", 56CM	423-40-803	55	15,8	10	70	1	69-267-0	-
HAYTER								

	OEM					X	ONE FOR ALL GATOR®	STD
Hobby Petrol	201026	40,6	15,8	-	-	1	69-239-0	69-248-0
Hunter 45	320019	45,5	15,8	-	-	1	69-242-0	69-258-0
Harrier, Kestrel 48	4013	48	15,8	-	-	1	69-243-0	69-259-0
Harrier, Kestrel 48 (old)	40130	48,2	15,8	-	-	1	69-243-0	69-259-0
HUNTER 54	330032	53	16	-	-	1	69-245-0	69-261-0
HONDA								
Pan-European E 410, HRE 410, HRG 410/413	CG81004396H0	40,8	18	8,8	65	1	69-239-0	-
SW429, SW429 Z, SW4642	81004396/0	41	18	8,8	65	1	69-239-0	69-248-0
SW429, SW429 Z, SW4642	81004341/0	41	18	8,8	65	1	69-239-0	69-248-0
HRE410, HRG410/413	8100-43-960	41	18	8,8	65	1	69-239-0	69-248-0
Pan-European HRF464S, HRG465C, HRF465PS, HRG465	8100-43-970	45,7	18	8,8	65	1	69-263-0	69-253-0
S4650Q, QA, QAE, SW439, A, AE, Z, SW4648, A, AE, JU 2135, H, CM7114 H, CM 7124 H	81004346/2	45,7	18	8,8	65	1	69-263-0	69-253-0
S4650Q, QA, QAE, SW439, A, AE, Z, SW4648, A, AE, JU 2135, H, CM7114 H, CM 7124 H	81004397/0	45,7	18	8,8	65	1	69-263-0	69-253-0
HF2113	8100-43-463	46,2	18	8,5	65	1	69-263-0	69-253-0
SW432 A, SW432 A3, SW432, AE3, SW4753 A, SW4753 A3	81004398/0	50,5	18	8,8	65	1	69-265-0	69-255-0
HURRICANE								
NG464	81004365/1	43,5	18	8,8	65	1	-	69-252-0
HUSQVARNA/AYP								
970-12 (97CM)	539-1032-74	38	16	-	-	3	-	69-247-0
Pro-Flex, R1200 (47", 120CM)	506-8852-01	43,7	10	-	-	3	69-241-0	-
Pro-Flex, R1200 (47", 120CM)	531-0050-09	43,7	10	-	-	3	69-241-0	-
BioClip Mulcher, Team Partner ABS	516 44 38-00	46	10	8,5	65	1	69-263-0	-
BioClip Mulcher, Team Partner ABS	5310050-40	46	10	8,5	65	1	69-263-0	-
36", 92CM	71285	46,1	9,5	-	-	2	69-242-0	69-258-0
36", 92CM	75270	46,1	9,5	-	-	2	69-242-0	69-258-0
36", 92CM	98111	46,1	9,5	-	-	2	69-242-0	69-258-0
36", 92CM	25645R	46,1	9,5	-	-	2	69-242-0	69-258-0
Partner 890, 1090, 1290 (36", 92CM)	121263	46,2	9,5	-	-	2	69-242-0	69-258-0
Partner 890, 1090, 1290 (36", 92CM)	120262X	46,2	9,5	-	-	2	69-242-0	69-258-0
Partner 890, 1090, 1290 (36", 92CM)	126338X	46,2	9,5	-	-	2	69-242-0	69-258-0
92CM, 36"	5321263-38	46,2	9,5	-	-	2	69-242-0	69-258-0
36", 92CM	5321222-60	46,2	9,5	-	-	2	69-242-0	69-258-0
Bioclip, Team Partner 246D	5164005-00	46,5	10	8,5	65	1	69-263-0	69-253-0
38", 96.5CM	123461X	49	9,5	-	-	2	69-243-0	-
38", 96.5CM	142978X	49	9,5	-	-	2	69-243-0	-
38", 96.5CM	106634X	49,2	9,5	-	-	2	69-243-0	69-259-0
38", 96.5CM	25036R	49,2	9,5	-	-	2	69-243-0	69-259-0
38", 96.5CM	121263X	49,2	9,5	-	-	2	69-243-0	69-259-0
LT960/YTH125	5321212-63	49,2	9,5	-	-	1	69-243-0	69-259-0
BIOCLIP, Husqvarna Master, Master Pro	516-4139-00	50	9,9	8,7	-	1	69-244-0	-
BIOCLIP, Husqvarna Master, Master Pro	531-0050-45	50	9,9	8,7	-	1	69-244-0	-

	OEM					X	ONE FOR ALL GATOR®	STD
Jet50, 51	850972	50,5	15,8	9,5	47,6	1	69-244-0	69-260-0
Jet 50-51	532-8509-72	50,6	15,8	9,5	47,6	1	69-265-0	-
20", WALK BEHIND	25744	50,6	15,8	9,5	47,6	1	69-244-0	-
Jet 50-51	129277	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51	131694	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51	133346	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51	145106	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51	532145106	50,8	15,8	9,5	47,6	1	69-265-0	-
Jet 50-51	532752233	50,8	15,8	9,5	47,6	1	69-265-0	-
ROYAL 53	516-4943-04	53	9,9	-	-	1	69-266-0	69-256-0
42", 106CM	101733	53	16	-	-	2	69-266-0	69-256-0
R52SE, P5553, 4553, 753, 553	532 1750-52	53,2	16	9,5	48	1	69-245-0	69-261-0
53CM	159267	53,5	16	10	48	1	69-245-0	69-261-0
53CM	199377	53,5	15,8	9,5	47,5	1	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)	165833	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)	175064	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)	189028	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)	406712	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)	532-1658-33	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)	532-1750-64	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)	532-1890-28	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)	532-4067-12	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
R 152, R53SV (21", 53CM - 42", 106CM)	539-1118-78	53,5	16	9,5	47,5	1-2	69-266-0	69-256-0
22", WALK BEHIND	532-3552-56	55,2	15,8	9,5	47,6	1	69-246-0	
22", WALK BEHIND	532-7522-34	55,2	15,8	9,5	47,6	1	69-246-0	
Jet 55	850973	55,2	15,8	9,5	47,6	1	69-267-0	-
FR6852SH-9612400J	406713	55,2	15,8	9,6	47,6	1	69-246-0	69-262-0
FR6852SH-9612400J	192682	55,2	15,8	9,6	47,6	1	69-246-0	69-262-0
Jet55 (56CM)	141114	55,2	15,8	9,6	47,6	1	69-246-0	
Jet55 (56CM)	532-1411-14	55,2	15,8	9,6	47,6	1	69-246-0	69-262-0
Jet55 (56CM)	532-8509-73	55,2	15,8	9,5	47,6	1	69-246-0	69-262-0
ISEKI								
SG153, SG173 (122CM)	8595306-002-00	42,8	14,5	-	-	3	-	69-252-0
TMG18 (137CM)	8657306-001-00	47,5	14	-	-	3	69-264-0	69-254-0
SF200, SF230 (137CM)	8654306-001-00	52,5	15,8	-	-	3	69-266-0	69-256-0
JACOBSEN								
92CM, 132CM	390655	45,7	15,8	-	-	2-3	69-242-0	69-258-0
JOHN DEERE								

	OEM					X	ONE FOR ALL GATOR®	STD
48", 122CM	AM104488	40,6	15,8	-	-	3	69-239-0	69-248-0
PT11136 (81CM, 122CM)	PC1255	40,6	15,8	-	-	2-3	69-239-0	69-248-0
46-47-48 (46", 117CM)	AM31100	40,6	17,5	-	-	3	69-239-0	69-248-0
46-47-48 (46", 117CM)	M41967	40,6	17,5	-	-	2	69-239-0	69-248-0
46-47-48 (46", 117CM)	M41967	40,6	17,5	-	-	2	69-239-0	69-248-0
Model 38, 39 & 41 (82CM, 122CM)	AM104489	40,6	17,5	-	-	2-3	69-239-0	69-248-0
100 SERIES-L (48", 122CM)	GX20250	43	17	10,3	85	3	69-241-0	69-249-0
50", 127CM	AM39966	43,6	17,6	-	-	3	69-241-0	69-249-0
92CM, 132CM	PT8721	45,7	15,8	-	-	2-3	69-243-0	69-259-0
38", 96.5CM	M112991	49,5	17,8	-	-	2	69-243-0	-
38", 96.5CM	AM10094	49,5	17,8	-	-	2	69-243-0	-
38", 96.5CM	M82408	49,5	17,8	-	-	2	69-264-0	69-254-0
38", 96.5CM	AM100946	49,5	17,8	-	-	2	69-264-0	69-254-0
38", 96.5CM	M84472	49,5	17,8	-	-	2	69-264-0	69-254-0
Model 400 (153CM)	AM112847	51,9	19,8	-	-	2	69-244-0	69-260-0
Model 400 (153CM)	AM35557	51,9	19,8	-	-	2	69-244-0	69-260-0
Model 400 (153CM)	M48452	51,9	19,8	-	-	2	69-244-0	69-260-0
62C Convertible (62", 158CM)	M1435	54	20,5	-	-	3	69-267-0	-
LT-166 (106CM)	M139802	54,6	17,4	-	-	2	69-267-0	69-257-0
LT-166 (106CM)	M145969	54,6	17,4	-	-	2	69-267-0	69-257-0
JONSERED								
LR8 (36", 92CM)	5320256-45	46,2	9,5	-	-	2	69-242-0	69-258-0
LR8 (36", 92CM)	532-126338	46,2	9,5	-	-	2	69-242-0	69-258-0
LR10/12/13/LT14/YTH16 (96.5CM)	532121263	49	9,5	-	-	2	69-243-0	-
LR10/12/13/LT14/YTH16	532143978	49,2	9,5	-	-	2	69-243-0	-
600S, 600R, 450	850972	50,5	15,8	9,5	47,6	1	69-244-0	69-260-0
600S, 600R, 450	532145106	50,8	15,8	9,5	47,6	1	69-244-0	69-260-0
455SD	532-8509-73	55,2	15,8	9,5	47,6	1	69-266-0	69-256-0
KLIPPO								
19" (18.5cm) Excellent, Kommun, Pro 4	60.00-4	48,7	14	-	-	1	69-264-0	-
Combi G7 21", G7 21"	60,04	52,8	14	-	-	1	69-266-0	-
Cornet, Pro S, Pro SDH, G7	60.04-4	53	14	-	-	1	69-245-0	-
KUBOTA								
RC48G (48", 122CM)	76500-34330	42,3	18	-	-	3	-	69-249-0
RC48-F19,RC48-G20F, RC48-C20F (48", 122CM)	76505-11550	42,3	18	-	-	3	-	69-252-0
U304H, U304M15, 348's (122CM)	70080-00450	42,5	15,9	-	-	3	-	69-252-0
T1400	66071-61760	52	17,4	-	-	1	69-265-0	69-255-0
KYNAST								
3r/1601/SIM48	00.1851.33	47	10	10	70	1	69-263-0	69-253-0
3r/1601/SIM48	3R/1601/SIM48	47	10	10	70	1	69-263-0	69-253-0
MAC ALLISTER								

	OEM					X	ONE FOR ALL	
							GATOR®	STD
	9265	43,2	15,8	-	-	3	69-241-0	69-249-0
MC CULLOCH								
	176-4381	53	12,7	9,5	63,5	1	69-266-0	69-256-0
MOUNTFIELD								
EMBLEM	M2868	37,9	16	6,5	70	1	-	69-250-0
Empress	M3204	40	16	6,5	70	1	-	69-248-0
Empress	M4609	40,5	16	7	70	1	69-239-0	69-251-0
Laser, Mascot, Mercury 16", Omega, Delta, Optima, Mascot 42, Mascot 420P	B021300/0	41,9	16	7,9	65	1	-	69-251-0
M3 M4	M1336	46	16	7	70	1	69-263-0	69-253-0
M3 M4	M4358	46	16	7	70	1	69-263-0	69-253-0
46 CM	M5320	46	16	8	65	1	69-263-0	69-253-0
Tuffcut 48	MS1173603	48	16,2	-	-	1	69-243-0	69-259-0
OMEGA 53/DELTA 53	90895105	51	10	8	65	1	69-265-0	69-255-0
MTD								
38", 83CM	742-04154	45,4	17,5x25,4	-	-	2	69-263-0	-
46SP, 465P, 9915PN	742-0638	45,5	17,5x25,4	7,9	65	1	69-242-0	69-258-0
46SP, 465P, 9915PN	742-0818	45,5	17,5x25,4	7,9	65	1	69-242-0	69-258-0
18", 46CM	742-0738	45,7	17,5x25,4	7,5	63,5	1	69-263-0	-
18", 46CM	942-0738	45,7	17,5x25,4	7,5	63,5	1	69-263-0	-
36", 92CM	742-0496	46,4	10,3	7,9	63,5	2	69-242-0	69-258-0
GE48, 48PT	742-0822	47,5	17,5x25,4	7,9	63,5	1	69-243-0	69-259-0
MTD Super King 48, 48HM, 48BH	328531	47,8	19,7	12,7x20	70	1	69-243-0	69-259-0
476, 487, 490, 493, 494, 495, 496, 497, 497F, 497P, 498, 628, 720, 760, 765, S/D, 138-495A, 138-497A, W7-BG-497B	742-0122	48,2	10,3	7,9	63,5	1	69-264-0	69-254-0
20", 51CM 1997->	742-0640	50,7	17,5x25,4	7,5	63,5	1	69-265-0	69-255-0
20", 51CM 1997->	942-0640	50,7	17,5x25,4	7,5	63,5	1	69-265-0	69-255-0
20", 51CM 1997->	942-0740	50,7	17,5x25,4	7,5	63,5	1	69-265-0	-
20", 51CM 1997->	742-0740	50,7	17,5x25,4	7,5	63,5	1	69-265-0	69-255-0
	742-0123	50,8	10,3	7,9	63,5	1	69-265-0	69-255-0
GES53, RB53, 53SP, HB53RB, RB53-5R, CPG53, BL5350SP, 478SPS, YM6021M	742-0828	51,5	17,5x25,4	-	-	1	69-244-0	69-260-0
GES53, RB53, 53SP, HB53RB, RB53-5R, CPG53, BL5350SP, 478SPS, YM6021M	942-0828	51,5	17,5x25,4	-	-	1	69-244-0	69-260-0
118-620A, W7-BG620-B, 128-290, W7-BG-290 SP-B	742-0124	53,3	10,3	7,9	63,5	1	69-266-0	69-256-0
21", 53CM 1997->	742-0641	53,3	17,5x25,4	7,9	63,5	1	69-266-0	69-256-0
21", 53CM 1997->	942-0641	53,3	17,5x25,4	7,9	63,5	1	69-266-0	69-256-0
42", 107CM	742-0503	53,8	10,3	7,9	63,5	2	69-266-0	69-256-0
42", 107CM	742-0538	53,8	10,3	7,9	63,5	2	69-245-0	-
MURRAY								

	OEM					X	ONE FOR ALL	
							GATOR®	STD
20", 51CM	20045	50	10	-	-	1	69-243-0	69-259-0
20", 51CM	42785HT	50	10	-	-	1	69-243-0	69-259-0
20", 51CM	42785E701	50	10	-	-	1	69-265-0	-
20", 51CM	672763E701	50,5	10	-	-	1	69-265-0	69-255-0
21", 53CM	672029	52,4	10	-	-	1	69-244-0	69-260-0
22", 56CM	672573	55	10	-	-	1	69-246-0	69-262-0
22", 56CM	672573E701	55	10	-	-	1	69-246-0	69-257-0
22", 56CM 1968->1990	20046	55,2	10,3	-	-	1	69-267-0	69-257-0
22", 56CM 1968->1990	422225	55,2	10,3	-	-	1	69-267-0	69-257-0
OLEO MAC								
G43	66010038	39	10	8	65	1	-	69-247-0
GE43	66010047	39	21	10,5	52	1	-	69-247-0
G44	-	40,5	10	8	65	1	69-239-0	69-248-0
G47 X/A/TAS	66030201	45,5	10	7,9	65	1	69-242-0	69-258-0
GE47	66010017	45,5	21	10,5	52	1	69-242-0	69-258-0
G53	66070034	51	10	8	65	1	69-244-0	69-260-0
PARTNER								
150, 150H, 150D	850972	50,5	15,8	9,5	47,6	1	69-244-0	69-260-0
1295 (96.5CM)	5321212-63	49	9,5	-	-	2	69-243-0	-
50-51	5328509-72	50,6	15,8	9,5	47,6	1	69-265-0	-
155LD,355D	532-8509-73	55,2	15,8	9,5	47,6	1	69-266-0	69-256-0
Jet 55	850973	55,2	15,8	9,5	47,6	1	69-267-0	-
PILOTE								
Groundsmaster (92CM, 132CM)	27-0990	45,7	12,7	-	-	2-3	69-263-0	69-253-0
534TR	81004398/0	50,5	18	8,8	65	1	69-265-0	69-255-0
PLANTIFLOR								
NG484	81004395/1	48	18	8,8	65	1	69-264-0	-
QUEEN GARDEN								
	344020	44,1	17,4	10	52	1	69-241-0	69-249-0
B484 TR-H	81004346/3	46,2	18	8,5	65	1	69-263-0	69-253-0
	206	49	18	-	-	1	69-243-0	69-259-0
GI 52	55013	51	10	8	65	1	69-244-0	69-260-0
RANSOMES								

	OEM					X	ONE FOR ALL	
							GATOR®	STD
92CM, 137CM	32022	45,7	15,8	6,3	41,2	2-3	69-242-0	-
82CM, 122CM	92418	41,2	15,8	-	-	2-3	69-239-0	-
XM SERIES 92CM, 137CM	112111-02	45,7	15,8	-	-	2-3	69-263-0	69-253-0
92CM, 137CM	32022HD	45,7	15,8	6,3	41,2	2-3	69-242-0	69-258-0
21", 53CM	72039	53,3	9,5	9,5	50,8	1	69-266-0	69-245-0
21", 53CM	WM172039	53,3	9,5	9,5	50,8	1	69-266-0	69-245-0
61" (155CM)	42180B	53,3	15,8	-	-	3	69-245-0	69-261-0
HA6010, HT3806, 851 (155CM)	112111-03	53,3	15,8	-	-	3	69-266-0	69-256-0
HA6010, HT3806, 851 (155CM)	112243-03	53,3	15,8	-	-	3	69-266-0	69-256-0
SABO								
Serie 120, 140, 200, 300 116, 116H , 170, 175, 180, 185, 240, 245, 260, 265, 285, 320, LT166, STX46, F510, F525	AM31100	40,6	17,5	-	-	2	69-239-0	69-248-0
TC92	SB81004346/3	46,2	18	8,5	65	1	69-263-0	69-253-0
SABRE								
48"-1948GV, 1948HV, 2148HV	AM39966	43,6	17,6	-	-	3	69-241-0	-
SANDRIGARDEN								
	206	49	18	-	-	1	69-243-0	69-259-0
GI52	53013	51	10	8	65	1	69-244-0	69-260-0
SCAG								
82CM, 122CM	A48110	41,9	15,8	-	-	2-3	69-241-0	69-249-0
82CM, 122CM	A48184	41,9	15,8	-	-	2-3	69-241-0	69-249-0
135CM	482878	45,5	15,8	-	-	3	69-263-0	69-253-0
Tiger Cub, Wildcat, Turf Tiger, Freedon Z52" deck (92CM, 132CM)	48185	45,7	15,8	-	-	2-3	69-242-0	69-258-0
Tiger Cub, Wildcat, Turf Tiger, Freedon Z52" deck (92CM, 132CM)	481711	45,7	15,8	-	-	2-3	69-242-0	69-258-0
Tiger Cub, Wildcat, Turf Tiger, Freedon Z52" deck (92CM, 132CM)	482306	45,7	15,8	-	-	2-3	69-242-0	69-258-0
(92CM) 2000 ->	482462	45,7	15,8	-	-	2	69-242-0	69-258-0
Tiger Cub, Wildcat, Turf Tiger, Freedon Z52" deck	48108	45,7	15,8	-	-	1	69-242-0	69-258-0
Tiger Cub, Wildcat, Turf Tiger, Freedon Z52" deck (92CM, 132CM)	481707	45,7	15,8	-	-	2-3	69-242-0	69-258-0
92CM, 132CM	482462	45,7	15,8	-	-	2-3	69-242-0	69-258-0
92CM, 132CM	482467	45,7	15,8	-	-	2-3	69-242-0	69-258-0
92CM, 132CM	A48108	45,7	15,8	-	-	2-3	69-242-0	69-258-0
61", 155CM	482879	53,3	15,8	-	-	3	69-266-0	69-256-0
61", 155CM	A48111	53,3	15,8	-	-	3	69-245-0	69-261-0
61", 155CM	A48304	53,3	15,8	-	-	3	69-245-0	-
SENTAR								
48", 122CM	71440002	41,9	15,8	-	-	3	69-241-0	69-249-0
52", 132CM	71440001	45,7	15,8	-	-	3	69-242-0	69-258-0
61", 155CM	71440003	53,3	15,8	-	-	3	69-245-0	-
SNAPPER								

	OEM					X	ONE FOR ALL	
							GATOR®	STD
82CM, 122CM	1-7036	41,2	15,8	-	-	2-3	69-239-0	69-248-0
82CM, 122CM	1-7043	41,9	15,9	-	-	2-3	69-241-0	-
92CM, 132CM	7-7344	45,5	15,8	-	-	2-3	69-242-0	69-258-0
Pro series 0, Pro 7 series, 0, 1, 2,4 (92CM, 132CM)	1-7037	45,5	15,8	-	-	2-3	69-242-0	69-258-0
Pro series 0, Pro 7 series, 0, 1, 2,4 (92CM, 132CM)	7-7037	45,7	15,8	-	-	2-3	69-242-0	69-258-0
STAUB								
Groundsmaster (92CM, 132CM)	44-5480	45,7	12,7	-	-	2-3	69-263-0	69-253-0
STIGA								
TRAC	114-0628-01	43,1	9,5	9,9	69,8	1	69-241-0	69-249-0
EURO 45		43,5	10	10,5	52	1	69-241-0	69-249-0
NG 464TR	81004365/3	43,5	18	8,8	65	1	-	69-252-0
Belos 1300	1135-1540-01	45,5	10	8	90	3	69-263-0	-
PARK 2000/2002/PONY (44", 110CM)	1111-1605-01	45,7	10	8,5	90	3	-	69-247-0
PARK 2000/2002/PONY (44", 110CM)	1134-0456-00	45,7	10	8,5	90	3	-	69-247-0
PARK 2000/2002/PONY (44", 110CM)	1134-1903-01	45,7	10	8,5	90	3	-	69-247-0
PARK 2000/2002/PONY (44", 110CM)	1134-9001-01	45,7	10	8,5	90	3	-	69-247-0
92CM, 132CM	303495	45,7	15,8	-	-	2-3	69-263-0	-
430, 480 series	81004346/2	45,7	18	8,8	65	1	69-263-0	69-253-0
430, 480 series	81004397/0	45,7	18	8,8	65	1	69-263-0	69-253-0
MULTICLIP 46S/PRO 46 18", 46CM)	1111-1530-01	46	10	8	55	1	69-242-0	-
MULTICLIP 46S/PRO 46 18", 46CM)	1111-1603-01	46	10	8	55	1	69-242-0	-
MULTICLIP 46S/PRO 46 18", 46CM)	1111-9077-01	46	10	8	55	1	69-242-0	-
MULTICLIP 46S/PRO 46 18", 46CM)	1111-9078-01	46	10	8	55	1	69-242-0	-
MULTICLIP PRO 515	1111-3298-02	46	10	8	90	1	69-244-0	-
MULTICLIP PRO 515	1111-9109-01	46	10	8	90	1	69-244-0	-
MULTICLIP PRO 515	1111-9155-01	46	10	8	90	1	69-244-0	-
SPL484	8104346/3	46	18	8,8	65	1	69-263-0	69-253-0
SPL484 TR		46	18	8,8	65	1	69-263-0	69-253-0
Estate Senator, Estate President Mulching	1111-9121-01	46	18	8,8	65	1	69-263-0	69-253-0
Estate Senator, Estate President Mulching	81004346/3	46	18	8,8	65	1	69-263-0	69-253-0
Estate Senator, Estate President	1111-9121-01	46,2	18	8,5	65	1	69-263-0	69-253-0
534 TR	1111-9194-01	50,5	18	8,8	65	1	69-265-0	69-255-0
TORO								
Z5000, Time Cutter 74375 (50", 127CM)	110-6837-03	44,4	15,8	-	-	3	-	69-252-0
Time Cutter ZX , Recycler (132CM)	107-1741-03	45,5	15,8	-	-	3	69-263-0	-
Time Cutter ZX , Recycler (132CM)	107-1742-03	45,5	15,8	-	-	3	69-263-0	69-253-0
Groundsmaster (92CM, 132CM)	27-0990	45,7	12,7	-	-	2-3	69-263-0	69-253-0
Groundsmaster (92CM, 132CM)	27-0990-03	45,7	12,7	-	-	2-3	69-263-0	69-253-0
Groundsmaster (92CM, 132CM)	44-5480	45,7	12,7	-	-	2-3	69-263-0	69-253-0
92CM, 132CM	56-2390	45,7	12,7	-	-	2-3	69-263-0	69-253-0
92CM, 132CM	56-2390-03	45,7	12,7	-	-	2-3	69-263-0	69-253-0

							ONE FOR ALL	
	OEM					X	GATOR®	STD
(92CM, 132CM)	TR56-2390	45,7	12,7	-	-	2-3	69-263-0	69-253-0
132CM	92-7961	45,7	12,7	-	-	3	69-263-0	69-253-0
(92CM, 132CM)	TR27-0990	45,7	12,7	-	-	2-3	69-263-0	69-253-0
455D (132", 340CM)	86-0010	48,2	12,7	-	-	7	69-264-0	-
RECYCLER (38", 97CM)	57-4700	49	15,8	-	-	2	69-264-0	69-254-0
RECYCLER (38", 97CM)	79-3060	49	15,8	-	-	2	69-264-0	69-254-0
Groundsmaster 580P (406CM)	69-6920	50,8	15,8	-	-	11	69-265-0	69-255-0
21", 53CM	108-3762-03	53	12,7	10	62	1	69-245-0	69-261-0
21", 53CM	93-4106-03	53	12,7	10	62	1	69-245-0	69-261-0
21", 53CM	TR93-4106-03	53	12,7	10	62	1	69-245-0	69-261-0
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	14-1659	53,1	11,1	9,5	61,9	1	69-266-0	-
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	14-9419	53,1	11,1	9,5	61,9	1	69-266-0	-
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	75-9420	53,1	11,1	9,5	61,9	1	69-266-0	-
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	80-0510	53,1	11,1	9,5	61,9	1	69-266-0	-
Recycler 21" 20219, 20103, 20106, 20107, 20210, 20211, 20217, 20218, 491 <-1995	91-2256	53,1	11,1	9,5	61,9	1	69-266-0	-
Timme Cutter Z, RZT420 (106CM)	106-2247-03	54,5	15,8	-	-	2	69-262-0	69-256-0
42", 107CM	106-8744-03	54,5	15,8	-	-	2	69-267-0	69-257-0
Groundsmaster (62", 158CM)	44-6250	54,6	12,7	-	-	3	69-266-0	69-256-0
Recycler (62", 158CM)	92-5608	55	12,7	-	-	3	69-267-0	69-257-0
22" Atomic	104-8697-03	55,2	11,5	-	-	1	69-246-0	-
22" Atomic	108-9764-03	55,2	11,5	-	-	1	69-246-0	69-262-0
VIKING								
HB 41, EP434	81004341/5	41	18	8,8	65	1	69-239-0	69-248-0
MT545, MT585	6125 702 0110	46,2	18	8,5	65	1	69-263-0	69-253-0
WESTWOOD								
Standard (36", 92CM)	4943	46	10	8	50	2	69-242-0	69-258-0
WHEEL HORSE								
718Z (127cm)	113579	43	15,8	-	-	3	69-241-0	69-249-0
WOODS								
112CM	70014	38,1	12,7	-	-	3	-	69-247-0
155CM	70104	45,7	12,7	-	-	3	69-263-0	69-253-0
155CM	70134	53,3	12,7	-	-	3	69-266-0	69-256-0
YAMAHA								
YLM34P/S/SE, YLE242P/S	JYWT-54320-00	40	19	-	-	1	69-239-0	-
	YWT-57374-20	45	19	-	-	1	69-242-0	-

	ONE FOR ALL	
OEM	GATOR®	STD
206	69-243-0	69-259-0
1206	69-263-0	69-253-0
1324	69-242-0	69-258-0
1893	69-242-0	69-258-0
4013	69-243-0	69-259-0
4943	69-242-0	69-258-0
5757	69-246-0	69-262-0
6004	69-266-0	-
6415	69-241-0	69-249-0
6895	69-242-0	
6898	69-245-0	
9258	69-241-0	69-249-0
9265	69-241-0	69-249-0
9433	69-241-0	-
9444	69-241-0	69-249-0
12441	69-245-0	69-261-0
12800	69-239-0	69-248-0
13920	-	69-247-0
18931	69-245-0	69-261-0
20045	69-243-0	69-259-0
20046	69-267-0	69-257-0
25124	-	69-261-0
25744	69-244-0	-
30278	-	69-252-0
31237	-	69-252-0
32022	69-242-0	-
38883	69-242-0	-
40130	69-243-0	69-259-0
42124	69-242-0	-
46998	69-241-0	69-249-0
46999	69-245-0	69-255-0
48108	69-242-0	69-258-0
48185	69-242-0	69-258-0
48864	69-245-0	69-255-0
53013	69-244-0	69-260-0
55013	69-244-0	69-260-0
70014	-	69-247-0
70104	69-263-0	69-253-0
70134	69-266-0	69-256-0
71285	69-242-0	69-258-0
72039	69-266-0	69-245-0
75270	69-242-0	69-258-0
76752	69-266-0	69-256-0
92418	69-239-0	-
98111	69-242-0	69-258-0
101733	69-266-0	69-256-0
113579	69-241-0	69-249-0
121263	69-242-0	69-258-0
129277	69-265-0	-
131694	69-265-0	-
133346	69-265-0	-
141114	69-246-0	
145106	69-265-0	-
159267	69-245-0	69-261-0
165833	69-266-0	69-256-0
175064	69-266-0	69-256-0
189028	69-266-0	69-256-0
192682	69-246-0	69-262-0
199377	69-266-0	69-256-0
201026	69-239-0	69-248-0
300130	69-264-0	69-254-0
303283	69-242-0	69-258-0
303495	69-263-0	-
313931	69-243-0	69-259-0
320019	69-242-0	69-258-0
320236	69-263-0	69-253-0
320242	69-266-0	69-256-0
328531	69-243-0	69-259-0
330032	69-245-0	69-261-0
343120	69-242-0	69-258-0
344020	69-241-0	69-249-0
390655	69-242-0	69-258-0
403059	69-239-0	69-248-0
405499	69-242-0	69-258-0
406712	69-266-0	69-256-0
406713	69-246-0	69-262-0
422225	69-267-0	69-257-0
460983	-	69-239-0
481707	69-242-0	69-258-0
481711	69-242-0	69-258-0
482306	69-242-0	69-258-0
482462	69-242-0	69-258-0
482467	69-242-0	69-258-0
482878	69-263-0	69-253-0
482879	69-266-0	69-256-0
490005	69-241-0	69-249-0
513519	-	69-247-0
513520	69-242-0	69-258-0
513621	69-242-0	69-258-0
530979	69-242-0	69-258-0
531486	-	69-247-0
531736	69-263-0	69-253-0
603283	-	69-255-0
603873	69-242-0	-
603874	69-265-0	-
633483	69-245-0	
653102	69-250-0	69-247-0
672029	69-244-0	69-260-0
672573	69-246-0	69-262-0
850972	69-244-0	69-260-0
850973	69-267-0	-
8779200	-	69-252-0
59006200	69-265-0	69-255-0
59006200	69-265-0	69-255-0
66010017	69-242-0	69-258-0
66010038	-	69-247-0
66010047	-	69-247-0
66030201	69-242-0	69-258-0
66070034	69-244-0	69-260-0
66070034	69-244-0	69-260-0
71440001	69-242-0	69-258-0
71440002	69-241-0	69-249-0
71440003	69-245-0	-
81004346	69-263-0	69-253-0
81004365	69-241-0	-
81004366	69-243-0	69-254-0
81004381	69-244-0	69-260-0

OEM	ONE FOR ALL GATOR®	ONE FOR ALL STD
81004385	69-242-0	69-258-0
81004396	69-239-0	69-248-0
81004398	69-265-0	69-255-0
90892047	69-261-0	69-245-0
90892048	69-264-0	69-254-0
90895105	69-265-0	69-255-0
532121263	69-243-0	-
532143978	69-243-0	-
532145106	69-244-0	69-260-0
532752233	69-265-0	-
664531048	69-263-0	69-253-0
00.1851.33	69-263-0	69-253-0
041300/0	69-263-0	69-253-0
104-8697-03	69-246-0	
106-2247-03	69-262-0	69-256-0
106634X	69-243-0	69-259-0
106-8744-03	69-267-0	69-257-0
107-1741-03	69-263-0	-
107-1742-03	69-263-0	69-253-0
108-3762-03	69-245-0	69-261-0
108-9764-03	69-246-0	69-262-0
110-6837-03	-	69-252-0
1111-1530-01	69-242-0	-
1111-1603-01	69-242-0	-
1111-1605-01	-	69-247-0
1111-3298-02	69-244-0	-
1111-9077-01	69-242-0	-
1111-9078-01	69-242-0	-
1111-9078-01	69-242-0	-
1111-9109-01	69-244-0	-
1111-9121-01	69-263-0	69-253-0
1111-9155-01	69-244-0	-
1111-9194-01	69-265-0	69-255-0
112111-02	69-263-0	69-253-0
112111-03	69-266-0	69-256-0
112243-03	69-266-0	69-256-0
11234P1	69-241-0	69-249-0
1134-0456-00	-	69-247-0
1134-1903-01	-	69-247-0
1134-9001-01	-	69-247-0
1135-1540-01	69-263-0	-
114-0628-01	69-241-0	69-249-0
117453-C1	69-266-0	69-256-0
120262X	69-242-0	69-258-0
121263X	69-243-0	69-259-0
123461X	69-243-0	-
126338X	69-242-0	69-258-0
14-1659	69-266-0	
142978X	69-243-0	-
14-9419	69-266-0	
1875887	69-239-0	69-248-0
1876253	69-242-0	69-258-0
1878444	69-241-0	-
173-0412	69-241-0	69-249-0
173-2145	69-241-0	69-249-0
173-8571	69-241-0	69-249-0
174-7640	69-242-0	69-258-0
176-4381	69-266-0	69-256-0
177-2335	69-242-0	69-258-0
189-3850	69-267-0	69-257-0
25036R	69-243-0	69-259-0
25645R	69-242-0	69-258-0
27-0990	69-263-0	69-253-0
27-0990-03	69-263-0	69-253-0
302-40-803	69-263-0	-
310-1220	69-266-0	
32022A	69-242-0	69-258-0
32022HD	69-242-0	69-258-0
3R/1601/SIM48	69-263-0	69-253-0
42180B	69-245-0	69-261-0
423-40-803	69-267-0	-
42785E701	69-265-0	-
42785HT	69-243-0	69-259-0
44-5480	69-263-0	69-253-0
44-6250	69-266-0	69-256-0
506-8852-01	69-241-0	
516 44 38-00	69-263-0	
5164005-00	69-263-0	69-253-0
516-4139-00	69-244-0	-
516-4943-04	69-266-0	69-256-0
531-0050-09	69-241-0	
5310050-40	69-263-0	
531-0050-45	69-244-0	-
532 1750-52	69-245-0	69-261-0
5320256-45	69-242-0	69-258-0
5321212-63	69-243-0	69-259-0
5321222-60	69-242-0	69-258-0
5321263-38	69-242-0	69-258-0
532-126338	69-242-0	69-258-0
532-1411-14	69-246-0	69-262-0
532-1658-33	69-266-0	69-256-0
532-1750-64	69-266-0	69-256-0
532-1890-28	69-266-0	69-256-0
532-3552-56	69-246-0	
532-4067-12	69-266-0	69-256-0
532-7522-34	69-246-0	
5328509-72	69-265-0	-
532-8509-72	69-265-0	-
532-8509-73	69-266-0	69-256-0
532-8509-73	69-266-0	69-256-0
539-1032-74	-	69-247-0
539-1118-78	69-266-0	69-256-0
56-2390	69-263-0	69-253-0
56-2390-03	69-263-0	69-253-0
57-4700	69-264-0	69-254-0
60.00-4	69-264-0	-
60.04-4	69-245-0	-
61257020110	69-263-0	69-253-0
66071-61760	69-265-0	69-255-0
672573E701	69-246-0	69-257-0
672763E701	69-265-0	69-255-0
69-6920	69-265-0	69-255-0
70080-00450	-	69-252-0
742-0122	69-264-0	69-254-0
742-0123	69-265-0	69-255-0
742-0124	69-266-0	69-256-0
742-04154	69-263-0	-

	ONE FOR ALL	
OEM	GATOR®	STD
742-0496	69-242-0	69-258-0
742-0503	69-266-0	69-256-0
742-0538	69-245-0	-
742-0638	69-242-0	69-258-0
742-0640	69-265-0	69-255-0
742-0641	69-266-0	69-256-0
742-0738	69-263-0	
742-0740	69-265-0	69-255-0
742-0818	69-242-0	69-258-0
742-0822	69-243-0	69-259-0
742-0828	69-244-0	69-260-0
742-3002	-	69-250-0
742-3003	-	69-252-0
742-3018	69-245-0	69-261-0
742-3019	69-241-0	69-249-0
75-9420	69-266-0	
76500-34330	-	69-249-0
76505-11550	-	69-252-0
1876434	69-242-0	69-258-0
1988564	69-242-0	69-258-0
79-3060	69-264-0	69-254-0
80-0510	69-266-0	
81004126/0	69-243-0	69-259-0
81004232/1	69-241-0	69-249-0
81004233/0	-	69-248-0
81004233/2	-	69-248-0
81004341/0	69-239-0	69-248-0
81004341/5	69-239-0	69-248-0
81004346/0	69-263-0	69-253-0
81004346/1	69-263-0	69-253-0
81004346/2	69-263-0	69-253-0
81004346/3	69-263-0	69-253-0
8100-43-463	69-263-0	69-253-0
81004360/1	-	69-248-0
81004360/2	-	69-248-0
81004360/3	-	69-248-0
81004365/1	-	69-252-0
81004365/3	-	69-252-0
81004366/0	69-264-0	69-254-0

	ONE FOR ALL	
OEM	GATOR®	STD
81004366/2	69-243-0	69-254-0
81004370/0	69-264-0	69-254-0
81004381/0	69-244-0	69-260-0
81004395/0	69-264-0	69-254-0
81004395/1	69-264-0	69-254-0
81004396/0	69-239-0	69-248-0
81004396/0	69-239-0	69-248-0
8100-43-960	69-239-0	69-248-0
81004397/0	69-263-0	69-253-0
81004397/0	69-263-0	69-253-0
8100-43-970	69-263-0	69-253-0
81004398/0	69-265-0	69-255-0
8104346/3	69-263-0	69-253-0
8595306-002-00	-	69-252-0
86-0010	69-264-0	
8654306-001-00	69-266-0	69-256-0
8657306-001-00	69-264-0	69-254-0
91-2256	69-266-0	
92-5608	69-267-0	69-257-0
92-7961	69-263-0	69-253-0
93-4106-03	69-245-0	69-261-0
942-0640	69-265-0	69-255-0
942-0641	69-266-0	69-256-0
942-0738	69-263-0	
942-0740	69-265-0	
942-0828	69-244-0	69-260-0
A48108	69-242-0	69-258-0
A48110	69-241-0	69-249-0
A48111	69-245-0	69-261-0
A48184	69-241-0	69-249-0
A48304	69-245-0	-
AM10094	69-243-0	-
AM100946	69-264-0	69-254-0
AM104488	69-239-0	69-248-0
AM104489	69-241-0	69-249-0
AM112847	69-244-0	69-260-0
AM31100	69-239-0	69-248-0
AM35557	69-244-0	69-260-0
AM39966	69-241-0	69-249-0

	ONE FOR ALL	
OEM	GATOR®	STD
B021300/0	-	69-251-0
BAN2111PB	69-263-0	69-253-0
CG81004396H0	69-239-0	-
GX20250	69-241-0	69-249-0
JYWT-54320-00	69-239-0	-
M112991	69-243-0	-
M1336	69-263-0	69-253-0
M139802	69-267-0	69-257-0
M1435	69-267-0	-
M145969	69-267-0	69-257-0
M2868	-	69-250-0
M3204	-	69-248-0
M41967	69-239-0	69-248-0
M4358	69-263-0	69-253-0
M4609	69-239-0	69-251-0
M48452	69-244-0	69-260-0
M5320	69-263-0	69-253-0
M82408	69-264-0	69-254-0
M84472	69-264-0	69-254-0
MS1173603	69-243-0	69-259-0
PC005	69-245-0	69-261-0
PC1255	69-239-0	69-248-0
PL4055	-	69-252-0
PL4205	69-241-0	-
PL4206	69-242-0	69-258-0
PL4855	69-241-0	-
PT8721	69-243-0	69-259-0
SB81004346/3	69-263-0	69-253-0
TR27-0990	69-263-0	69-253-0
TR56-2390	69-263-0	69-253-0
TR93-4106-03	69-245-0	69-261-0
WM132061	69-239-0	-
WM172039	69-266-0	69-245-0
YWT-57374-20	69-242-0	-

REPLACEMENT BLADES

ONE FOR ALL
69-247-0

1

ONE FOR ALL
69-242-0
69-258-0

2



3

ONE FOR ALL
69-242-0
69-258-0

4

ONE FOR ALL
69-243-0
69-253-0

5

6

7

G3

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	ALKO/DOLMAR/NOMA											
1	Alko #513519	Classic 40E, 40B, Comfort 40E	38,5 15″	19,7 3/4″	9 11/32″	65 2-1/2″	55 - 3 2-1/8″ - 1/8″					69-247-0
2	Alko #513520, #513621 #530979, #343120	Sigma 460, Goldenline 460, Orion 460,474, Classic 46E, 46B, BR, BRE	46 18″	19,5 3/4″	9 11/32″	65 2-1/2″	55 - 3 2-1/8″ - 1/8″					69-242-0 ❹ 69-258-0
3	Alko #332039	Comfort 470 Bio-combi	46 18-5/8″	19,7 25/32″	12.7 x 20 1/2″x 7,9″	70 2-3/4″	55 - 4 2,16″ - 5/32″			P621546000301		
4	Alko #531438, #405499		46,8 18-7/16″	19,5 3/4″	8 5/16″	65 2-1/2″	50 - 3,5 2″ - 1/8″					69-242-0 ❹ 69-258-0
5	Alko #328531	Aero-Keil 48cm (19″), MTD Super King 48, 48HM, 48BH	47,8 18-13/16″	19,7 3/4″	12,7 x 20 1/2″ x .79″	70 2-3/4″	55 - 3,4 2.16″ - .134″					69-243-0 ❹ 69-253-0
	ANTONIO CARRARO											
6	Caroni #59009200 Antonio Carraro	Rondo 1500	51,4	19	-	-	50,8 - 6,3 2″ - .250″	152 / 60″		91-141	x3	69-265-0 ❹ 69-255-0
7	Caroni #59009200 Antonio Carraro	Rondo 1500	51,4	19	-	-	50,8 - 6,3 2″ - .250″	152 / 60″		96-605	x3	69-265-0 ❹ 69-255-0

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY


1 G3

2 G3

3

4

ONE FOR ALL
69-242-0
69-258-0
5

6

7


8

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	AYP/HUSQVARNA/JONSERED/PARTNER/ROPER/ELECTROLUX											
1	Husqvarna #5440677-01, #5055445		35,8 14-1/16"	10 .390"	8 .320"	40 1.57"	57,1 - 4,2 2.25" - .164"	94 / 37"		95-080	x3	
2	Husqvarna #5441027-01, #5041878		42 16-.56"	12,5 .492"	8,7 .345"	40 1.57"	57,1 - 4,2 2.25" - .164"	112 / 44"		95-081	x3	
3	AYP #127841, #532-127841 #138496 Husqvarna #5321384-96	HVA LT100, 112, 120, Jonsered LR10, 12, 112, LRH13 Partner 890, 1090, 1290	46,1 18-3/16"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57 - 3,5 2-1/4" - .140"	92 / 36"		05460B	x2	
4	AYP #127841, #532-127841 #138496 Husqvarna #5321384-96	HVA LT100, 112, 120, Jonsered LR10, 12, 112, LRH13 Partner 890, 1090, 1290	46,1 18-3/16"	15,8 star 5/8" star	- -	- -	57,1 - 4,7 2.25" - .187"	92 / 36"	❿	95-026	x2	
5	AYP #120262X, #126338X #121263 Jonsered #532-122260 Husqvarna #5321263-38	Jonsered LR, Partner 890, 1090, 1290	46,2 18-13/64"	9.5 3/8"	- -	- -	57,1 - 4,7 2.25" - .187"	92 / 36"	❼		x2	69-242-0 ❹ 69-258-0
6	AYP #127842	HVA LT125, YTH 125, Jonsered LR, 12,13,LT14, YTH16, Partner 12-95	48,9 19-9/32"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57,1 - 3,5 2.25" - .134"	96,5 / 38"		05490B	x2	
7	AYP #138497		48,9 19-9/32"	15,8 star 5/8" star	- -	- -	57,1 - 4,7 2.25" - .187"	96,5 / 38"	❿	95-038	x2	
8	AYP #134148 Husqvarna #5321341-48		48,9 19-9/32"	15,8 star 5/8" star	- -	- -	57,1 - 3,5 2.25" - .134"	96,5 / 38"	❹	05490MB	x2	

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

1

ONE FOR ALL
69-243-0
69-259-0

2

ONE FOR ALL
69-244-0
69-260-0

3

ONE FOR ALL
69-244-0

4

ONE FOR ALL
69-265-0

5

6

7

8

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	AYP #127842, #139774 #134148X, #24692 #139744, #532134148 #532139774 Husqvarna #5321212-63 #5321278-42		48,9 19-9/32”	15,8 star 5/8” star	- -	- -	63.5 - 4,7 2.50” - .187”	96,5 / 38”		95-601	x2	
2	AYP #121263X Husqvarna #5321212-63	HVA LT960, 125, YTH 125, Jonsered LR10, 12,13, LT14,YTH16, Partner 1295	48,9 19-9/32”	9,5 3/8”	- -	- -	57,1 - 4,7 2.25” - .187”	96,5 / 38”	❼		x2	69-243-0 ❹ 69-259-0
3	AYP #850972	HVA JET 50, 51, Jonsered 600S, 600R, 450 Partner 150, 150H, 150D	50,6 19-15/16”	15,8 5/8”	9,5 3/8”	47,6 1-7/8”	63,5 - 4 2.50” - .149”	51 / 20”				69-244-0 ❹ 69-260-0
4	AYP #25744		50,6 19-15/16”	15,8 5/8”	9,5 3/8”	47,6 1-7/8”	63,5 - 4 2.50” - .149”	51 / 20”				69-244-0 ❹
5	AYP #145106 Husqvarna #532145106 Jonsered #532145106 Partner #532145106		50,8 20”	15,8 5/8”	9,5 3/8”	47,6 1-7/8”	57,1 - 3,4 2.25” - .134”	51 / 20”	❹			69-265-0
6	AYP #127843, #138498 Husqvarna #5321278-43	HVA YT130, 150, YTH150, 160, Jonsered LT14, 15, LTH15 Partner 12, 5, 13, 14, 15, 105E, 105EH	53,5 21-3/32”	15,8 star 5/8” star	- -	- -	57 - 3,5 2-1/4” - .140”	107 / 42”		05535B	x2	
7	AYP #138498		53,5 21-3/32”	15,8 star 5/8” star	- -	- -	57,1 - 4,7 2.25” - .187”	107 / 42”	❿	195-039	x2	
8	AYP #127843		53,5 21-3/32”	15,8 star 5/8” star	- -	- -	57,1 - 4,7 2.25” - .187”	107 / 42”	❿	195-048	x2	

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

1

2

ONE FOR ALL
69-266-0
3

ONE FOR ALL
69-266-0
69-255-0
4

ONE FOR ALL
69-266-0
5

6


7

ONE FOR ALL
69-246-0
69-262-0
8

ONE FOR ALL
69-246-0
9

ONE FOR ALL
69-246-0
69-262-0
10

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	AYP #134149 Husqvarna #5321341-49		53,5 21-3/32"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57 - 3,5 2-1/4" - .140"	107 / 42"	❹	05535MB	x2	
2	AYP #138498, #138971 Husqvarna #5321278-43 #5321384-98		53,5 21-3/32"	15,8 star 5/8" star	- -	- -	57,1 - 4,7 2.25" - .187"	107 / 42"		96-900	x2	
3	AYP #159267		53,5 21-3/32"	16 5/8"	10 3/8	48 1-7/8"	57 - 3,5 2-1/4" - .140"	53 / 21"	❹			69-266-0 ❹
4	AYP #175064		53,5 21-3/32"	16 5/8"	9,5 3/8"	47,5 1-7/8"	70 - 3.3 2.75" - .130"	53 / 21" 106,6 / 42"	❼		x1 x2	69-266-0 ❹ 69-255-0
5	AYP #175064		53,5 21-3/32"	16 5/8"	9,5 3/8"	47,5 1-7/8"	70 - 4 2.75" - .149"	53 / 21" 106,6 / 42"			x1 x2	69-266-0 ❹
6	AYP #168721, #175451 #180584		54,3 21-1/3"	6 pt. star	13 1/2"	85 3.34"	57.1 - 4 2-1/4" - .160"	107 / 42"	❹ ❶	P635854300901	P635854300701	
7	AYP #168710, #180583 #175450		54,3 21-1/3"	6 pt. star	13 1/2"	85 3.34"	57.1 - 4 2-1/4" - .160"	107 / 42"	❹ ❶	P635854300701	P635854300901	
8	AYP #406713, #192682	FR6852SH, 9612400J	55,4 21-53/64"	15,8 5/8"	9,6 3/8"	47,6 1-7/8"	57,1 - 3,4 2.25" - .134"					69-246-0 ❹ 69-262-0
9	AYP #141114		55,2 21-3/4"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	57,1 - 3,4 2.25" - .134"	56 / 22"	❹			69-246-0 ❹
10	AYP #850973, #69334		55,2 21-3/4"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	63,5 - 4 2.50" - .149"	56 / 22"	❼			69-246-0 ❹ 69-262-0

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

ONE FOR ALL
69-246-0
1

ONE FOR ALL
69-267-0
2

ONE FOR ALL
69-267-0
3

ONE FOR ALL
69-241-0
69-249-0
4

5

6



7

8

9

10

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	AYP #752234 Husqvarna #5321411-14		55,2 21-3/4″	15,8 5/8″	9,5 3/8″	47,6 1-7/8″	50 - 3.8 2″ - 1/8″	56 / 22″	❹			69-246-0 ❹
2	AYP #134768, #141114 #157101 Husqvarna #532850973		55,2 21-3/4″	15,8 5/8″	9,5 3/8″	47,6 1-7/8″	63,5 - 3,9 2.50″ - .149″	56 / 22″	❹			69-267-0 ❹
3	AYP #850973	Husqvarna Jet 55, Partner 55	55,2 21-3/4″	15,8 5/8″	9,5 3/8″	47,6 1-7/8″	63,5 - 3,9 2.50″ - .149″	56 / 22″				69-267-0 ❹
	BOLENS											
4	Bolens #1738571	30048S, 30048E, 18336, 19211	43,1 16-31/32″	9,5 3/8″	9,5 3/8″	69,8 2-3/4″	50,8 - 4,7 2.00″ - .187″	122 / 48″			x3	69-241-0 ❹ 69-249-0
5	Bolens #742-0616, #742-0616A		53,8 21-3/16"	15,8 6 star	-	-	76,2 - 3,9 3.00"- .149"	-		198-153	x2	
	BUNTON											
6	Bunton #PL4855, #PL4205		41,9 16-1/2″	15,8 5/8″	- -	- -	63,5 - 5,1 2.50″ - .203″	81 / 32″ 122 / 48″		96-308	x2 x3	69-241-0 ❹
7	Bunton #PL4205, #PL4055		41,9 16-1/2″	15,8 5/8″	- -	- -	76,2 - 6,3 3″ - .250″	81 / 32″ 122 / 48″		396-735	x2 x3	
8	Bunton #PL4206	John Deere # AM104490	45,7 18″	16 5/8″	- -	- -	63,5 - 5 2.50″ - .203″	92 / 36″ 132 / 52″		96-344	x2 x3	69-242-0 ❹
9	Bunton #PL4206	John Deere # AM104490	45,7 18″	16 5/8″	- -	- -	76,2 - 6,3 3″ - .250″	92 / 36″ 132 / 52″		396-726	x2 x3	69-242-0 ❹
10	Bunton #PC005		53,1 20-15/16″	16 5/8″	- -	- -	63,5 - 5 2.50″ - .203″	152 / 60″		96-347	x3	69-245-0 ❹

- ❶ TURNS LEFT
- ❷ TURNS RIGHT
- ❸ REAR DISCHARGE
- ❹ MULCHING BLADE
- ❺ BLADE FOR BAGGING
- ❻ ELECTRIC MODELS
- ❼ HI-LIFT
- ❽ UPPER BLADE
- ❾ LOWER BLADE
- ❿ HEAVY DUTY

1

2

3

ONE FOR ALL
69-248-0

4

ONE FOR ALL
69-239-0
69-248-0

5

ONE FOR ALL
69-239-0
69-248-0

6

ONE FOR ALL
69-252-0

7

ONE FOR ALL
69-241-0

8

ONE FOR ALL
69-242-0

9

ONE FOR ALL
69-263-0
69-253-0

10

ONE FOR ALL
69-263-0
69-253-0

11

12

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	CARONI											
1	Caroni #59009200 Antonio Carraro #Rondo 1500	TC590N, TC590NSLD	51,4 20-1/4"	19 3/4"	- -	- -	50,8 - 6,3 2.00" - .250"	152/ 60"		91-141	x3	69-265-0 ❹ 69-255-0
2	Caroni #59009200 Antonio Carraro #Rondo 1500	TC590N, TC590NSLD	51 20"	19 3/4"	- -	- -	63,5 - 5,1 2.50" - .203"	152 / 60"		96-605	x3	69-265-0 ❹
3	Caroni #71001000	TC710N	61,5 24-1/4"	19 3/4"	- -	- -	63,5 - 6,3 2.50" - .250"	180 / 71"		396-707	x3	
	CASTELGARDEN/HONDA/VIKING/STIGA/FARM+ GARTEN											
4	Castelgarden # 81004360/1	New Garda 410, 414	39 15-3/8"	18 0.70"	8,5 5/16"	65 2-1/2"	50 - 3 2" - 1/8"					69-248-0
5	Castelgarden # 81004396/0	430, 480 series	40,8 16-1/16"	18 0.70"	8,8 .350"	65 2.6"	55 - 3 2.16" - .118"					69-239-0 ❹ 69-248-0
6	Castelgarden # 81004341/0	Raser 43 etc.	41 16-1/8"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - 5/32"					69-239-0 ❹ 69-248-0
7	Castelgarden # 81004365/1		43,5 17-1/8"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - 5/32"					69-252-0
8	Castelgarden # 81004365/3	460	43,5 17-1/8"	18 0.70"	8.5 .335"	65 2-1/2"	57 - 4 2.24" - 5/32"		❹			69-241-0 ❹
9	Castelgarden #81004385	S474L, G45	44,9 17-46/64"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - 5/32"		❹			69-242-0 ❹
10	Castelgarden #81004397/0	430, 480 series	45,7 18"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"					69-263-0 ❹ 69-253-0
11	Castelgarden #81004346/2	T430, T434, T480, T484	46 18-7/64"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"					69-263-0 ❹ 69-253-0
12	Castelgarden #82004345/0	Twin Cut Junior	46 18-7/64"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 3 2.16" - .118"	92 / 36"	❶	40461LMB	40461RMB	

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

1

ONE FOR ALL
69-264-0
69-254-0
2

ONE FOR ALL
69-243-0
69-254-0
3 4

ONE FOR ALL
69-243-0
69-259-0
5

ONE FOR ALL
69-365-0
69-255-0
6

ONE FOR ALL
69-260-0
69-244-0
7

8

9

10

11

12

13

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	Castelgarden #82004353/0	Twin Cut 92 Junior	46 18-7/64″	18 0.70″	8,8 .350″	65 2-1/2″	55 - 3 2.16″ - .118″	92 / 36″	❷	40461RMB	40461LMB	
2	Castelgarden #81004395	500 series	47.6 18-3/4″	18 0.70″	8,8 .350″	65 2-1/2″	57 - 4 2.24″ - 5/32″					69-264-0 ❹ 69-254-0
3	Castelgarden #81004366	474TT, N504	48 18-57/64″	18 0.70″	8,8 .350″	65 2-1/2″	55 - 4 2.16″ - .157″					69-243-0 ❹ 69-254-0
4	Castelgarden #81004366/2	474TT-NG504- NG504TR-TRE	48 18-57/64″	18 0.70″	8,8 .350″	65 2-1/2″	57 - 4 2.24″ - 5/32″		❹			69-243-0 ❹ 69-254-0
5	Castelgarden #81004126/0		50 19-3/4″	18 0.70″	8,8 .350″	65 2-1/2″	60 - 4 2-3/8″ - 5/32″					69-243-0 ❹ 69-259-0
6	Castelgarden #81004398/0	RL 534	50,5 19-7/8″	18 0.70″	8,8 .350″	65 2-1/2″	55 - 4 2.16″ - .157″					69-365-0 ❹ 69-255-0
7	Castelgarden #81004381	530	50,3 19-7/8″	18 0.70″	8,5 .335″	65 2-1/2″	55 - 4 2.16″ - .157″		❹			69-260-0 ❹ 69-244-0
8	Castelgarden #82004340/0 Viking #61517020100	Twin Cut	51,9 20-7/16″	18 0.70″	8,8 .350″	65 2-1/2″	55 - 4 2.16″ - .157″	102 / 40″	❷	55520RB	55520LB	
9	Castelgarden #82004340/0 Viking #61517020100	Twin Cut	51,9 20-7/16″	18 0.70″	8,8 .350″	65 2-1/2″	55 - 4.6 2.16″ - .180″	102 / 40″	❶	55520LB	55520RB	
10	Castelgarden #82004341/0 Viking #61517020105	Twin Cut	51,9 20-7/16″	18 0.70″	8,8 .350″	65 2-1/2″	55 - 4 2.16″ - .157″	102 / 40″	❷	91-958	91-959	
11	Castelgarden #82004341/0 Viking #61517020105	Twin Cut	51,9 20-7/16″	18 0.70″	8,8 .350″	65 2-1/2″	55 - 4.6 2.16″ - .180″	102 / 40″	❶	91-959	91-958	
12	Castelgarden #82004347/0	Twin Cut 102 Mulching	52 20-7/16″	18 0.70″	8,8 .350″	65 2-1/2″	55 - 4 2.16″ - .157″	102 / 40″	❷ ❹	55520RMB	P625552002701	
13	Castelgarden #82004347/0	Twin Cut 102 Mulching	52 20-7/16″	18 0.70″	8,8 .350″	65 2-1/2″	55 - 4 2.16″ - .157″	102 / 40″	❶ ❹	P625552002701	55520RMB	

❶	❷	❸	❹	❺	❻	❼	❽	❾	❿
TURNS LEFT	TURNS RIGHT	REAR DISCHARGE	MULCHING BLADE	BLADE FOR BAGGING	ELECTRIC MODELS	HI-LIFT	UPPER BLADE	LOWER BLADE	HEAVY DUTY

1

2

ONE FOR ALL
69-247-0

3

ONE FOR ALL
69-241-0

4

5

6

ONE FOR ALL
69-242-0
69-258-0

7

ONE FOR ALL
69-242-0
69-258-0

8

ONE FOR ALL
69-244-0
69-260-0

9

10

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	CUB CADET											
1	Cub Cadet #742-04053A		45,4 17-7/8"	6 pt. star	- -	- -	63,5 - 4,7 2.50" - .187"	127 / 50"		91-938	x3	
2	Cub Cadet #742-04087, #942-04087	"LTX1040, LTX1042, LTX1042KW, LTX1042KH, LTX1045, RZT42, RZT-S42, RZT-L42"	53,8 21-3/16"	15,8 6 star	- -	- -	76,2 - 3,9 3.00" - .149"	127 / 50"		198-153	x2	
	DIXON											
3	Dixon #8688	Model # 428-429, 542	36,8 14-1/2"	17,7 .700"	- -	- -	50,8 - 4,7 2.00" - .187"	107 / 42"			x3	69-247-0
4	Dixon #9265, #9258		43,2 17"	15,8 5/8"	- -	- -	63,5 - 5,1 2.50" - .203"	127 / 50"			x3	69-241-0 ❹
5	Dixon #539119871, #9383		52 20-1/2"	15,8 5/8"	- -	- -	63,5 - 6,3 2.50" - .250"	152 / 60		396-740	x3	
6	Dixon #539109755,#539105711,#522936601, #522829301, #574481301		53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	-		91-308	x3	
	EFCO/EMAK/OLEO MAC/TROMECA											
7	Efco #66030201	Efco LR47PB, Oleo-Mac G47 X / A / TAS	45,5 18"	10 3/8"	8 5/16"	65 2-1/2"	50 - 4 2" - 5/32"					69-242-0 ❹ 69-258-0
8	Efco #66040017	Efco LR47PE, Oleo-Mac GE47	45,5 18"	21 13/16"	10,5 3/8"	52 2"	50 - 4 2" - 5/32"					69-242-0 ❹ 69-258-0
9	Efco #66070034	Efco G53TX	51 20"	10 3/8"	8 5/16"	65 2-1/2"	55 - 3 2-1/8" - 1/8"					69-244-0 ❹ 69-260-0
10	Efco #8203141		52 20-1/2"	34 1-5/16"	10,2 3/8"	110 4-5/16"	75 - 2,5 2-15/16" - .10"			P6297520001		

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

ONE FOR ALL
69-263-0
1

ONE FOR ALL
69-263-0
69-253-0
7

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	EXMARK											
1	#303495		45,7 18”	15,8 5/8”	- -	- -	63,5 - 4,1 2.50” - .164”	92 / 36” 132 / 52”	❹		x2 x3	69-263-0 ❹
2	#303146, #303283 #303527, #633482 #633484, #633485		45,7 18”	15,8 5/8”	- -	- -	63,5 - 5,1 2.50” - .203”	92 / 36” 132 / 52”		96-344	x2 x3	69-242-0 ❹
3	#303146		45,7 18”	15,8 5/8”	- -	- -	63,5 - 6,3 2.50” - .250”	92 / 36” 132 / 52”		396-726	x2 x3	
4	#633483		52 20-1/2”	15,8 5/8”	- -	- -	63,5 - 6,3 2.50” - .250”	152 / 60”		396-740	x3	
5	Exmark #116-6358, #116-6358-03,#116-6358-S	ECKA30	39,05 15-3/8"	15,8 5/8"	7,9 5/16"	31,7 1-1/4"	76,2 - 3,40 3.00" - .134"	-		594-601	x2	
	FERRIS											
6	Ferris #1520842 Ferris #GDU10232	"1000Z, IS2000Z, IS3100Z, IS4500Z, IS5100Z, PCM4818K, PCM6118K, PCM61200, PCT4818B, PCT6118B, PCW6114K, R61R"	53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	-		91-308	x3	
	GRANJA											
7	Granja #041300/0 Mountfield #M5320		46 18”	16 5/8”	8 5/16”	65 2-1/2”	55 - 4 2-1/8” - 5/32”					69-263-0 ❹ 69-253-0

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

ONE FOR ALL
69-263-0
1

2

ONE FOR ALL
69-263-0
3

ONE FOR ALL
69-266-0
69-256-0
4

5

ONE FOR ALL
69-241-0
6

7

8

9

10

11

12

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	GRASSHOPPER											
1	Grasshopper #320236		45,7 18″	12,7 1/2″	- -	- -	50,8 - 5,1 2.00″ - .203″	132 / 52″			x3	69-263-0 ④ 69-253-0
2	Grasshopper #320236		45,7 18″	12,7 1/2″	- -	- -	63,5 - 6,3 2.50″ - .250″	132 / 52″		96-329	x3	69-263-0 ④
3	Grasshopper #320236		45,7 18″	12,7 1/2″	- -	- -	63,5 - 6,3 2.50″ - .250″	132 / 52″			x3	69-263-0 ④
4	Grasshopper #320242		53,9 21″	12,7 1/2″	- -	- -	63,5 - 6,3 2.50″ - .250″	155 / 61″			x3	69-266-0 ④ 69-256-0
5	Grasshopper #320243, #320242		53,3 21″	12,7 1/2″	- -	- -	63,5 - 6,3 2.50″ - .250″	155 / 61″		396-712	x3	
	GRAVELY											
6	Gravely #46998		43,2 17″	15,8 5/8″	- -	- -	63,5 - 5,1 2.50″ - .203″	127 / 50″			x3	69-241-0 ④
7	Gravely #25124		52,1 20-1/2″	15,8 5/8″	- -	- -	63,5 - 6,3 2.50″ - .250″	152 / 60″		396-740	x3	
8	Gravely #GDU10232		53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50"- .203"	-		91-308	x3	
	GREAT DANE											
9	Great Dane #D18037		45,7 18″	15,8 5/8″	6,3 1/4″	41,2 1-5/8″	63,5 - 5,1 2.50″ - .203″	132 / 52″			x3	69-242-0 ④ 69-258-0
10	Great Dane #D18037		45,7 18″	15,8 5/8″	- -	- -	63,5 - 5,1 2.50″ - .203″	132 / 52″		96-344	x3	69-242-0 ④
11	Great Dane #D18037		45,7 18″	15,8 5/8″	- -	- -	63,5 - 6,3 2.50″ - .250″	132 / 52″		396-726	x3	69-242-0 ④
12	Great Dane #D18036	HVA ZHT 5223	53,3 21″	15,8 5/8″	- -	- -	63,5 - 6,3 2.50″ - .250″	155 / 61″		396-727	x3	

① TURNS LEFT
② TURNS RIGHT
③ REAR DISCHARGE
④ MULCHING BLADE
⑤ BLADE FOR BAGGING
⑥ ELECTRIC MODELS
⑦ HI-LIFT
⑧ UPPER BLADE
⑨ LOWER BLADE
⑩ HEAVY DUTY

1

69-239-0
2

69-243-0
3

4

5

69-263-0
69-253-0
6

7

8

9


10

11

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	Great Dane #D18036 #GDU10232	All models	53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	-		91-308	x3	
	HAYTER											
2	Hayter #201026	Hobby Petrol	40,6 16”	16 5/8”	- -	- -	57 - 3,4 2.24” - .134”					69-239-0 ❹ 39-248-0
3	Hayter #40130	48cm (19”) old, Harrier/Kestrel	48,2 19”	16 5/8”	- -	- -	63,5 - 3,8 2.50” - .149”					69-243-0 ❹ 69-259-0
4	Hayter #4013	Harrier, Kestrel 48cm (19”)	48 19”	19 3/4”	- -	- -	63,5 - 3,2 2.50” - .126”			91-893		69-243-0 ❹ 69-259-0
5	Hayter #480149	Harrier 48, Harrier 2, Ranger 48, Motif 48	48 19”	15,8 5/8”	10,5 7/16”	94 3-11/16”	63,5 - 3 2-1/2” - .120”			P6303480002		
	HONDA ◁→ CASTELGARDEN											
6	Honda #CG81004397HO	Pan-European HRF 464S, HRG465C, HRF465PS, HRG465	45,7 17”	18 .710”	8,8 .350	65 2.6”	55 - 4 2-3/16” - .16”					69-263-0 ❹ 69-253-0
7	Castelgarden # 82004348/0	Twin Cut 102 Mulching	52 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"	102 / 40"	❶ ❹	P625552002701	55520RMB	
8	Castelgarden # 82004348/0	Twin Cut 102 Mulching	52 20-7/16"	18 0.70"	8,8 .350"	65 2-1/2"	55 - 4 2.16" - .157"	102 / 40"	❷ ❹	55520RMB	P625552002701	
9	Honda #CG82004340/00	TwinCut 120	51,9 20-7/16”	18,2 .719”	8,7 11/32”	65 2.6”	55 - 4 2-5/32” - .16”	120 / 40”	❷	55520RB	55520LB	
10	Honda # CG82004340/00	TwinCut 120	51,9 20-7/16”	18,2 .719”	8,7 11/32”	65 2.6”	55 - 4 2-5/32” - .16”	120 / 40”	❶	55520LB	55520RB	
11	Honda #72511-VE1-651 #72511-VE1-650 #72511-VE1-652	HRB 535, HRD 536, IZY 53	52,4 20-5/8”	21,4 .844”	10,4 .410”	88 3-1/2”	83 - 2.5 3.27” - .10”			66535B		

- ❶ TURNS LEFT
- ❷ TURNS RIGHT
- ❸ REAR DISCHARGE
- ❹ MULCHING BLADE
- ❺ BLADE FOR BAGGING
- ❻ ELECTRIC MODELS
- ❼ HI-LIFT
- ❽ UPPER BLADE
- ❾ LOWER BLADE
- ❿ HEAVY DUTY

1



2

3

4



5

6

ONE FOR ALL
69-241-0
7

ONE FOR ALL
69-263-0
8

9

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	HUSQVARNA ↔ AYP											
1	Husqvarna #506-6687-01 #5065518-01 #5066765-01 #5310050-11	Model 850-12	30,4 11-13/32″	10,2 .404	8,2 .326″	60,3 2-3/8″	50 - 4 2″ - 3/16″	86 / 34″		10300B	x3	
2	Husqvarna #5440677-01, #5055445		35,8 14-1/16″	10 .930″	8 .320″	40 1-9/16″	57,1 - 4,2 2.25″ - .164″	94 / 55″		95-080	x3	
3	Husqvarna #5055445		36 14-3/16″	10,2 .404″	8,2 .326″	40 1-9/16″	50 - 4 2″ - 3/16″			P621035900101		
4	Husqvarna #5041882-01 #5441030-01	Rider 15T AWD, 15TS AWD, 15T, 15V2, 15V2 AWD 15V2S AWD, 155, 155 AWD, 155 EU, 16, 175, 175 AWD, 15, 18 AWD, PRO15, PRO 18, PRO 18 AWD	38,8 15-1/4″	10,3 7/16″	8,2 5/16″	40 1-9/16″	50 - 4 2″ - 3/16″			94-083		
5	Husqvarna #5441027-01 #5041878		42 16.56″	12,5 .492″	8,7 .345″	40 1.57″	57,1 - 4,2 2.25″ - .164″	112 / 44″		95-081	x3	
6	Husqvarna #173920, #180054 #532180054		42,2 16-5/8″	15,8 star 5/8″ star	-	-	76,2 - 4,7 3″ - .187″			596-615		
7	Husqvarna #506-8852-01 #531-0050-09	Pro-Flex, R1200	43,7 17.2″	10 .394″	-	-	63,5 - 5,2 2.50″ - .204″	130 / 51″			x3	69-241-0 ❹
8	Husqvarna #5164438-00 #5310050-40	BioClip Mulcher, Team Partner ABS	46 18-3/16″	10 .394″	8,5 5/16″	65 2.6″	58 - 3,5 2.26″ - .134″		❹			69-263-0 ❹
9	Husqvarna #532-1278-41 #138496 #532 13 84-96 #532 12 63-38	HVA LT100, 112, 120, Jonsered LR10, 12, 112, LRH13, Partner 890, 1090, 1290	46 18-3/16″	15,8 star 5/8″ star	-	-	57,1 - 4,7 2.25″ - .187″	92 / 36″	❿	95-026	x2	

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

1

ONE FOR ALL
69-243-0
69-259-0
1

2

3

4

5

ONE FOR ALL
69-244-0
69-260-0
6

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	Husqvarna #532-1278-41 #138496	LT100	46 18-3/16″	15,8 star 5/8″ star	9 3/8″	80 3-1/8″	57 - 3,5 2-1/4″ - .14″	92 / 36″		05460B	x2	
2	Husqvarna #5321212-63	HVA LT125, YTH125, Jonsered LR10, 12, 13, LT14, YTH16, Partner 12-95	49 19-9/32″	9,5 3/8	-	-	57,1 - 4,7 2.25″ - .187″	96,5 / 38″	❼		x2	69-243-0 ❹ 69-259-0
3	Husqvarna #532-1278-42 #532-1384-97	HVA LT125, YTH125, Jonsered LR10, 12, 13, LT14, YTH16, Partner 12-95	49 19-9/32″	15,8 star 5/8″ star	9 3/8″	80 3-1/8″	57 - 3,5 2-1/4″ -	96,5 / 38″		05490B	x2	
4	Husqvarna #138497	HVA LT125, YTH125, Jonsered LR10, 12, 13, LT14, YTH16, Partner 12-95	49 19-9/32″	15,8 star 5/8″ star	-	-	57,1 - 4,7 2.25″ - .187″	96,5 / 38″	❿	95-038	x2	
5	Husqvarna #5321341-48 AYP #134148		49 19-9/32″	15,8 star 5/8″ star	9 3/8″	80 3-1/8″	57 - 3,5 2-1/4″ - .14″	96,5 / 38″	❹	05490MB	x2	
6	Husqvarna #5321278-42 #530127-84 #5321384-97 AYP #127842		49 19-9/32″	15,8 star 5/8″ star	-	-	63,5 - 3,9 2.50″ - .164″	96,5 / 38″		95-601	x2	
7	Husqvarna #532-8509-72	HVA Jet50, 51, Jonsered 600S, 600R, 450, Partner 150, 150H, 150D	50,8 20″	15,8 5/8″	9,5 3/8″	47,6 1-7/8″	63,5 - 4 2.50″ - .16″	51 / 20″				69-244-0 ❹ 69-260-0

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

ONE FOR ALL
69-265-0

1

ONE FOR ALL
69-266-0
69-256-0

2

3

ONE FOR ALL
69-245-0
69-261-0

4

5

6

7

8



9

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	Husqvarna #532145106	HVA Jet50, 51, Jonsered 600S, 600R, 450, Partner 150, 150H,150D	50,8 20"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	57 - 3,5 2-1/4" - .14"	51 / 20"	❹			69-265-0 ❹
2	Husqvarna #516-4943-04	Royal 53	53 20,86"	9,9 .390"	8,4 5/16"	65 2-9/16"	76 - 3 3" - .118"					69-266-0 ❹ 69-256-0
3	Husqvarna #532 1993-77	Royal 152, R52	53,2 20-15/16"	16 5/8"	10 .394"	48 1 - 7/8"	63,5 - 3 2.50" - .118"			95-065		
4	Husqvarna #532 1750-52	R52SE, P5553, 4553, 753, 553	53,2 20-15/16"	16 5/8"	9,5 3/8"	48 1 - 7/8"	63,5 - 3 2.50" - .118"		❼			69-245-0 ❹ 69-261-0
5	Husqvarna #539101733 Husqvarna #539102093	2348, 30, 4217, 4819, 4821, 5221, 5223, 5225, 5227, 61, 6123, 6125, 6127, 6130, 6134, 7230	53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	-		91-308	x3	
6	Husqvarna #127843, #138498 #5321278-43		53,5 21-1/16"	15,8 star 5/8" star	-	-	57 - 3,5 2-1/4" - .14"			05535B		
7	Husqvarna #134149		53,5 21-1/16"	15,8 star 5/8" star	9 3/8"	80 3-1/8"	57 - 3,5 2-1/4" - .14"			05535MB		
8	AYP #180584, #168721 #175451 Husqvarna #5321805-84	CTH18, CTH150, CTH210, P18H107, PM1842HRB, M180HCRD, MI145HCRD	54,3 21-1/3"	6 pt. star	13 1/2"	85 3,34"	57 - 4 2-1/4" - .157"	107 / 42"	❶ ❽ ❹	P635854300901	P635854300701	
9	AYP #168710, #180583 #175450 Husqvarna #531 1805-83	CTH18, CTH150, CTH210, P18H107, PM1842HRB, M180HCRD, MI145HCRD	54,3 21-1/3"	5 pt. star	13 1/2"	85 3,34"	57 - 4 2-1/4" - .157"	107 / 42"	❷ ❽ ❹	P635854300701	P635854300901	

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

1

2

ONE FOR ALL
69-246-0

3

ONE FOR ALL
69-246-0
69-262-0

4

ONE FOR ALL
69-246-0

5

ONE FOR ALL
69-252-0

6

ONE FOR ALL
69-266-0
69-256-0

7

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	Husqvarna #532 1804-25	CTH18, CTH150, CTH210, P18H107, PM1842HRB, M180HCRD, MI145HCRD	54,3 21-1/3″	10 .394″	13 - 10 1/2″ - .394″	85 - 80 3,34″ - 3,14″	57 - 4 2-1/4″ - .157″	107 / 42″	❶ ❾	P635854301001	P635854300801	
2	Husqvarna #532 1804-24	CTH18, CTH150, CTH210, P18H107, PM1842HRB, M180HCRD, MI145HCRD	54,3 21-1/3″	10 .394″	13 - 10 1/2″ - .394″	85 - 80 3,34″ - 3,14″	57 - 4 2-1/4″ - .157″	107 / 42″	❷ ❾	P635854300801	P635854301001	
3	Husqvarna #5321411-14		55,1 21-21/32″	16 .630″	9,5 3/8″	48 1.9″	50 - 3,8 2″ - .15″		❹			69-246-0 ❹
4	Husqvarna #532-8509-73	HVA Jet 55S, Jonsered 455SD, Partner 155LD, 355D	55,2 21-3/4″	15,8 5/8″	9,5 3/8″	47,6 1-7/8″	63,5 - 4 2-1/2″ - .16″	56 / 22″				69-246-0 ❹ 69-262-0
5	Husqvarna #532-8509-73 AYP #850973	Jet 55. Partner 55	55,2 21-3/4″	15,8 5/8″	9,5 3/8″	47,6 1-7/8″	63,5 - 3.8 2.50″ - .149″	56 / 22″				69-246-0 ❹
	ISEKI											
6	Iseki #8595-306-002-00	SG153, SG173	43 16-7/8″	14,5 9/16″	-	-	60 - 6 2-3/8″ - 1/4″	122 / 48″			x3	69-252-0
7	Iseki #8654-306-00 #8654-306-011-0		53,3 21″	15,8 5/8″	-	-	63,5 - 6,3 2.50″ - .250″	155 / 61″			x7	69-266-0 ❹ 69-256-0
8	Iseki #8654-306-00 #8654-306-011-0		53,3 21″	15,8 5/8″	-	-	63,5 - 6,3 2.50″ - .250″	155 / 61″		396-702	x7	
	JACOBSEN ↔ FORD											
9	Jacobsen #390665		45,7 18″	15,9 5/8″	-	-	63,5 - 5,1 2.50″ - .203″	92 / 36″ 132 / 52″		96-344	x2 x3	69-242-0 ❹ 69-258-0
10	Jacobsen #390665		45,7 18″	15,9 5/8″	-	-	63,5 - 6,3 2.50″ - .250″	92 / 36″ 132 / 52″		396-726	x2 x3	

❶	❷	❸	❹	❺	❻	❼	❽	❾	❿
TURNS LEFT	TURNS RIGHT	REAR DISCHARGE	MULCHING BLADE	BLADE FOR BAGGING	ELECTRIC MODELS	HI-LIFT	UPPER BLADE	LOWER BLADE	HEAVY DUTY

1

2

ONE FOR ALL
69-239-0
69-248-0

3

4



5

ONE FOR ALL
69-241-0

6

7

8



9

10

11

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	Jacobsen #392564, #M144935		55,6 21-29/32"	23 29/32"	-	-	63,5 - 6,3 2.50" - .250"			396-710		
2	Jacobsen #JT391039		58,5 23"	13,5 17/32"	10,3 13/32"	73 2-7/8"	63,5 - 6,3 2.50" - .250"		❶	96-696		
JOHN DEERE												
3	John Deere #AM31100, #M41967	Model 46-47-48	40,6 16"	17,5 11/16"	-	-	50 - 5 2" - .20"	117 / 46"			x3	69-239-0 ❹ 69-248-0
4	John Deere #AM104489		41,9 16-1/2"	15,9 5/8"	-	-	63,5 - 5,1 2.50" - .203"	82 / 32" 122 / 48"		96-308	x2 x3	69-241-0 ❹
5	John Deere #AM104489		41,9 16-1/2"	15,9 5/8"	-	-	63,5 - 6,3 2.50" - .250"	82 / 32" 122 / 48"		396-735	x2 x3	
6	John Deere #GX20250	100 Series	43 17"	17 11/16"	10,3 13/32"	85 3-11/16"	63,5 - 5,2 2-1/2" - .203"	122 / 48"			x3	69-241-0 ❹
7	John Deere #M127673, #M127500		43,4 17-3/32	20,6 13/16"	-	-	63,5 - 5,1 2.50" - .203"	122 / 48"		96-354	x3	
8	John Deere #PT8721		45,7 18"	15,9 5/8"	-	-	63,5 - 5,1 2.50" - .203"	91 / 36" 132 / 52"		96-344	x2 x3	69-242-0 ❹
9	John Deere #PT8721		45,7 18"	15,9 5/8"	-	-	63,5 - 6,3 2.50" - .250"	91 / 36" 132 / 52"		396-726	x2 x3	
10	John Deere #M143520, #M145516	54C Convertible	48 18-7/8"	20 13/16"	-	-	63,5 - 6 2-1/2" - 1/4"	138 / 54"		396-719	x3	
11	John Deere # M144652, # M134305, #M135334, #M136195, #M164016, #M164016, #TCU30316, #TCU30317		48,2 19 "	22,2 7/8 "	-	-	76,5- 6,3 3.00 " - .250"	-		396-769		

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

1

ONE FOR ALL
69-264-0
69-254-0
2

ONE FOR ALL
69-264-0
3

4

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	John Deere # AM100946, M82408	11 - 111H - 112L - 116H - 130 - 160 - 165 - 2056 - 170 - 175 - 180 - 185 - 2084 - S80 - S82 - S92 - 2106 - RX63 - RX73 - RX75 - SX75 - RX95 - SX95 - 2150 - 240 - 245 - 260 - 265 - 285 - 320 - 2232 - SRX75 - SRX95 - 2317 - STX38 - LX172 - LX173 - LX176 - LX178 - LX186 - LX188 - 2342 - GT242 - GT262 - GT275 - 2399 - LT133 - 2607 - LT155 - 2608 - LT166 - 2725 - LT150 - 9072 - LT160	49,5 19-1/2"	17,4 11/16"	9,5 3/8"	101,6 4"	50,3 - 5,3 2.3" - 0.203"	-	2	191-392	x2	
2	John Deere #M84472		49,5 19-1/2"	17,8 45/64"	-	-	76,2 - 5 3"-.20"	96,5 / 38"	❼		x2	69-264-0 ❹ 69-254-0
3	John Deere #M82408, #AM10094		49,5 19-1/2"	17,8 45/64"	-	-	63,5 - 5,1 2.50"-.203"	96,5 / 38"			x2	69-264-0 ❹
4	John Deere #AM100538	Roberine "802"	52 20-1/2"	23,1 .910"	-	-	63,5 - 6,3 2.50"-.250"	153 / 60"		396-734	x3	

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY


1


2


3


4


5


6


7


8

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	John Deere #101733	ZKH61121, ZKH61251, ZMKW61231, ZVH061242, ZVKH61272, ZVKW61252, ZWKH61303, ZWKH61243, ZWKH61273	53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50"-.203"	-		91-308	x3	
2	John Deere #AM137327,#AM137328,#AM137329, #AM137330, #AM137333, #AM141031, #AM141032, #AM141033, #AM141034, #GX22151,#GY20850, #M149422, #M154061,#M154062		54,2 21-3/8"	7 Star	-	-	76,5- 6,3 3"- .203"	-		592-615		
3	John Deere #M139802, #M145969	LT-166	54,6 21-1/2"	17,4 11/16"	-	-	63,5 - 4,1 2.50"-.164"	106 / 42"		91-449	x2	69-267-0 ❹ 69-257-0
4	John Deere #M145245LH #AM131560	LTR155, LTR166, LTR180	55,3 21-3/4"	35 x 20,5 1-3/8" x 13/16"	-	-	84 - 5 3-5/16" -20"			94-081		
5	John Deere #M145243RT #AM131560	LTR155, LTR166, LTR180	55,3 21-3/4"	35 x 20,5 1-3/8" x 13/16"	-	-	84 - 5 3-5/16" - 20"			94-082		
6	John Deere #TCU51118		55,5 21-7/8"	23 29/32"	-	-	63,5 - 7,92 2.50" - .25"			92-120		
7	John Deere #AM102401, #AM38314 #M80783, #M141786		63,4 24-31/32"	23 29/32"	-	-	63,5 - 6,3 2.50" - .25"	183 / 72"		396-775	x3	
8	John Deere #EPC201693, M141669		63,5 25"	22,2 7/8"	-	-	76,5- 6,3 3"-.250"	-		396-743		

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

ONE FOR ALL
69-242-0
69-258-0
1

2

3

ONE FOR ALL
69-266-0
4

ONE FOR ALL
69-249-0
5

ONE FOR ALL
69-252-0
6


7

8



9

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	JONSERED ◁→ AYP, HUSQV.											
1	Jonsered #532-126338	Jonsered LR8, Partner 890, 1090, 1290	46,2 18-13/64"	9,5 3/8"	-	-	57,1 - 4,7 2.25" - .187"	92/36"	❼		x2	69-242-0 ❹ 69-258-0
	KLIPPO											
2	Klippo #60.00		47,5 18-3/4"	14,5 9/16"	-	-	57 - 3,9 2.25" - .150"			90-804		69-264-0(G)
3	Klippo #60.04	Combi G7 21" (53,3cm), G7 21" (53,3cm)	52,8 20-13/16"	14,5 9/16"	-	-	57 - 3,9 2.25" - .150"			90-805		
4	Klippo #60.04	Combi G7 21" (53,3cm), G7 21" (53,3cm)	52,8 20-13/16"	14,5 9/16"	-	-	57 - 3,9 2.25" - .150"					69-266-0 ❹
	KUBOTA ◁→ WOODS											
5	Kubota #76500-34330	RC48G	42,3 16-11/16"	18,2 23/32"	-	-	50 - 5 2" - .20"	122 / 48"			x3	69-249-0
6	Kubota #76505-11550 #76500-34330	RC48-F19, RC48-G20F(S) RC48-C20F(S)	42,3 16-11/16"	18 .710"	-	-	50 -6 2" - .24"	122 / 48"			x3	69-252-0
7	Kubota #76539-34330		52,2 20-9/16"	28,5 1-1/8"	-	-	60 - 7 2-3/8" - .28"	153 / 60"		P624752200103	x3	
8	Kubota #76539-34330		52,2 20-9/16"	28,5 1-1/8"	-	-	63,5 - 6,3 2.50" - .250"	153 / 60"		396-787	x3	
9	Kubota #70000-25002 #70000-25013 #70000-25030 #76553-34330 #K5676-97520 #K5677-34340		62,2 24-1/2"	28,6 1-1/8"	-	-	76,2 - 6,4 3" - .250"			396-814		

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

ONE FOR ALL
69-250-0
1

ONE FOR ALL
69-239-0
69-251-0
2

ONE FOR ALL
69-263-0
69-253-0
3

4

ONE FOR ALL
69-242-0
69-258-0
5

ONE FOR ALL
69-263-0
6

ONE FOR ALL
69-242-0
69-258-0
7

ONE FOR ALL
69-264-0
69-254-0
8

9

10

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	MOUNTFIELD (COOPER, MASCOT)											
1	Mountfield #M2868	Emblem	37,9 14-59/64"	16 .630"	6,5 .260"	70 2-3/4"	50 - 3 2" - .125"	38 / 15"				69-250-0
2	Mountfield #M4609	Empress	40,5 15-61/64"	16 .630"	7 .275"	70 2-3/4"	50,8 - 3 2" - .125"		❼			69-239-0 ❹ 69-251-0
3	Mountfield #041300/0, #90800114		46 18"	16 5/8"	8 5/16"	65 2 - 1/2"	55 - 4 2-3/16" - .16"					69-263-0 ❹ 69-253-0
	MTD											
4	MTD #742-04053A		45,4 17-7/8"	15,8 star 5/8"star	-	-	63,5 - 4,7 2-1/2" - 3/16"	127 / 50"		91-938		
5	MTD #742-0638	46SP, 465P, 9915PN	45,5 18"	bow-tie	8 5-16"	65 2-1/2"	57 - 3 2-1/4" - 1/8"					69-242-0 ❹ 69-258-0
6	MTD #742-0738		45,7 18"	bow-tie	8 5-16"	63,5 2-1/2"	57 - 3 2-1/4" - 1/8"					69-263-0
7	MTD #742-0496		46,4 18-9/32"	10,3 13/32"	7,9 5/16"	63,5 2-1/2"	76 - 3,7 3" - .15"	92 / 36"			x2	69-242-0 ❹ 69-258-0
8	MTD #742-0122	476, 487, 490, 493, 494, 495, 496, 497, 497F,497P,498, 628, 698, 720, 760, 765, S/D,138-495A, 138-497A, W7-BG-497B	48,2 19"	10,3 13/32"	7,9 5/16"	63,5 2-1/2"	50 - 3,5 2" - 1/8"	96,5 / 38"	❼		x2	69-264-0 ❹ 69-254-0
9	MTD #742-0610		49 19-5/16"	16 star 5/8" star	7,9 5/16"	63,5 2-1/2"	70 - 3,7 2-3/4" - .15"			P630449000101		
10	MTD #942-0610		49 19-5/16"	16 star 5/8" star	7,9 5/16"	63,5 2-1/2"	76,2 - 3,9 3" - .149	96,5 / 38"		198-052	x2	

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

1

ONE FOR ALL
69-265-0

2

ONE FOR ALL
69-265-0
69-255-0

3



4

5

6

ONE FOR ALL
69-245-0

7

8

9

ONE FOR ALL
69-243-0
69-259-0

10

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	MTD #742-0610		49 19-5/16″	16 star 5/8″ star	7,9 5/16″	63,5 2-1/2″	76,2 - 3,5 3″ - .155″	96,5 / 38″		98-628	x2	
2	MTD #942-0740		50,7 19-63/64″	bow-tie	7,5 19/64″	63,5 2-1/2″	57,1 - 3,5 2.25″ - .134″	51 / 20″	❹			69-265-0 ❹
3	MTD #742-0640, #942-0640	1997 ->	50,7 19-63/64″	bow-tie	7,5 19/64″	63,5 2-1/2″	57 - 3,5 2-1/4″ - .14″	51 / 20″	❼			69-265-0 ❹ 69-255-0
4	MTD #742-0620		50,8 19-31/32″	21 .830″	9,9 25/64″	63,5 2-1/2″	57,1 - 3,5 2.25″ - .134″	51 / 20″		98-001		
5	MTD # 742-0616		53,8 21-3/16"	15,8 star 5/8" star	8 5/16"	63,5 2-1/2"	70 - 3,7 2-3/4"-.15"			P630453800102		
6	MTD #742-0616		53,8 21-3/16″	15,8 star 5/8″ star	8 5/16″	63,5 2-1/2″	76 - 3,8 3.00″ - .149″	107 / 42″		98-629	x2	
7	MTD #742-0499, #742-0538		53,8 21-3/16″	10,3 13/32″	7,9 5/16″	63,5 2-1/2″	76,2 - 3,9 3.00″ - .149″	107 / 42″			x2	69-245-0 ❹
8	MTD #742-04087, MTD #942-04087	125/96L - B135 - LF125 - LF125H - LF130 - FL155 - FL155T - P155HF - RS115/96B -RS120/96 - RS125/96 - RS125/96B - Mastercut 96	53,8 21-3/16"	15,8 6 star	-	-	76,2 - 3,9 3.00"-.149"	-		198-153	x2	
	MURRAY (YARD KING)											
9	Murray #92003E701, #92003HT		49,3 19-7/16″	21,5 27/32″	-	-	57,1-3,1 2.25″-.120″	96,5 / 38″	❼	97-010	x2	
10	Murray #20045, #42785HT		50 19-5/8″	10,5 7/16″	10,5 7/16″	63,75	57 - 4 2-1/4″ - .16″	51 / 20″				69-243-0 ❹ 69-259-0

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

ONE FOR ALL
69-265-0
1

2


3

ONE FOR ALL
69-242-0
69-258-0
4

5

6

7

8

ONE FOR ALL
69-266-0
69-256-0
9

10

11

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	PARTNER <) -> AYP, HUSVARNA											
1	Partner #532145106	Partner 150, 150H, 150D	50,8 20"	15,8 5/8"	9,5 3/8"	47,6 1-7/8"	57 - 3,5 2-1/4" - .14"	51 / 20"	❹			69-265-0 ❹
	PUBERT											
2	Pubert #13987		50,7 20"	30,5 1-3/16"	-	-	63,5-53 2.5"-.203"			90-411		
3	Pubert #13988		52 20-1/2"	30,5 1-3/16"	-	-	63,5-53 2.5"-.203"			90-396		
	RANSOMES BOBCAT											
4	Ransomes #32022HD		45,7 18"	15,8 5/8"	6,3 1/4"	41,2 1-5/8"	63,5 - 6,3 2.50"-.250"	92 / 36" 137 / 54"	❿		x2 x3	69-242-0 ❹ 69-258-0
5	Bobcat #32022HD Ransomes #32022		45,7 18"	15,8 5/8"	-	-	63,5 - 5,1 2.50"-.203"	92 / 36" 137 / 54"		96-344	x2 x3	69-242-0 ❹
6	Bobcat #32022HD, #32022		45,7 18"	15,8 5/8"	-	-	63,5 - 6,3 2.50"-.250"	92 / 36" 137 / 54"		396-726	x2 x3	
7	Ransomes #42180B		53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50"-.203"	155 / 61"		96-347	x3	69-245-0 ❹
8	Bobcat #42180B		53,3 21"	15,8 5/8"	-	-	63,5 - 6,3 2.50"-.250"	155 / 61"		396-727	x3	
9	Ransomes #112243-03	HA6010, HT3806, 851	53,3 21"	15,8 5/8"	-	-	63,5 - 6,3 2.50"-.250"	155 / 61"			x3	69-266-0 ❹ 69-256-0
10	Bobcat #112111-03 Ransomes #112243-03	HA6010, HT3806, 851	53,3 21"	15,8 5/8"	-	-	63,5 - 6,3 2.50"-.250"	155 / 61"		396-702	x3	
11	Ransomes #42139B		63,5 25"	15,8 5/8"	-	-	63,5-6,3 2.50"-.250"	188 / 74"		396-731	x3	

- ❶ TURNS LEFT
- ❷ TURNS RIGHT
- ❸ REAR DISCHARGE
- ❹ MULCHING BLADE
- ❺ BLADE FOR BAGGING
- ❻ ELECTRIC MODELS
- ❼ HI-LIFT
- ❽ UPPER BLADE
- ❾ LOWER BLADE
- ❿ HEAVY DUTY

ONE FOR ALL
69-241-0
69-249-0

1

2

3

ONE FOR ALL
69-242-0
69-258-0

4

ONE FOR ALL
69-242-0
69-258-0

5

6

7

8

9

10

ONE FOR ALL
69-245-0
69-261-0

11

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	SCAG											
1	Scag #A48110		41,9 16-1/2″	15,8 5/8″	10 31/32″	102 4″	63,5 - 5,1 2.50″-.203″	82 / 32″ 122 / 48″			x2 x3	69-241-0 ❹ 69-249-0
2	Scag #A48110, #A48184		41,9 16-1/2″	15,8 5/8″	-	-	63,5 - 5,1 2.50″-.203″	82 / 32″ 122 / 48″		96-308	x2 x3	69-241-0 ❹
3	Scag #A48184, #A48110		41,9 16-1/2″	15,8 5/8″	-	-	63,5 - 6,3 2.50″-.250″	82 / 32″ 122 / 48″		396-735	x2 x3	
4	Scag #48108		45,7 18″	15,8 5/8″	10 31/32″	102 4″	63,5 - 5 2.50″-.203″	92 / 36″ 132 / 52″			x2 x3	69-242-0 ❹ 69-258-0
5	Scag #A48185		45,7 18″	15,8 5/8″	-	-	76,2 - 5,1 3.00″-.203″	92 / 36″ 132 / 52″	❼		x1 x2	69-242-0 ❹ 69-258-0
6	Scag #48108 /A48108 #48185		45,7 18″	15,8 5/8″	-	-	63,5 - 5,1 2.50″-.203″	92 / 36″ 132 / 52″		96-344	x2 x3	69-242-0 ❹
7	Scag #48185, #48108 #482467		45,7 18″	15,8 5/8″	-	-	63,5 - 6,3 2.50″-.250″	92 / 36″ 132 / 52″		396-726	x2 x3	
8	Scag #A48111		53,3 21	15,8 5/8	-	-	63,5 - 5,1 2.50″-.203″	155 / 61″			x3	69-245-0 ❹ 69-261-0
9	Scag #A48111		53,3 21	15,8 5/8	-	-	63,5 - 5,1 2.50″-.203″	155 / 61″		96-347	x3	
10	Scag #A48111		53,3 21	15,8 5/8	-	-	63,5-6,3 2.50″-.250″	155 / 61″		396-727	x3	
11	Scag #A48304		53,3 21	15,8 5/8	-	-	76,2-5,1 3.00″-.203″	155 / 61″	❼		x3	69-245-0 ❹ 69-261-0

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

ONE FOR ALL
69-241-0
69-249-0
1

2

ONE FOR ALL
69-242-0
69-258-0
3

4

5

ONE FOR ALL
69-245-0
69-261-0
6

7

8

91-605
9

10

11

ONE FOR ALL
69-242-0
69-258-0
12

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
	SENTAR											
1	Sentar #71440002		42 16-1/2"	15,8 5/8"	10 31/32"	102 4"	63,5 - 5,1 2,5" - .203"	122 / 48"			x3	69-241-0 ❹ 69-249-0
2	Sentar #71440002		42 16-1/2"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	122 / 48"		396-735	x3	
3	Sentar #71440001		45,7 18"	15,8 5/8"	10 31/32"	102 4"	63,5 - 5 2.50"-.203"	132 / 52"			x3	69-242-0 ❹ 69-258-0
4	Sentar #71440001		45,7 18"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	132 / 52"		96-344	x3	69-242-0 ❹
5	Sentar #71440001		45,7 18"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	132 / 52"		396-726	x3	
6	Sentar #71440003		53,40 21"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	155 / 61"			x3	69-245-0 ❹ 69-261-0
7	Sentar #71440003		53,40 21"	15,8 5/8"	-	-	63,5 - 5,1 2,5" - .203"	155 / 61"		396-727	x3	
	SIMPLICITY											
8	Simplicity# 17081, 5104045SYP, 7017081, 7073396,7073396YP, 7075770, 7075770BMA, 7075770BZ, 7075770YP, 75770		53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50"-.203"	-		91-308	x3	
9	Simplicity #1737816 1737816BM, 1737816BMA 1737816BMYP, 1737816BZ 1737816SM, 1737816YP		53,8 21"-3/16"	20,6 13/16"	-	-	57,5 - 3,7 2.25"-.149"	-		91-605	x2	
	SNAPPER											
10	Snapper #1-7043		41,9 16-1/2"	15,8 5/8"	-	-	63,5 - 5,1 2.50"-.203"	81 / 32" 122 / 48"		96-308	x2 x3	69-241-0 ❹
11	Snapper #1-7043		41,9 16-1/2"	15,8 5/8"	-	-	63,5 - 6,3 2.50"-.250"	81 / 32" 122 / 48"		396-735	x2 x3	
12	Snapper #7-7344, #7-7037	Series 2, Pro Series 0, Pro 7 series 0, 1, 2, 4	45,7 18"	15,8 5/8"	-	-	63,5 - 6,3 2.50"-.250"	92 / 36" 132 / 52"	❿		x2 x3	69-242-0 ❹ 69-258-0

❶	❷	❸	❹	❺	❻	❼	❽	❾	❿
TURNS LEFT	TURNS RIGHT	REAR DISCHARGE	MULCHING BLADE	BLADE FOR BAGGING	ELECTRIC MODELS	HI-LIFT	UPPER BLADE	LOWER BLADE	HEAVY DUTY

ONE FOR ALL
69-242-0
69-258-0
1

2

3

4

ONE FOR ALL
69-241-0
69-249-0
8

5

6

91-605
7

9

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	Snapper #7-7344		45,7 18”	15,8 5/8”	6,3 1/4”	41,2 1-5/8”	63,5 - 6,3 2.50”-.250”	92 / 36” 132 / 52”	❿		x2 x3	69-242-0 ❹ 69-258-0
2	Snapper #1-7037		45,7 18”	15,8 5/8”	-	-	63,5 - 5,1 2.50”-.203”	92 / 36” 132 / 52”		96-344	x2 x3	69-242-0 ❹
3	Snapper #1-7037		45,7 18”	15,8 5/8”	-	-	63,5 - 6,3 2.50”-.250”	92 / 36” 132 / 52”		396-726	x2 x3	
4	Snapper #1-9702, #1-9710		52,5 20-11/16”	9,5 3/8”	9,5 3/8”	69,8 2-3/4”	69,8 - 4,3 2.75”-.164”	53 / 21”		99-103		
5	Snapper #1-9515, #1-6980		71,1 28”	27 1-1/16”	14,2 9/16”	190,5 7-1/2”	70 - 5,1 2.75”-.187”	72 / 28”		96-628		
6	Snapper # 17081 #5104045SYP #7017081 #7073396 #7073396YP #7075770 #7075770BMA #7075770BZ #7075770YP #75770		53,3 21"	15,8 5/8"	-	-	63,5 - 5,1 2.50" - .203"	-		91-308	x3	
7	Snapper #1737816, #1737816BM #1737816BMA #1737816BMYP #1737816BZ #1737816SM #1737816YP		53,8 21 "-3/16"	20,6 13/16"	-	-	57,5 - 3,7 2.25"-.149"	-		91-605	x2	
	STIGA											
8	Stiga #1134-0628-01	Stiga Trac	43,1 16-31/32”	9,5 3/8”	9,5 3/8”	69,8 2-3/4”	50,7 - 4,7 2.00”-.188”					69-241-0 ❹ 69-249-0
	TORO & WHEEL HORSE											
9	Toro #116-6358-03, #116-6358-S, #120-9500-03	22200 Turfmaster	39,05 15-3/8"	15,8 5/8"	7,9 5/16"	31,7 1-1/4"	76,2 - 3,40 3.00" - .134"	-		594-601	x2	

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

1

2

ONE FOR ALL
69-263-0
69-253-0
3

4

ONE FOR ALL
69-264-0
69-254-0
5

ONE FOR ALL
69-264-0
69-254-0
6

ONE FOR ALL
69-264-0
7

ONE FOR ALL
69-245-0
69-261-0
8


9


10

11

12

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	Toro #44-5480, #27-0990		45,7 18"	12,7 1/2"	-	-	63,5 - 4,7 2.50"-.187"	92 / 36" 132 / 52"		94-018	x2 x3	69-263-0 ❹ 69-253-0
2	Toro #44-5480, #27-0990	Groundsmaster	45.7 18"	12,7 1/2"	-	-	63.5 - 6.3 2.50"-.250"	92 / 36" 132 / 52"		94-618	x2 x3	
3	Toro #56-2390		45.7 18"	12,7 1/2"	-	-	63,5 - 4,7 2.50"-.187"	92 / 36" 132 / 52"			x2 x3	69-263-0 ❹ 69-253-0
4	Toro #86-0010	455D	48,2 19"	12,7 1/2"	-	-	63,5 - 6,3 2.50"-.250"	340 / 132"		96-701	x7	
5	Toro #79-3060	Recycler	49 19-5/16"	15,8 5/8"	-	-	63,5-4,7 2.50"-.187"	96,5 / 38"	❹		x2	69-264-0 ❹ 69-254-0
6	Toro #57-4700		49 19-5/16"	15,8 5/8"	-	-	63,5-4,7 2.50"-.187"	96,5 / 38"			x2	69-264-0 ❹ 69-254-0
7	Toro #79-3060		49 19-5/16"	15,8 5/8"	-	-	63,5-4,7 2.50"-.187"	96,5 / 38"			x2	69-264-0 ❹
8	Toro-Wheelhorse #93-4106-03		53 20-7/8"	12,7 1/2"	10 3/8"	62 2-7/16"	57 - 3,8 2,1/4" - ,149"	53 / 21"				69-245-0 ❹ 69-261-0
9	Toro #92-5608	Recycler	55 21-11/16"	12,7 1/2"	-	-	63,5 - 6,3 2.50"-.250"	158 / 62"		94-045	x3	69-267-0 ❹ 69-257-0
10	Toro #92-5608	Recycler	55 21-11/16"	12,7 1/2"	-	-	63,5 - 6,3 2.50"-.250"	158 / 62"		96-708	x3	69-267-0 ❹
11	Toro #110-0621-03	Groundsmaster 3280-D3320	62,2 24-1/2"	12,7 1/2"	-	-	63,5 - 6,4 2-1/2" - .250"			94-074		
12	Toro #57-0250	Groundsmaster	62,8 24-3/4"	12,7 1/2"	-	-	63.5 - 6,3 2-1/2" - .250"	183 / 72"		96-724	x3	

❶ TURNS LEFT
❷ TURNS RIGHT
❸ REAR DISCHARGE
❹ MULCHING BLADE
❺ BLADE FOR BAGGING
❻ ELECTRIC MODELS
❼ HI-LIFT
❽ UPPER BLADE
❾ LOWER BLADE
❿ HEAVY DUTY

1

ONE FOR ALL
69-242-0
69-258-0

2

3

ONE FOR ALL
69-266-0
69-256-0

4

5

6

	OEM	MODEL	CM / INCHES	MM / INCHES				CM / INCHES	INFO	OREGON	REQUIRED	ONE FOR ALL
1	Toro #107-0235-03		68,5 27"	12,7 1/2"	-	-	63,5 - 6,4 2-1/2" - .250"			96-741		
	WESTWOOD											
2	Westwood #4943	Standard	46 18ÕÕ	10 3/8"	8 5/16"	50 2"	65 - 4 2.1/2" - 5/32"	92 / 36"			x2	69-242-0 ❹ 69-258-0
	WOLF											
3	Wolf #171046/7340 Husqvarna #5164934-04 #5310050-27	1992 ->, PVT, PH-TF	46 18-7/64"	32,2 1.27"	8,8 .350"	100 3-15/16"	88,9 - 3 3.50"-.120"			90-816		
	WOODS											
4	Woods #70134		53,3 21"	12,7 1/2"	-	-	63,5 - 6,3 2.50"-.250"	155 / 61"			x3	69-266-0 ❹ 69-256-0
	UNIVERSAL - MULCHING BLADES											
5			52,7 21	9,5 3/8"			57,1 - 3,8 2.25"-.149"			90-621		
	EDGER BLADE											
6		Echo #720237-001 Shindaiwa #72950-92110	20,3 8"	25,4 1"	-	-	5,1 2"	-	-	40-141		

❶	❷	❸	❹	❺	❻	❼	❽	❾	❿
TURNS LEFT	TURNS RIGHT	REAR DISCHARGE	MULCHING BLADE	BLADE FOR BAGGING	ELECTRIC MODELS	HI-LIFT	UPPER BLADE	LOWER BLADE	HEAVY DUTY

OEM BLADES CROSS REFERENCES

OEM				ONE FOR ALL	
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
ALKO					
328531				69-253-0	69-243-0
332039	P621546000301				
343120				69-258-0	69-242-0
513519				69-247-0	
513520				69-258-0	69-242-0
513621				69-258-0	69-242-0
530979				69-258-0	69-242-0
531438				69-258-0	69-242-0
ANTONIO CARRARO					
59009200	91-141		96-605 G3	69-255-0	69-265-0
Rondo 1500	91-141		96-605 G3	69-255-0	69-265-0
AYP					
120262X				69-258-0	69-242-0
121263				69-258-0	69-242-0
121263X				69-259-0	69-243-0
126338X				69-258-0	69-242-0
127841	05460B				
127842	05490B				
127842			95-601 G3		
127843	05535B				
127843	195-048				
127843	05535B				
134148	05490MB				
134148	05490MB				
134148X			95-601 G3		
134149	05535MB				
134768					69-267-0
138496	05460B				
138497	95-038				
138497	95-038				
138498	05535B	195-039			
138498			96-900 G3 496-900 G3 *Fusion*		
138498	05535B				
138971			96-900 G3 496-900 G3 *Fusion*		
139744			95-601 G3		
139774			95-601 G3		
141114					69-246-0
141114					69-267-0

OEM				ONE FOR ALL	
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
145106					69-265-0
157101					69-267-0
159267					69-266-0
168721	P635854300901				
168721	P635854300901				
175064				69-255-0	69-266-0
175451	P635854300901				
175451	P635854300901				
180584	P635854300901				
180584	P635854300901				
192682				69-262-0	69-246-0
24692			95-601 G3		
25744					69-244-0
406713				69-262-0	69-246-0
532127841	05460B				
532134148			95-601 G3		
532139774			95-601 G3		
69334				69-262-0	69-246-0
752234					69-246-0
850972				69-260-0	69-244-0
850973				69-262-0	69-246-0
850973					69-267-0
850973					69-246-0
BOBCAT					
112111-03			396-702 G6		
32022HD			96-344 G3 396-726 G6	69-258-0	69-242-0
BOLENS					
1738571				69-249-0	69-241-0
BUNTON					
PC005	96-347				69-245-0
PL4055			396-735 G6		
PL4205	96-308		396-735 G6		
PL4206			96-344 G3 396-726 G6	69-258-0	69-242-0
PL4855	96-308				69-241-0
CARONI					
59009200	91-141		96-605 G3	69-255-0	69-265-0
71001000			396-707 G6		

OEM BLADES CROSS REFERENCES

OEM				ONE FOR ALL	
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
CASTELGARDEN					
81004126/0				69-259-0	69-243-0
81004341/0				69-248-0	69-239-0
81004346				69-253-0	69-263-0
81004360/1					69-248-0
81004365					69-241-0
81004365/1					69-252-0
81004366				69-254-0	69-243-0
81004366/2				69-254-0	69-243-0
81004381/1				69-260-0	69-244-0
81004385				69-258-0	69-242-0
81004395/1				69-254-0	69-264-0
81004397/0				69-253-0	69-263-0
82004340/0	55520RB	91-958			
82004341/0	55520LB	91-959			
82004347/0	55520RMB				
82004354/0	40461LMB				
81004396				69-248-0	69-239-0
81004398				69-255-0	
CUB CADET					
742-04053A			91-938 **G3**		
DALOZ					
4453	P621352800101				
DIXON					
539119871			396-740 **G6**		
8688				69-247-0	
9258					69-241-0
9265					69-241-0
9383			396-740 **G6**		
9403					69-241-0
9433					69-241-0
EFCO					
8203141	P6297520001				
66030201B				69-258-0	69-242-0
66040017B				69-258-0	69-242-0
EMAK					
66030201B				69-258-0	69-242-0
66040017B				69-258-0	69-242-0

OEM				ONE FOR ALL	
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
EXMARK					
303146			96-344 G3		69-242-0
303146			96-344 G3 396-726 G6		69-242-0
303283			96-344 G3		
303495					69-263-0
303527			96-344 G3		
633483			396-740 G6		
663482			96-344 G3		
663484			96-344 G3		
663485			96-344 G3		
GRANJA					
041300/0				69-253-0	69-263-0
GRASSHOPPER					
320236			96-329 G3	69-253-0	69-263-0
320242			396-712 G6	69-256-0	69-266-0
320242			396-712 G6		
320243			396-712 G6		
GRAVELY					
25124			396-740 G6		
46998					69-241-0
GREAT DANE					
D18036			96-347 G3 396-727 G6		
D18037			96-344 G3 396-726 G6	69-258-0	69-242-0
HAYTER					
201026				69-248-0	69-239-0
4013	91-893			69-259-0	69-243-0
40130				69-259-0	69-243-0
HONDA					
72511-VE1-650	66535B				
72511-VE1-651	66535B				
72511-VE1-652	66535B				
CG81004397H0				69-253-0	69-263-0
CG82004340/00	55520RB				
CG82004341/0	55520LB				

OEM BLADES CROSS REFERENCES

OEM				ONE FOR ALL	
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
HUSQVARNA					
127842			95-601 G3		
134149	05535MB				
138496	95-026				
173920			596-615 G5		
5041878			95-081 G3		
5041882-01	94-083				
5055445	P621035900101				
5065518-01	10300B				
506-6687-01	10300B				
5066765-01	10300B				
506-8852-01					69-241-0
5164438-00					69-263-0
5164934-04	90-816				
516-4943-04				69-256-0	69-266-0
530127-84			95-601 G3		
531-0050-09					69-241-0
5310050-11	10300B				
5310050-27	90-816				
5310050-40					69-263-0
5321212-63			95-601 G3	69-259-0	69-243-0
5321263-38		95-026			
5321278-41	05460B	95-026			
5321278-42	05490B		95-601 G3		
5321278-43	05535B		96-900 G3		
5321341-48	05490MB				
5321341-49	05535MB				
5321384-96	05460B	95-026			
5321384-97	05490B		95-601 G3		
5321384-98			96-900 G3		
532145106					69-265-0
5321750-52				69-261-0	69-245-0
532180054			596-615 G5		
5321804-24	P635854300801				
5321993-77	95-065				
5321411-14					69-246-0
5321805-84	P635854300901				
532-8509-72				69-260-0	69-244-0
532-8509-73				69-262-0	69-246-0

OEM				ONE FOR ALL	
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
5440677-01			95-080 G3		
5441027-01			95-081 G3		
5441030-01	94-083				
ISEKI					
8595-306-002-00				69-252-0	
8654-306-00			396-702 G6	69-256-0	69-266-0
8654-306-011-0			396-702 G6	69-256-0	69-266-0
JACOBSEN					
390665			96-344 G3 396-726 G6	69-258-0	69-242-0
392564			396-710 G6		
JT391039			96-696 G3		
JT391040			96-795 G3		
JOHN DEERE					
AM100538			396-734 G6		
AM102401			396-775 G6		
AM104489			96-308 G3 396-735 G6		69-241-0
AM31100				69-248-0	69-239-0
AM38314			396-775 G6		
M127500			96-354 G3		
M139802	91-449			69-257-0	69-267-0
M141786			396-775 G6		
M143520			396-719 G6		
M144935			396-710 G6		
M145969	91-449			69-257-0	69-267-0
M80783			396-775 G6		
M84472				69-254-0	69-264-0
PT8721			96-344 G3 396-726 G6		69-242-0
TCU51118	92-120				
JONSERED					
532-122260				69-258-0	69-242-0
532-126338				69-258-0	69-242-0
532145106					69-265-0
KLIPPO					
60.00			90-804		69-264-0
60,04			90-805		69-266-0

OEM BLADES CROSS REFERENCES

OEM				ONE FOR ALL	
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
KUBOTA					
70000-25002			396-814 G6		
70000-25013			396-814 G6		
70000-25030			396-814 G6		
76500-34330				69-249-0	
76505-11550				69-252-0	
76539-34330	P624752200103		396-787 G6		
76553-34330			396-814 G6		
K5676-97520			396-814 G6		
K5677-34340			396-814 G6		
MOUNTFIELD					
M2868				69-250-0	
M4609				69-251-0	69-239-0
MTD					
742-0122				69-254-0	69-264-0
742-04053A			91-938 G3		
742-0496				69-258-0	69-242-0
742-0499					69-245-0
742-0538					69-245-0
742-0610	P630449000101		98-628 G3		69-265-0
742-0616	P630453800102		98-629 G3		
742-0620	98-001				
742-0638				69-258-0	69-242-0
742-0640				69-255-0	69-265-0
742-0641				69-256-0	69-266-0
942-0610	198-052				
942-0640				69-255-0	69-265-0
942-0738					69-263-0
MURRAY					
92003E701	97-010				
92003HT	97-010				
95103E701				69-259-0	69-243-0
OLEO-MAC					
66030201B				69-258-0	69-242-0
66040017B				69-258-0	69-242-0
PARTNER					
532145106					69-265-0
PUBERT					
13987			90-411		
13988			90-396		

OEM				ONE FOR ALL	
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
RANSOMES					
112243-03				69-256-0	69-266-0
32022			96-344 G3 396-726 G6		69-242-0
42139B			396-731 G6		
42180B			96-347 G3 396-727 G6		69-245-0
ROPER					
134149	05535MB				
SCAG					
48108			96-344 G3 396-726 G6	69-258-0	69-242-0
48185			396-726 G6		
482467			396-726 G6		
A48108			96-344 G3		69-242-0
A48110			96-308 G3 396-735 G6	69-249-0	69-241-0
A48111			96-347 G3 396-727 G6	69-261-0	69-245-0
A48184			96-308 G3 396-735 G6		
A48185			96-344 G3	69-258-0	69-242-0
A48304				69-261-0	69-245-0
SENTAR					
71440001			96-344 G3 396-726 G6	69-258-0	69-242-0
71440002				69-249-0	69-241-0
71440003			396-727 G6	69-261-0	69-245-0
SNAPPER					
1-6980			96-628 G3		
1-7037			96-344 G3 396-726 G6		69-242-0
1-7043			96-308 G3 396-735 G6		69-241-0
1-9515			96-628 G3		
1-9702					
1-9710					
7-7037				69-258-0	69-242-0
7-7344				69-258-0	69-242-0
STIGA					
1134-0628-01				69-249-0	69-241-0

OEM BLADES CROSS REFERENCES

OEM				ONE FOR ALL	
	STANDARD	PREMIUM	GATOR®	STRAIGHT	GATOR®
TORO					
107-0235-03			96-741 G3		
110-0621-03					
27-0990	94-018		94-618 G3	69-253-0	69-263-0
44-5480	94-018		94-618 G3	69-253-0	69-263-0
57-0250			96-724 G3		
79-3060				69-254-0	69-264-0
86-0010			96-701 G3		
92-5608	94-045		96-708 G3	69-257-0	69-267-0
93-4106-03				69-261-0	69-245-0
VIKING					
61517020100	55520RB	91-958			
61517020105	55520LB	91-959			
WALKER					
4943				69-258-0	69-242-0
WHEEL HORSE					
93-4106-03				69-261-0	69-245-0
WOLF					
171046/7340	90-816				
WOODS					
70134				69-256-0	69-266-0
YAMAHA					

BLADES BY LENGHT

OREGON	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	S F
90-284	11,7	4.6”	12,7	1/2”	-	-	-	-	50 - 1.6	1.9” - .063”	-
90-293	15,9	5/8	11,2	7/16”	6,3	1/4”	-	-	70 - 4	2.75” - .157”	-
90-711	17,5	7”	15,9	5/8”	-	-	-	-	50 - 4	2” - 5/32”	-
P624525000101	25	9-13/16”	16,2	5/8”	8,5	5/16”	35	1-3/8”	40 - 2,5	1-9/16” - .10”	S
P622230400101	30	12”	10	0.39”	-	-	-	-	63 - 3,4	2.48” - .130”	F
P6202300001	30	11-13/16”	50	2”	-	-	-	-	40 - 2,5	1-9/16” - .10”	S
P6280300001	30	11-13/16”	20,2	13/16”	10,2	3/8”	40	1-9/16”	45 - 3	1-3/4” - .12”	S
96-349	30,4	11-13/32”	10,2	.404”	8,2	.326”	60,3	2-3/8”	63,5 - 5,1	2.50” - .203”	S
P620830900101	31	12”	17	17/64”	-	-	-	-	50 - 3	2” - 1/8”	S
P628333100101	33	13”	18	0.70”	8,5	5/16”	45	1-3/4”	45 - 2,5	1-3/4” - 1/8”	S
P620833000101	33	13”	18	0.70”	8,5	5/16”	45	1-3/4”	50 - 2,5	19-11/16” - 1/8”	S
89-815	33	13”	15,8	5/8”	7,9	5/16”	35	1-3/8”	39,5 - 3,1	1.55” - .122”	F
P628333000101	33	13”	20	13/16”	10,5	3/8”	52	2”	45 - 2,5	1-3/4” - .10”	F
P6337330001	33	13”	20	13/16”	10,5	3/8”	52	2”	45 - 1,8	1-3/4” - .070”	S
91-931	35	13-3/4”	10,2	.404”	8,2	.326”	60	2-3/8”	57,1 - 4,7	2.25” - .187”	S
10346B	35	13-3/4”	10,2	.404”	8,2	.326”	60,3	2-3/8”	50,8 - 4,1	2.00” - .164”	S
P622935600101	35,6	14”	20	25/32”	6,5	1/4”	70	2-3/4”	50 - 2	2.50” - 5/64”	S
P6211358001	35,8	14-1/16”	10,2	.404”	8,2	.326”	40	1-9/16”	50 - 4	2” - 3/16”	F
P6210364001	36,4	14-5/16”	9,5	3/8”	-	-	-	-	50 - 3,5	2” - .14”	S
91-167	36,8	14-1/2”	17,7	.700”	-	-	-	-	50,8 - 4,7	2.00” - .187”	S
96-303	36,8	14-1/2”	17,7	.700”	-	-	-	-	63,5 - 5,1	2.50” - .203”	S
P620837000101	37	14-1/2”	18	0.70”	8,5	5/16”	45	1-3/4”	50 - 2,5	19-11/16” - 1/8”	S
P6259368001	37	14-9/16”	20,2	13/16”'	10,2	3/8”	40	1-9/16”	50 - 3	2” - .12”	S
P621336700101	37,2	1-7/16”	18	11/16”	-	-	-	-	50 - 5	2” - .20”	S
P6213367002	37,2	14-5/8”	18	11/16”	8,5	5/16”	38	1-1/2”	50 - 5	2” - .20”	S
P620937500101	37,5	14-3/4”	19,7	3/4”	9	11/32”	65	2-1/2”	50 - 3	2” - 1/8”	S
P621637500101	37,5	14-3/4”	18	.070”	8,8	.350”	65	2.6”	55 - 3	2.16”-1/8”	F
P6307376001	37,5	14-13/16”	17,4 star	11/16” star	7,9	5/16”	63,5	2-1/2”	76,2 - 3,0	3.00” - .120”	F
P6209376002	37,6	14-13/16”	19,7	3/4”	12,7 x 20	1/2” x .79”	70	2-3/4”	50 - 3	2” - 1/8”	S
P6307376002	37,6	14-13/16”	10,2	3/8”	8	5/16”	63,5	2-1/2”	76,2 - 3,7	3” - .15”	F
P6217378001	37,8	14-7/8”	22,5 x 26	7/8” x 1”	-	-	-	-	57 - 4	2-1/4” - .16”	S
98-061	37,9	14-29/32”	15,8 star	5/8” star	9,5	3/8”	63,5	2-1/2”	63,5 - 3,8	2.50” - .149”	F
P620937800101	37,9	14-59/64”	16	.630”	6,5	.260”	70	2-3/4”	50 - 3	2” - .125”	S
P622238200101	38	15”	10	0.39”	-	-	-	-	63,5 - 3,5	2.50” - .140”	F
P622238200201	38,1	15”	10	0.39”	10	0.39”	45	1.77”	63 - 3,5	2.48” - .140”	F
90-154	38,1	15”	20	25/32”	7	9/32”	-	-	40 - 3	1-1/2” - 1/8”	S
90-824	38,5	15”	19,7	3/4”	9	11/32”	65	2-1/2”	55 - 3	2-1/8” - 1/8”	S
91-097	38,8	15-9/32”	9,9	.390”	-	-	-	-	50.8 - 4,7	2.00”-.187”	S
P6209388001	38,8	15-1/4”	19	3/4”	10,5	7/16”	52	2-1/16”	50 - 3	2” - .12”	S
P6273390001	38,9	15-11/32”	10	3/8”	10,2	3/8”	102	4”	57 - 5	2.25” - .187”	S
95-607	38,9	15-11/32”	9,5	3/8”	-	-	-	-	57,1 - 4,7	2.25” - .187”	S
P621538600201	38,9	15-3/8”	18	0.70”	7,9	5/16”	65	2-1/2”	50 - 3	2” - 1/8”	S
P621439400101	38,9	15-3/8”	17,4	11/16”	8,5	11/32”	38	1-1/2”	50 - 5	2” - 3/16”	F
P621338600101	38,9	15-11/32”	18,2	23/32”	8,7	11/32”	38,1	1-1/2”	50,8 - 4,7	2.00” - .187”	S
P6285390001	39	15-3/8”	18	0.70”	8,9	3/8”	65	2-1/2”	57 - 3	2-1/4” - 1/8”	F
P630539100102	39	15-11/32”	16,1	5/8”	90	3/8”	80	3-1/8”	57 - 3,5	2-1/4” - 1/8”	S
95-052	39,3	15-1/2”	15,8 star	5/8” star	-	-	-	-	57,1 - 3,9	2.25” -.155”	S
94-026	39,3	15-1/2”	15,8	5/8”	-	-	-	-	63,5 - 4,7	2.50”-.187”	F
94-039	39,3	15-1/2”	15,8	5/8”	-	-	-	-	63,5 - 5,1	2.50”-.203”	F
94-061	39,3	15-1/2”	15,8	5/8”	-	-	-	-	63,5 - 4,7	2.50” - .187”	S
P628240100101	40	15-3/4”	17,4	11/16”	11 x 11,5	7/16” x 29/64”	40	1-1/2”	65 - 3	2.50” - .118”	F
P630540000103	40	15-3/4”	21,5	27/32”	-	-	-	-	57,1 - 3,9	2.25”-.149”	F
97-012	40	15-3/4”	21,5	27/32”	-	-	-	-	63,5 - 4,7	2.25”-.187”	S
91-840	40	15-3/4”	32	1-17/64”	6,8	.270”	86	3.4”	70 - 3,4	2.75”-.134”	F
P6215393002	40	15-1/2”	19	3/4”	-	-	-	-	55 - 4	2-1/8” - 5-32”	S
P6264397001	40,5	15-61/64”	16	.630”	7	.275”	70	2-3/4”	50 - 3,6	1.97” - .142”	F
P621640800101	40,6	16”	18	0.70”	8,8	.350”	65	2-1/2”	60 - 4	2-3/8” - 5/32”	S
P630340300101	40,6	16”	15,8	5/8”	-	-	-	-	57 - 3,4	2.24” - .134”	S
P6213406001	40,6	16”	17,4	11/16”	-	-	-	-	63,5 - 5,1	2.50” - .203”	S
P6259406001	40,8	16-1/16”	18	.710”	8,8	.350”	65	2.6”	55 - 3	2.16” - .120”	S
96-013	40,8	16-1/16”	9,5	3/8”	-	-	-	-	50,8 - 3,4	2.00”-.134”	F
90-325	40,9	16-1/8”	21	13/16”	10	3/8”	88	3-1/2”	76 - 3	3” - .125”	F
P621141000201	40,9	16-1/8”	24	15/16”	7,9	5/16”	48	1-7/8”	50 - 4	2” - 5/32”	F
91-723	40,9	16-1/8”	19	3/4”	10,3	.406”	65	2-9/16”	50,8 - 5,1	2.00”-.203”	F
91-705	40,9	16-1/8”	19	3/4”	10,3	.406”	65	2-9/16”	63,5 - 5,1	2.50-.203	S

OREGON											S F
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
90-229	40,9	16-1/8"	32,5	1-1/4"	-	-	-	-	75 - 3	3" - 1/8"	S
P6217410001	41	16-1/8"	18	0.70"	8,8	.350"	65	2-1/2"	57 - 4	2-1/4" - 5/32"	F
P6209410001	41	16-1/8"	20	13/16"	10,5	3/8"	52	2"	50 - 3	2" - .120"	F
P621141000101	41	16-1/8"	10,1	3/8"	8,3	5/16"	60	2-3/8"	50 - 4	2" - 3/16"	S
P621041000101	41	16-1/8"	10,2	3/8"	8	5/16"	63,5	2-1/2"	50 - 3,5	2" - .14"	S
07408B	41,1	16-3/16"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .149"	F
396-716	41,2	16-1/4"	15,8	5/8"	-	-	-	-	63,5 - 6,3	2.50" - .250"	S
P6231412001	41,2	16-1/4"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 4,2	3.00" - .164"	F
98-054	41,2	16-1/4"	6pt.star	6pt.star	7,9	5/16"	63,5	2-1/2"	76,2 - 3,0	3.00" - .120"	F
P6333413002	41,3	16-1/4"	16	5/8"	10	3/8"	102	4"	63,5 - 6	2.50" -.24"	S
P635941300101	41,3	16-1/4"	19,2	3/4"	8	5/16"	63,5	2-1/2"	76,2 - 3	3" - .125"	F
P6239415001	41,4	16-9/32"	26,8	1.05"	8,2	.310"	78	3"	57 - 2,4	2.24" - .096"	F
P630741300101	41,5	16-11/32"	10,3	13/32"	7,9	5/16"	63,5	2-1/2"	76,2 - 3,9	3.00" - .156"	F
P621641500101	41,5	16-5/16"	10	3/8"	8	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	F
P6215416001	41,6	16-3/8"	19,7	3/4"	12,7 x 20	1/2"x.79"	70	2-3/4"	55 - 3,4	2.16" - .134"	F
39414B	41,8	16-15/32"	28	1.10"	6 x 8,5	15/64" x 11/32"	50	2"	57 - 2,4	2.24" - .096"	F
P6284419002	41,9	16-1/2"	21	13/16"	6 x 8 & 10	1/4" x 5/16" & 3/8"	88 & 94	3-1/2" & 3-3/4"	74 - 3	2-7/8" - 1/8"	F
90-867	41,9	16-1/2"	19	3/4"	-	-	-	-	50 - 7	2" - .275"	F
P622441900101	41,9	16-1/2"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50"-.203"	S
P626141900101	41,9	16-1/2"	16	5/8"	12	1/2"	258	10-3/16"	60 - 3	2-3/8" - .12"	S
91-678	42	16-5"	32	1-1/4"	-	-	-	-	88 - 3,6	3.46"-.142"	F
P6240420002	42	16-1/2"	18,8	3/4"	10,5	7/16"	88	3-1/2"	79 - 3	3-1/8" - .12"	F
P6210420004	42	16.56"	10,1	3/8"	8,3	5/16"	40	1.57"	50 - 4	2" - 3/16"	F
P6216420001	42	16-9/16"	16,3	5/8"	8,2	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	F
91-381	42,2	16-5/8"	20,2	51/64"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
91-401	42,2	16-5/8"	20,2	51/64"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
396-732	42,2	16-5/8"	20,2	51/64"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
90-279	42,2	16-39/64"	18,3	23/32"	-	-	-	-	64,5 - 6,3	2.53" - .236"	S
90-278	42,2	16-39/64"	18,3	23/32"	-	-	-	-	64,5 - 6,3	2.53" - .236"	S
95-068	42,3	16-11/16"	15.8 star	5/8" star	-	-	-	-	63,5 - 5,1	2.5 - 0.203	F
P621442700101	42,3	16-11/16"	18	.710"	-	-	-	-	50,8 - 6,3	2.00" - .250"	F
P621342000101	42,3	16-11/16"	18,2	23/32"	-	-	-	-	50,8 - 5,1	2.00" - .203"	S
P6218423001	42,5	16-3/4"	8,3	5/16"	-	-	-	-	60 - 3	2-3/8" - 1/8"	S
P6266420003	42,5	16-47/64"	23	53/64"	10	25/64"	95	3-3/4"	82 - 2.6	3.22" - .102"	S
90-862	42,5	16-3/4"	9/16"		-	-	-	-	50 - 4	2" - .157"	F
91-703	42,5	16-3/4"	25,4	1"	-	-	-	-	63,5 - 5,1	2.50"-.203"	F
94-803	42,5	16-47/64"	32	1.26"	-	-	-	-	69 - 5,5	2.71"-.216"	S
P624042600101	42,6	16-8"	32	1-1/4"	-	-	-	-	60 - 3,4	2.37"-.134"	S
96-615	42,8	16-7/8"	15,8 star	5/8" star	-	-	-	-	65 - 5,2	2.50" - .203"	S
96-603	42,8	16-7/8"	19	3/4"	-	-	-	-	63,5 - 6,3	2.50" - .250"	F
P621642700101	42,8	16-7/8"	14,5	9/16"	-	-	-	-	60 - 6	2-3/8" - 1/4"	F
P621642700201	42,8	16-7/8"	20,5	13/16"	-	-	-	-	60 - 6	2-3/8" - 1/4"	F
P6339430001	43	16-15/16"	10	3/8"	8,1	5/16"	65	2-9/16"	58 - 4	2-1/4" - .16"	S
91-096	43,1	16-31/32"	9,5	3/8"	9,5	3/8"	69,8	2-3/4"	50,8 - 4,7	2.00" - .187"	S
96-323	43,1	17"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
90-669	43,1	17"	17,4	11/16"	-	-	-	-	63,5 - 4,7	2.50" - .187"	S
92-675	43,1	17"	17,4	11/16"	10,3	13/32"	85	3-11/16"	63,5 - 5,2	2-1/2" - .203"	S
90-348	43,1	17"	20	13/16"	-	-	-	-	63,5 - 6	2-1/2" - 1/4"	S
91-673	43,1	17"	32	1-1/4"	-	-	-	-	96 - 3,8	3.66"-.150"	F
592-616	43,2	17"	7pt.star	7pt.star	-	-	-	-	76,2 - 4,2	3" - .164"	F
91-445	43,4	17-1/16"	20,6	13/16"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
396-770	43,4	17-1/16"	15,8	45876	-	-	-	-	76,2 - 6,3	3 - 0.250	S
P6285440001	43,5	17-1/8"	18	0.70"	8,5	.335"	65	2-9/16"	64 - 4,2	2-1/2" - .160"	F
P6216436001	43,5	17-1/8"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 3	2.16"- 1/8"	F
P6215436001	43,5	17-1/8"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 3	2.16" - 1/8"	S
396-738	43,6	17-3/16"	17,4	11/16"	-	-	-	-	63,5 - 6,3	2.50" - .250"	S
96-676	43,7	17-3/16"	10	.394"	-	-	-	-	63,5 - 5,2	2.50" - .204"	S
P6285438001	43,8	17.24"	9,6	.38"	10,4	13/32"	52	2	57 - 3	2.16" - .11"	S
P6210439001	43,9	17-1/4"	10,5	7/16"	8,5	5/16"	63,7	2-1/2"	50 - 3,5	2" - 1/8"	S
P625243500101	44	17"	33	1.1/4"	-	-	-	-	70 - 4	2.3/4" - 5/32"	S
16445B	44,9	17-46/64"	18	0.70"	8,8	.350"	65	2.6	55 - 4	2.16" - .157"	S
P625244800101	45	17-3/4"	28	1-1/8"	-	-	-	-	55 - 3	2-1/8" - 1/8"	F
P627245300102	45	17-23/32"	16	.630"	7	.275"	70	2-3/4"	73 - 3,3	2.87" - .130"	F
P622045400101	45	17,7"	12,5	1/2"	8,5	.335"	40	1,57"	60 - 5	2-11/32" - .203"	S
P632245100101	45	17-23/32"	32	1-17/64"	6,8	.270"	86	3.4"	70 - 3,2	2.75"-.126"	F

BLADES BY LENGHT

OREGON	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	S F
P6215452002	45	17-3/4”	19	3/4”	-	-	-	-	55 - 4	2-1/8” - 5-32”	S
P637246000101	45,5	18”	10	3/8”	7,9	5/16”	65	2-1/2”	50 - 4	2” - 5/32”	S
P637246000201	45,5	18”	21	13/16”	10,5	3/8”	52	2”	50 - 4	2” - 5/32”	S
91-558	45,5	18”	12,7	1/2”	-	-	-	-	63,5 - 6,3	2.5 - 0.250	F
P627945600101	45,5	17-59/64”	10	.394”	8,5	.335”	65	2.6”	76 - 3,9	3.00” - .156”	F
P627245300201	45,5	18”	20	.787”	10,2	.404”	94	3.84”	70 - 2.75”	3 - .125”	S
P6285457003	45,5	18”	bow-tie	bow-tie	7,9	5/16”	65	2-1/2”	52 - 3	2” - 1/8”	S
P6217455001	45,5	17-5/16”	18	0.70”	8,7	.340”	65	2-1/2”	57 - 4	2.24” - 5/32”	F
P621045500103	45,5	18”	10,5	7/16”	8,5	5/16”	63,7	2-1/2”	50 - 3,5	2” - 1/8”	S
P6217452001	45,5	17-15/16”	21,2	13/16”	10,7	.420”	54	2.12”	57 - 4	2.16” - .150”	S
P6266456002	45,6	17-15/16”	32,2	1.27”	9	3/8”	100	3-15/16”	95 - 2,5	3-3/4” - .10”	S
59456B	45,7	17”	18	.710”	8,8	.350”	65	2.6”	55 - 3,4	2.16” - .134”	F
17460MB	45,7	17”	18	0.70”	-	-	-	-	57-4	2.24” - 0.15”	S
91-218	45,7	18”	15,8	5/8”	-	-	-	-	63,5 - 4,1	2.50” - .164”	F
396-729	45,7	18”	12,7	1/2”	-	-	-	-	63,5 - 6,3	2.50” - .203”	S
93-006	45,7	18”	15,8	5/8”	6,3	1/4”	41,2	1-5/8”	63,5 - 5,1	2.50” - .203”	S
P6285457004	45,7	17-63/64”	bow-tie	bow-tie	7,5	19/64”	63,5	2-1/2”	57,1 - 3,5	2.25” - .134”	F
93-010	45,7	18”	15,8	5/8”	-	-	-	-	63,5 - 5,1	2.50”-.203”	F
P622445700201	45,7	18”	15,8	5/8”	-	-	-	-	63,5 - 5,1	2.50”-.203”	S
91-623	45,7	18”	15,8	5/8”	-	-	-	-	76,2 - 5,1	3.00”-.203”	S
91-184	45,7	18”	15,8	5/8”	-	-	-	-	63,5 - 6,3	2.50” - .250”	S
94-022	45,7	18”	12,7	1/2”	-	-	-	-	63,5 - 4,7	2.50”-.187”	F
596-344	45,7	18”	15,8	5/8”	-	-	-	-	76,2 - 5,1	3” - .203”	S
491-622	45,7	18”	15,8	5/8”	-	-	-	-	63,5 - 5,1	2,5” - .203”	S
P629046000101	46	18”	19,5	3/4”	9	11/32”	65	2-1/2”	55 - 3	2-1/8” - 1/8”	S
P6209476001	46	18”	19,5	3/4”	12,7x20	1/2”x.79”	70	2-3/4”	50 - 3	2” - 1/8”	S
16458B	46	18-7/64”	18	0.70”	8,8	.350”	65	2,6	55 - 4	2.16” - .157”	F
40461LB	46	18-7/64”	18	0.70”	8,8	.350”	65	2,6	55 - 3.3	2.16” - .130”	F
40461RB	46	18-7/64”	18	0.70”	8,8	.350”	65	2,6	55 - 3.3	2.16” - .130”	F
40461LMB	46	18-7/64”	18	0.70”	8,8	.350”	65	2,6	55 - 3.3	2.16” - .130”	F
40461RMB	46	18-7/64”	18	0.70”	8,8	.350”	65	2,6	55 - 3.3	2.16” - .130”	F
P621646000101	46	18”	16	5/8”	8	5/16”	65	2 - 1/2”	55 - 4	2-1/8” - 5/32”	F
P6240460002	46	18”	21	13/16”	10	3/8”	88	3-1/2”	76 - 3	3” - .125”	F
91-875	46	18-3/16”	10	.394”	8,5	.335”	65	2.6”	58 - 3,5	2.26” - .134”	F
05460MB	46	18”	5pt.star	5pt.star	-	-	-	-	57 - 3,5	2-1/4” - 9/64”	S
P628246200101	46	18-7/64”	17,4	11/16”	11 x 11,5	7/16” x 29/64”	40	1-1/2”	65 - 4	2.50” - .157”	F
98-074-0	46	18”	6pt.star	6pt.star	-	-	-	-	71 - 3	.795” - 0.118”	S
98-075-0	46	18”	6pt.star	6pt.star	-	-	-	-	71 - 3	.795” - 0.118”	S
91-706	46	18-9/64”	19	3/4”	10,3	13/32”	65	2-9/16”	50,8 - 5,1	2.00”-.203”	S
90-698	46	18-9/64”	19	3/4”	10,3	13/32”	65	2-9/16”	63,5 - 5,1	2.50”-.203”	S
94-802	46	18-7/64”	32	1.26”	-	-	-	-	68,4 - 5	2.67”-.196”	F
P6222459002	46	18”	10	3/8”	7,9	5/16”	50	2”	65 - 4	2.1/2” - 5/32”	F
P6210459001	46	18-7/64”	-	-	7,9	5/16”	46	1.8”	50,8 - 3,4	2.00”-.134”	F
P6209460002	46	18-1/8”	20	13/16”	10,5	3/8”	52	2”	50 - 3	2” - .120”	F
P6285460001	46	18-7/64”	17	11/16”	12	1/2”	40	1-1/2”	57 - 3	2-1/4” - .12”	S
P6285460002	46	18-1/8”	18	11/16”	8,3	5/16”	45	1-3/4”	57 - 3	2-1/4” - .12”	F
P621646000201	46	18-1/8”	10	3/8”	8	5/16”	65	2-9/16”	55 - 4	2-3/16” - .16”	F
P6339460001	46	18”	16,3	5/8”	8	5/16”	65	2-1/2”	58 - 4	2-1/4” - .16”	F
P6306460001	46	18-1/8”	10	3/8”	9,6	3/8”	101,6	4”	54 - 3,5	2-1/8” - .14”	S
95-034	46,1	18-3/16”	9,5	3/8”	-	-	-	-	57,1 - 4,7	2.25” - .187”	S
95-613	46,1	18-3/16”	15,8 star	5/8” star	-	-	-	-	57,1 - 4,7	2.25” - .187”	F
P6215462002	46,2	18-3/16”	19,5	3/4”	12,7x20	1/2”x.79”	70	2-3/4”	55 - 3	2-1/8” - 1/8”	S
595-613	46,2	18-3/16”	15,8 star	5/8” star	-	-	-	-	76,2 - 4,2	3” - .164”	S
97-105	46,3	18-1/4”	22,2x25,4	7/8x1”	-	-	-	-	57,1 - 3,9	2.25”-.149”	F
P6217462001	46,3	18-1/4”	22,2x25,4	7/8x1”	-	-	-	-	57,1 - 3,9	2.25”-.149”	F
P635846600401	46,4	18,3”	10	.394	45943	1/2” - .394”	85 - 80	3.34” - 3.14”	-4	- .157	S
P635846600301	46,4	18,3”	10	.394	45943	1/2” - .394”	85 - 80	3.34” - 3.14”	-4	- .157	S
P625546601101	46,4	18,3”	5 star	-	13	1/2”	85	3.34”	-4	- .157	S
P625546601201	46,4	18,3”	6 star	-	13	1/2”	85	3.34”	-4	- .157	S
07460B	46,4	18-9/32”	10,3	13/32”	7,9	5/16”	63,5	2-1/2”	76,2 - 3,9	3.00” - .149”	F
P6217461002	46,4	18-17/64”	10	.394”	10	.394”	46	1.8”	57 - 4	2.24”-.157”	F
55465RB	46,5	18-1/4”	5 star	5 star	9	3/8”	80	3-1/8”	57 - 4	2-1/4”-5/32”	F
55465LB	46,5	18-1/4”	6 star	6 star	9	3/8”	80	3-1/8”	57 - 3,8	2-1/4”-.150”	F
17465B	46,5	18-1/4”	25	1”	14,5	9/16”	90	3 - 1/2”	57 - 4	2-1/4” - 5/32”	F

OREGON											S F
	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	
P6217465003	46,5	18-5/16”	21	13/16”	10,5	7/16”	88	3-1/2”	57 - 4	2.24” - .16”	S
P6255466003	46,5	18-1/4”	5pt.star	5pt.star	10	3/8”	80	3-1/8”	57 - 3,8	2-1/4” - .150”	S
P6255466004	46,5	18-1/4”	6pt.star	6pt.star	10	3/8”	80	3-1/8”	57 - 3,8	2-1/4” - .150”	S
P6231465001	46,6	18-11/32”	10,3	13/32”	7,9	5/16”	63,5	2-1/2”	76,2 - 3,9	3.00” - .149”	F
P629246700101	46,7	18-3/8”	24	15/16”	14,5	.571”	88	3-1/2”	57 - 4	2.24” -.16”	F
P621046500201	46,8	18-7/16”	19,5	3/4”	8	5/16”	65	2-1/2”	50 - 3,5	2” - 1/8”	F
P621646800101	46,8	18-7/16”	20,4	.800”	10,3	13/32”	40	1-9/16”	55 - 4,2	2.16” - .164”	F
91-674	46,9	18-15/32”	32	1-1/4”	-	-	-	-	88 - 3,6	3.46”-.142”	S
P6217467001	47	18-1/2”	22	.866”	14,5	.571”	88	3.5”	57 - 4,2	2.24” - .164”	F
95-082	47	18-1/2”	5pt.star	5pt.star	-	-	-	-	63,5 - 4,7	2.50” - .187”	S
P628947200101	47	18-1/2”	17,4	11/16”	11 x 11,5	7/16” x 29/64”	40	1-1/2”	63,5 - 3,5	2.50” - .134”	F
98-672	47	18-1/2”	6pt.star	6pt.star	-	-	-	-	76 - 5	3 - 0.203	F
P624048100101	47	18-1/2”	21	13/16”	10,3	13/32”	88	3.5”	55 - 3	2-5/32” - .10”	F
P6252470001	47	1-7/8”	33	1-5/16”	-	-	-	-	80 - 3	3-1/8” - .140”	S
P625147000301	47,2	18-9/16”	16,2	5/8”	8,5	5/16”	35	1-3/8”	57 - 4	2-1/4” - 3/16”	S
91-404	47,3	18-21/32”	20,2	51/64”	-	-	-	-	63,5 - 5,1	2.50” - .203”	F
P6224475001	47,3	18-21/32”	20,2	51/64”	-	-	-	-	63,5 - 5,1	2.50” - .203”	S
396-706	47,3	18-21/32”	20,2	51/64”	-	-	-	-	63,5 - 6,3	2.50” - .250”	F
396-796	47,3	18-5/8”	28,5	1-1/8”	-	-	-	-	63,5 - 6,3	2.50” - .250”	F
P624747500101	47,3	18-5/8”	28,5	1-1/8”	-	-	-	-	63,5 - 6,3	2.50” - .250”	F
592-617	47,3	18-21/32”	7 pt.star	7 pt.star	-	-	-	-	76,2 - 4,2	3” - .164”	F
P6254474001	47,4	1-7/8”	16	5/8”	10	3/8”	69,5	2-3/4”	90 - 3	3-9/16” - .12”	S
P6266468003	47,5	18-11/16”	21,4	.844”	10,4	.410”	88	3.5”	83 - 3,4	3.27” - .134”	F
90-197	47,5	18-3/4”	20,5	13/16”	-	-	-	-	60 - 7	2-3/8” - 9/32”	F
P627947500101	47,5	1-7/8”	10	.394”	8,4	5/16”	65	2.6”	76 - 3	5/16” - .120”	F
P6285475002	47,5	1-7/8”	20	13/16”	11	7/16”	94	3-11/16”	57 - 3	2-1/4” - .120”	S
P6285475001	47,5	1-7/8”	17	11/16”	12	15/32”	40	1-9/16”	57 - 3	2-1/4” - .120”	S
94-070	47,5	18-3/4”	16	5/8”	-	-	-	-	57,2 - 4,2	2-1/4” - .170”	S
17477B	47,6	18-3/4”	21,5	.850”	10,5	.416”	90	3.5”	57 - 4	2.25” - .157”	F
94-804	47,6	18-47/64”	11,5	29/64”	10,2	.400”	62	2.4”	61 - 4,5	2.40”-.177”	F
P6240475004	47,7	18-3/4”	33	1-5/16”	-	-	-	-	63,5 - 3	2-1/2” - .140”	S
P6215476001	47,8	18-13/16”	19,7	3/4”	12,7x20	1/2” x .79”	70	2-3/4”	55 - 3,4	2.16” - .134”	F
P6216476001	48	18-57/64”	18	0.70”	8,8	.350”	65	2.6	55 - 4	2.16” - .157”	F
17479MB	48	18-57/64”	18	0.70”	8,8	.350”	65	2.6	57 - 4	2.24” - .130”	S
55476B	48	18-57/64”	18	0.70”	8,8	.350”	65	2.6	55 - 4,2	2.16” - .170”	F
91-894	48	19”	19	3/4”	15	.590”	95	3-3/4”	63,5 - 3,2	2.50” - .126”	S
P621148000401	48	18-7/8”	24	0.95”	7,9	5/16”	48	1-7/8”	50 - 4	2” - 5/32”	F
90-354	48	18-7/8”	20	13/16”	-	-	-	-	63,5 - 6	2-1/2” - 1/4”	F
P6210481001	48	18-57/64”	18	0.70”	8,8	.350”	65	2-1/2”	50 - 4	2” - 5/32”	S
P6303480002	48	19”	15,8	5/8”	10,5	7/16”	94	3-11/16”	63,5 - 3	2-1/2” - .120”	S
P632248000101	48	18-7/8”	32	1-17/64”	12,3	1/2”	94	3-11/16”	70 - 3	2-3/4” - .12”	S
90-801	48,2	19”	15,8	5/8”	-	-	-	-	63,5 - 3,8	2.50” - .149”	S
P621048000305	48,2	19”	10,3	13/32”	7,9	5/16”	63,5	2-1/2”	50,8 - 3,5	2.00” - .134”	F
P633348000101	48,2	19”	16	5/8”	11	7/16”	70	2-3/4”	63,5 - 6	2-1/2” - 1/4”	F
P621848300101	48,4	19-1/16”	32	1-1/4”	-	-	-	-	60 - 3	2-3/8” - .12”	S
P6227480001	48,5	19-1/16”	18	11/16”	15	9/16”	48	1-7/8”	70 - 4	2-3/4” - 3/16”	S
94-078	48,6	19-1/8”	16,2	5/8”	6,5	1/4”	150	1/4”	55 - 4	2-3/16” - .160”	S
94-080	48,6	19-1/8”	16,2	5/8”	6,5	1/4”	150	1/4”	55 - 4	2-3/16” - .160”	S
95-031	49	19-5/16”	9,5	3/8”	-	-	-	-	57,1 - 4,7	2.25” - .187”	S
17490MB	49	19-1/4”	18	0.70”	8,8	.350”	65	2.6	57 - 4	2.24” - .130”	S
P625248500201	49	19”	33	1.1/4”	-	-	-	-	70 - 4	2.3/4” - 5/32”	S
94-602	49	19-5/16”	15,8	5/8”	-	-	-	-	63,5 - 4,7	2.50”-.187”	F
94-032	49	19-5/16”	15,8	5/8”	-	-	-	-	63,5 - 4,7	2.50”-.187”	F
94-038	49	19-5/16”	15,8	5/8”	-	-	-	-	63,5 - 4,7	2.50”-.187”	F
595-601	49	19-9/32”	15,8 star	5/8” star	-	-	-	-	76,2 - 4,2	3” - .164”	S
P6231490001	49	19-5/16”	10,3	13/32”	8,1	5/16”	63,6	2-1/2”	75 - 4	2-15/16” - .16”	S
07486B	49,2	19-3/8”	9,5	3/8”	7,9	5/16”	63,5	2-1/2”	76,2 - 3,9	3.00” - .149”	F
98-493	49,2	19-3/8”	9,5	3/8”	7,9	5/16”	63,5	2-1/2”	76,2 - 3,9	3.00” - .149”	F
P6273495001	49,3	19-7/16”	21,5	27/32”	-	-	-	-	57,1 - 3,5	2.25”-.134”	F
P630549500202	49,3	19-7/16”	21,5	27/32”	-	-	-	-	57,1 - 4,7	2.25”-.187”	F
91-398	49,5	19-1/2”	17,8	45/64”	-	-	-	-	63,5 - 5,1	2.50” - .203”	F
96-309	49,5	19-1/2”	17,8	45/64”	-	-	-	-	63,5 - 5,1	2.50” - .203”	S
P632649600101	49,5	19-1/2”	17,8	45/64”	-	-	-	-	63,5 - 5,1	2.50” - .203”	F
P634449800101	49,8	19-5/8”	33,1	1-5/16”	10	3/8”	94	3-11/16”	70 - 3,5	2-3/4” - .14”	S
P6236500001	50	19-11/16”	20,2	13/16”	6,5	1/4”	47	1-7/8”	80 - 5	3-1/8” - .20”	S
90-834	50	19-3/4”	18	0.70”	8,8	.350”	65	2.6	60 - 4	2-3/8” - 5/32”	S

BLADES BY LENGHT

	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	S F
P625150500101	50	20”	16	5/8”	-	-	-	-	55 - 3,5	2.16” - .137”	S
P6217502001	50	19-5/8”	10	13/32”	-	-	-	-	57,1 - 3,4	2.25”-.134”	S
96-005	50	19-11/16”	9,5	3/8”	-	-	-	-	50,8 - 3,5	2.00”-.134”	S
06500B	50	19-11/16”	9,5	3/8”	-	-	-	-	50,8 - 3,5	2.00”-.134”	S
15504B	50	19-3/4”	18	0.70”	8,8	.350”	65	2-1/2”	55 - 3	2.16” - .118”	S
P623150200501	50,2	19-3/4”	24,5	15/16”	8,5	11/32”	44	1-3/4”	75 - 4	3” - 5/32”	S
P621950200101	50,2	19-3/4”	24,5	15/16”	8,5	11/32”	100	3-15/16”	60 - 4	2-3/8” - .16”	S
P6285502001	50,2	19-3/4”	17	11/16”	12	1/2”	40	1-1/2”	57 - 3	2-1/4” - .12”	S
17506MB	50,5	19-7/8”	18	0.70”	8,5	.335”	65	2-9/16”	64 - 4,2	2-1/2” - .160”	S
55504B	50,5	19-7/8”	18	0.70”	8,8	.350”	65	2.6”	55 - 4	2.16” - .157”	F
P6217506003	50,5	19-7/8”	21,5	7/8”	10	3/8”	94	3-11/16”	57 - 4	2.24” - 5/32”	F
P621350500101	50,5	19-7/8”	15,2	5/8”	10,2	3/8”	125	4-15/16”	50 - 5	2” - .20”	F
65508B	50,6	19-15/16”	15,8	5/8”	9,5	3/8”	47,6	1-7/8”	63,5 - 4	2.50” - .149”	F
95-041	50,6	19-15/16”	15,8	5/8”	9,5	3/8”	47,6	1-7/8”	63,5 - 3,9	2.50” - .149”	F
P6217508002	50,8	20”	19,5	3/4”	8,3	5/16”	65	2-1/2”	57 - 4	2-1/4” - 3/16”	F
05508MB	50,8	20”	15,8	5/8”	9,5	3/8”	47,6	1-7/8”	57,1 - 3,4	2.25” - .134”	F
P630553300103	50,8	20”	15,8	5/8”	9,5	3/8”	47,6	1-7/8”	57 - 3,5	2-1/4” - .140”	F
98-066	50,8	20”	bow-tie	bow-tie	7,5	19/64”	63,5	2-1/2”	57,1 - 3,5	2.25” - .134”	F
P630550700101	50,8	20”	17,5 x 25,4	11/16” x 1”	7,5	19/64”	63,5	2-1/2”	57,1 - 3,5	2.25” - .134”	F
96-720	50,8	20”	15,8	5/8”	-	-	-	-	63,5 - 5,1	2.50”-.203”	F
P621651000102	50,8	20”	10	3/8”	8	5/16”	65	2-9/16”	55 - 4	2-3/16” - .16”	F
P621050800102	50,8	19-31/32”	10,2	3/8”	7,9	5/16”	63,5	2-1/2”	50 - 3,5	2” - 1/8”	S
P622050900101	50,9	20-1/16”	30,5	1-3/16”	-	-	-	-	60 - 5	2-3/8” - .20”	S
90-187-0	51	20”	10	3/8”	7,9	5/16”	65	2-1/2”	55 - 3	2-1/8” - 1/8”	S
P625251000101	51	20”	32	1.1/4”	-	-	-	-	80 - 3	3.15” - .120”	F
P6272524003	51	20-5/64”	32,2	1.27”	5,1	.200”	42,4	1.6”	88,9 - 3	3.50”-.120”	F
P6217508001	51	20”	16	5/8”	10,3	13/32”	94	3.7”	57 - 4	2.16” - .115”	F
P6227512001	51,2	20-3/16”	18	11/16”	7,2	1/4”	60	2-3/8”	70 - 4	2-3/4” - .16”	F
P6227507001	51,2	20-3/16”	32	1-1/4”	-	-	-	-	70 - 4	3/16” - .16”	S
P621651300101	51,3	20-3/16”	19,5	3/4”	-	-	-	-	55 - 4	2-1/4” - 3/16”	F
94-001	51,4	20-1/4”	11,1	7/16”	-	-	-	-	57,1 - 3,4	2.25”-.134”	F
P6305517002	51,5	20-9/32”	21,4	27/32”	-	-	-	-	57,1 - 3,5	2.25”-.134”	F
06515B	51,5	20-5/16”	9,5	3/8”	9,6	3/8”	101,6	4”	52,5 - 3,5	2-1/16” - .14”	S
97-004	51,6	20-11/32”	21,8	.850”	-	-	-	-	69,8 - 3,4	2.75-.134”	F
P6305518001	51,6	20-11/32”	21,8	.850”	-	-	-	-	69,8 - 3,4	2.75-.134”	F
P6273520001	51,7	20-3/8”	21,8	.850”	-	-	-	-	57,1 - 3,5	2.25”-.134”	F
97-119	51,7	20-3/8”	21,8	.850”	-	-	-	-	57,1 - 4,7	2.25”-.187”	F
97-604	51,7	20-3/8”	21,8	.850”	-	-	-	-	57,1 - 4,7	2.25”-.187”	F
P625552002701	51,9	20-7/16”	18,2	.719”	8,7	11/32”	65	2.6”	55 - 4,6	2.16” - .181”	F
90-233	52	20-15/32”	16,2	41/64”	7	9/32”	73,5	2-29/32”	-	-	S
90-234	52	20-15/32”	16,2	41/64”	7	9/32”	73,5	2-29/32”	-	-	S
90-253	52	20-1/2”	24,6	31/32”	5,2	13/64”	76,2	3”	3,5	.137”	F
P625552002201	52	20-15/32”	16,2	41/64”	10,4	.410”	73,5	2,90625	55 - 3	2.16 - .125”	F
P625552002101	52	20-15/32”	16,2	41/64”	10,4	.410”	73,5	2,90625	55 - 3	2.16 - .125”	F
P631952200101	52	20-1/2”	23,1	.910”	-	-	-	-	63,5 - 7,8	2.50” - .312”	S
P6253520001	52	20-1/2”	32	1-1/4”	-	-	-	-	93 - 3	3.66”-.120”	F
P6249520001	52	20-4”	32	1-1/4”	-	-	-	-	88 - 3	3.46” - 120”	F
P629252000101	52	20-15/32”	38	1-1/2”	-	-	-	-	68 - 4,5	2.67” - .177”	F
P6220518001	52	20-1/2”	25,5	1”	-	-	-	-	60 - 5	2-3/8” - .20”	F
P6297520002	52	20-1/2”	34	1-5/16”	10,2	3/8”	70 - 94	2-3/4” - 3-11/16”	95 - 2,5	3-3/4” - .10”	S
P621351800101	52	20-1/2”	18	11/16”	-	-	-	-	50 - 5	2” - .20”	S
P625552002501	52	20-1/2”	25,2	1”	14,5	9/16”	90	3-9/16”	55 - 4	2-3/16” - .16”	F
P6255520004	52	20-1/2”	10,3	7/16”	8	5/16”	63	2-1/2”	55 - 4	2-3/16” - .16”	S
P6255520003	52	20-1/2”	10	3/8”	8	5/16”	63	2-1/2”	55 - 3,5	2-3/16” - .15”	S
396-739	52	20-1/2”	12,7	1/2”	-	-	-	-	76,2 - 6,3	3” - .250”	S
90-252	52,1	20-1/2”	24,6	31/32”	5,2	13/64”	76,2	3”	3,5	.137”	F
P6308521001	52,2	20-9/16”	9,5	3/8”	-	-	-	-	69,8 - 3,5	2.75” - .134”	F
P624752300101	52,2	20-9/16”	26,8	1-1/8”	-	-	-	-	63,5 - 6,3	2.5 - 0.250	F
491-438	52,2	20-9/16”	28,5	1-1/8”	-	-	-	-	63,5 - 6,3	2.50” - .250”	F
91-983	52,4	20.62”	16,2	41/64”	6,5	1/4”	150	5.9”	4	0.15”	S
91-984	52,4	20-5/8”	16,2	41/64”	6,5	1/4”	150	5.9”	4	0.15”	S
91-756	52,4	20-5/8”	24	.944”	14,4	.570”	87.5	3.4”	57 - 4	2.25 - .157	F
P627252400101	52,5	20-1/2”	16	5/16”	8	5/16”	95	3.74”	70 - 3	2.75” - .125”	S
P627252400202	52,5	20-1/2”	20	.787”	10	.394”	95	3.74”	70 - 3	2.75” - .125”	S
P6227526001	52,5	20-11/16”	9,5	3/8”	9,5	3/8”	69,8	2-3/4”	69,8 - 4,1	2.75”-.164”	F

	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	S F
96-620	52,5	20-11/16”	9,5	3/8”	9,5	3/8”	69,8	2-3/4”	70 - 4,1	2.75”-.164”	S
P6257523002	52,5	20-1/2”	21	13/16”	14,5	9/16”	88	3-1/2”	90 - 4	3-1/2” - 5/32”	F
P6217526005	52,5	20-1/2”	21	13/16”	14,5	9/16”	88	3-1/2”	57 - 4	2.25” - .157”	S
P629253000101	52,5	20-1/2”	24	.944”	14,5	9/16”	88	3-1/2”	57 - 4	2.25” - .157”	F
17524B	52,5	20-11/16”	25,2	1”	14,5	9/16”	90	3-9/16”	57 - 4	2-1/4” - .16”	F
P625552500101	52,5	20-11/16”	16	5/8”	8	5/16”	65	2-9/16”	55 - 4	2-3/16” - .16”	F
P621652500101	52,5	20-11/16”	16	5/8”	8	5/16”	65	2-9/16”	55 - 4	2-3/16” - .16”	F
P621752400301	52,6	20-11/16”	20	51/64”	14,6	37/64”	90	3-9/16”	57 - 3,8	2.25” - .149”	F
P621752600301	52,6	20-23/32”	21	13/16”	10,5	.416”	88	3-1/2”	57 - 4	2.25” - .157”	S
P6305526001	52,6	20-11/16”	17	11/16”	12	1/2”	40	1-9/16”	57 - 3,5	2-1/4” - .14”	F
P6217526008	52,8	20-13/16”	21,2	.835”	10,5	.416”	87,7	3.455”	57,1 - 3,8	2.25” - .149”	S
17526B	52,8	20-13/16”	21,2	.835”	10,5	.416”	87,7	3.455”	57,1 - 3,8	2.25” - .149”	S
90-651	52,8	20-13/16”	21,2	.835”	10,5	.416”	87,7	3.455”	57,1 - 3,9	2.25” - .187”	S
490-805	52,8	20-13/16”	14,5	9/16”	-	-	-	-	57 - 3,9	2.25” - .150”	F
P621352800101	52,8	20-13/16”	15,2	5/8”	10,2	3/8”	125	4-15/16”	50 - 5	2” - 3/16”	F
P624752800101	52,9	21-1/16”	20	51/64”	-	-	-	-	60 - 7	2-3/18” - .28”	F
P625252600101	53	20-7/8”	28	1.10”	-	-	-	-	81 - 2,5	3.19”-.098”	F
91-516	53	20-7/8”	21,5	27/32”	10,5	.413”	88	3.5”	57 - 3	2.25” - .120”	S
91-443	53	20-7/8”	23,1	.910”	10,3	.406”	93,6	3-11/16”	69,8 - 3,4	2.75” - .134”	F
17527B	53	20-7/8”	21,5	.850”	10,5	.416”	90	3.5”	57 - 4	2.25” - .157”	F
P627153000101	53	20-7/8”	10,2	13/32”	8,2	.328”	54	2.12”	-	-	S
94-051	53	20-7/8”	12,7	1/2”	10	3/8”	62	2-7/16”	57 - 3,8	2.1/4” - .149”	S
P6217527002	53	20-7/8”	23,1	.910”	10,5	7/16”	93	3-11/16”	57 - 4	2-1/4” - .16”	S
94-086	53	20-7/8”	32	1-1/4”	-	-	-	-	97 - 4	3-13/16” - .160”	S
P6217529001	53	20 - 15/16”	21	27/32”	10,7	.420”	54	2.12”	57 - 4	2.16” - .150”	S
91-796	53,1	20-15/16”	20	0.79”	-	-	-	-	80 - 4,4	3.15” - .173”	F
91-517	53,1	20-15/16”	32	1.25”	10,5	.413”	88	3.5”	65,3 - 3	2.50” - .120”	S
98-002	53,1	20-15/16”	21	27/32”	10,3	13/32”	63,5	2-1/2”	57,1 - 3,4	2.25” - .134”	F
94-770	53,1	20-15/16”	11,1	7/16”	9,5	3/8”	61,9	2-7/16”	57,1 - 3,5	2.25”-.134”	F
91-988	53,2	20,9”	16	5/8”	9,5	3/8”	48	1-7/8”	63,5 - 3	2.50” - .118”	S
90-242	53,3	21”	20,3	51/64”	6,8	17/64”	47	1-7/8”	80 - 4	3-1/8” - .157”	S
91-547	53,3	21”	12,7	1/2”	-	-	-	-	63,5 - 6,3	2.50”-.250”	F
91-468	53,3	21”	21	13/16”	10,3	13/32”	90	3-17/32”	57 - 4,1	2.25” - .157”	S
P627953100101	53,3	21”	9,9	.390”	-	-	-	-	50,8 - 3,4	2.00” - .134”	F
93-013	53,3	21”	15,8	5/8”	-	-	-	-	63,5 - 6,3	2.50” - .250”	F
91-078	53,3	21”	23	29/32”	-	-	-	-	63,5 - 8	2.50” - .312”	S
P6289529002	53,3	21”	17,4	11/16”	11 x 11,5	7/16” x 29/64”	40	1-1/2”	65 - 3	2.50” - .118”	F
90-152-0	53,3	21”	bow-tie	bow-tie	7,9	5/16”	63,5	2-1/2”	-	-	F
P628553300202	53,3	21”	bow-tie	bow-tie	7,9	5/16”	63,5	2-1/2”	57,1 - 3,4	2.25” - .134”	F
91-626	53,3	21”	15,8	5/8”	-	-	-	-	63,5 - 5,1	2.50”-.203”	S
91-628	53,3	21”	15,8	5/8”	-	-	-	-	76,2 - 5,1	3.00”-.203”	S
94-017	53,3	21”	11,1	7/16”	9,5	3/8”	61,9	2-7/16”	57,1 - 3,5	2.25”-.134”	F
596-900	53,3	21”	15,8 star	5/8” star	-	-	-	-	76,2 - 4,2	3” - .164”	S
P621053300101	53,3	21”	10,2	3/8”	8	5/16”	63,5	2-1/2”	50 - 3,5	2” - 1/8”	S
598-631	53,3	21”	bow-tie	bow-tie	7,9	5/16”	63,5	2-1/2”	76 - 3,8	3” - .150”	S
555350MB	53,5	21-3/32”	16	5/8”	10	3/8”	48	1-7/8”	57 - 3,5	2-1/4” - .140”	F
P621753800101	53,5	21-3/32”	15,8 star	5/8” star	9	3/8”	80	3-1/8”	57 - 4	2-1/4” - .160”	F
496-900	53,5	21-3/32”	15,8 star	5/8” star	-	-	-	-	57,1 - 4,7	2.25” - .187”	F
P6308537001	53,5	21-3/32”	16	5/8”	9,5	3/8”	47,5	1-7/8”	70 - 3,3	2.75” - .130”	S
95-621	53,5	21-3/32”	15,8	5/8”	9,5	3/8”	47,5	1-7/8”	70 - 4	2.75” - .149”	F
P622053700101	53,5	21”	24,5	15/16”	-	-	-	-	60 - 5	2-3/8” - 3/16”	S
P630753200104	53,8	21-3/16”	10,3	13/32”	7,9	5/16”	63,5	2-1/2”	76,2 - 3,9	3.00” - .149”	F
98-600	53,8	21-3/16”	10,3	13/32”	7,9	5/16”	63,5	2-1/2”	76,2 - 3,9	3.00” - .149”	F
98-093	53,8	21-3/16”	6pt.star	6pt.star	-	-	-	-	69,8 - 3,8	2.75 - 0.149	F
98-076-0	53,8	21-3/16”	6pt.star	6pt.star	-	-	-	-	71 - 3	2.795” - .118”	F
98-077-0	53,8	21-3/16”	6pt.star	6pt.star	-	-	-	-	71 - 3	2.795” - .118”	F
P6307538001	53,8	21-3/16”	10,4	7/16”	8	5/16”	63,5	2-1/2”	76,2 - 3,7	3” - .15”	S
94-084	53,9	21-1/4”	32,1	1-1/4”	-	-	-	-	97 - 2,5	3-13/16” - .100”	S
396-771	54	21-1/2”	20,6	13/16”	-	-	-	-	63,5 - 6	2-1/2” - 1/4”	F
P6305540003	54	21-1/4”	21,5	27/32”	-	-	-	-	57,1 - 3,4	2.25”-.134”	F
97-005	54	21-1/4”	21,5	27/32”	-	-	-	-	57,1 - 3,4	2.25”-.134”	F
P621754000102	54	21-1/4”	21,5	27/32”	-	-	-	-	57,1 - 3,9	2.25”-.149”	F
97-013	54	21-1/4”	21,5	27/32”	-	-	-	-	57,1 - 4,7	2.25”-.187”	F
P635854300901	54,3	21-1/3”	6pt.star	6pt.star	13	1/2”	85	3.34”	57,1 - 4	2-1/4” - .160”	F
P635854300701	54,3	21-1/3”	5pt.star	5pt.star	13	1/2”	85	3.34”	57,1 - 4	2-1/4” - .160”	F

BLADES BY LENGHT

	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	S F
P635854301001	54,3	21,4"	10	.394"	45943	1/2" - .394"	85 - 80	3.34" - 3.14"	-4	- .157	S
P635854300801	54,3	21,4"	10		-	-	-	-	-	-	S
596-356	54,3	21-3/8"	7 pt.star	7 pt.star	-	-	-	-	76,2 - 5,2	3" - .203"	F
96-340	54,6	21-1/2"	17,4	11/16"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
94-621	54,6	21-1/2"	12,7	1/2"	-	-	-	-	63,5 - 6,3	2.50"-.250"	S
P621754600101	54,6	21-1/2"	21,8	7/8"	10	3/8"	60	2-3/8"	57 - 4	2-1/4" - .16"	S
06552B	55	21-11/16"	9,5	3/8"	-	-	-	-	50,8 - 3,6	2.00"-.134"	S
P6254547001	55	2-3/16"	16	5/8"	10	3/8"	69,5	2-3/4"	90 - 3	3-9/16" - .12"	S
65552B	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	63,5 - 4	2.50" - .149"	S
P621055000101	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	50 - 3,8	2.00" - 1/8"	F
95-042	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	63,5 - 3,9	2.50" - .149"	F
P6305552001	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	57,1 - 3,4	2.25" - .134"	F
95-602	55,2	21-3/4"	15,8	5/8"	9,5	3/8"	47,6	1-7/8"	63,5 - 155	2.50" - .149"	F
94-322	55,2	21-3/4"	11,5	7/16"	-	-	-	-	57 - 3,8	2.1/4" - .149"	S
94-081	55,3	21-3/4"	35 x 20,5	1-3/8" x 13/16"	-	-	-	-	84 - 5	3-5/16" - 20"	S
94-082	55,3	21-3/4"	35 x 20,5	1-3/8" x 13/16"	-	-	-	-	84 - 5	3-5/16" - 20"	S
P6217555001	55,5	21-7/8"	10	3/8"	10,3	7/16"	101,6	4"	57 - 4	2-1/4" - .16"	F
95-073	55,6	21-7/8"	55,6	45874	15,8	45872	47,6	39630	57,1 - 3,5	2.25 - 0.134	F
P6238557001	55,7	2-3/16"	10,5	7/16"	12 x 10,5	1/2" x 7/16"	70 - 96	2-3/4" - 3-3/4"	79 - 3,5	3-1/8" - 1/8"	S
91-912	55,8	22"	15,8	5/8"	5,2	.208"	76,2	3"	69,8 - 4,1	2.75"-.164"	F
91-913	55,8	22"	15,8	5/8"	5,2	.208"	76,2	3"	70 - 4,1	2.75"-.164"	F
94-075	55,8	22"	12,7	1/2"	-	-	-	-	63,5 - 6,4	2-1/2" - .250"	F
94-077	55,8	22"	12,7	1/2"	-	-	-	-	63,5 - 6,4	2-1/2" - .250"	F
394-075	55,8	22"	12,7	1/2"	-	-	-	-	76 - 6,4	3" - .250"	F
P630355700101	56	22"	15,8	5/8"	-	-	-	-	63,5 - 3,2	2.50" - .126"	F
P6339560002	56	22-1/16"	18	11/16"	10,2	3/8"	94	3-11/16"	58,5 - 4	2-5/16" - .16"	S
P633356000201	56	22"	16	5/8"	11	7/16"	70	2-3/4"	63,5 - 6	2-1/2" - 1/4"	F
P633356000101	56	22"	16	5/8"	11	7/16"	70	2-3/4"	63,5 - 6	2-1/2" - 1/4"	F
P625556000101	56	22-1/16"	10	30/8"	8	5/16"	65	2-9/16"	55 - 4	2-3/16" - .16"	S
91-701	56,5	22-1/4"	19	3/4"	10,3	.406"	65	2-9/16"	50,8 - 5,1	2.00"-.203"	S
95-074	58,1	39651	15,8 star	5/8" star	-	-	-	-	57,1 - 3,8	2.25 - 0.149	F
596-370	58,1	22-7/8"	15,8 star	5/8" star	-	-	-	-	76,2 - 4,7	3" - .187"	F
91-363	58,5	23"	13,5	17/32"	10,3	13/32"	73	2-7/8"	63,5 - 6,3	2.50"-.250"	S
91-364	58,5	23"	13,5	17/32"	10,3	13/32"	73	2-7/8"	63,5 - 6,3	2.50"-.250"	S
P6273603001	60,5	23-13/16"	21	.827"	10,4	.410"	88	3.5"	57,1 - 3,8	2.25" - .149"	F
91-493	61,1	24-1/12"	26,7	1-1/8"	-	-	-	-	63,5 - 6,3	2.5 - 0.250	F
55620LB	61,5	24-13/64"	18	0.70"	8,8	.350"	65	2,6	55 - 4,4	2.16" - .175"	F
55620RB	61,5	24-13/64"	18	0.70"	8,8	.350"	65	2,6	55 - 4,4	2.16" - .175"	F
55620RMB	61,5	24-13/64"	18	0.70"	8,8	.350"	65	2,6	55 - 4,4	2.16" - .175"	F
55620LMB	61,5	24-13/64"	18	0.70"	8,8	.350"	65	2,6	55 - 4,4	2.16" - .175"	F
P633162000101	62,2	24-1/2"	18	0.70"	8,8	.350"	192	7,55	55 - 3	2.16" - 3	F
P6285620001	62,2	24-1/2"	18	0.70"	8,8	.350"	192	7,55	55 - 3	2.16" - 3	F
96-341	62,2	24-1/2"	15,8	5/8"	-	-	-	-	63,5 - 5,1	2.50" - .203"	S
90-342	62,2	24-31/64"	32	1-1/4"	10	31/32"	80	3-5/32"	88 - 3	3.46"-.120"	S
90-285	62,2	24-31/64"	32	1-1/4"	10,6./8,2.	27/64./21/64.	80./170.	3 5/32./6.69	79 - 6,3	3.11" - .250"	F
90-286	62,2	24-31/64"	32	1-1/4"	10,6./8,2.	27/64./21/64.	80./170.	3 5/32./6.69	79 - 6,3	3.11" - .250"	F
396-717	62,4	24-9/16"	29	1.141"	-	-	-	-	63,5 - 6,3	2-1/2" - 0.250"	S
90-280	62,4	24-9/16"	29	1 -5/32"	-	-	-	-	65 - 7,2	2.55" - .283"	F
P6236630002	63	24-13/16"	20	0.79"	-	-	-	-	80 - 4,4	3.15" - .173"	S
P6217630001	63	24-13/16"	26	1"	-	-	-	-	57 - 4	2-1/4" - .16"	S
91-395	63,1	24-31/32"	23,1	.910"	-	-	-	-	63,5 - 7,8	2.50" - .312"	S
93-025	63,3	24-15/16"	15,8	5/8"	-	-	-	-	63,5 - 6,3	2.50"-.250"	F
P6236630001	63,5	25"	20	13/16"	6,5	1/4"	47	1-7/8"	80 - 5	3-1/8" - 3/16"	F
596-797	63,5	25"	20	13/16"	-	-	-	-	80 - 4,7	3" - .187"	S
P6227642001	63,5	25"	24,5	15/16"	-	-	-	-	70 - 4	2-3/4" - 5-32"	F
96-602	63,5	25"	19	3/4"	-	-	-	-	57 - 6.3	2.50" - .250"	S
P6225633001	63,5	25"	19	3/4"	-	-	-	-	63,5 - 6,3	2.50"-.250"	F
90-704	63,5	25"	16	5/8"	-	-	-	-	63,5 - 6,3	2.50" - .250"	S
94-040	64	25-3/16"	12,7	1/2"	-	-	-	-	63,5 - 6,3	2.50"-.250"	F

	CM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	S F
96-705	64	25-3/16"	12,7	1/2"	-	-	-	-	63,5 - 6,3	2.5 - 0.250	F
P637564000101	64	25-3/16"	13	1/2"	8	5/16"	48	1-7/8"	120 - 5	4-3/4" - .20"	F
P637564000201	64	25-3/16"	13	1/2"	8	5/16"	48	1-7/8"	120 - 5	4-3/4" - .20"	F
94-073	64	25-3/16"	12,7	1/2"	-	-	-	-	63,5 - 6,4	2-1/2" - .250"	F
P6285651001	65,1	25-5/8"	18	0.70"	8,8	.350"	65	2-1/2"	"57 - 3	2.24" - .12"	S
P6223660001	66	26"	10,3	.406"	8	5/16"	63,5	2.50"	63 -4.5	2.50 - .21	S
P629967300101	67,3	26-1/2"	18,5	3/4"	9	3/8"	65	2-9/16"	55 - 5	2-3/16" - .20"	F
P6299673003	67,3	26-1/2"	18,5	3/4"	9	3/8"	65	2-9/16"	55 - 5	2-3/16" - .20"	S
94-049	68,5	27"	12,7	1/2"	-	-	-	-	63,5 - 6,4	2-1/2" - .250"	F
P625570900101	71	28"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 4	2.16"- 1/8"	S
55709MB	71	28"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 4	2.16"- 1/8"	S
P6255709005	71	28"	18	0.70"	8,8	.350"	65	2-1/2"	55 - 4	2-1/8" - 5-32"	S
P622871100101	71,1	28"	27	1-1/16"	14,2	9/16"	190,5	7-1/2"	69,8 - 4,1	2.75"-.164"	F
79-728	71,1	28"	27	1-1/16"	13,5	1/2"	190,5	7-1/2"	67 - 5	2-5/8" - .20"	-
P637571600101	71,6	28-3/16"	13	1/2"	8	5/16"	48	1-7/8"	120 - 5	4-3/4" - .20"	F
P637571600201	71,6	28-3/16"	13	1/2"	8	5/16"	48	1-7/8"	120 - 5	4-3/4" - .20"	F
91-999	76	29,9"	6pt.star	6pt.star	-	-	-	-	-	-	S
P6299760002	76	29-15/16"	18,5	3/4"	9	3/8"	65	2-9/16"	55 - 5	2-3/16" - .20"	S
98-032	76,1	29-31/32"	10,3	13/32"	7,9	.315"	63,5	2.50"	76,2 - 3,8	3.00" - .149"	F
91-399	76,2	30"	17,4	11/16"	-	-	-	-	63,5 - 5,1	2.50" - .203"	F
97-009	76,2	30"	21,7	.855"	-	-	-	-	69,8 - 4,2	2.75"-.149"	F
96-630	76,2	30"	27	1-1/16"	14,2	9/16"	190,5	7-1/2"	70 - 4,1	2.75"-.187"	S
P6228762001	76,2	30"	27,3	1-1/16"	13,5	1/2"	190,5	7-1/2"	67 - 5	2-5/8" - .20"	S
97-330	76,3	30-1/16"	21,5	.850"	-	-	-	-	69,8 - 3,7	2.75"-.149"	F
94-021	79,8	31-7/16"	15,8	5/8"	-	-	-	-	63,5 - 4,7	2.50"-.187"	F
P6228838001	83,8	33"	27	1-1/16"	14,2	9/16"	19,5	7-1/2"	69.8 - 4.7	2.75" - .187"	F
96-633	83,8	33"	27	1-1/16"	14,2	9/16"	190,5	7-1/2"	70 - 4,7	2.75"-.187"	S

OREGON®

MORE THAN 75 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged.
Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing, and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents.
Engineering is the bedrock of our reputation.

PRINTED IN EUROPE ON PAPER SOURCED FROM SUSTAINABLY MANAGED FORESTS. OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2025 - AD100-012-EN

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C008551

OREGON
PowerCut

Discover more of our products at
OregonProducts.com

PRODUCT AND BRAND PROMOTION

PBP_1.2
EN/EUR

OREGON
OREGON
OREGON
OREGON
OREGON

OREGON
Chaînes & Guides
OregonProducts.com

Enduser product flyers

	OREGON	SPECIFICATIONS	📦
	AD400-015EN	Trimmer head flyer, 10x21, EN	50
	AD400-016EN	Maintenance flyer, 10x21 EN	50
	AD400-017EN	PPE flyer, 10x21, EN	50
	AD400-018EN	Saw chains and Guide bars flyer, 10x21, EN	50
	AD400-019EN	OPE flyer, 10x21, EN	50
	AD400-020EN	70EXL flyer, 10x21, EN	125
	AD400-021EN	Nylium Silencio flyer, 10x21, EN	125

OREGON
Nylium Silencio
l'efficacité silencieuse
OregonProducts.com

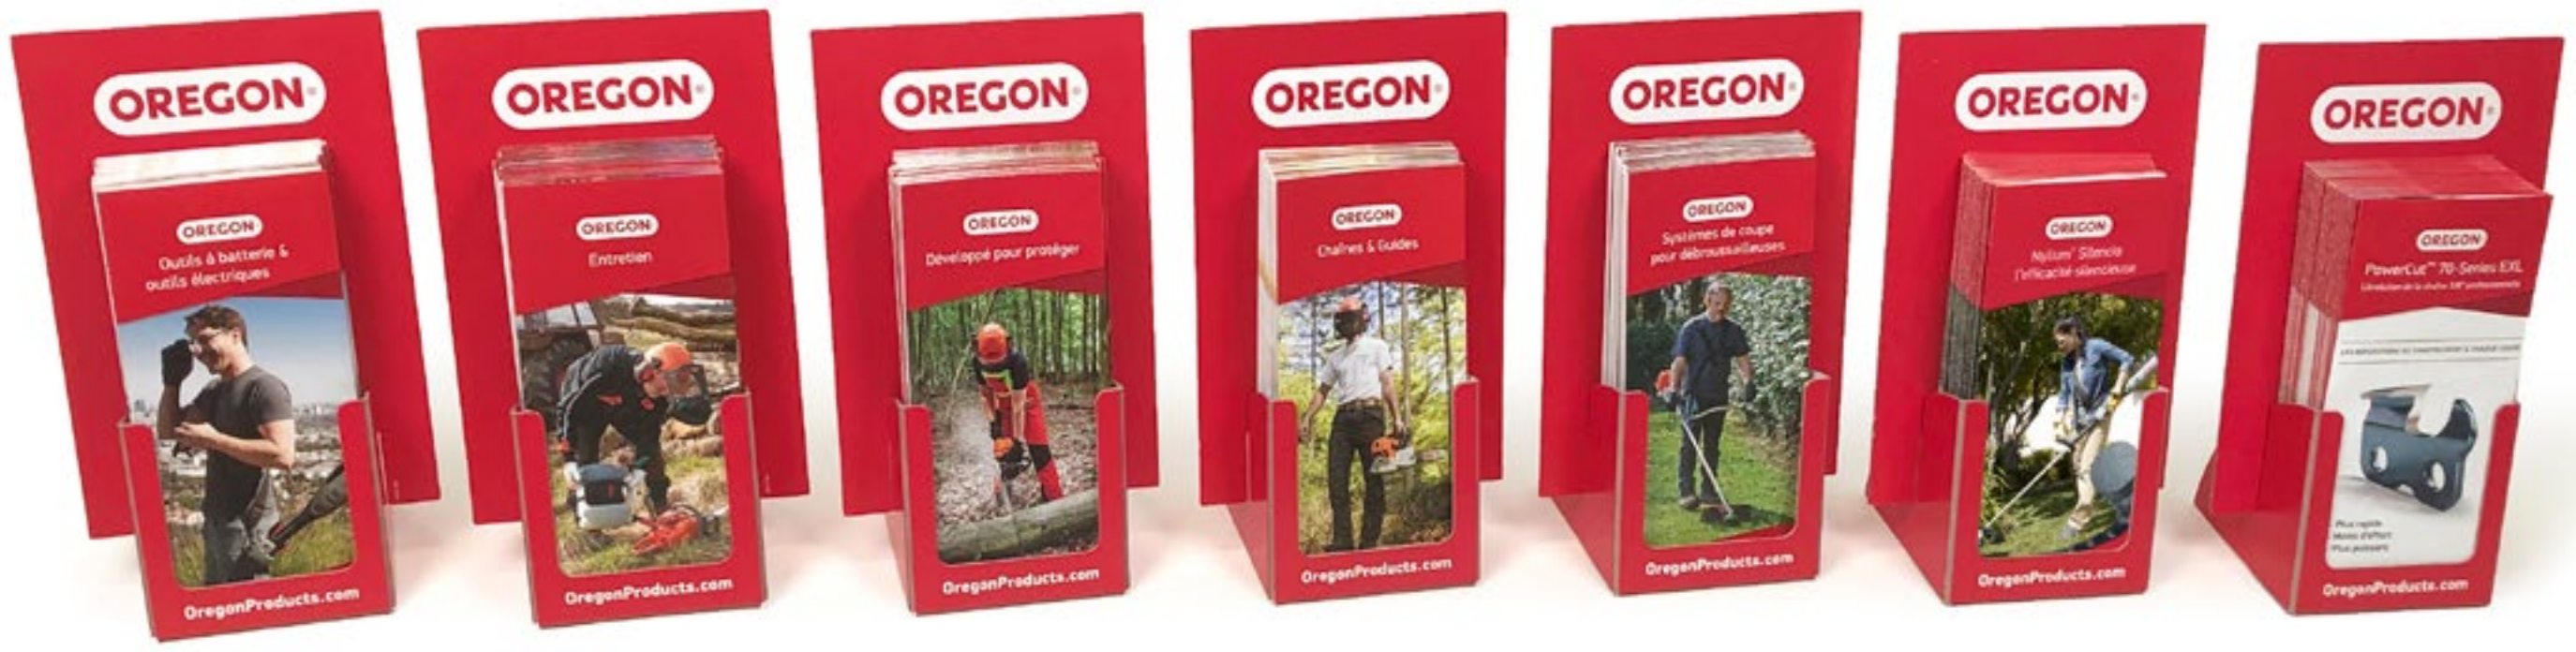
OREGON
Outils à batterie & outils électriques
Entretien
Développé pour protéger
Chaînes & Guides
Systèmes de coupe pour débroussailleuses
Nylium Silencio
PowerCut 70-Series EXL
OregonProducts.com

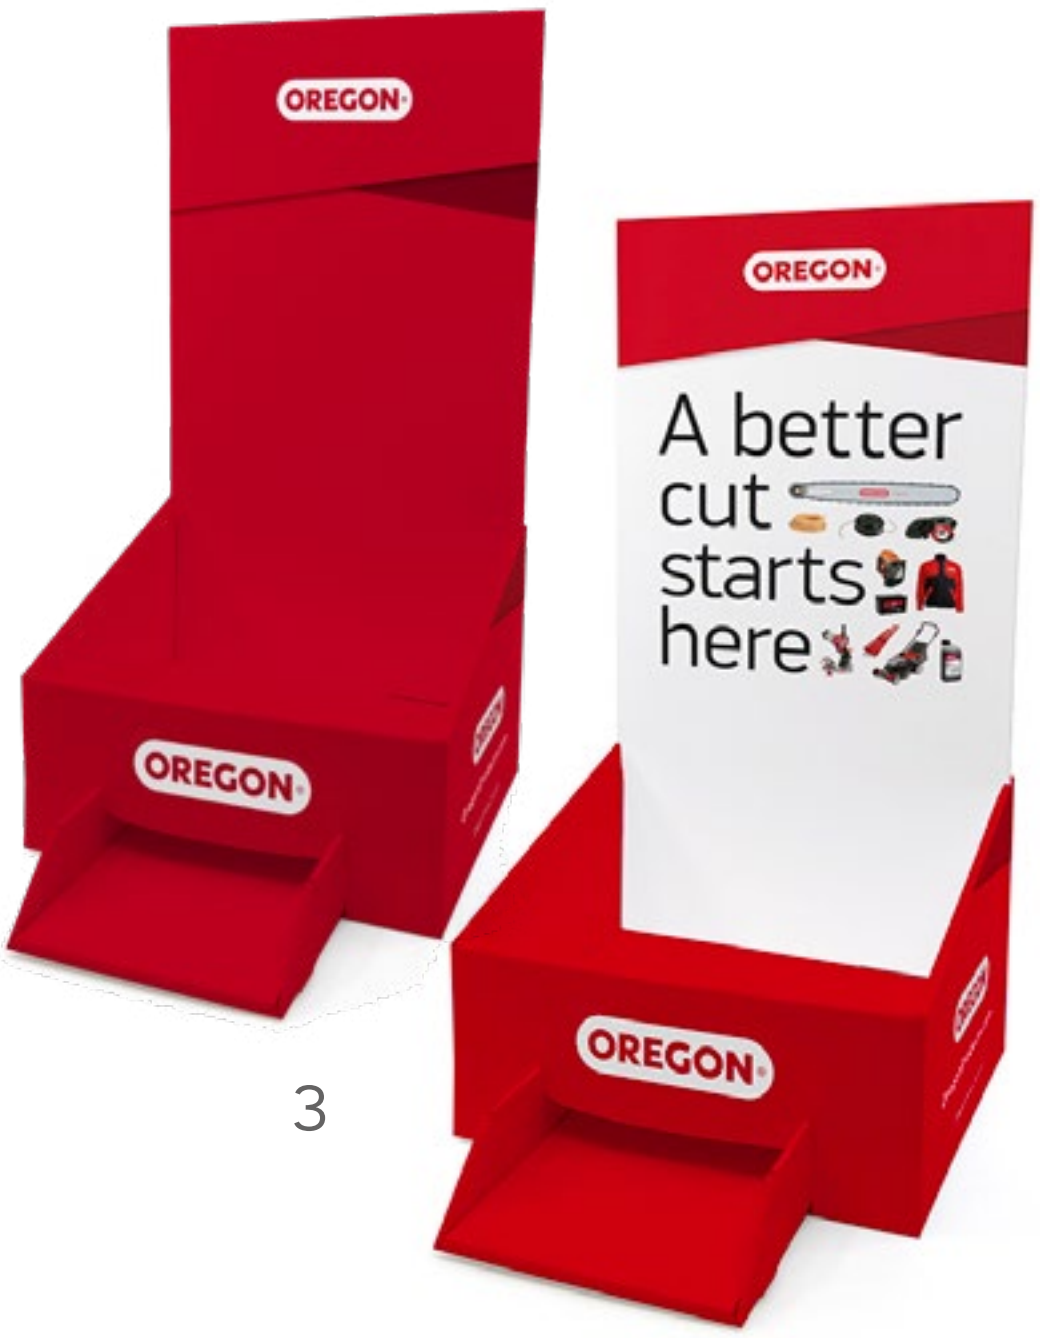
3

A better cut starts here

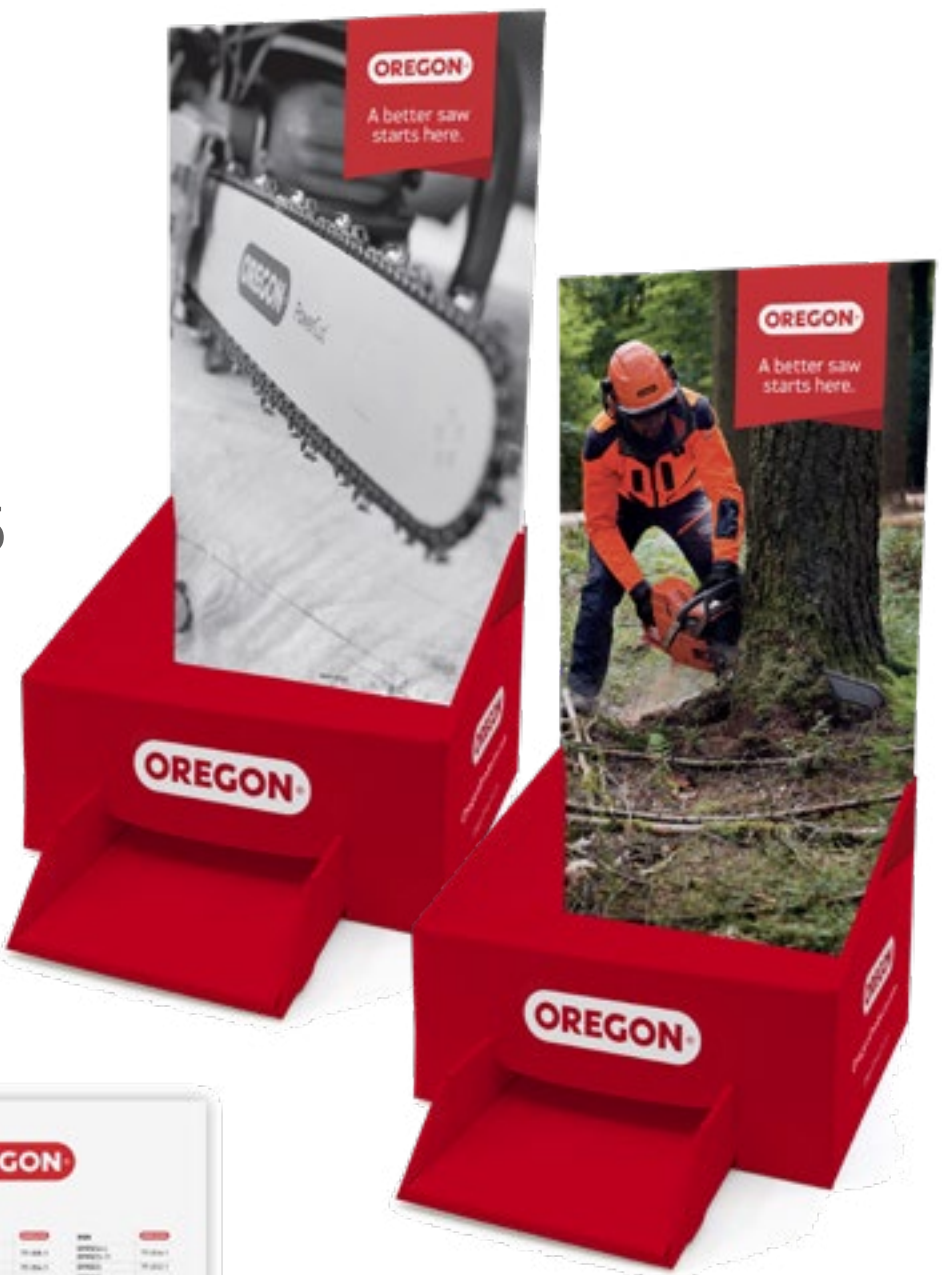
5

A better saw starts here.
A better saw starts here.

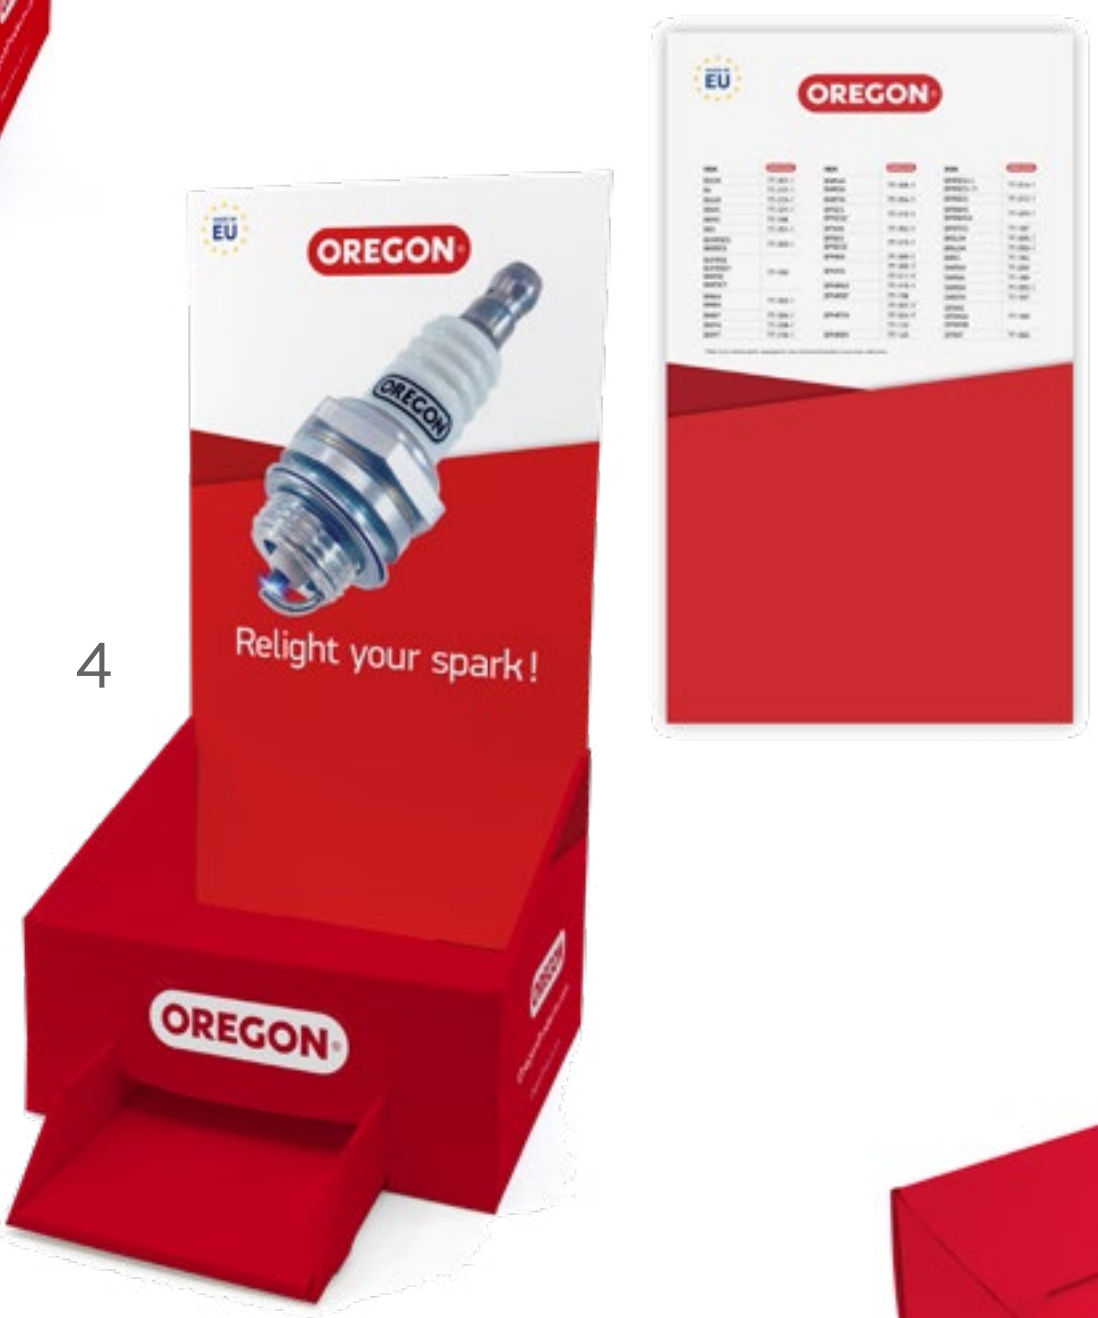
4

EU
Relight your spark!

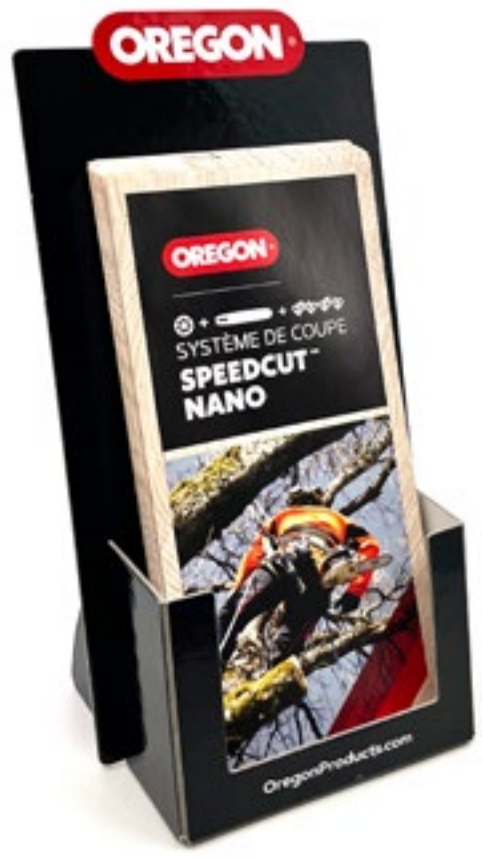
1

SYSTÈME DE COUPE
SPEEDCUT
NANO
OregonProducts.com

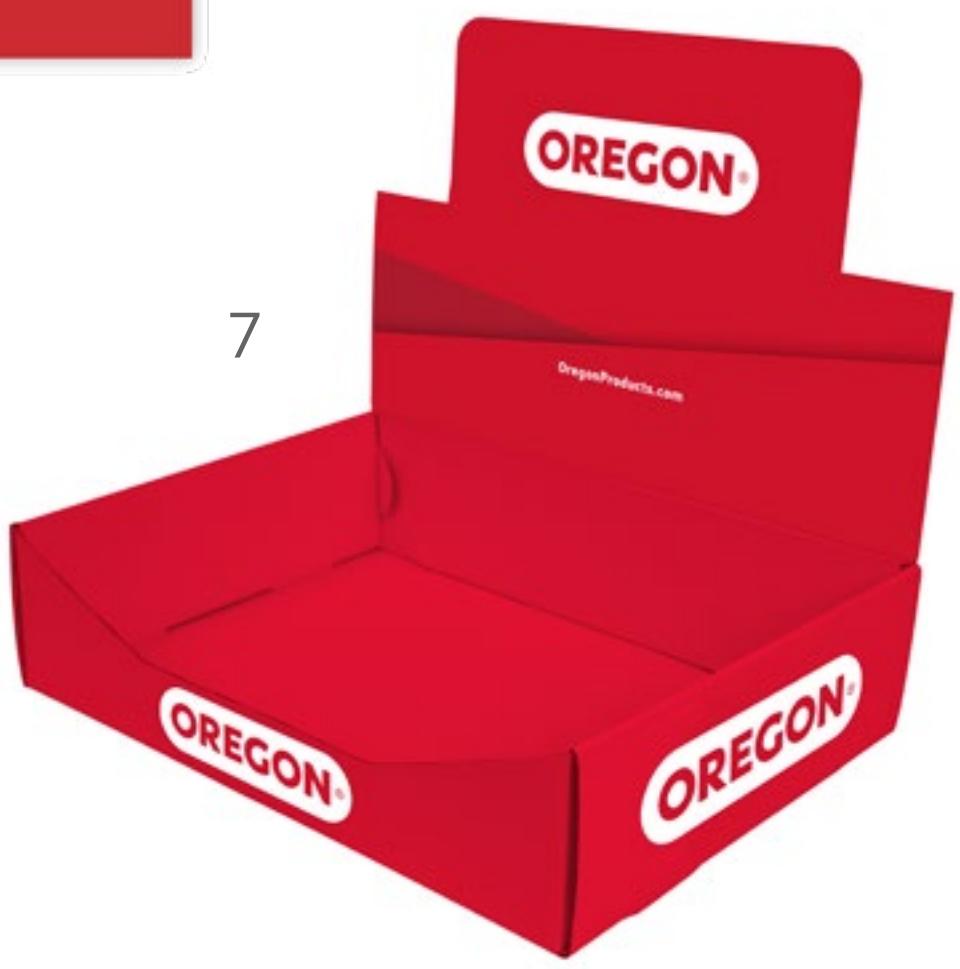
7

OregonProducts.com


2

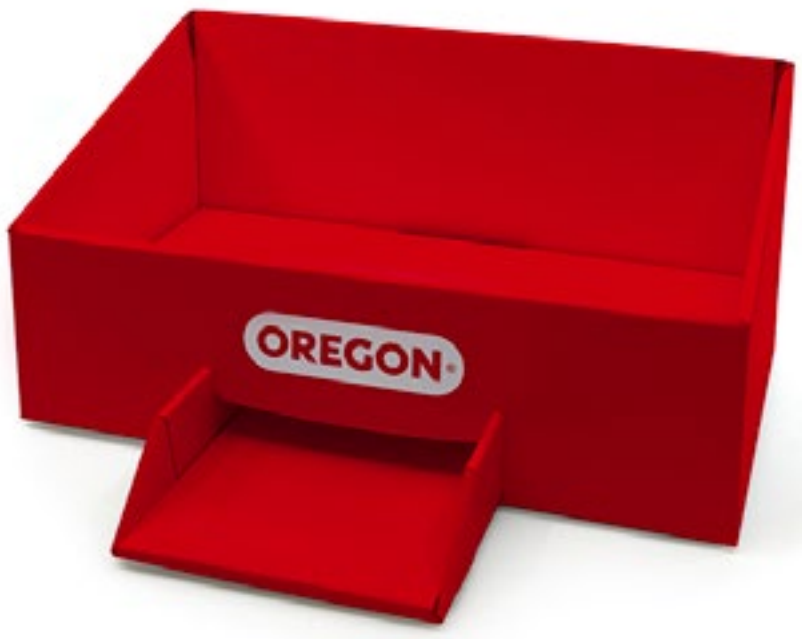
6

Counter cardboard displays

	OREGON	SPECIFICATIONS	
1	AD600-290	Counter display for 10x21cm flyers	1
2	AD600-300	Counter display, base, Small	1
	AD600-302EN	Top card, small, generic, EN	1
3	CB-AD600-302EN	Full display, small, generic, EN	1
	AD600-306EN	Top card, small, spark plug, led, EN	1
4	CB-AD600-306EN	Full display, small, spark plug, led, EN	1
	AD600-307EN	Top card, small, chain, EN	1
5	CB-AD600-307EN	Full display, small, chain, EN	1
6	AD600-301	Counter display, base, Large	1
7	AD200-600	Counter display Large	1

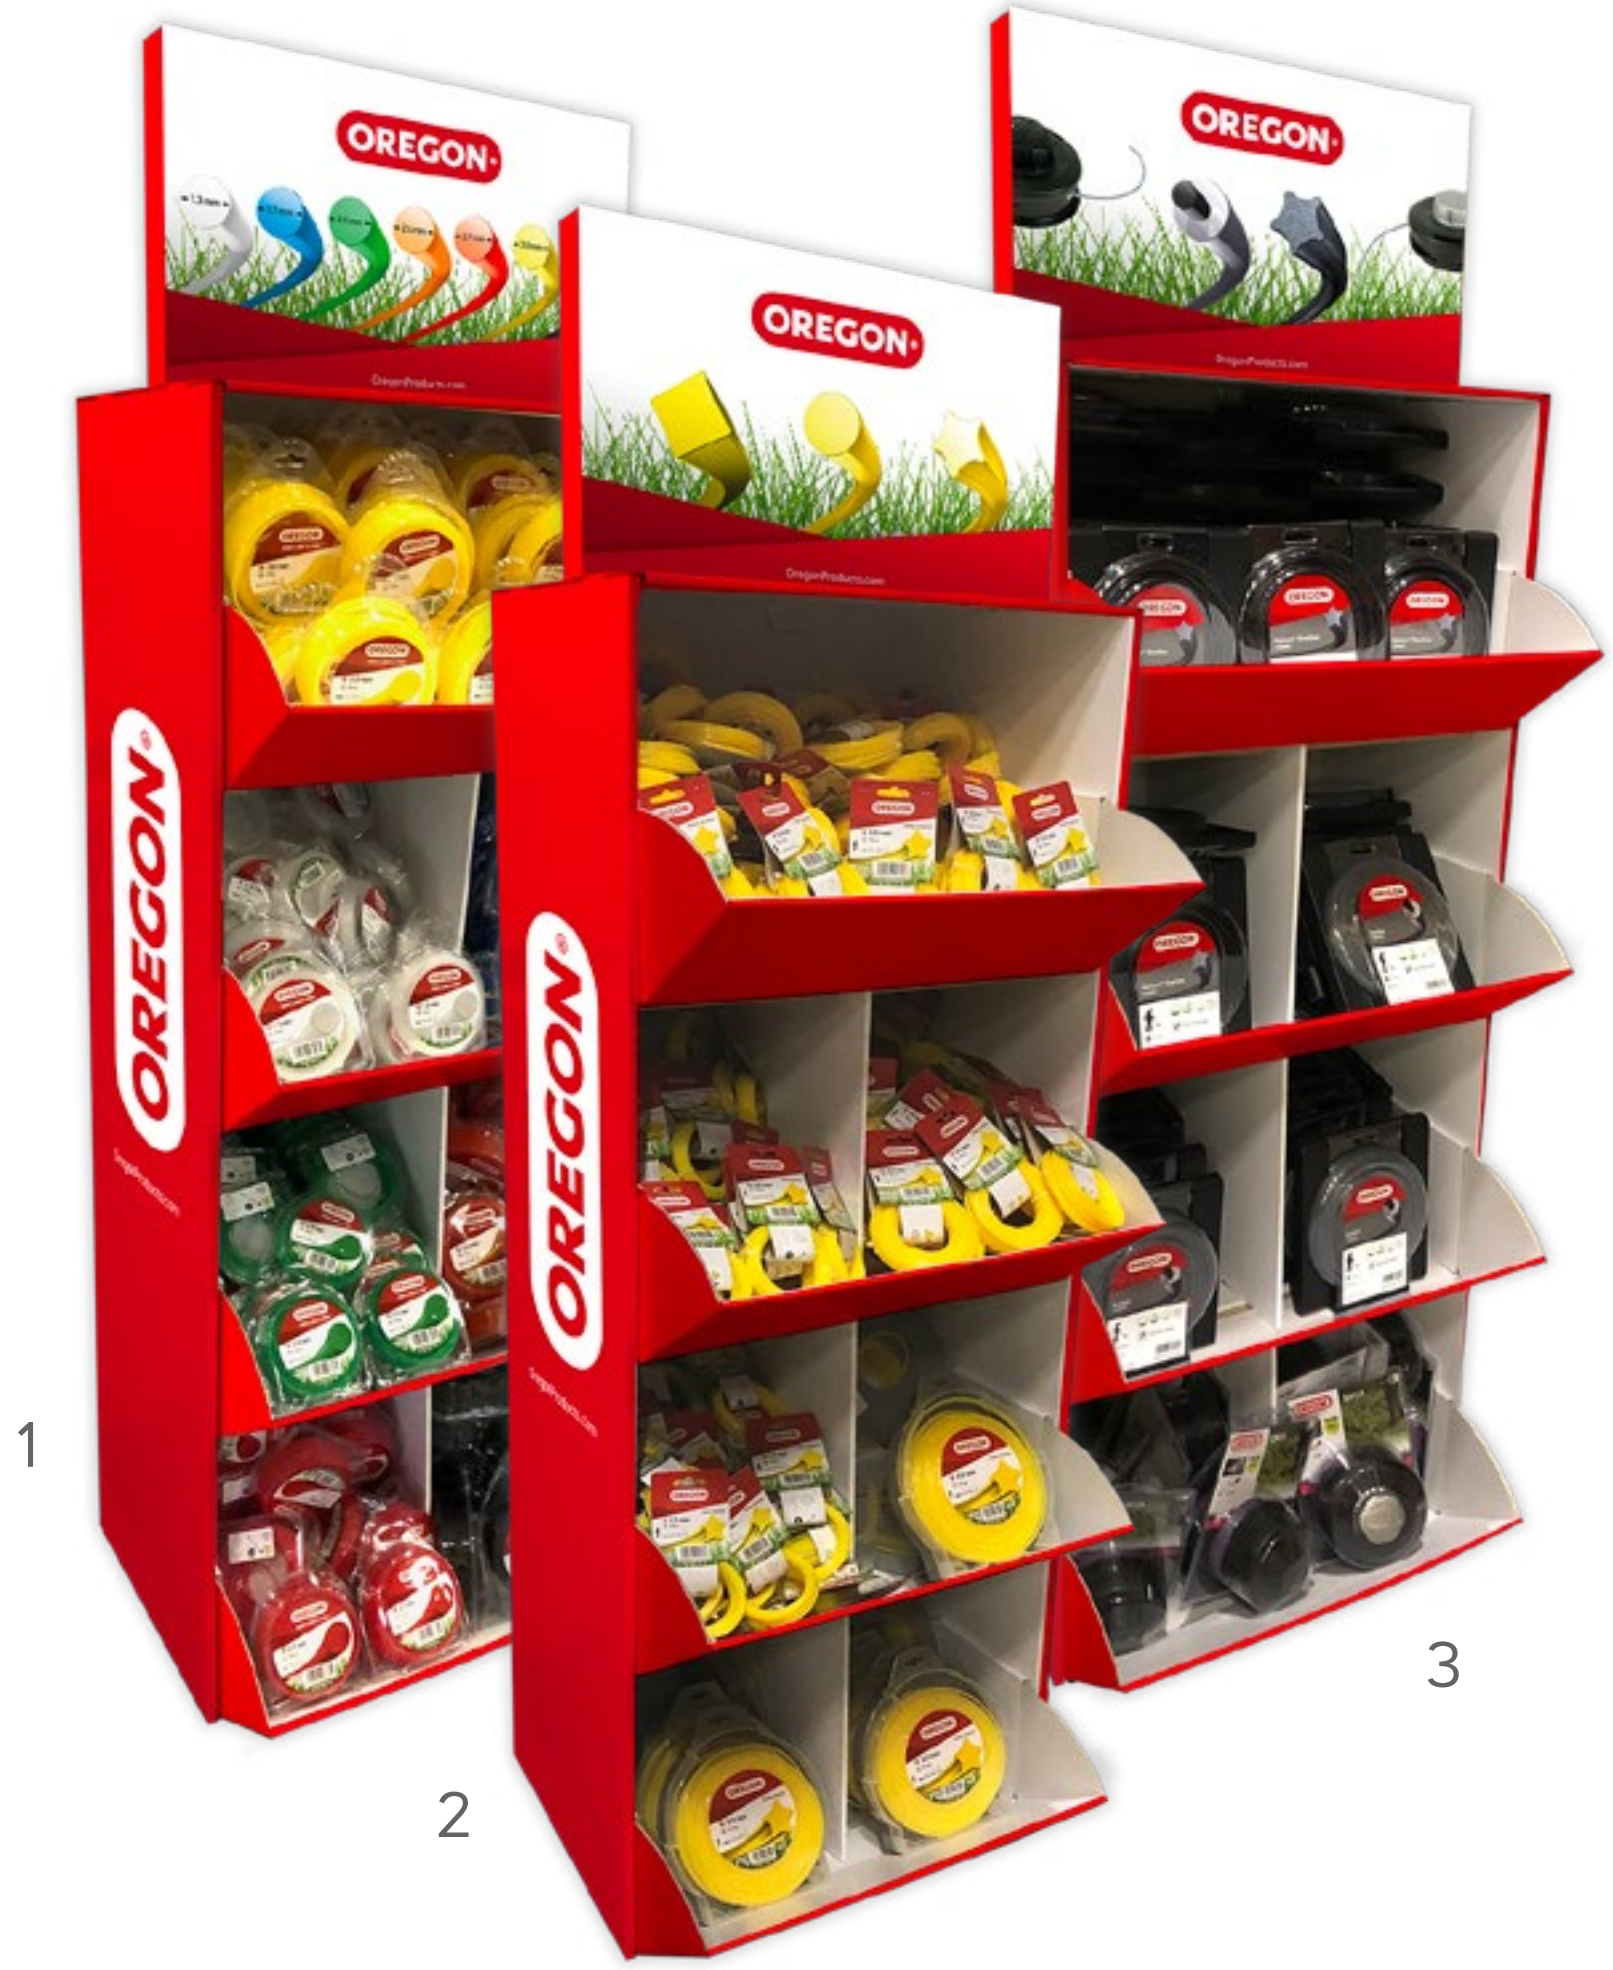

Standalone displays

	OREGON	SPECIFICATIONS	
1	AD600-200	Volume box, colored range	1
2	AD600-210	Volume box, yellow range	1
3	AD600-220	Volume box, premium range	1
4	AD600-224	Volume box, plastic pallet (not illustrated)	1
5	AD200-608	Metalbase for floor standing display (base only)	1
	AD401-061	Display cordless standalone, eu	
	AD401-070	Headercard, ope standalone display	
8	AD200-580	Rolling merchandiser	
9	AD200-598	Rolling merchandiser, header card	
10	AD600-111	PPE display, 80cm x 80cm x 140cm Height-adjustable pediment 300cm Easy transport thanks to wheels Storage capacity: 44 pants/bib and brace or 72 jackets or 32 pairs of shoes → possibility to combine articles	1
11	AD600-111EN	PPE display Cardboard panel (4pce set) EN	1
12	AD600-111FR	PPE display Cardboard panel (4pce set) FR	1

contact us

5
OREGON
Light-Weight Professional Guide Bars
SpeedCut
VersaCut
ControlCut
OREGON

9
OREGON
OregonProducts.com
8

OREGON
OREGON
Développé pour protéger
OREGON
OregonProducts.com
OREGON
OregonProducts.com
10
11–12

NEW

MERCHANDISERS

Modular merchandising solution to meet your market needs and fulfill your expectations

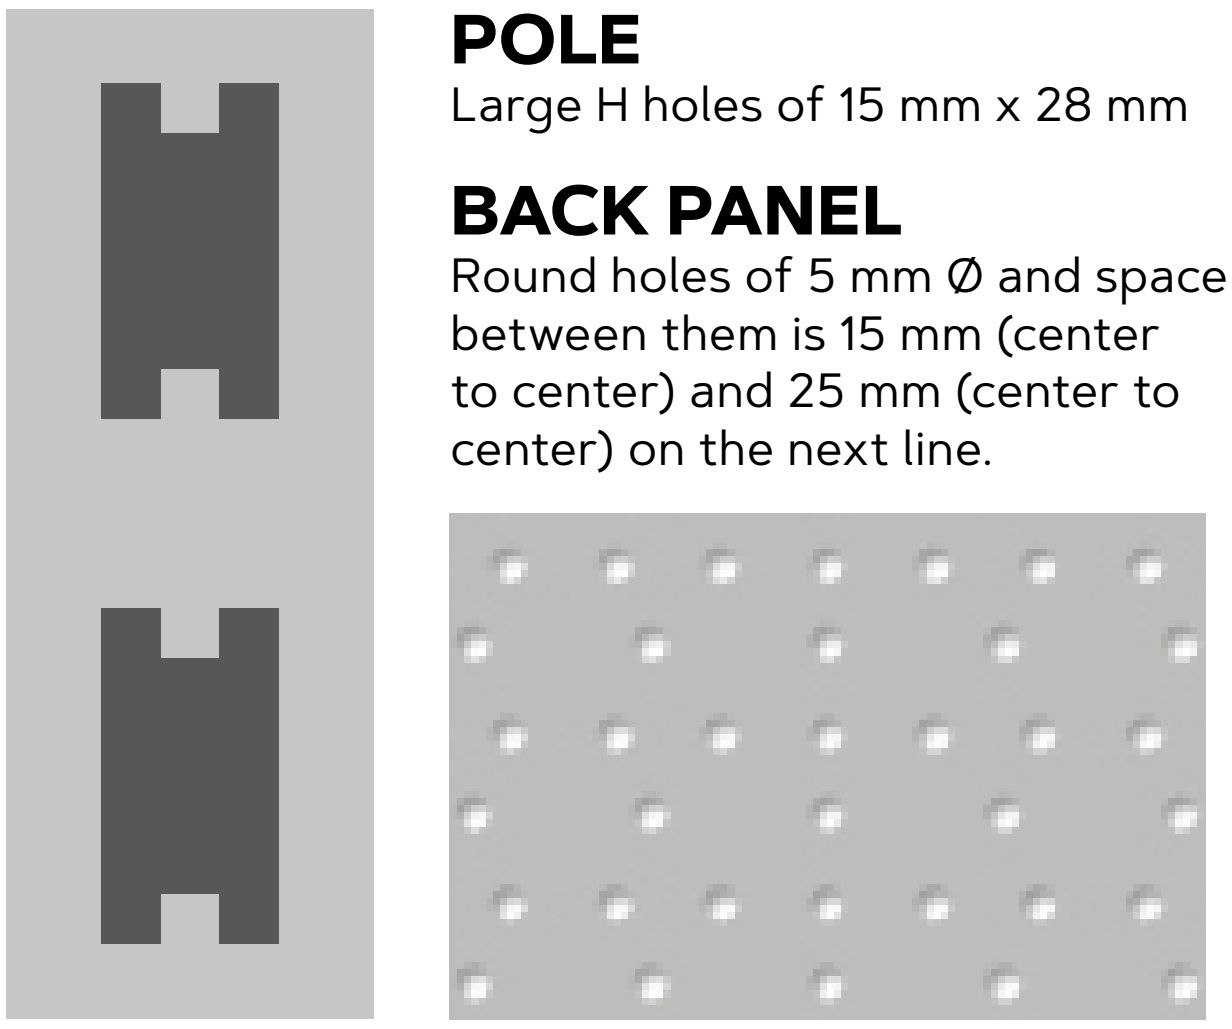

POLE
Large H holes of 15 mm x 28 mm

BACK PANEL
Round holes of 5 mm Ø and space between them is 15 mm (center to center) and 25 mm (center to center) on the next line.

NEW **CB-M1525-220-G**

Tegometal® compatible

All our accessories will fit this merchandiser, but some specific accessories need an adaptator.

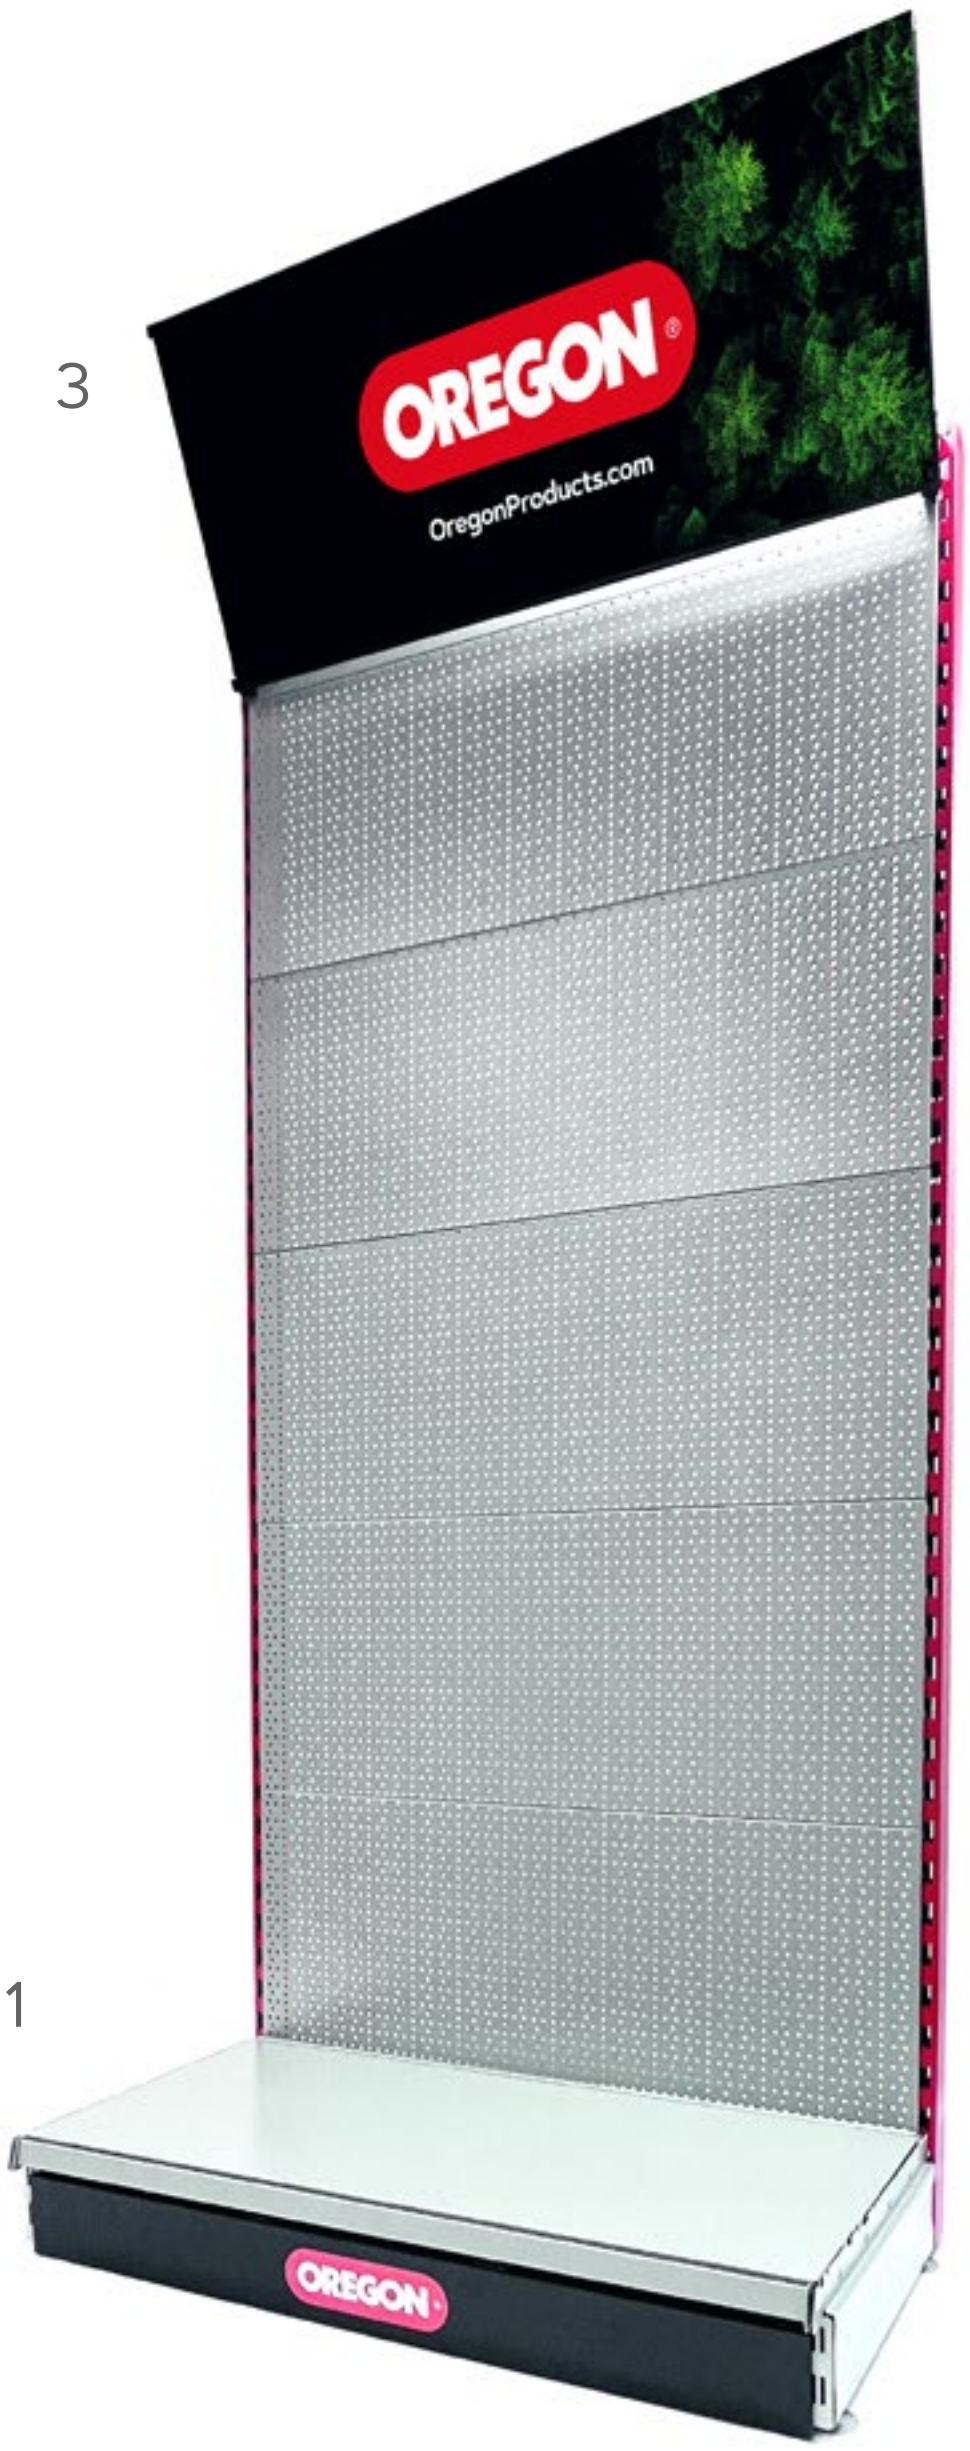

NEW

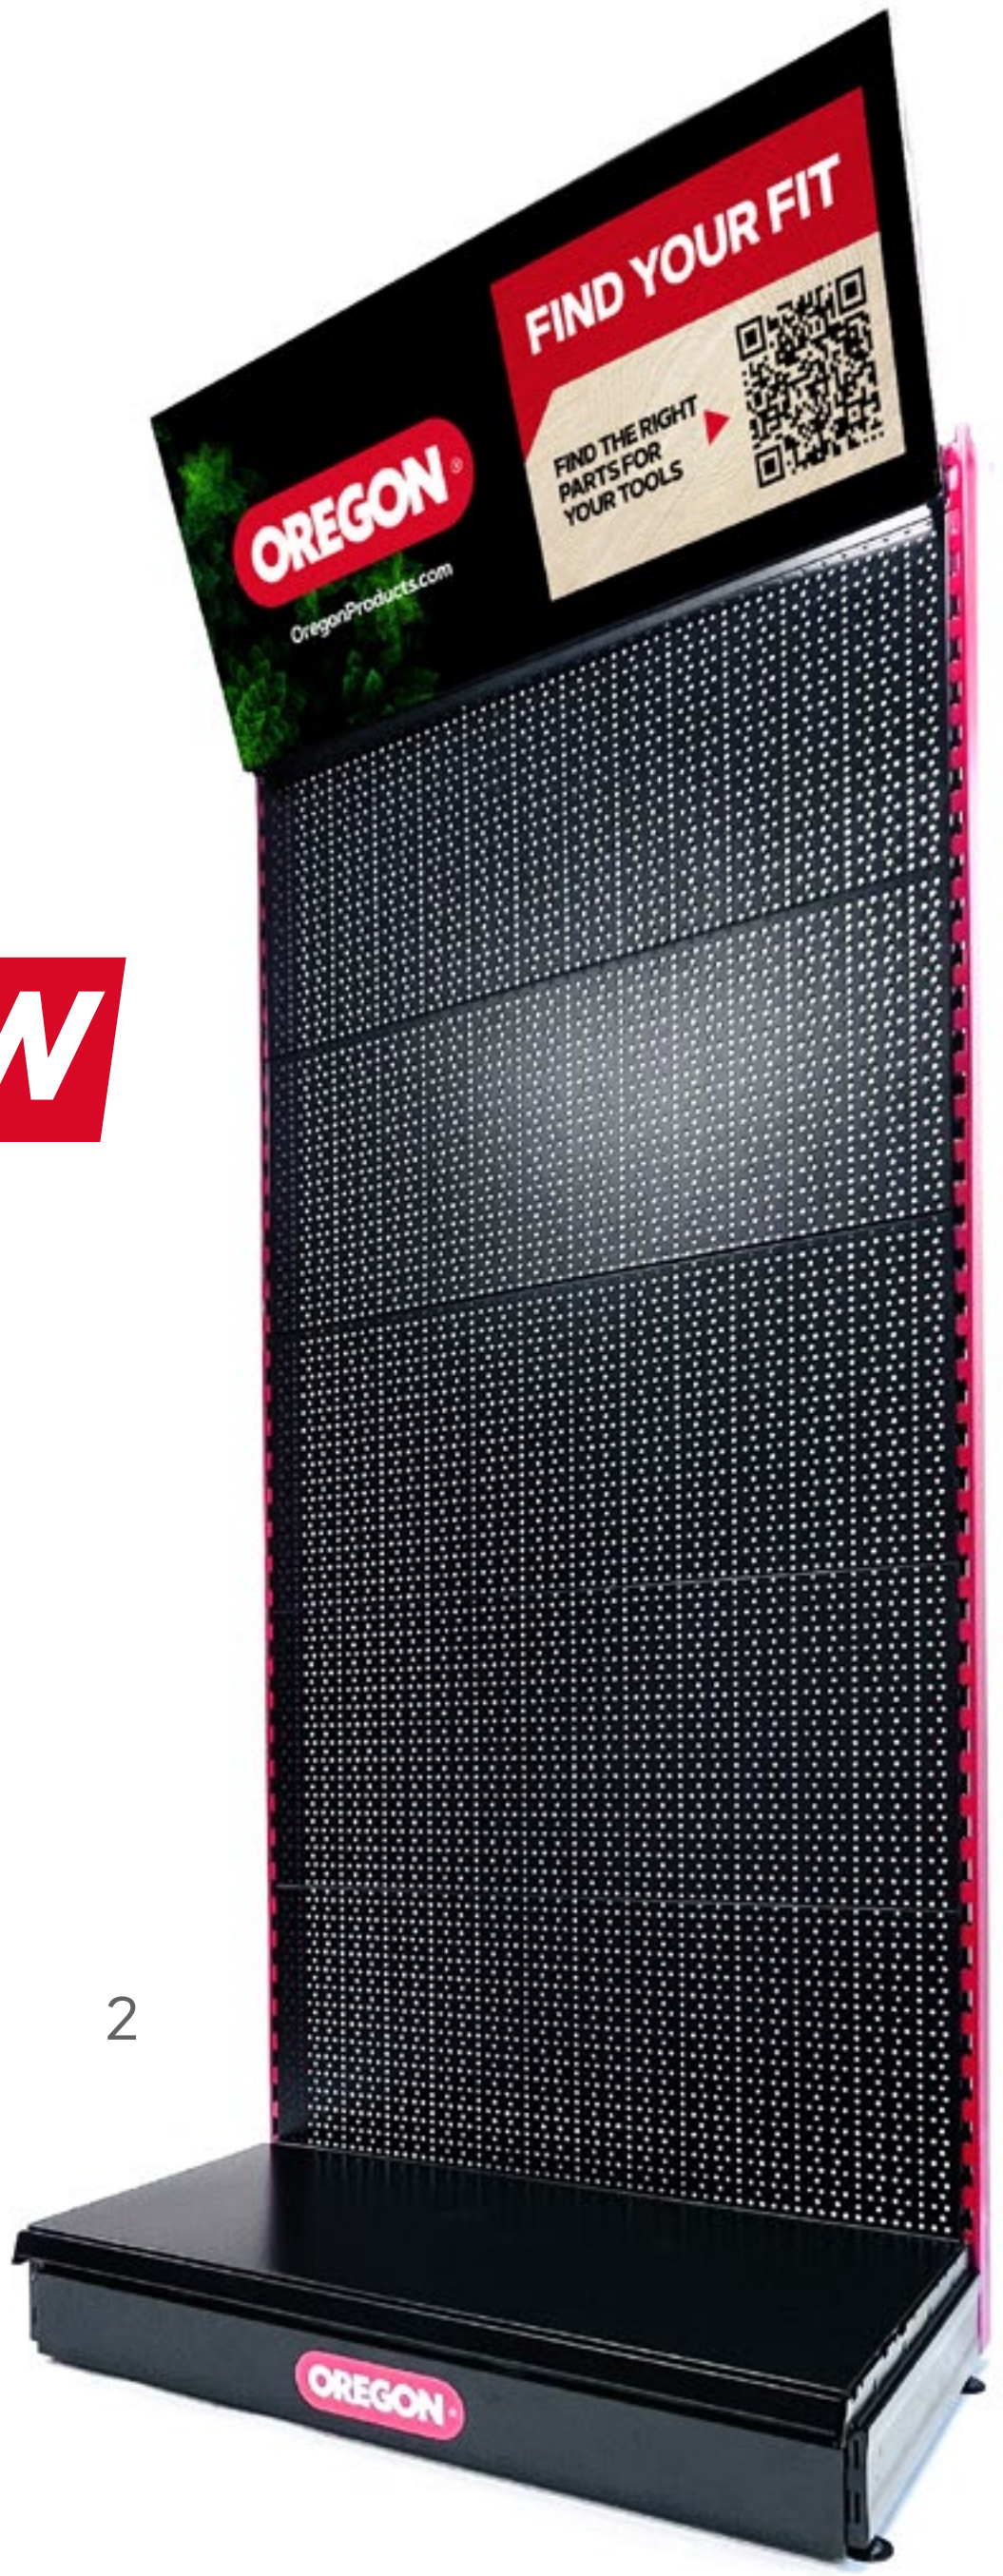

Merchandisers

		OREGON	SPECIFICATIONS	
NEW **CB-M1525-220-G**	1	M1525-140-1-R	Merchandiser, 140cm, Poles, Red, part 1/3	1
		M1525-140-2-G	Merchandiser, 140cm, Grey, part 2/3	1
		M1525-080-4-G	Merchandiser, extra 80cm, Grey, part 3/3	1
CB-M1525-220-B	2	M1525-140-1-R	Merchandiser, 140cm, Poles, Red, part 1/3	1
		M1525-140-2-B	Merchandiser, 140cm, Black, part 2/3	1
		M1525-080-4-B	Merchandiser, extra 80cm, Black, part 3/3	1
	3	M099-040-EN	Big Merchandiser Oregon header card ENGLISH	1
		M099-040-FR	Big Merchandiser Oregon header card FRENCH	1
		M099-040-DE	Big Merchandiser Oregon header card GERMAN	1

Hanging Hooks

	OREGON	SPECIFICATIONS	📦
1	M100-030	Standard Hooks 30cm (10 pack)	10
2	M102-030	Hook 30cm with price holder (+ price tag)	30
3	AD200-311	Hooks for guide bars	1
4	AD200-329	Hook for side panel	1
5	AD200-539	Hook for brushcutter blades	1
	AD200-603	White magnetic hook for side panel	1
	AD401-081	Hook single for 1m display	

Merchandisers shelves

	OREGON	SPECIFICATIONS	📦
8	M100-037	Grey Shelf, with brackets 100 x 37cm (TEGO compatible)	1
8	M100-037-B	Black Shelf, with brackets 100 x 37cm (TEGO compatible)	1
9	AD200-531	Shelf kit with dividers (TEGO compatible)	1
10	AD200-533	Inclinable brackets for shelf *	2
11	AD200-532	Brackets for shelf (CB-AD200-010)	2
12	AD200-534	Dividers (37 x 15cm)	4
13	AD200-535	Dividers (37 x 5,5cm)	4
	AD200-538	Basket with 5 dividers (TEGO compatible)	1
	AD200-588	Support for dividers x2	2
16	AD200-315	Shoe shelf (100 x 45cm) ⚠	1
17	AD200-316	Divider for shoe display shelf AD200-315	1
18	AD200-327	Adapter for tegometal pole	1

Special product accessories

	OREGON	SPECIFICATIONS	📦
19	M200-317	Clothing rail	1
20	AD200-313	Heavy weight support (for AD200-314) ⚠	1
21	AD200-314	Bead tube hanger	1
22	AD200-319	Metal hanger for trousers	10
23	AD200-326	Metal hanger for jackets	10
24	AD200-579	Chain dispenser	1
25	AD200-599	Header card for chain dispenser	1
26	AD600-230	Spark plug, metal, dispenser	1
27	AD200-270	One for all blades shelf for merchandiser	1
28	AD200-587	Orange Promo Tag	10

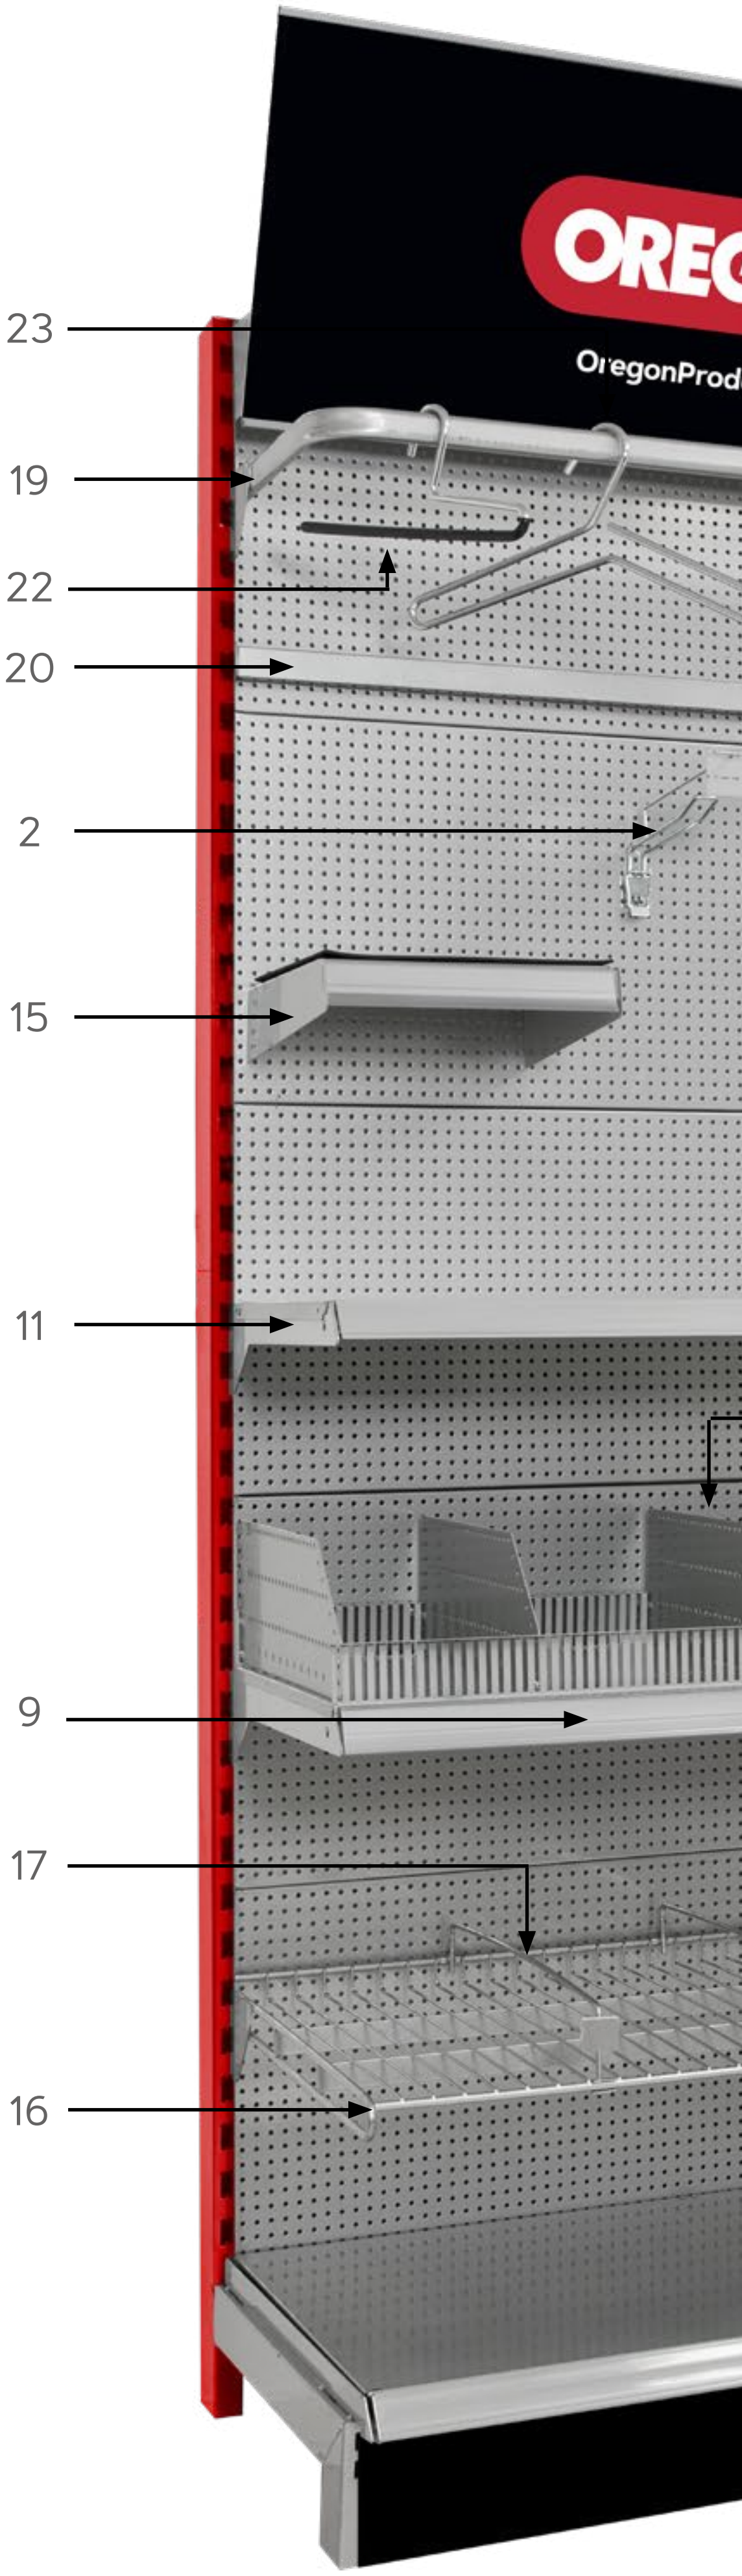

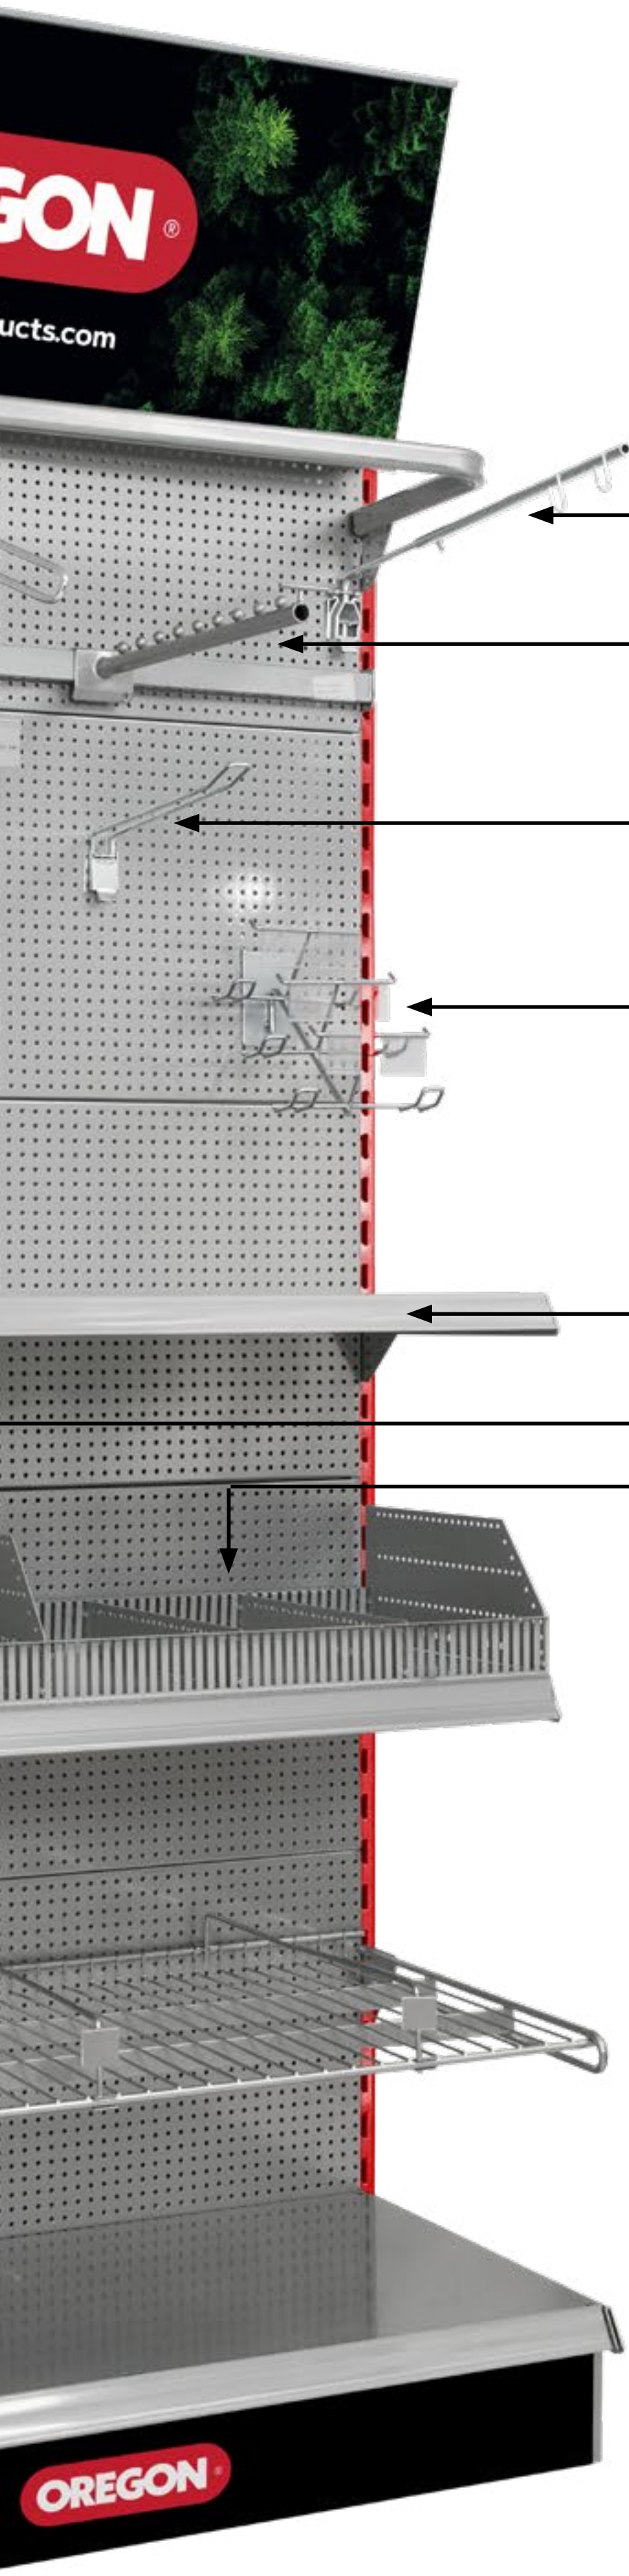
GON
ucts.com
4
21
1
3
8
12
13
OREGON



25
24
PROS
OREGON
OregonProducts.com

26
EU
OREGON
Relight your spark!

contact us

Additional adapter required

AD200-327 Adapter (1pce)

Clothing accessories

	OREGON	SPECIFICATIONS	📦
1	AD200-180	Glasses Merchandiser (without glasses)	1
2	AD200-130	Dummy head grey	1
3	AD200-065	Dummy, full body, 190cm	1

1

OREGON
OregonProducts.com

2

OREGON
OREGON

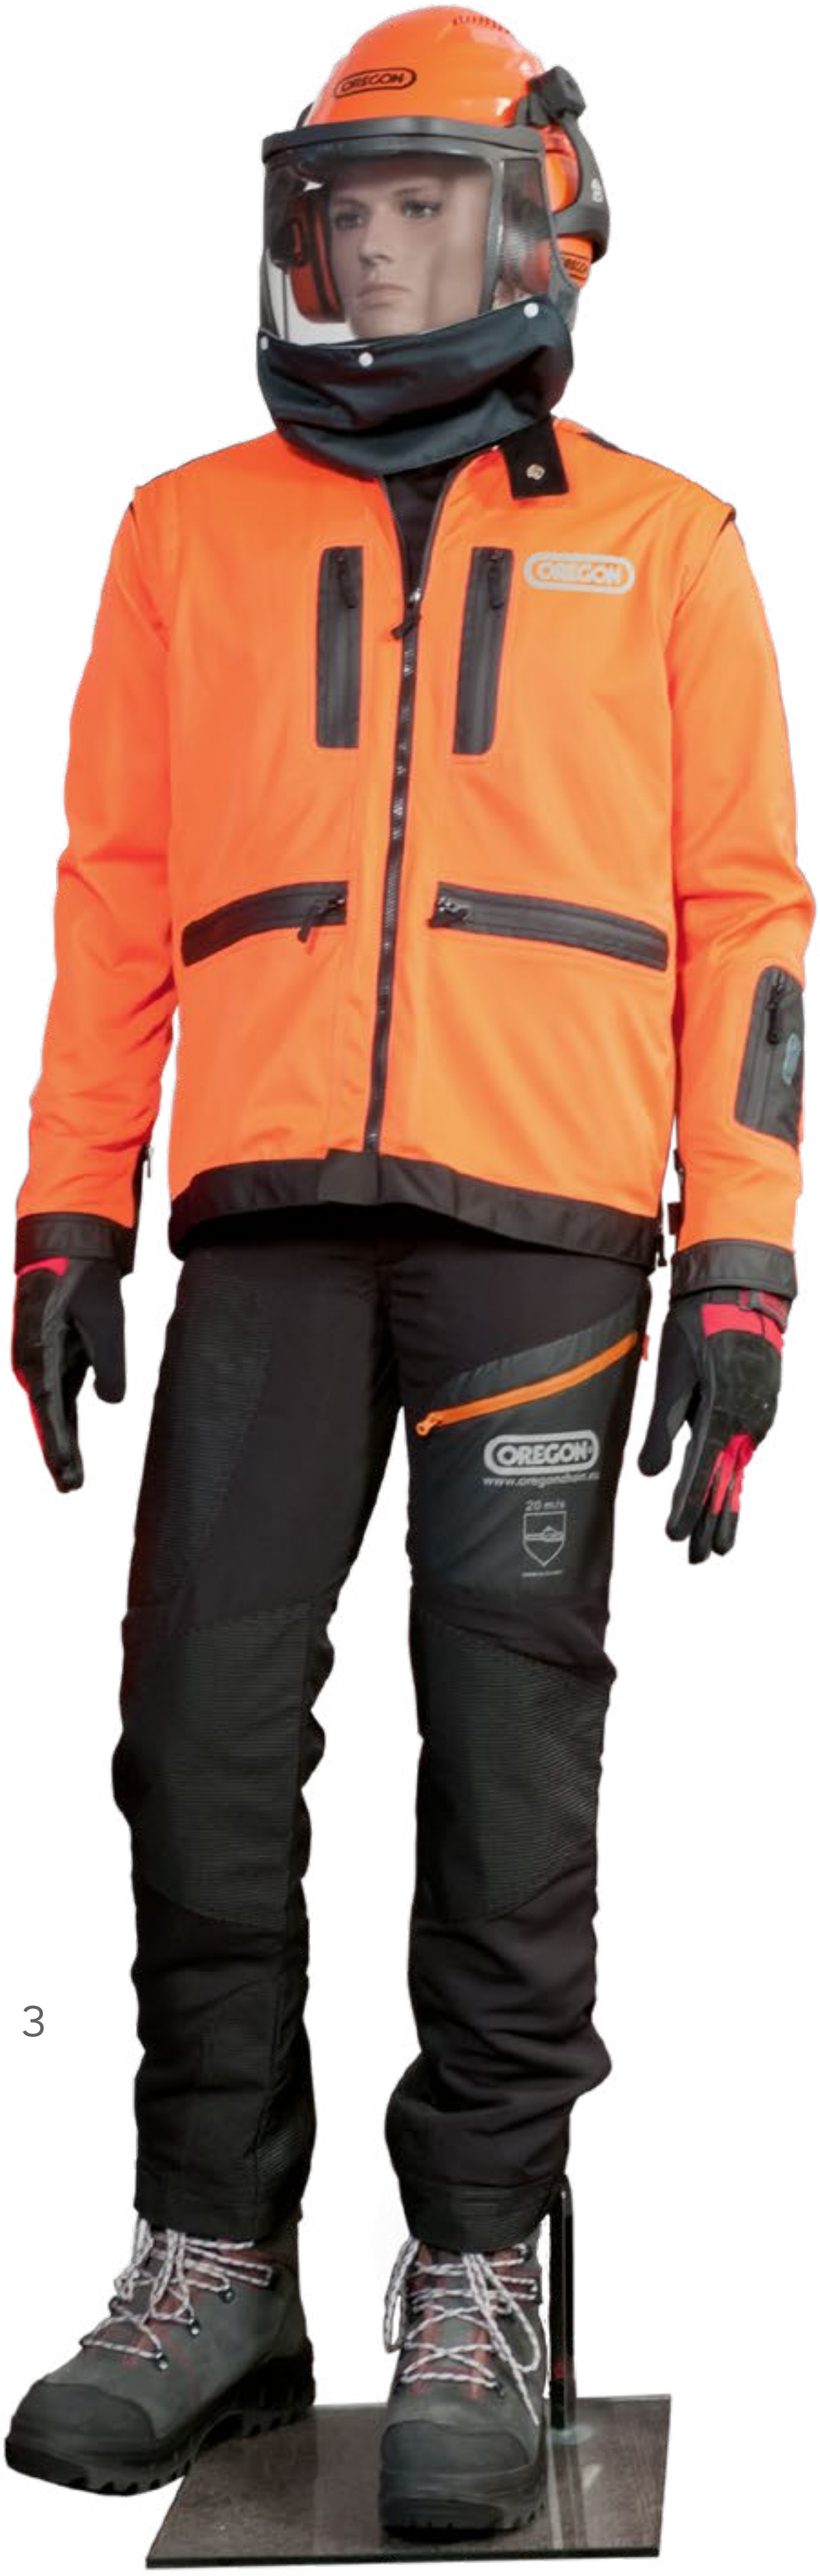
OREGON
OREGON
OREGON
20 m/s

3

2

OREGON®
OregonProducts.com

3

OREGON®
OregonProducts.com

4

OREGON®
OregonProducts.com

OREGON®
OregonProducts.com

1

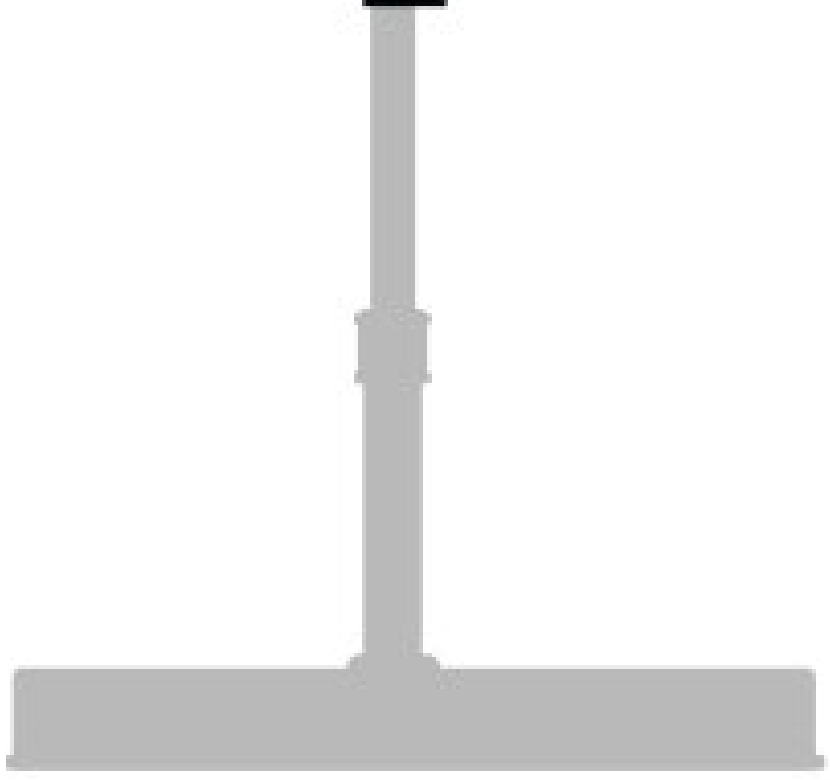

5

Flags

	OREGON	SPECIFICATIONS	📦
1	AD403-011H	Horizontal Flag 100x150 cm	1
2	AD403-011V	Vertical Flag 95x250 cm	1
3	AD403-012V	Vertical Outdoor Flag 120x300 cm	1
4	AD403-012	Beachflag 85x220 cm	1
5	AD403-013	Beachflag, base oregon	

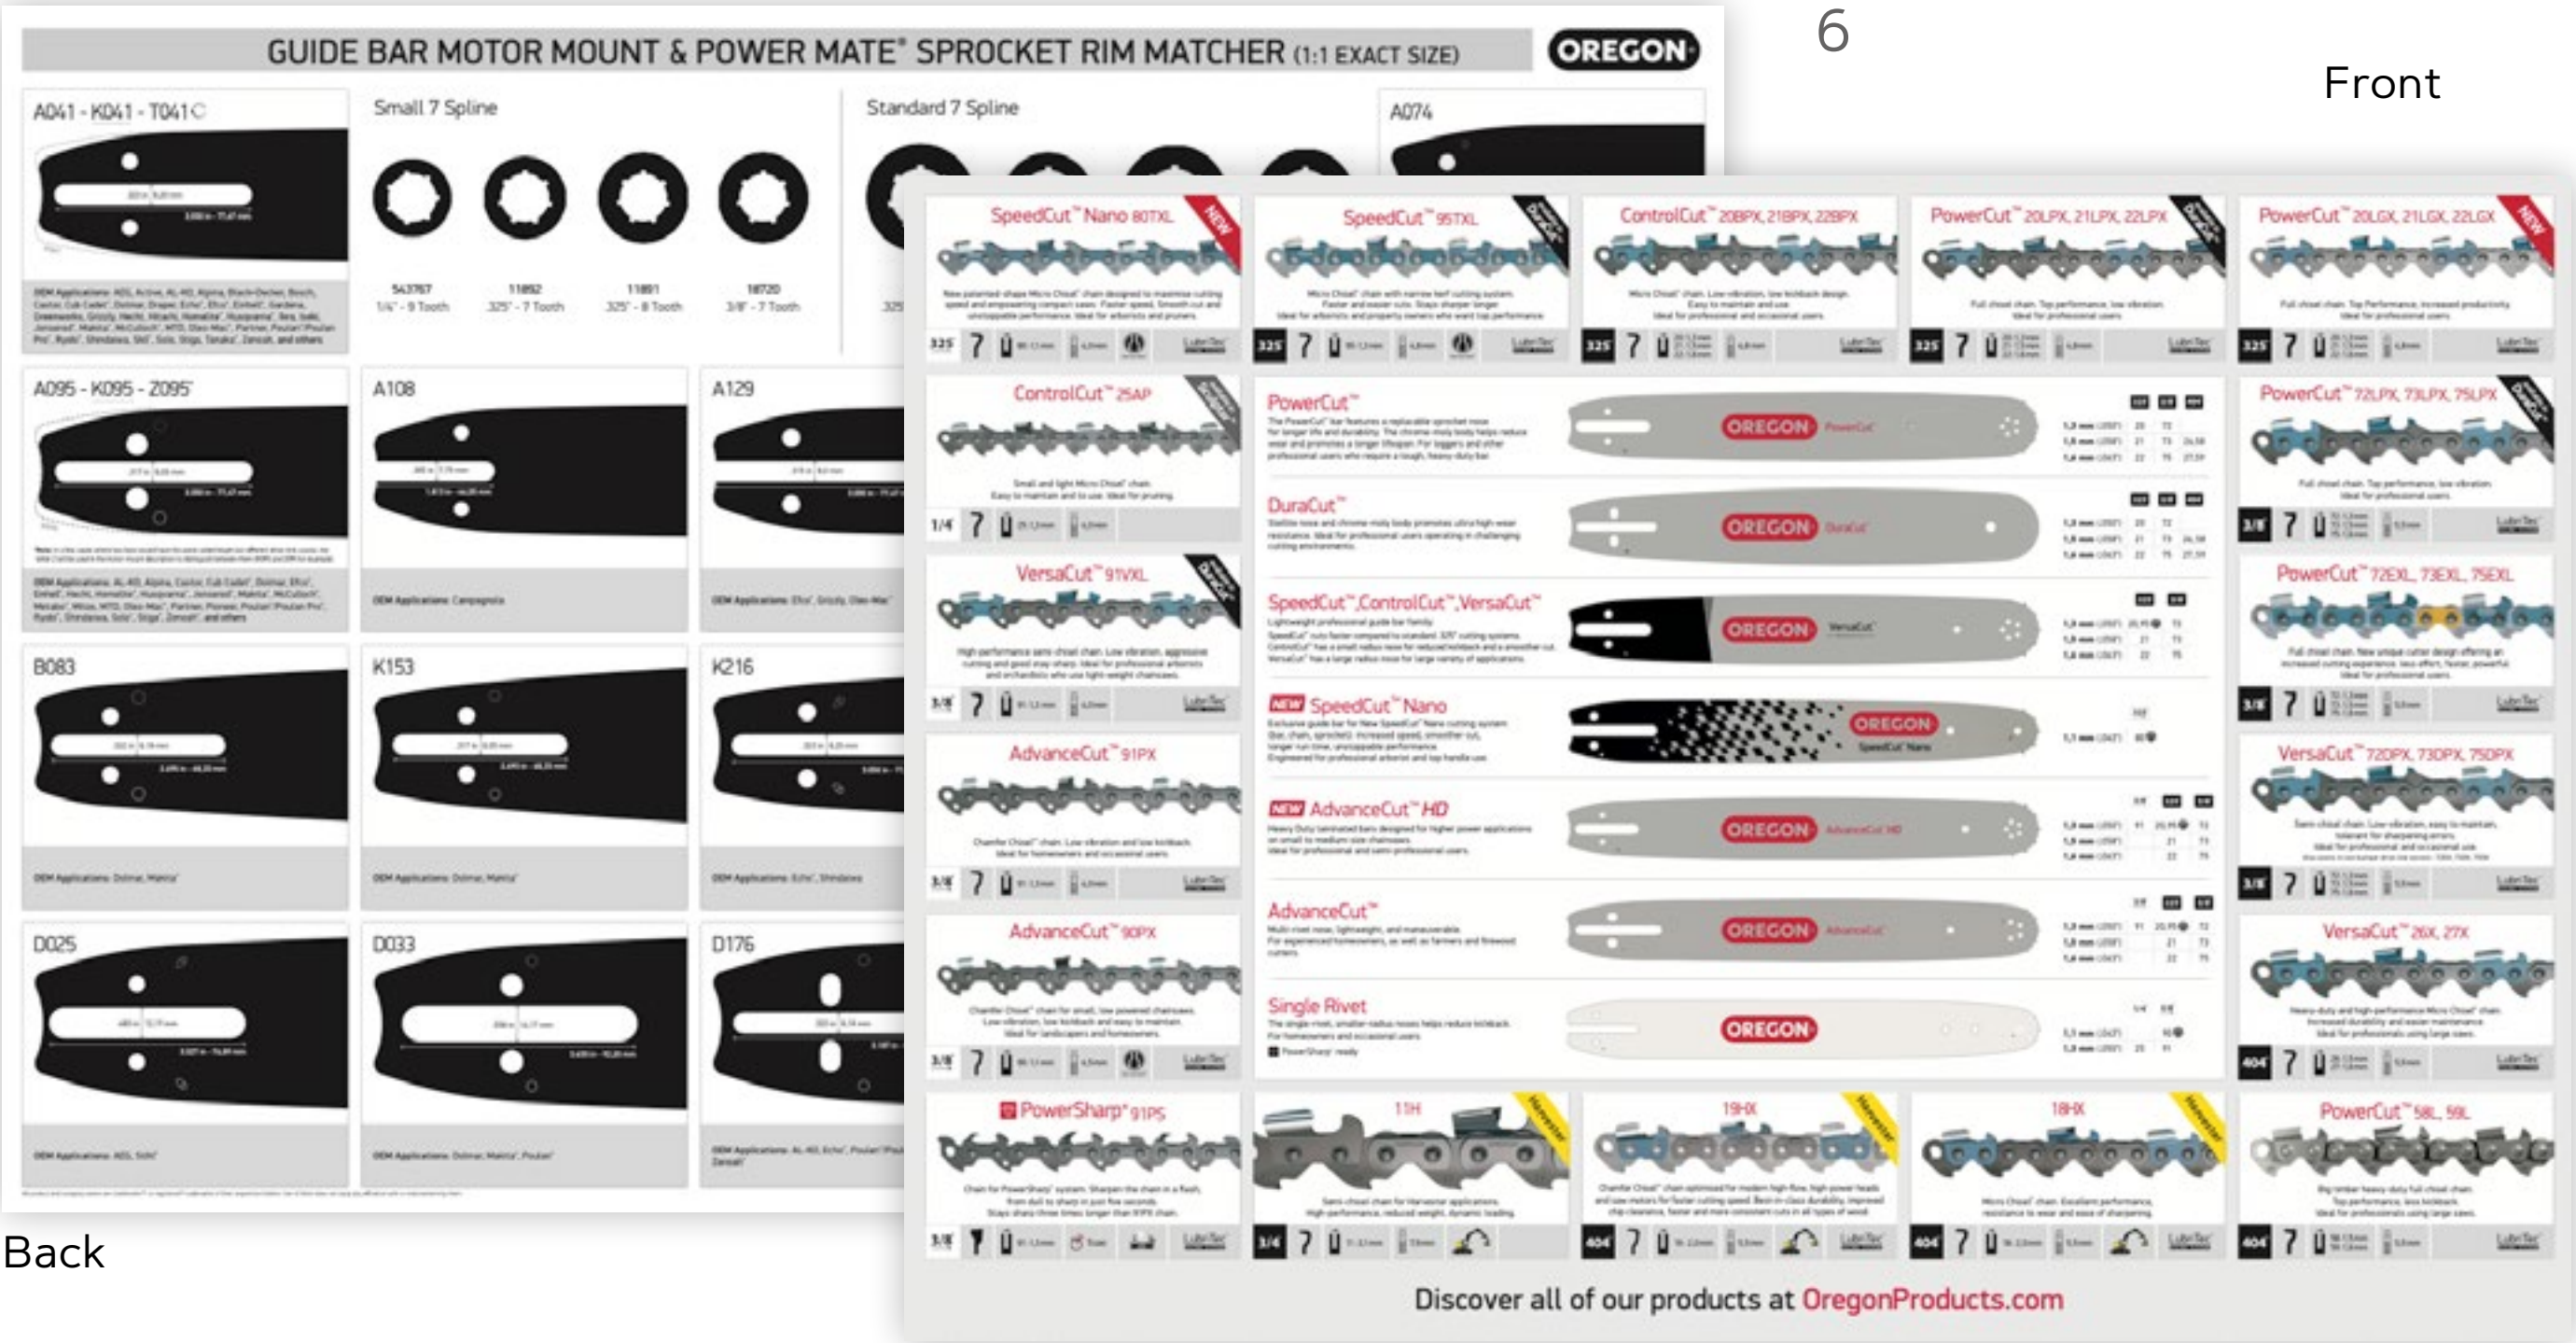
GUIDE BAR MOTOR MOUNT & POWER MATE® SPROCKET RIM MATCHER (1:1 EXACT SIZE)
OREGON
Discover all of our products at OregonProducts.com

6

Front

Back

OREGON Chain Scale
OREGON Chain Scale

7

13

OREGON
OregonProducts.com

8

OREGON
OregonProducts.com

9

11

OREGON
OregonProducts.com

12

In store material

	OREGON	SPECIFICATIONS	
6	AD600-250EN	Oregon Counter mat 66,5x47 cm, EN	1
7	533129	Chain Scale, 15x180 cm EN	1
8	AD200-595	Oregon Embossed metal plate	1
9	AD200-597	Oregon front door opening hour sign	1
	AD301-845	Oregon dealer panel	1

Sticker

	OREGON	SPECIFICATIONS	
11	AD403-010S	Oregon sticker, Small 24x60 mm	50
12	AD403-010L	Oregon sticker, Large, 380x150 mm	25
13	AD200-617	Oregon Sticker 360x100 mm	1

3

OREGON
SPEEDCUT™ NANO
CUTTING SYSTEM
+ SAFE & SMOOTH CUTS
+ UNSTOPPABLE
+ INCREASED SPEED
+ LONGER RUN TIME
WATCH THE VIDEO

4

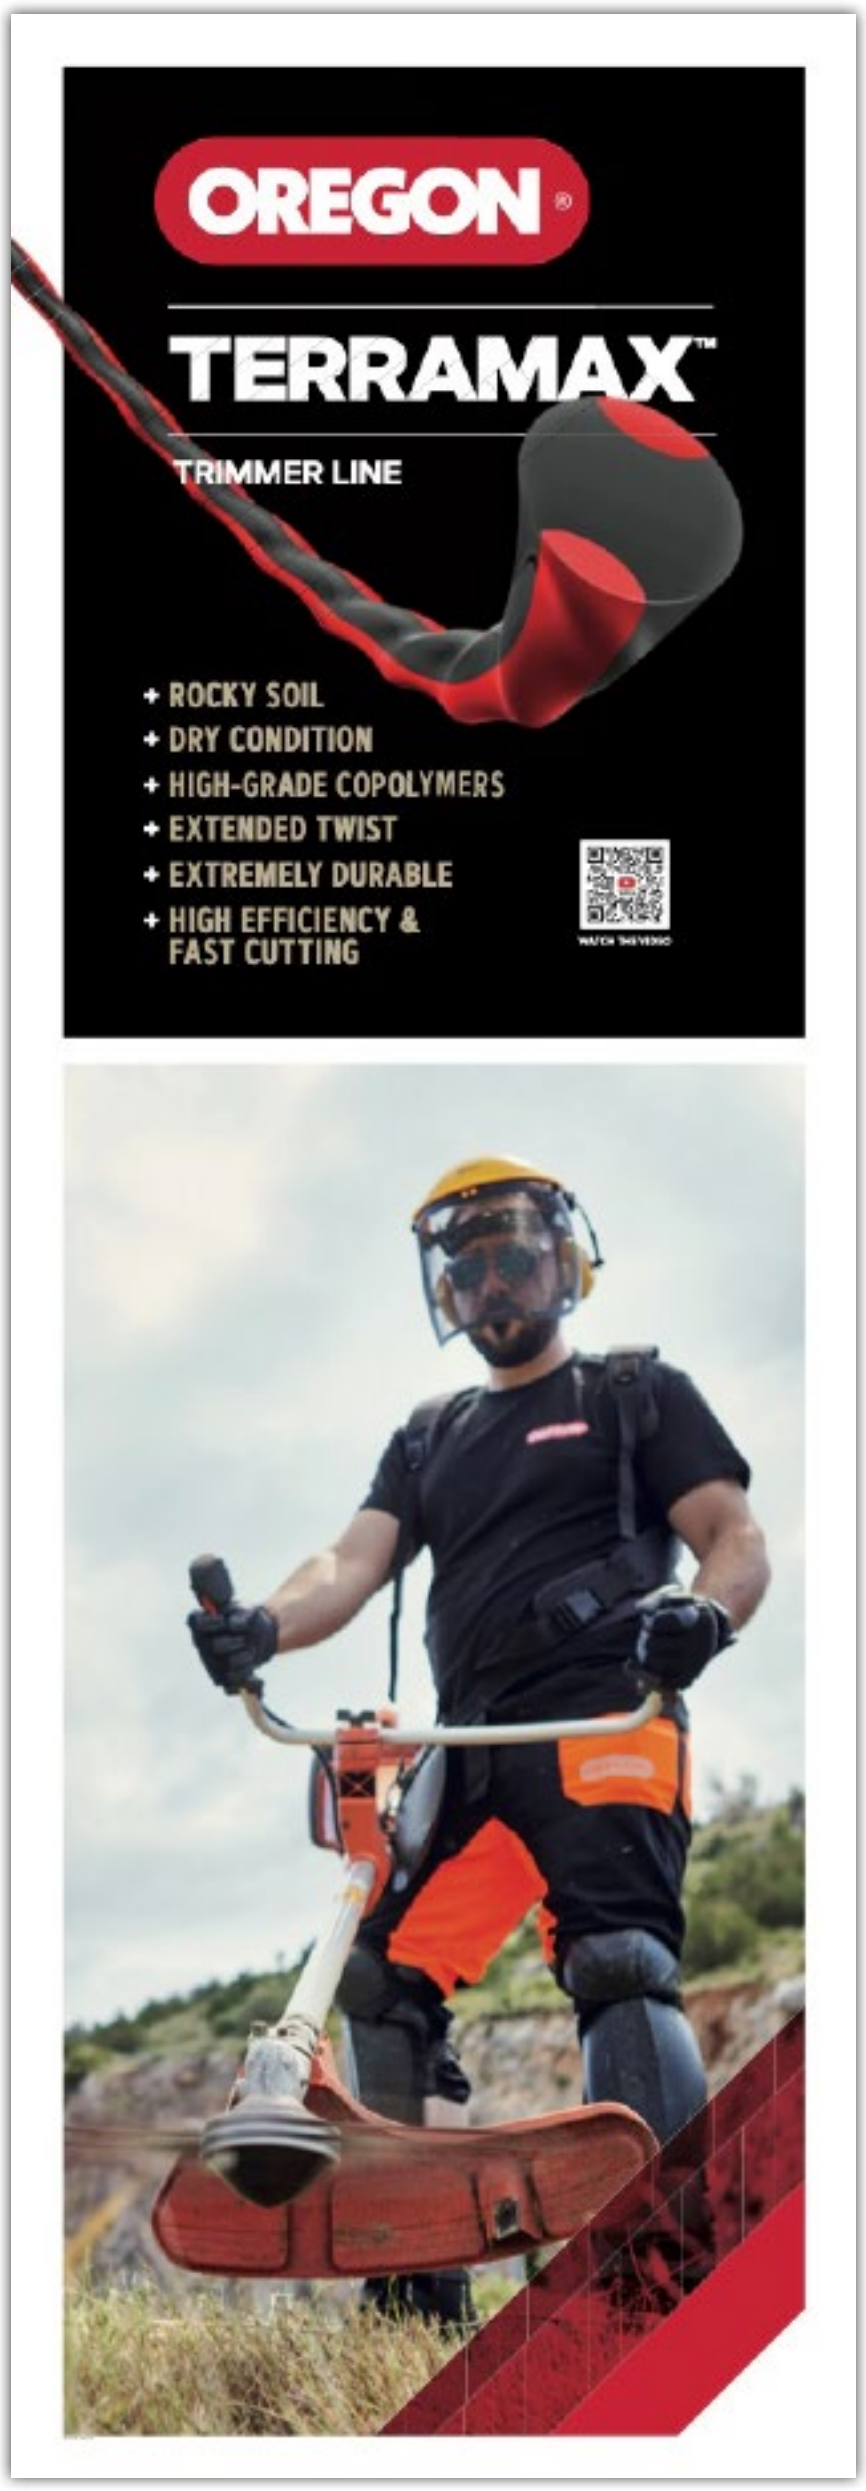
OREGON
TERRAMAX™
TRIMMER LINE
+ ROCKY SOIL
+ DRY CONDITION
+ HIGH-GRADE COPOLYMERS
+ EXTENDED TWIST
+ EXTREMELY DURABLE
+ HIGH EFFICIENCY & FAST CUTTING
WATCH THE VIDEO

6

CELEBRATING OUR PIONEERING SPIRIT SINCE 1947
75
2023
1 JANUARY
OREGON
OregonProducts.com

5

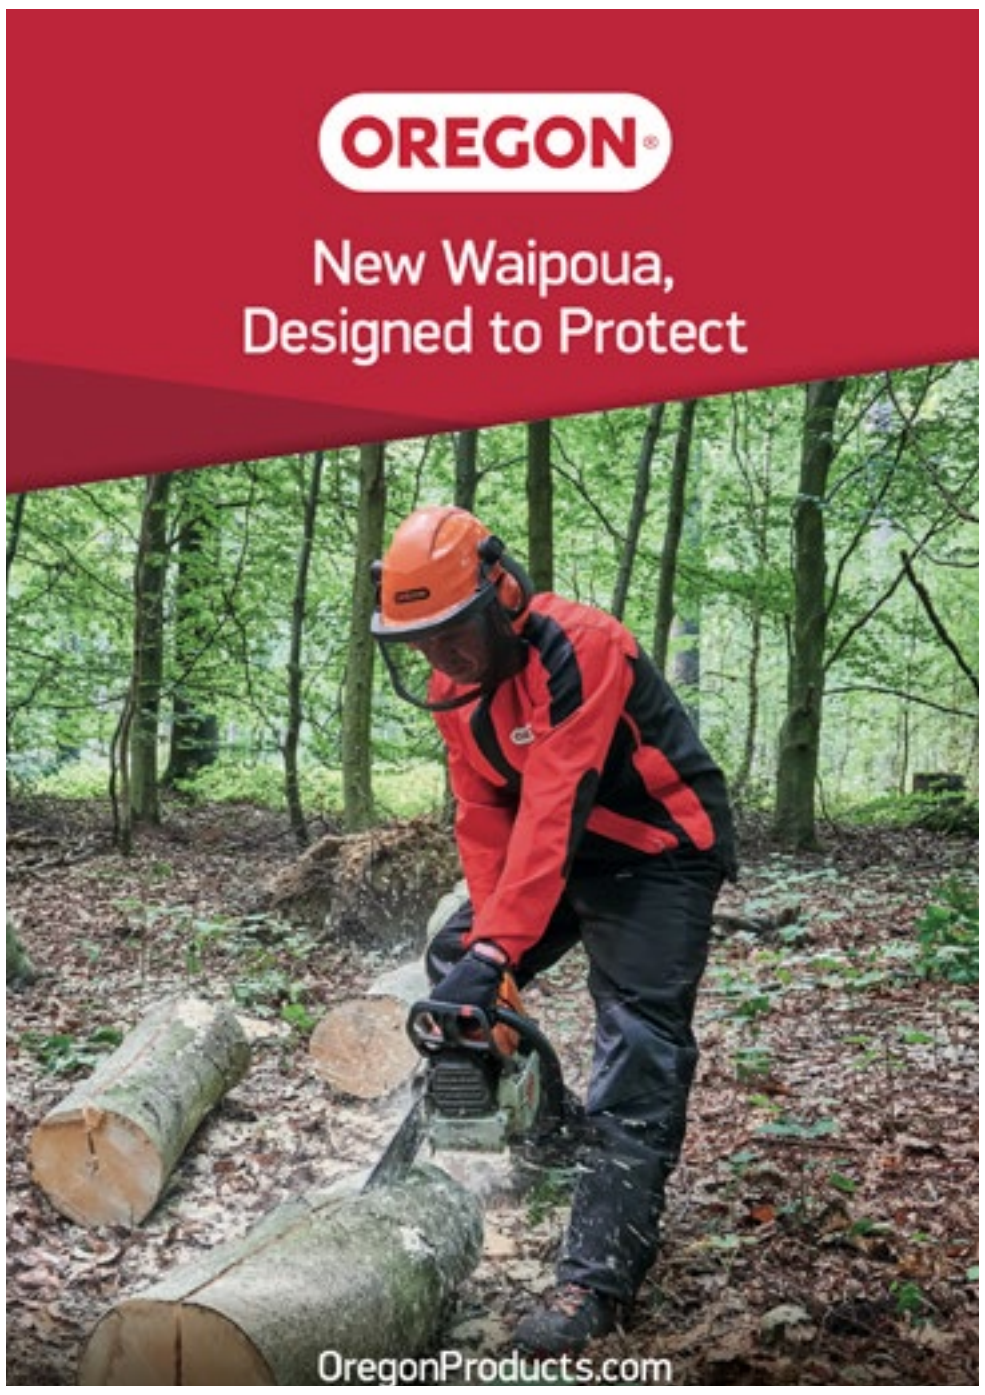
OREGON
New Waipoua, Designed to Protect
OregonProducts.com

	OREGON	Specifications	
1	AD403-008	SpeedCut Note pad	1
2	AD301-881	Sticker, speedcut	1
3	AD600-140EN	Totem SpeedCut Nano EN 620x1900mm	1
4	AD600-142-EN	Totem TerraMax EN 620x1900mm	1
5	AD600-130EN	Waipoua poster A1 EN	1

Special event gift

	OREGON	Specifications	
6	AD302-023C	2023 Oregon calendar, 297x420mm Wall poster included	1
	AD302-019E	Envelope C3 for calendar, 310x440mm	1

1

OREGON
SpeedCut

Special for your events or fairs

contact us

OREGON
NEW
Waipoua Protective Clothing
Designed to Protect
OREGON
NEW
SpeedMax™ XL .404" Cutting System
19HX Chain, SpeedMax XL Bar, Sprocket
OREGON
NEW
PowerCut™ 70-Series EXL
The Evolution of 3/8" Professional Saw Chain
OREGON
NEW
SpeedCut™ Nano Cutting System
80 TXL Saw Chain, .325" Low Profile™ Guide Bar, Sprocket
OREGON
NEW
PowerCut™ 70-Series EXL
The Evolution of 3/8" Professional Saw Chain
OregonProducts.com
OregonProducts.com
OregonProducts.com

contact us

OREGON
NEW
PowerCut™
OREGON
NEW
Waipoua
OREGON
OREGON
NEW
SpeedCut™ Nano Cutting System
80 TXL Saw Chain, .325" Low Profile™ Guide Bar, Sprocket
OregonProducts.com

Technical Posters for your shop (50x70cm)

contact us

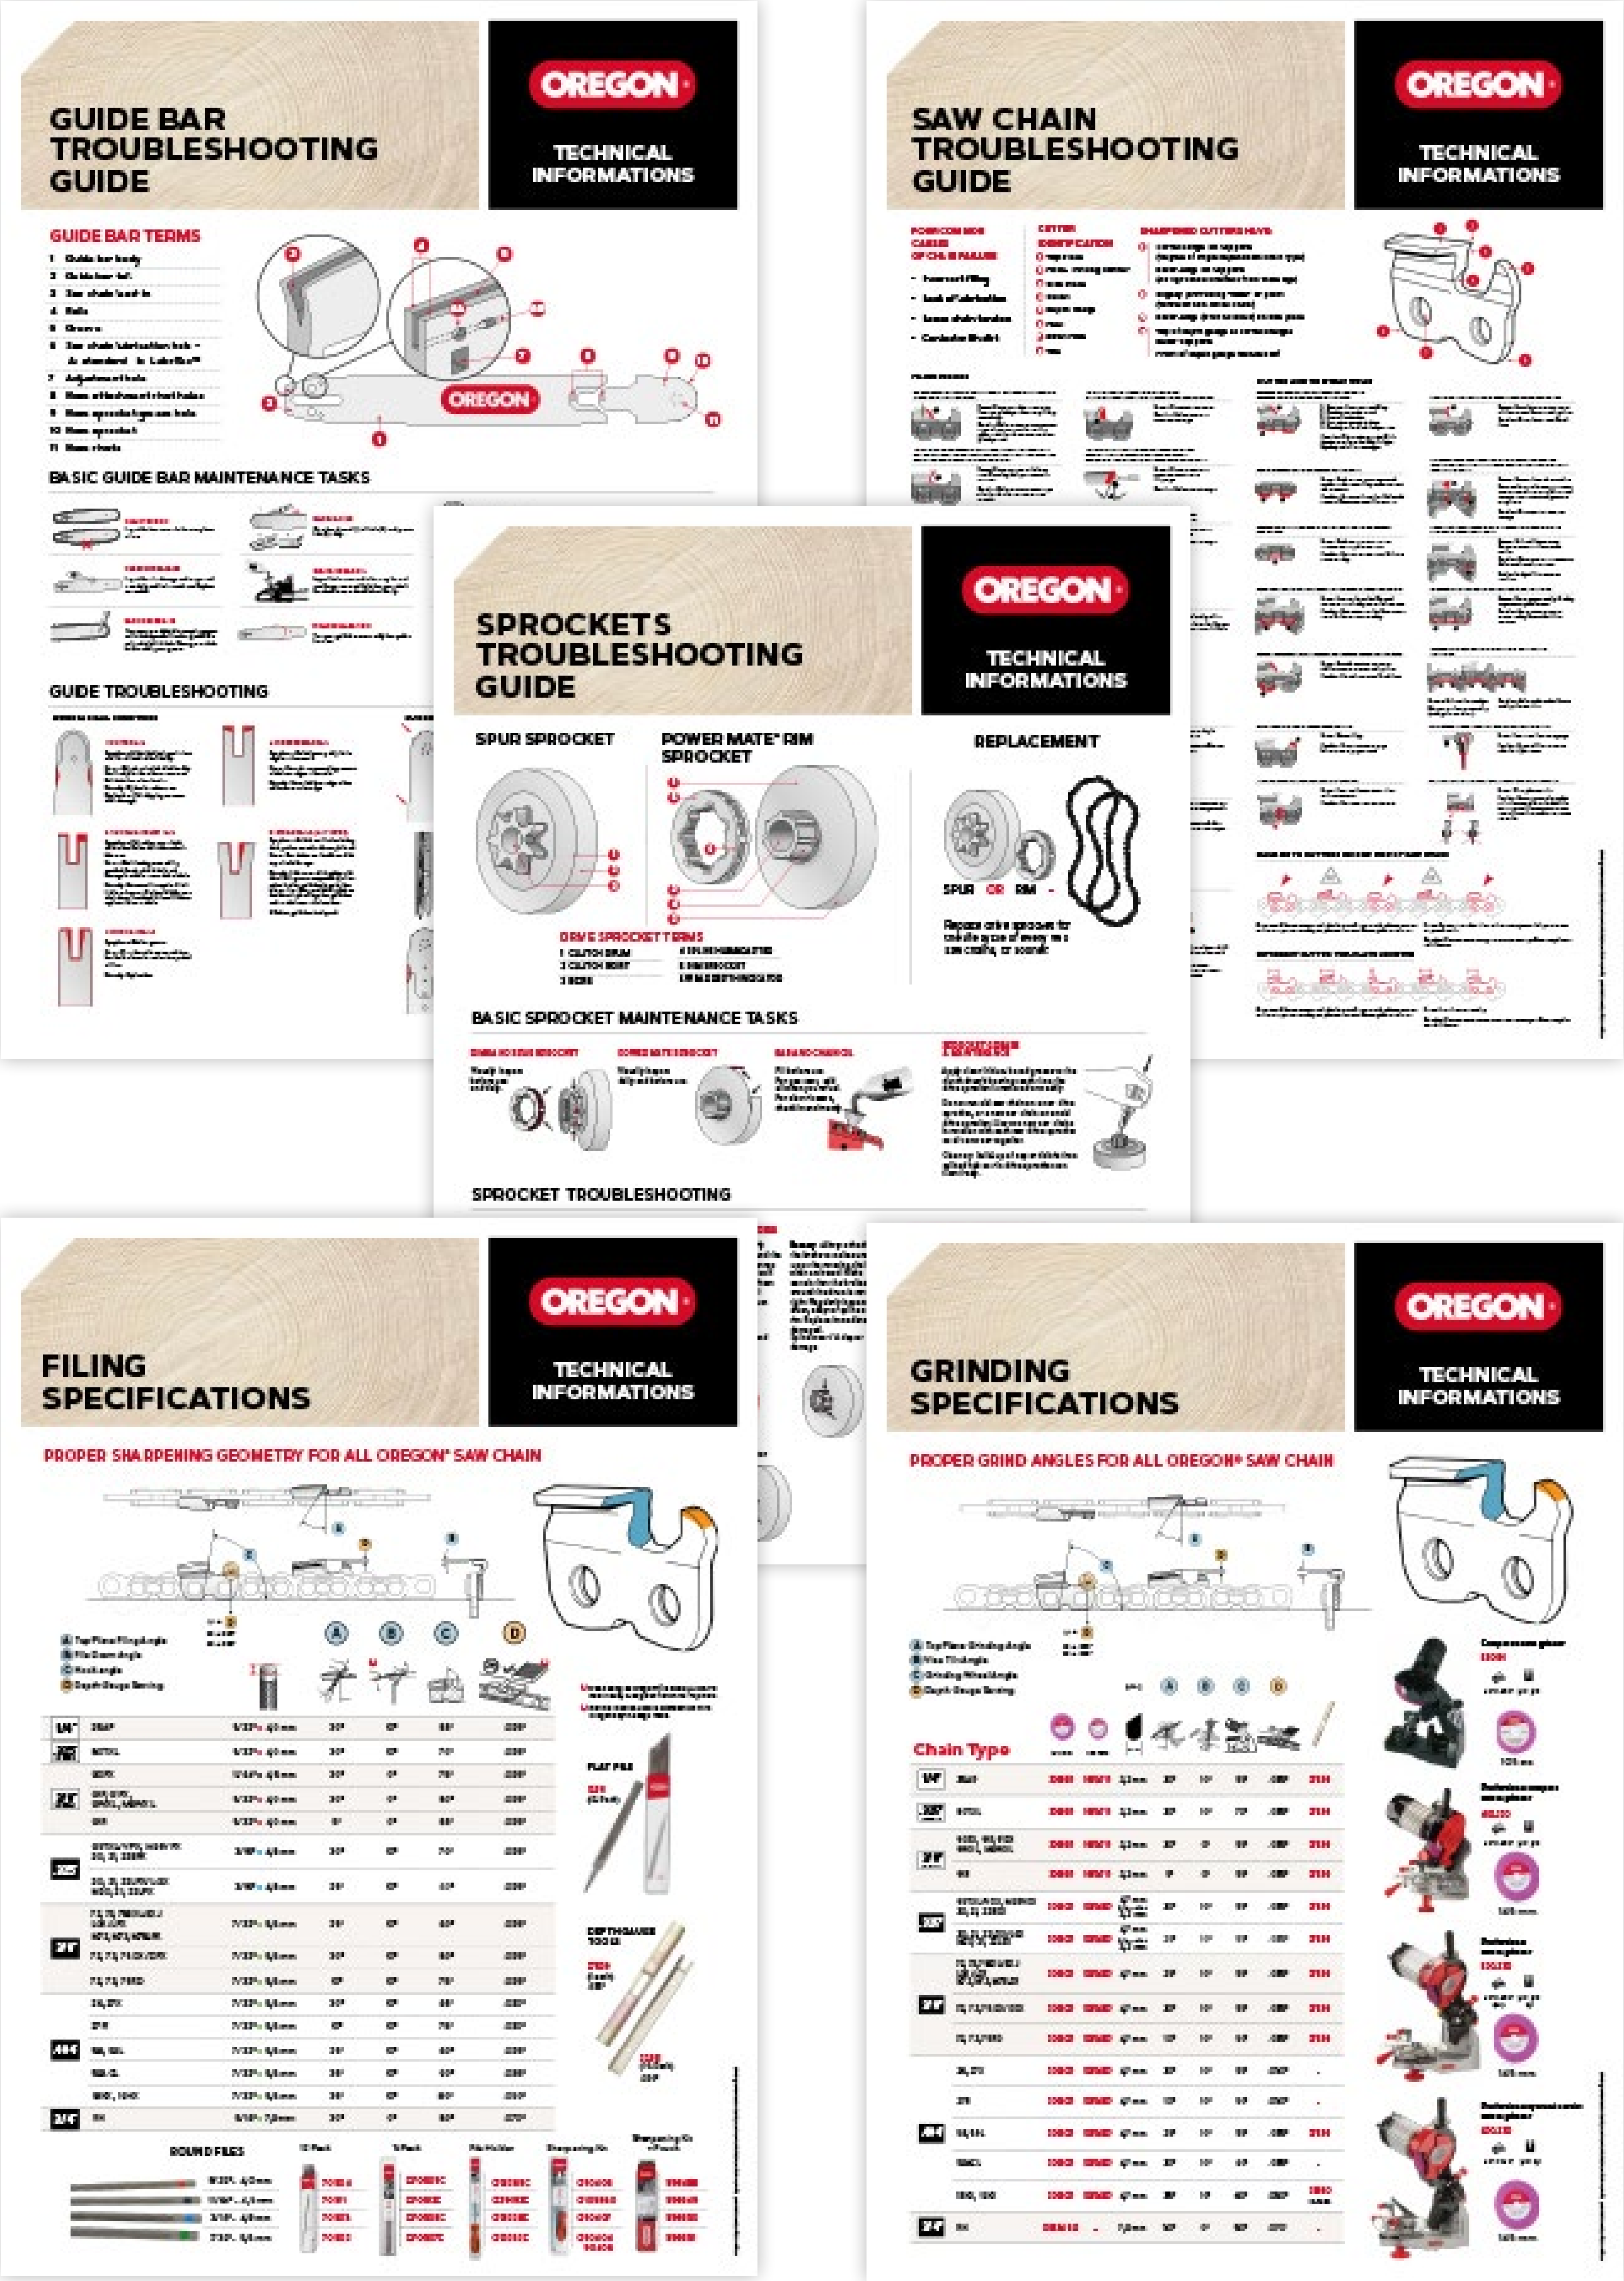

GUIDE BAR TROUBLESHOOTING GUIDE

OREGON TECHNICAL INFORMATIONS

GUIDE BAR TERMS

BASIC GUIDE BAR MAINTENANCE TASKS

GUIDE TROUBLESHOOTING

SAW CHAIN TROUBLESHOOTING GUIDE

OREGON TECHNICAL INFORMATIONS

SPROCKETS TROUBLESHOOTING GUIDE

OREGON TECHNICAL INFORMATIONS

SPUR SPROCKET

POWER MATE® RIM SPROCKET

REPLACEMENT

SPUR OR RIM

DRIVE SPROCKET TERMS

BASIC SPROCKET MAINTENANCE TASKS

SPROCKET TROUBLESHOOTING

FILING SPECIFICATIONS

OREGON TECHNICAL INFORMATIONS

PROPER SHARPENING GEOMETRY FOR ALL OREGON® SAW CHAIN

ROUND FILES

GRINDING SPECIFICATIONS

OREGON TECHNICAL INFORMATIONS

PROPER GRIND ANGLES FOR ALL OREGON® SAW CHAIN

Chain Type

OREGON®

MORE THAN 70 YEARS OF KNOWLEDGE

In 1947, the founding principles of Oregon were forged.
Through innovative design, manufacturing, and an unwavering focus on our customer needs, we are driven to maximize our product's performance.

THE INDUSTRY LEADER IN CUTTING TECHNOLOGY

Home to mechanical, metallurgical, manufacturing,
and electrical experts, our team is credited with the development of several industry-leading performance and safety standards, and numerous patents. Engineering is the bedrock of our reputation.

OREGON TOOL EUROPE SA - ALL RIGHTS RESERVED - 2022 - PRINTED IN EU - XXXXXX

OREGON
PowerCut

Discover more of our products at
OregonProducts.com